

BATTERY CHANGE INSTRUCTION

5375947

Rev. 1

Page 1 of 15

WORD REV	DATE	REASON FOR CHANGE
1	3/23/10	Initial release

1 PROCEDURE

This procedure is applicable only in case of battery replacement.

The battery should be checked annually and replaced after two years of service to assure proper auto restart operation.

Before changing the battery confirm that the panel has a PULS ML15.121 power supply in place of the original EDS11027 charger or any other charger that may be previously substituted. The regulated power supply is the recommended 12VDC source for all systems.

GE Healthcare has catalog number 5338648 power supply upgrade kit which includes instructions, new door drawing, power supply, mounting bracket, instruction and a new battery to simplify the upgrade to the new power supply.



RISK OF ELECTRICAL HAZARD,

Before opening the door, turn off all incoming power sources and apply correct LOTO (Lock Out Tag Out) procedures and equipment as required locally. Follow **PERSONAL PROTECTIVE EQUIPMENT POLICES** of the installer's company and of the site owner.

GE (USA) CONFIDENTIAL AND PROPRIETARY

This GE document contains confidential and proprietary information of GE Consumer and Industrial (C&I). It is loaned on the condition that it and the information therein shall not be used by recipient nor be disclosed to others except as expressly approved by C&I. Any document containing such information shall be returned on request.

Catalog # 5375947, GE Energy Industrial Solutions document # 55-217821

BATTERY CHANGE INSTRUCTION

5375947

Rev. 1

Page 2 of 15

Applicability: Main Disconnect Panels;


GEHC E4503K, GE EIS CR243B10438

GEHC G0000AL, GE EIS CR243B10431

GEHC M3088TH, GE EIS CR243B10435

GEHC M3088TM, GE EIS CR243B10453

Tools and Test Equipment: Standard Field Engineering Tools + Multimeter

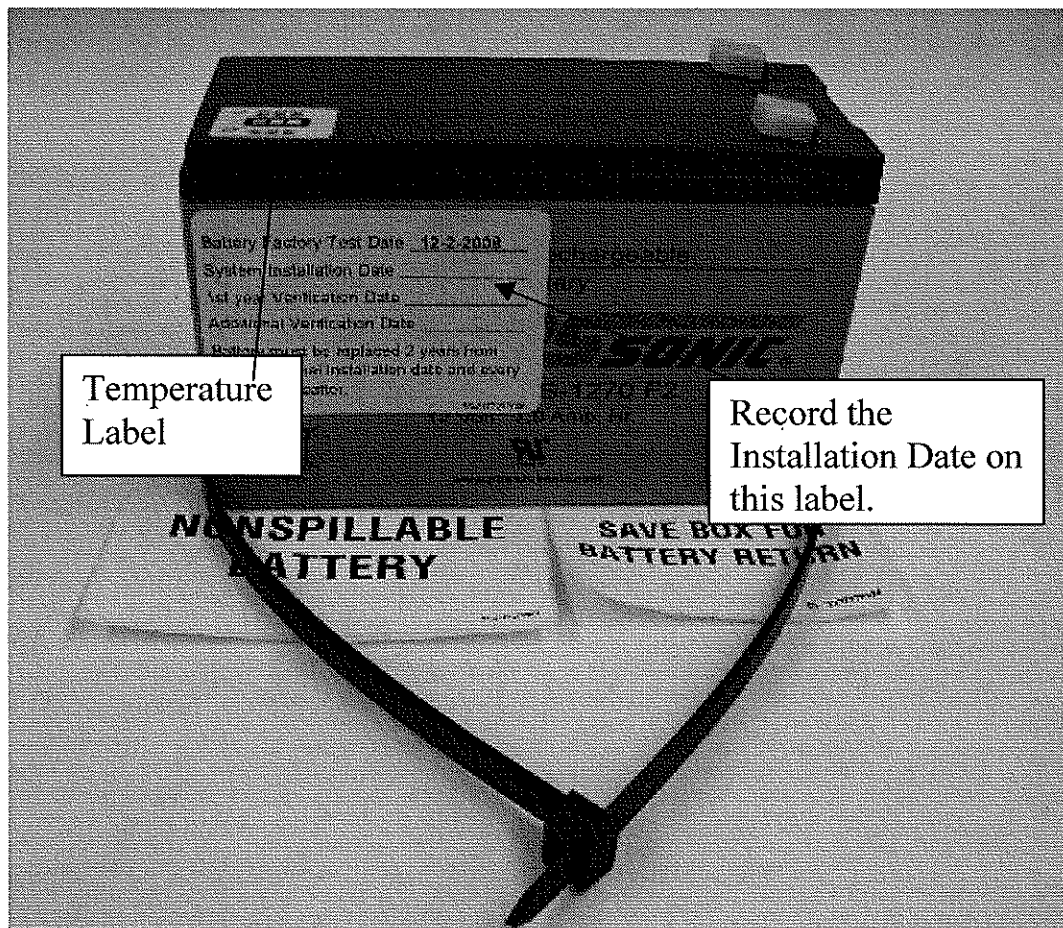

BATTERY CHANGE INSTRUCTION

5375947

Rev. 1

Page 3 of 15

LIST OF MATERIAL FOR 5375947

4001N43P001	BATTERY PS-127OF1	1	
55-217727P006	TEMPERATURE LABEL	1	
4000N29P027	CABLE TIE 24" X 0.3	1	
55-217727P007	LABEL "NON SPILLABLE BATTERY"	2	
55-217727P005	LABEL "INSTALLED DATE"	1	
55-217727P016	LABEL "+"	2	
55-217727P017	LABEL "-"	2	
55-217821	INSTALLATION GUIDE	1	

Installation Preface

Battery Check

Locate the new battery from the kit. Check the temperature sticker on the new battery and the new battery voltage. If the sticker shows a temperature of more than 120 degrees F (49C) or if the battery voltage is less than 12VDC the battery should not be used. High temperature indication on a new battery is an indication of improper storage. Contact GEXPRO Milwaukee at 414-527-6600 to purchase a replacement battery.

If you have not already done so, disconnect all incoming power and apply correct LOTO (Lock Out Tag Out) procedures and equipment as required locally.

Follow PERSONAL PROTECTIVE EQUIPMENT POLICES of the installer's company and of the site owner.

Installation

1) Disconnect all incoming power and apply correct LOTO (Lock Out Tag Out) procedures and equipment as required locally. Follow PERSONAL PROTECTIVE EQUIPMENT POLICES of the installer's company and of the site owner.

BATTERY CHANGE INSTRUCTION

5375947

Rev. 1

Page 4 of 15

2) Open panel door. Verify that blue wires connected to the battery are marked with plus (+) and minus (-) labels before removing wires from battery. If not marked, mark them with the labels included in kit. Disconnect wires from battery

Note: It is possible that the piggyback terminals for the battery connection could be damaged when disconnecting the battery.

3) Cut and remove the cable tie holding the battery to the bracket.

4) Remove the old battery in the panel and replace it with the battery included in the kit.

5) Remove and save the battery terminal insulators from the new battery for the return of the used battery. Mark the installation date on the new battery.

6) A new strap, to fasten the battery in place, is included in the kit. Put the new battery in place and tie down tightly with the new strap.

6a) Before connecting any wires to the battery, measure and record the battery terminal voltage.

_____ Volts DC.

7) Connect the existing #14 dark blue positive (+) wire(s) (piggy back terminal) to the positive (red) terminal on the battery and the existing #14 blue / white negative (-) wire(s) (piggy back terminal) to the negative (black) terminal on the battery. (note, there are 2 wires to each terminal after the MR MDP Battery & Charger kit has been installed)

8) Place the battery terminal insulators from the new battery on to the terminals of the used battery or use electrical grade tape to insulate terminals on the old battery

Testing

9) Verify that the panel main disconnect is in the OFF position.

BATTERY CHANGE INSTRUCTION

5375947

Rev. 1

Page 5 of 15

10) Make sure all Remote Emergency Off functions or pushbuttons are set to normal (“RUN”) position.

11) Verify that all connected equipment is turned off.

Note: For steps 12 and 15, the panel door needs to be opened and the panel energized. Use proper PPE including Flash Guard if required.

12) Remove the lock and lockout tag following the established lockout removal procedures. Confirm arc flash PPE requirements before attempting to open the energized panel. Use proper PPE clothing before attempting to test, service or troubleshoot any energized panel. Less than category II protective clothing (and hood) shall NEVER be used. With the panel door open, turn the panel disconnect or the external disconnect ON to apply power to the panel. For MDPs that have a main disconnect, a lock-out device may have to be actuated in order to operate the disconnect with the panel door open. The green LED light on the power supply should be on. If not, recheck connections, check the fuse in the DIN rail mounted fuse holder and verify 120Vac at the Power Supply “L” to “N” terminals.

13) Measure the voltage at the Power Supply “+” to “-” terminals. The voltage should measure:

13.5 VDC +/-0.05VDC.

To adjust the voltage, locate the potentiometer under the “Adjusted 13.5 VDC” label. Adjust the pot using a small screwdriver. Replace the label.

Note: The correct setting of the voltage is critical for long battery life.

14) Measure the voltage at the battery terminals. This voltage should be greater than the battery voltage measured in step 6a. If not, verify 120VAC +/- 10% at the power supply L to N terminals and check the fuse in the DIN rail mounted fuse holder.

After an overnight charge, the battery voltage should be 13.5 +0.05 / -0.05V.

BATTERY CHANGE INSTRUCTION

5375947

Rev. 1

Page 6 of 15

15) Deliver or ship the old battery to a battery-recycling center. A “NON SPILLABLE BATTERY” label is included in the kit and should be placed on the outside of the carton used to ship the battery.

Battery installation is complete.

BATTERY CHANGE INSTRUCTION

5375947

Rev. 1


Page 7 of 15

APPENDIX

Power Supply for reference

13. FRONT SIDE AND USER ELEMENTS

Fig. 13-1 Front side

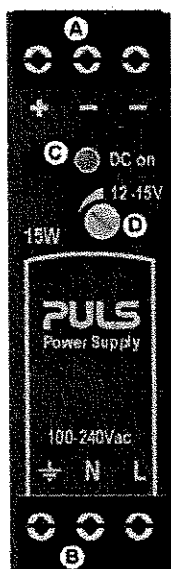

A Output Terminals

Screw terminals

Dual terminals for the negative pole allows an easy earthing of voltage

- + Positive output
- Negative (return) output

B Input Terminals

Screw terminals

- L Neutral input
- N Line (hot) input

PE EMI ground

Ground this terminal to minimize high-frequency emission
For safety reasons, connecting to ground is not required.

C DC-ON LED (green)

On when the voltage is > 10.5V

D Output voltage potentiometer

Turn to set the output voltage. Factory setting is 12.0V.

14. TERMINALS AND WIRING

All terminals are easy to access when mounted on the panel. Input and output terminals are separated from each other (input below, output above) to help in error-free wiring.

Type	Screw terminals
Solid wire	0.5-6mm ²
Stranded wire	0.5-4mm ²
American wire gauge	20-10 AWG
Ferrules	Allowed, but not required
Recommended tightening torque	1Nm, 9lb.in
Screwdriver	3.5mm slotted or Pozidrive No 2
Wire stripping length	7mm / 0.275inch


BATTERY CHANGE INSTRUCTION

5375947

Rev. 1

Page 8 of 15

Manufacturer's battery specifications

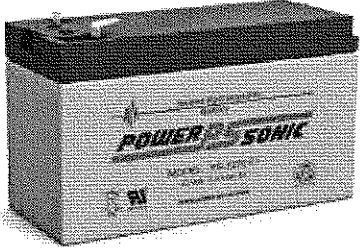


PS-1270 12 Volt 7.0 AH
Rechargeable Sealed Lead Acid Battery

We've Got The Power.™




Terminals (mm)

- F1 - Quick disconnect tabs, 0.187" x 0.032" Mate with AMP, INC. FASTON "187" Series
- F2 - Quick disconnect tabs, 0.250" x 0.032" Mate with AMP, INC. FASTON "250" Series



Physical Dimensions: in (mm)

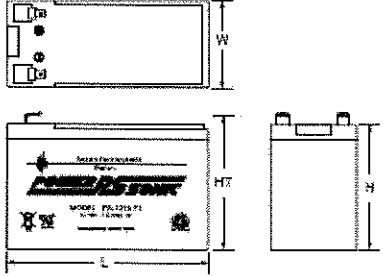

L: 5.95 (151) W: 2.58 (65) H: 3.70 (94) HT: 3.68 (93)

Tolerances are ± 0.04 in. (± 1 mm) and ± 0.08 in. (± 2 mm) for height dimensions. All data subject to change without notice.

Features

- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Approved for transport by air, D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845

Performance Specifications

Nominal Voltage..... 12 volts (6 cells)

Nominal Capacity

20-hr. (350mA to 10.50 volts)	7.00 AH
10-hr. (850mA to 10.50 volts)	6.50 AH
5-hr. (1.2A to 10.20 volts)	6.00 AH
1-hr. (4.5A to 9.00 volts)	4.50 AH
15-min. (14A to 9.00 volts)	3.50 AH

Approximate Weight..... 4.80 lbs. (2.18 kg)

Energy Density (20-hr. rate)..... 1.49 W-hr./in³ (90.95 W-hr./l)

Specific Energy (20-hr. rate)..... 17.50 W-hr./lb (38.56 W-hr./kg)

Internal Resistance (approx.)..... 23 milliohms

Max Discharge Current (7 Min.)..... 21.0 amperes

Max Short-Duration Discharge Current (10 Sec.)..... 70.0 amperes

Shelf Life (% of nominal capacity at 68°F (20°C))

1 Month	97%
3 Months	91%
6 Months	83%

Operating Temperature Range

Charge..... -4°F (-20°C) to 122°F (50°C)

Discharge..... -40°F (-40°C) to 140°F (60°C)

Case..... ABS Plastic

Power-Sonic Chargers..... PSC-12B00A, 12B00A-C

To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on the website.
All data subject to change without notice.

www.power-sonic.com

BATTERY CHANGE INSTRUCTION

5375947


Rev. 1

Page 9 of 15


POWER-SONIC

PS-1270 12 Volt 7.0 AH

Shelf Life & Storage

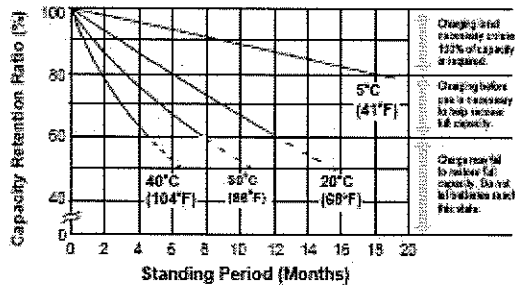

Discharge Time vs. Discharge Current

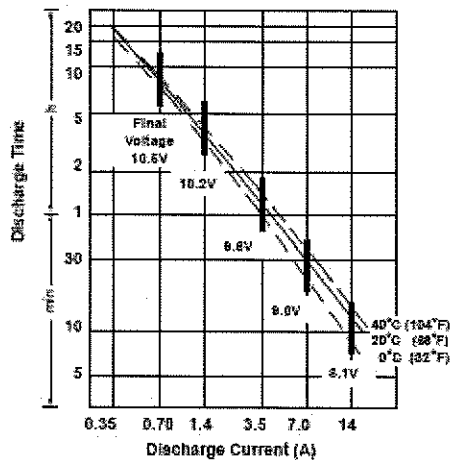

Charging

Cycle Applications: Limit initial current to 2.1A. Charge until battery voltage (under charge) reaches 14.4 to 14.7 volts at 68°F (20°C). Hold at 14.4 to 14.7 volts until current drops to under 70mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.


"Float" or "Stand-By" Service: Hold battery across constant voltage source of 13.5 to 13.8 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

Notes: Due to the self-discharge characteristic of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.


Chargers

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for "C-Series Switch Mode Chargers" and "Transformer Type A and F-Series". Please contact our Technical department for advice if you have difficulty in locating suitable models.


Discharge Characteristics

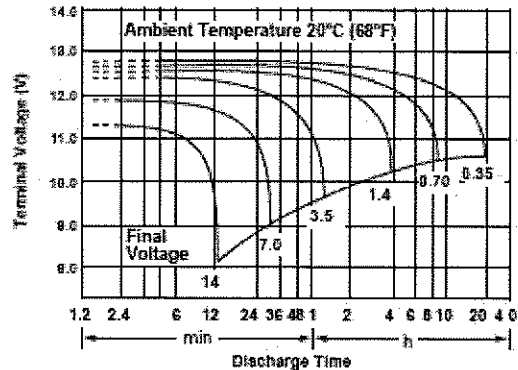

Life Characteristics in Stand-By Use

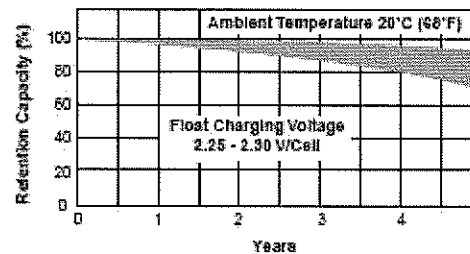

Life Characteristics in Cyclic Use

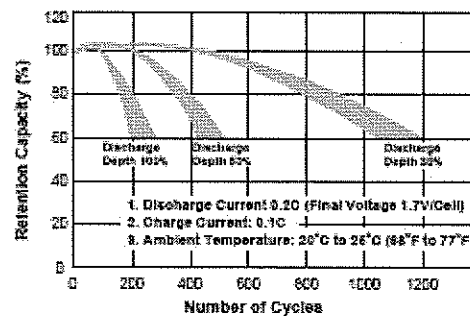

Further Information

Please refer to our website www.power-sonic.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..

Contact Information

DOMESTIC SALES

Tel: +1-619-661-2020

Fax: +1-619-661-3650

national@power-sonic.com

CUSTOMER SERVICE

Tel: +1-619-661-2020

Fax: +1-619-661-3648

customerservice@power-sonic.com

TECHNICAL SUPPORT

Tel: +1-619-661-2020

Fax: +1-619-661-3648

support@power-sonic.com

www.power-sonic.com

INTERNATIONAL SALES

Tel: +1-650-364-8001

Fax: +1-650-368-3882

battery@power-sonic.com

CORPORATE OFFICE • 7550 Panasonic Way • San Diego, CA 92154 • USA • Tel: +1-619-661-2020 • Fax: +1-619-661-3650

0506 1M

BATTERY CHANGE INSTRUCTION

5375947

Rev. 1

Page 10 of 15

4.1 Battery Manufacturer's Material Safety Data Sheet



Power-Sonic MSDS Page 1 of 6

MATERIAL SAFETY DATA SHEET

PS, PSH, PSG, PG and Power Sport Series
Valve Regulated (VRLA) Batteries
Absorbed Electrolyte (AGM)

Section 1 - Product Identification

Manufacturers Name Power-Sonic Corporation, 7550 Panasonic Way San Diego, CA 92154	Emergency Telephone Numbers:
	CHEMTREC (Domestic): (800) 424-9300 CHEMTREC (International): (703) 527-3887
	Telephone Number for Information Power-Sonic Corporation: (619) 661-2020
	Date Issued: June 10, 2008
<i>The information contained within is provided as a service to our customers and is for their information only. The information and recommendations set forth herein are made in good faith and are believed to be accurate at the date compiled. Power-Sonic Corporation makes no warranty expressed or implied.</i>	

Section 2 - Hazardous Ingredients/Identity Information

Components	CAS Number	Approx WL %	OSHA PEL (µg/m³)	ACGIH TLV (µ/m³)	NIOSH (µ/m³)
Inorganic Lead/Lead Compounds	7439-92-1	65%-75%	50	150	10
Tin	7440-31-5	<0.5%	2000	2000	N/A
Calcium	7440-70-2	<0.1%	N/A	N/A	N/A
Electrolyte: Dilute sulfuric Acid	7664-93-9	14-20%	1000	1000	1000
Fiberglass Separator	-	5%	N/A	N/A	N/A
Case Material: Acrylonitrile Butadiene Styrene (ABS)	9003-56-9	5-10%	N/A	N/A	N/A

Inorganic lead and electrolyte (sulfuric acid) are the main components of every Valve Regulated Lead Acid battery supplied by Power-Sonic Corporation. Other ingredients may be present dependent upon the specific battery type. For additional information contact Power-Sonic Corporation Technical Department.

Section 3 - Physical/Chemical Characteristics

Components	Density	Melting Points	Solubility (H2O)	Odor	Appearance
Lead	11.34	621 F°	None	None	Silver-Gray
Lead Sulfate	6.20	1950 F°	40mg/l(60 F°)	None	White Powder
Lead Dioxide	9.40	554 F°	None	None	Brown Powder
Sulfuric Acid	About 1.30	203-240 F°	100%	Sharp penetrating pungent	Clear Colorless Liquid
Fiberglass Separator	N/A	N/A	Slight	None	White Fibrous
Case Material: Acrylonitrile Butadiene Styrene (ABS)	N/A	N/A	None	None	Solid

Continued on next page

BATTERY CHANGE INSTRUCTION

5375947

Rev. 1

Page 11 of 15

Power-Sonic MSDS Page 2 of 6

Section 4 – Flammability Data

Components	Flashpoint	Explosive Limit	Comments
Lead and Sulfuric Acid	None	None	None
Hydrogen		LEL = 4.1%	Sealed batteries can emit hydrogen if overcharged (float voltage > 2.40 VPC)
Fiberglass Separator	N/A	N/A	Toxic vapors may be released. In case of fire, wear self contained breathing apparatus
Acrylonitrile Butadiene Styrene (ABS)	None	N/A	Temp over 527°F (300°C) may release combustible gases. In case of fire, wear self contained breathing apparatus

Section 5 - Reactivity Data

Stability	Unstable		Conditions to Avoid
	Stable	X	Prolonged overcharge on high current, ignition sources. Sulfuric acid remains stable at all temperatures
Incompatibility (Materials to Avoid) Sulfuric acid: Contact with combustibles and organic materials may cause fire and explosion. Also reacts violently with strong reducing agents, metals, sulfur trioxide gas, strong oxidizers, and water. Contact with metals may produce toxic sulfur dioxide fumes and may release flammable hydrogen gas. Lead Compounds: Avoid contact with strong acids, bases, halides, halogenates, potassium nitrate, permanganate, peroxides, nascent hydrogen, and reducing agents.			
Hazardous Decomposition or Byproducts Sulfuric acid: Sulfur trioxide, carbon monoxide, sulfuric acid mist, sulfur dioxide, and hydrogen sulfide. Lead Compounds: High temperatures above the melting point are likely to produce toxic metal fume, vapor, or dust; contact with strong acid or base or presence of nascent hydrogen may generate highly toxic arsine gas. Hazardous Polymerization.			
Polymerization: Sulfuric acid will not polymerize			
Decomposition Products: Sulfuric Dioxide, Trioxide, Hydrogen Sulfide, Hydrogen.			
Conditions to Avoid: Prohibit smoking, sparks, etc. from battery charging area. Avoid mixing acid with other chemicals.			

Section 6 - Health Hazard Data

Routes of Entry Sulfuric acid: Harmful by all routes of entry Lead compounds: Hazardous Exposure can occur only when product is heated, oxidized, or otherwise processed or damaged to create dust, vapor or fume.
Inhalation Sulfuric Acid: Breathing sulfuric acid vapors and mists may cause severe respiratory problems. Lead Compounds: Dust or fumes may cause irritation of upper respiratory tract or lungs. Fiberglass Separator: Fiberglass is an irritant to the upper respiratory tract, skin and eyes. For exposure up to 10F* use MSA Controll with type H filter. Above 10F use Ultra Twin with type H filter. This product is not considered carcinogenic by NTP or OSHA.
Skin Contact Sulfuric acid: Severe irritation, burns and ulceration. Lead Compounds: Not absorbed through the skin

Continued on next page

BATTERY CHANGE INSTRUCTION

5375947

Rev. 1

Page 12 of 15

Power-Sonic MSDS Page 3 of 6

Ingestion Sulfuric acid: May cause severe irritation of the mouth, throat, esophagus, and stomach. Lead Compounds: May cause abdominal pain, nausea, vomiting, diarrhea, and severe cramping. Acute ingestion should be treated by a physician.
Eye Contact Sulfuric acid: Severe irritation, burns, cornea damage and possible blindness. Lead Compounds: May cause eye irritation.
Acute Health Hazards Sulfuric acid: Severe skin irritation, burns, damage to cornea may cause blindness, upper respiratory irritation. Lead Compounds: May cause abdominal pain, nausea, headaches, vomiting, loss of appetite, severe cramping, muscular aches and weakness, and difficulty sleeping. The toxic effects of lead are cumulative and slow to appear. It affects the kidneys, reproductive and central nervous systems. The symptoms of lead overexposure are listed above. Exposure to lead from a battery most often occurs during lead reclamation operations through the breathing or ingestion of lead dust or fumes.
Chronic Health Hazards Sulfuric acid: Possible scarring of the cornea, inflammation of the nose, throat and bronchial tubes, possible erosion of tooth enamel. Lead Compounds: May cause anemia, damage to kidneys and nervous system, and damage to reproductive system in both males and females.
Carcinogenicity Sulfuric acid: The National Toxicological Program (NTP) and The International Agency for Research on Cancer (IARC) have classified strong inorganic acid mist containing sulfuric acid as a Category 1 carcinogen, a substance that is carcinogenic to humans. The ACGIH has classified strong inorganic acid mist containing sulfuric acid as an A2 carcinogen (suspected human carcinogen). These classifications do not apply to liquid forms of sulfuric acid or sulfuric acid solutions contained within a battery. Inorganic acid mist (sulfuric acid mist) is not generated under normal use of this product. Misuse of the product, such as overcharging, may result in the generation of sulfuric acid mist. Lead Compounds: Human studies are inconclusive regarding lead exposure and an increased cancer risk. The EPA and the International Agency for Research on Cancer (IARC) have categorized lead and inorganic lead compounds as a B2 classification (probable/possible human carcinogen) based on sufficient animal evidence and inadequate human evidence.
Medical Conditions Generally Aggravated by Exposure Inorganic lead and its compounds can aggravate chronic forms of kidney, liver, and neurological diseases. Contact of battery electrolyte (acid) with the skin may aggravate skin diseases such as eczema and contact dermatitis. Overexposure to sulfuric acid mist may cause lung damage and aggravate pulmonary conditions.
Emergency and First Aid Procedures <u>Inhalation</u> Sulfuric acid: Remove to fresh air immediately. If breathing is difficult, give oxygen. Lead Compounds: Remove from exposure, gargle, wash nose and lips, consult physician. <u>Ingestion</u> Sulfuric acid: Do not induce vomiting, consult a physician immediately. Lead Compounds: Consult a physician immediately. <u>Eyes</u> Sulfuric acid: Flush immediately with water for 15 minutes, consult a physician. Lead Compounds: Flush immediately with water for 15 minutes, consult a physician. <u>Skin</u> Sulfuric acid: Flush with large amounts of water for at least 15 minutes, remove any contaminated clothing. If irritation develops seek medical attention. Lead Compounds: Wash with soap and water.

Continued on next page

BATTERY CHANGE INSTRUCTION

5375947

Rev. 1

Page 13 of 15

Power-Sonic MSDS Page 4 of 6

Section 7 - Precautions for Safe Handling and Use

Steps to be Taken in Case Material is Released or Spilled There is no release of material unless the case is damaged or battery is misused/overcharged. If release occurs stop flow of material, contain/absorb all spills with dry sand, earth, or vermiculite. Do not use combustible materials. Neutralize spilled material with soda ash, sodium bicarbonate, lime, etc. Wear acid-resistant clothing, boots, gloves, and face shield. Dispose of as hazardous waste. Do not discharge acid to sewer.
Waste Disposal Method Spent Batteries - send to secondary lead smelter for recycling. Follow applicable federal, state and local regulations. Neutralize as in preceding step. Collect neutralized material in sealed container and handle as hazardous waste as applicable. A copy of this MSDS must be supplied to any scrap dealer or secondary lead smelter with the battery.
Precautions to be Taken in Handling and Storing Store batteries in a cool, dry, well ventilated area that are separated from incompatible materials and any activities which may generate flames, sparks, or heat. Keep all metallic articles that could contact the negative and positive terminals on a battery and create a short circuit condition.
Electrical Safety Due to the battery's low internal resistance and high power density, high levels of short circuit current can be developed across the battery terminals. Do not rest tools or cables on the battery. Use insulated tools only. Follow all installation instructions and diagrams when installing or maintaining battery systems.
Fiberglass Separator Fiberglass is an irritant to the upper respiratory tract, skin and eyes. For exposure up to 10F% use MSA Comfoil with type H filter. Above 10F use Ultra Twin with type H filter. This product is not considered carcinogenic by NTP or OSHA.

Section 8 - Control Measures

Respiratory Protection None required under normal conditions. If battery is overcharged and concentrations of sulfuric acid are known to exceed PEL use NIOSH or MSH approved respiratory protection.	
Engineering Controls Store and handle batteries in a well ventilated area. If mechanical ventilation is used, components must be acid resistant.	
Protective Gloves None needed under normal conditions. If battery case is damaged use rubber or plastic elbow length gauntlets.	Eye Protection None needed under normal conditions. If handling damaged or broken batteries use chemical splash goggles or face shield.
Other Protective Clothing or Equipment None needed under normal conditions. In case of damaged or broken battery use an acid resistant apron. Under severe exposure or emergency conditions wear acid resistant clothing.	
Work Hygienic Practices Handle batteries carefully to avoid damaging the case. Do not allow metallic articles to contact the battery terminals during handling. Avoid contact with the internal components of the battery.	

Continued on next page

BATTERY CHANGE INSTRUCTION


5375947

Rev. 1

Page 14 of 15

Power-Sonic MSDS Page 5 of 6

Section 9 Regulatory Information

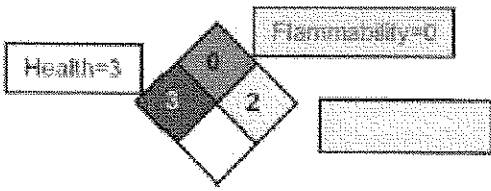NFPA Hazard Rating for Sulfuric Acid	
	
Transportation Batteries: Non-Restricted Status	
North America Surface and Air Shipments	
Our nonspillable lead acid batteries are listed in the U.S. Department of Transportation's (DOT) hazardous materials regulations but are <u>excepted</u> from these regulations since they meet all of the following requirements found at 49 CFR 173.159(d) - NMFC # 60580 Class 65.	
• When offered for transport, the batteries are protected against short circuits and securely packaged as required by 49 CFR 173.159(d) (1); • The batteries and outer packaging are marked with the words NONSPILLABLE BATTERY as required by 49 CFR 173.159(d) (2); and • The batteries comply with the vibration and pressure differential tests found in 49 CFR 173.159(d) (3) and "crack test" found at 49 CFR 173.159(d) (4).	
International	
Our non-spillable lead acid batteries also are <u>excepted</u> from the international hazardous materials (also known as "dangerous goods") regulations since they comply with the following requirements:	
• The vibration and pressure differential tests found in Packing Instruction 806 and Special Provision A67 of the <u>International Air Transport Association (IATA) Dangerous Goods Regulations</u>.	
The vibration and pressure differential tests found in Packing Instruction 806 and Special Provision A67 of the International Civil Aviation Organization (ICAO) Technical Instructions for the Safe Transport of Dangerous Goods by Air; and	
• The vibration, pressure differential, and "crack" tests found in Special Provision 238.1 and 238.2 of the <u>International Maritime Dangerous Goods (IMDG) Code</u>.	
Regulatory Information	
RCRA: Spent lead acid batteries are not regulated as hazardous waste by the EPA when recycled, however state and international regulations may vary.	
CERCLA (superfund) and EPCRA:	
(a) Reportable Quantity (RQ) for spilled 100% sulfuric acid under CERCLA (superfund) and EPCRA (Emergency Planning Community Right to Know Act) is 1,000lbs. State and local reportable quantities for spilled sulfuric acid may vary. (b) Sulfuric acid is a listed "Extremely Hazardous Substance" under EPCRA with a Threshold Planning Quantity (TPQ) of 1,000lbs. (c) EPCRA Section 302 Notification is required if 1,000lbs. or more of sulfuric acid is present at one site. The quantity of sulfuric acid will vary by battery type. Contact Power-Sonic Corporation for additional information. (d) EPCRA Section 312 Tier 2 reporting is required for batteries if sulfuric acid is present in quantities of 500lbs. or more and/or lead is present in quantities of 10,000lbs. or more. (e) Supplier Notification: This product contains toxic chemicals which may be reportable under EPCRA Section 313 Toxic Chemical Release Inventory (Form R) requirements. If you are a manufacturing facility under SIC codes 20 through 39 the following information is provided to enable you to complete the required reports:	

Continued on next page

BATTERY CHANGE INSTRUCTION

5375947

Rev. 1

Page 15 of 15

Power-Sonic MSDS Page 5 of 6

Regulatory Information continued:

(f)

Toxic Chemical	CAS Number	Approximate % by weight
Lead	7439-92-1	60
Sulfuric Acid	7664-93-9 10-	30
Arsenic	7440-38-2	0.2

If you distribute this product to other manufacturers in SIC codes 20 through 39, this information must be provided with the first shipment in a calendar year. The Section 313 supplier notification requirement does not apply to batteries which are "consumer products". Not present in all battery types. Contact Power-Sonic Corporation for further information.

TSCA

Ingredients in Power-Sonic Corporation's batteries are listed in the TSCA Registry as follows:

Components	CAS Number	TSCA Status
Electrolyte Sulfuric Acid (H ₂ SO ₄)	7664-93-9	Listed
Inorganic Lead Compound: Lead (Pb)	7439-92-1	Listed
Lead Oxide (PbO)	1317-36-8	Listed
Lead Sulfate (PbSO ₄)	7446-14-2	Listed
Arsenic (As)	7440-38-2	Listed
Calcium (Ca)	7440-70-2	Listed
Tin (Sn)	7440-31-5	Listed

Power-Sonic Corporation
7550 Panasonic Way,
San Diego, CA 92154
Tel: 619-661-2020
Fax: 619-661-3650
E-Mail: quality-assurance@power-sonic.com
Website: <http://www.power-sonic.com>