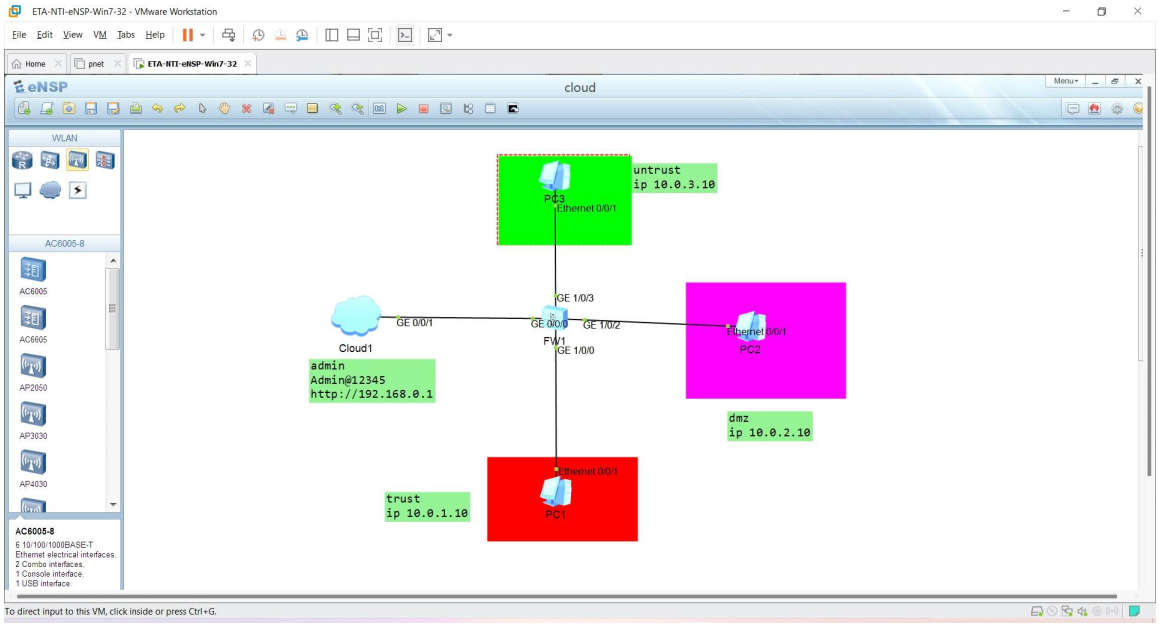
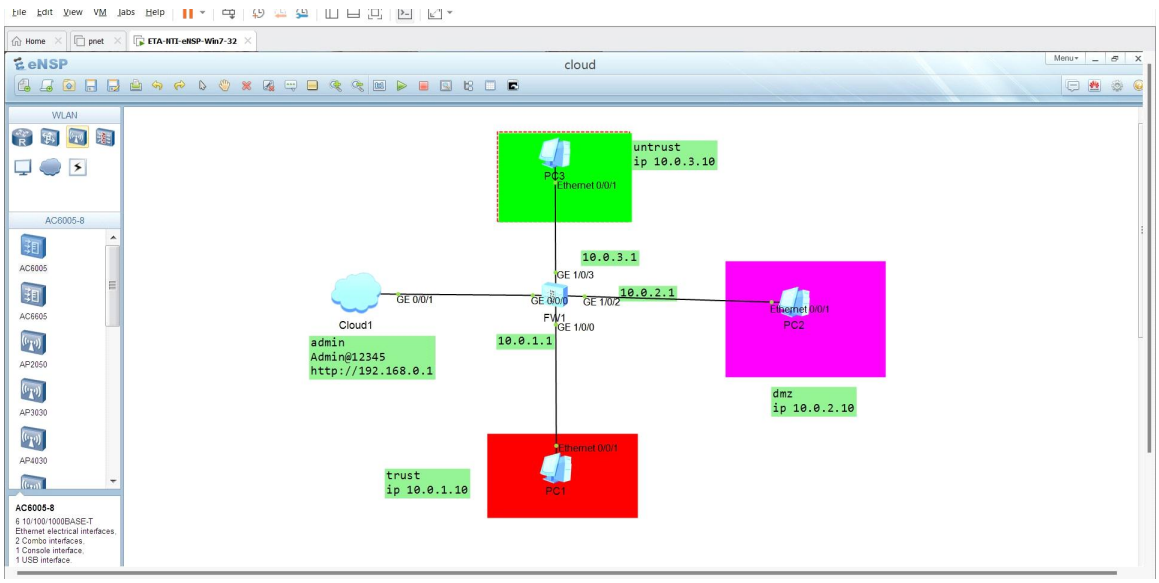
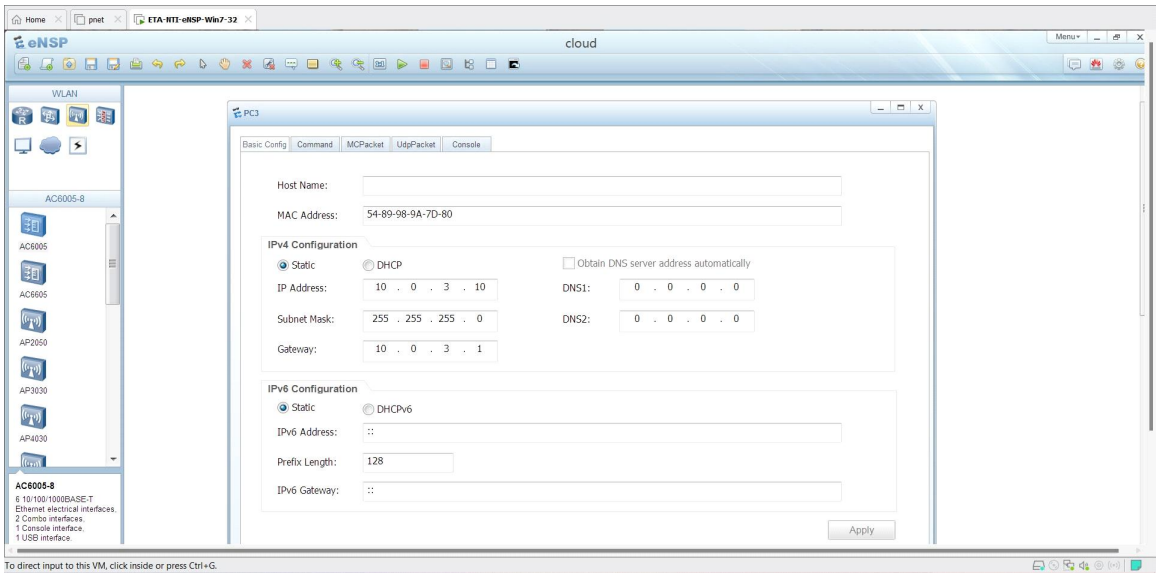
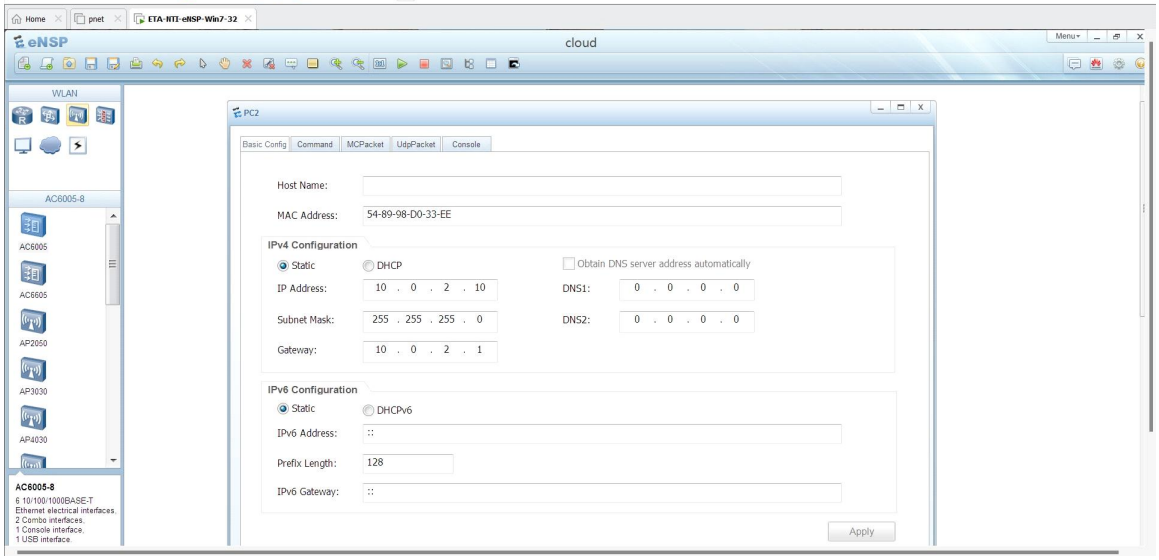
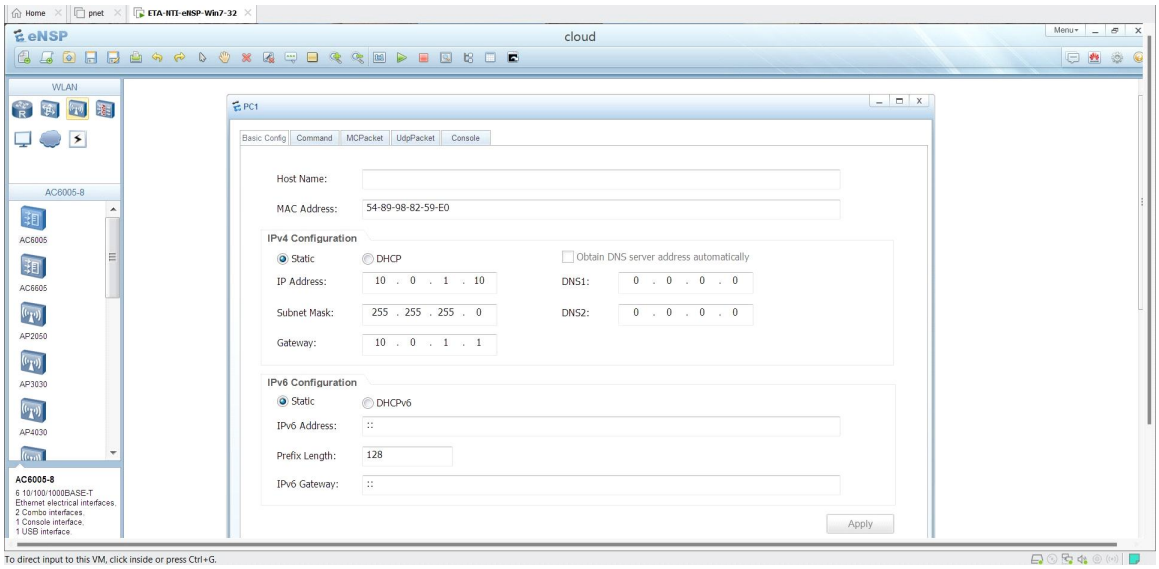

ETA-NTI-eNSP-Win7-32 - VMware Workstation
File Edit View VM Tabs Help
Home
pnet
ETA-NTI-eNSP-Win7-32
eNSP
cloud
Menu
WLAN
AC6005-8
AC6005
AC6005
AP2050
AP3030
AP4030
AC6005-8
6 10/100/1000BASE-T Ethernet electrical interfaces.
2 Combo interfaces.
1 Console interface.
1 USB interface.
PC3
Ethernet 0/0/1
untrust
ip 10.0.3.10
GE 1/0/3
GE 0/0/1
GE 0/0/0
GE 1/0/2
FW1
GE 1/0/0
Cloud1
admin
Admin@12345
http://192.168.0.1
Ethernet 0/0/1
PC2
dmz
ip 10.0.2.10
Ethernet 0/0/1
PC1
trust
ip 10.0.1.10
To direct input to this VM, click inside or press Ctrl+G.


File Edit View VM Tabs Help
Home
pnet
ETA-NTI-eNSP-Win7-32
eNSP
cloud
Menu
WLAN
AC6005-8
AC6005
AC6005
AP2050
AP3030
AP4030
AC6005-8
6 10/100/1000BASE-T Ethernet electrical interfaces.
2 Combo interfaces.
1 Console interface.
1 USB interface.
PC3
Ethernet 0/0/1
untrust
ip 10.0.3.10
10.0.3.1
GE 1/0/3
GE 0/0/1
GE 0/0/0
GE 1/0/2
10.0.2.1
FW1
GE 1/0/0
Cloud1
admin
Admin@12345
http://192.168.0.1
10.0.1.1
Ethernet 0/0/1
PC2
dmz
ip 10.0.2.10
Ethernet 0/0/1
PC1
trust
ip 10.0.1.10

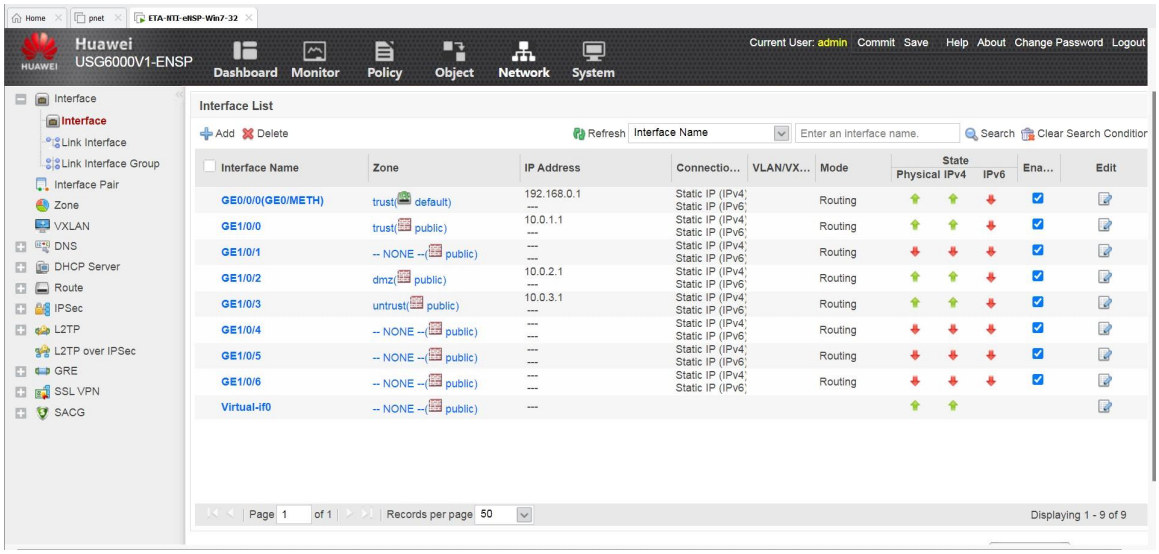

Home
pnet
ETA-NTI-eNSP-Win7-32
eNSP
cloud
Menu
WLAN
AC6005-8
AC6005
AC6605
AP2050
AP3030
AP4030
AC6005-8
6 10/100/1000BASE-T Ethernet electrical interfaces.
2 Combo interfaces.
1 Console interface.
1 USB interface.
PC3
Basic Config
Command
MCPacket
UdpPacket
Console
Host Name:
MAC Address: 54-89-98-9A-7D-80
IPv4 Configuration
Static
DHCP
Obtain DNS server address automatically
IP Address: 10 . 0 . 3 . 10
DNS1: 0 . 0 . 0 . 0
Subnet Mask: 255 . 255 . 255 . 0
DNS2: 0 . 0 . 0 . 0
Gateway: 10 . 0 . 3 . 1
IPv6 Configuration
Static
DHCPv6
IPv6 Address: ::
Prefix Length: 128
IPv6 Gateway: ::
Apply
To direct input to this VM, click inside or press Ctrl+G.

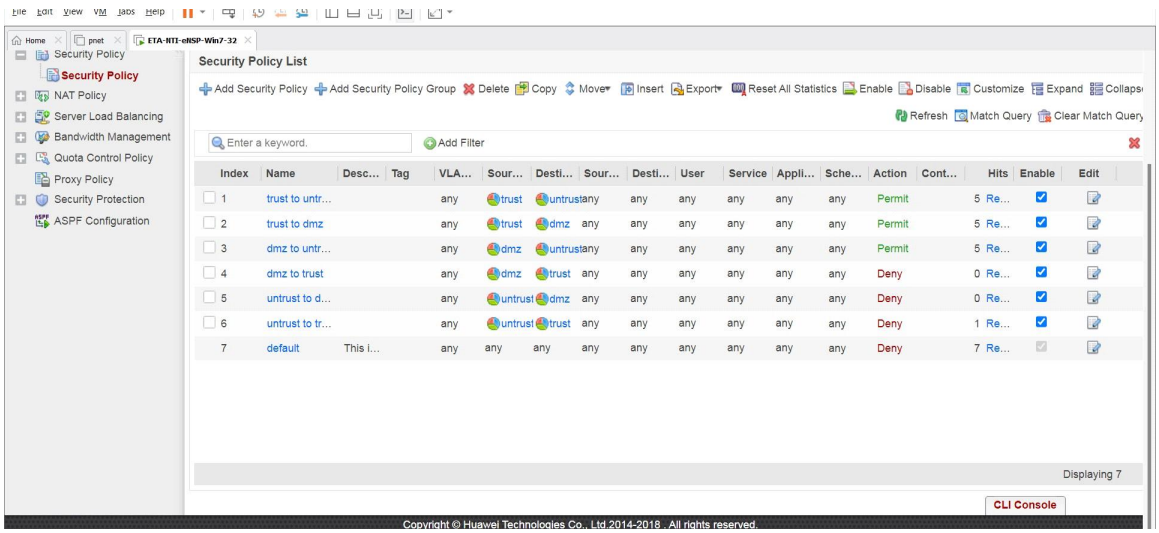
File Edit View VM Tabs Help

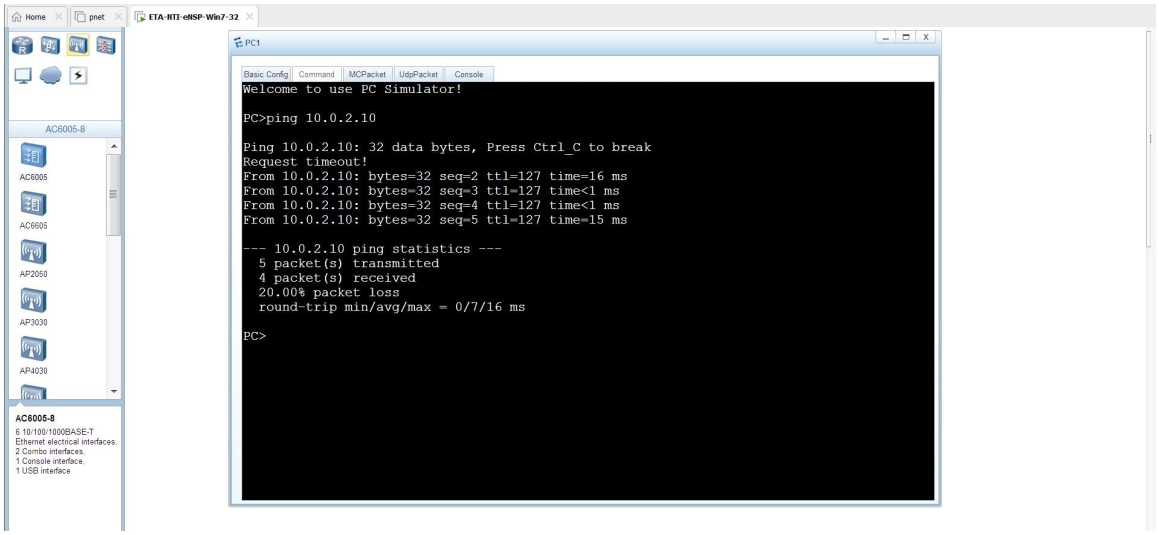

Home
pnet
ETA-NTI-eNSP-Win7-32
eNSP
cloud
Menu
WLAN
AC6005-8
AC6005
AC6605
AP2050
AP3030
AP4030
AC6005-8
6 10/100/1000BASE-T Ethernet electrical interfaces.
2 Combo interfaces.
1 Console interface.
1 USB interface.
PC2
Basic Config
Command
MCPacket
UdpPacket
Console
Host Name:
MAC Address: 54-89-98-D0-33-EE
IPv4 Configuration
Static
DHCP
Obtain DNS server address automatically
IP Address: 10 . 0 . 2 . 10
DNS1: 0 . 0 . 0 . 0
Subnet Mask: 255 . 255 . 255 . 0
DNS2: 0 . 0 . 0 . 0
Gateway: 10 . 0 . 2 . 1
IPv6 Configuration
Static
DHCPv6
IPv6 Address: ::
Prefix Length: 128
IPv6 Gateway: ::
Apply

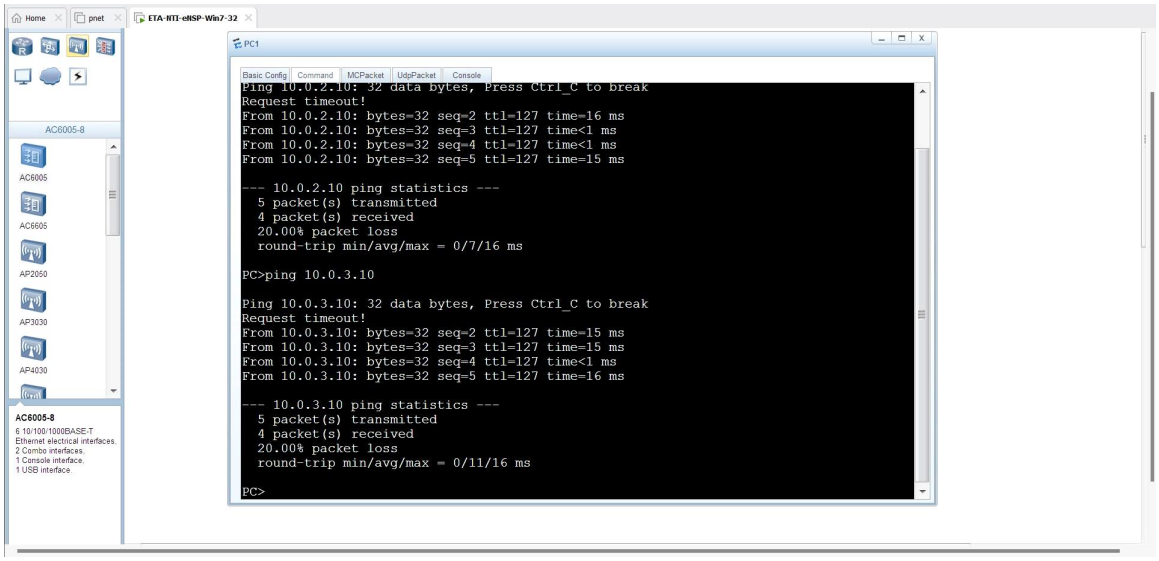

eNSP
cloud
WLAN
AC6005-8
AC6005
AC6605
AP2050
AP3030
AP4030
PC1
Basic Config
Command
MCPacket
UdpPacket
Console
Host Name:
MAC Address:
54-89-98-82-59-E0
IPv4 Configuration
Static
DHCP
Obtain DNS server address automatically
IP Address:
10 . 0 . 1 . 10
Subnet Mask:
255 . 255 . 255 . 0
Gateway:
10 . 0 . 1 . 1
DNS1:
0 . 0 . 0 . 0
DNS2:
0 . 0 . 0 . 0
IPv6 Configuration
Static
DHCPv6
IPv6 Address:
::
Prefix Length:
128
IPv6 Gateway:
::
Apply
AC6005-8
6 10/100/1000BASE-T Ethernet electrical interfaces.
2 Combo interfaces.
1 Console interface.
1 USB interface.
To direct input to this VM, click inside or press Ctrl+G.

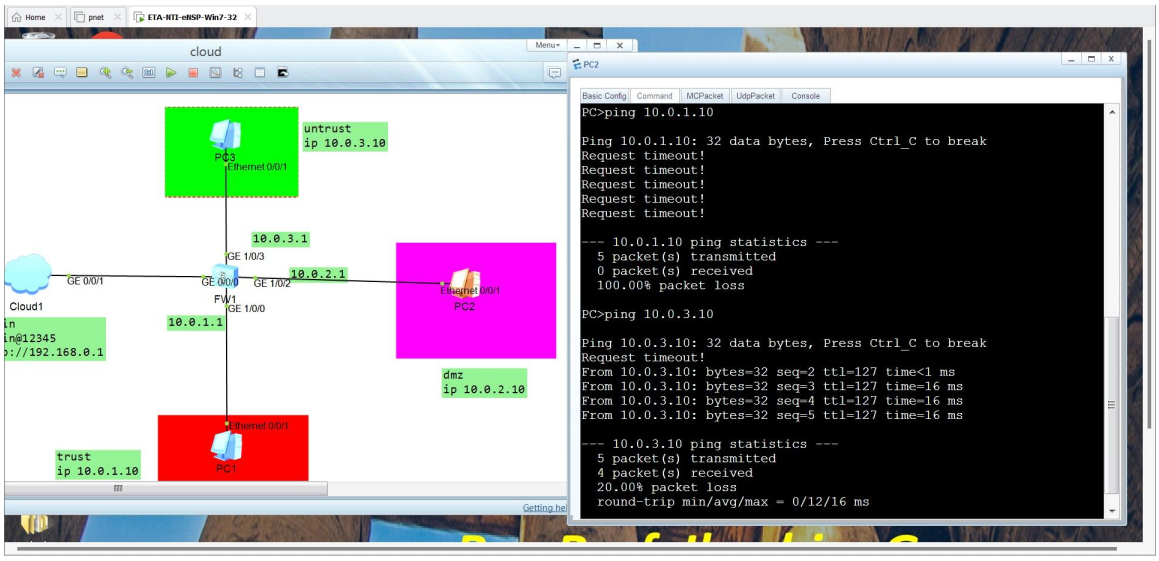

Huawei
USG6000V1-ENSP
HUAWEI
Language
English
User Name
admin
Password
Login
Download CA Certificate
Copyright © Huawei2014-2018. All rights reserved. (Open-Source Software Notice)

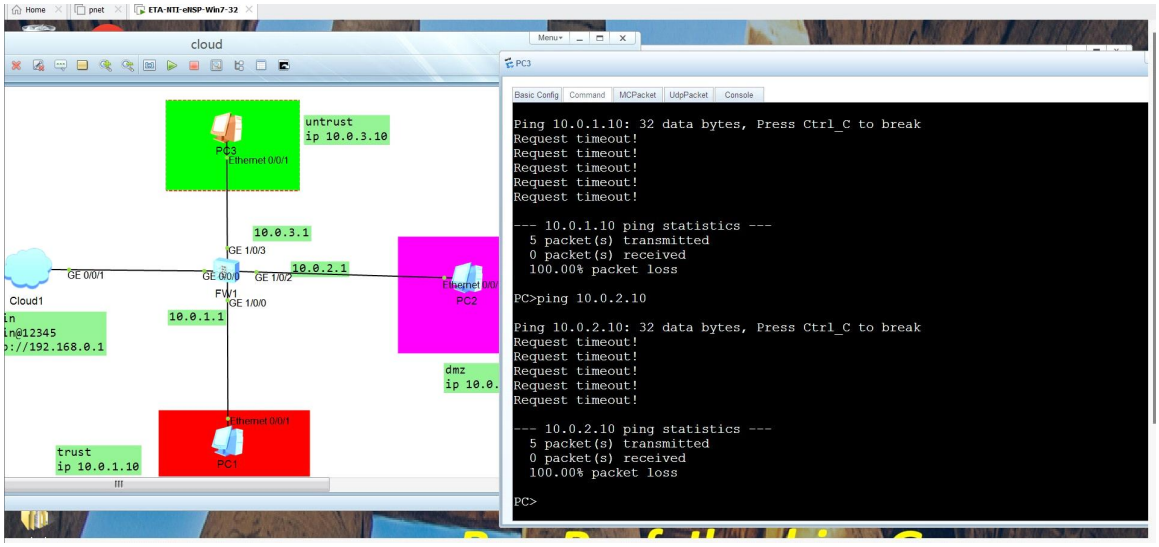

Huawei
USG6000V1-ENSP
Dashboard
Monitor
Policy
Object
Network
System
Current User: admin
Commit
Save
Help
About
Change Password
Logout
Interface
Interface
Link Interface
Link Interface Group
Interface Pair
Zone
VXLAN
DNS
DHCP Server
Route
IPSec
L2TP
L2TP over IPSec
GRE
SSL VPN
SACG
Interface List
Add
Delete
Refresh
Interface Name
Enter an interface name.
Search
Clear Search Conditior
Interface Name
Zone
IP Address
Connectio...
VLAN/VX...
Mode
State
Physical
IPv4
IPv6
Ena...
Edit
GE0/0/0(GE0/METH)
GE1/0/0
GE1/0/1
GE1/0/2
GE1/0/3
GE1/0/4
GE1/0/5
GE1/0/6
Virtual-if0
Routing
Page 1 of 1
Records per page 50
Displaying 1 - 9 of 9


File Edit View VM Tabs Help
Home
pnet
ETA-NTI-eNSP-Win7-32
Security Policy
Security Policy
NAT Policy
Server Load Balancing
Bandwidth Management
Quota Control Policy
Proxy Policy
Security Protection
ASPF Configuration
Security Policy List
Add Security Policy
Add Security Policy Group
Delete
Copy
Move
Insert
Export
Reset All Statistics
Enable
Disable
Customize
Expand
Collapse
Refresh
Match Query
Clear Match Query
Enter a keyword.
Add Filter
Index
Name
Desc...
Tag
VLA...
Sour...
Desti...
Sour...
Desti...
User
Service
Appli...
Sche...
Action
Cont...
Hits
Enable
Edit
1 trust to untr... any trust untrust any any any any any any Permit 5 Re...
2 trust to dmz any trust dmz any any any any any any Permit 5 Re...
3 dmz to untr... any dmz untrust any any any any any any Permit 5 Re...
4 dmz to trust any dmz trust any any any any any any Deny 0 Re...
5 untrust to d... any untrust dmz any any any any any any Deny 0 Re...
6 untrust to tr... any untrust trust any any any any any any Deny 1 Re...
7 default This i... any any any any any any any any any Deny 7 Re...
Displaying 7
CLI Console
Copyright © Huawei Technologies Co., Ltd.2014-2018 . All rights reserved.


Home
pnet
ETA-NTI-eNSP-Win7-32
AC6005-8
AC6005
AC6605
AP2050
AP3030
AP4030
AC6005-8
6 10/100/1000BASE-T Ethernet electrical interfaces.
2 Combo interfaces.
1 Console interface.
1 USB interface.
PC1
Basic Config
Command
MCPacket
UdpPacket
Console
Welcome to use PC Simulator!
PC>ping 10.0.2.10
Ping 10.0.2.10: 32 data bytes, Press Ctrl_C to break
Request timeout!
From 10.0.2.10: bytes=32 seq=2 ttl=127 time=16 ms
From 10.0.2.10: bytes=32 seq=3 ttl=127 time<1 ms
From 10.0.2.10: bytes=32 seq=4 ttl=127 time<1 ms
From 10.0.2.10: bytes=32 seq=5 ttl=127 time=15 ms
--- 10.0.2.10 ping statistics ---
5 packet(s) transmitted
4 packet(s) received
20.00% packet loss
round-trip min/avg/max = 0/7/16 ms
PC>


Home
pnet
ETA-NTI-eNSP-Win7-32
AC6005-8
AC6005
AC6605
AP2050
AP3030
AP4030
AC6005-8
6 10/100/1000BASE-T Ethernet electrical interfaces.
2 Combo interfaces.
1 Console interface.
1 USB interface.
PC1
Basic Config
Command
MCPacket
UdpPacket
Console
Ping 10.0.2.10: 32 data bytes, Press Ctrl_C to break
Request timeout!
From 10.0.2.10: bytes=32 seq=2 ttl=127 time=16 ms
From 10.0.2.10: bytes=32 seq=3 ttl=127 time<1 ms
From 10.0.2.10: bytes=32 seq=4 ttl=127 time<1 ms
From 10.0.2.10: bytes=32 seq=5 ttl=127 time=15 ms
--- 10.0.2.10 ping statistics ---
5 packet(s) transmitted
4 packet(s) received
20.00% packet loss
round-trip min/avg/max = 0/7/16 ms
PC>ping 10.0.3.10
Ping 10.0.3.10: 32 data bytes, Press Ctrl_C to break
Request timeout!
From 10.0.3.10: bytes=32 seq=2 ttl=127 time=15 ms
From 10.0.3.10: bytes=32 seq=3 ttl=127 time=15 ms
From 10.0.3.10: bytes=32 seq=4 ttl=127 time<1 ms
From 10.0.3.10: bytes=32 seq=5 ttl=127 time=16 ms
--- 10.0.3.10 ping statistics ---
5 packet(s) transmitted
4 packet(s) received
20.00% packet loss
round-trip min/avg/max = 0/11/16 ms
PC>


Home
pnet
ETA-NTI-eNSP-Win7-32
cloud
untrust
ip 10.0.3.10
PC3
Ethernet 0/0/1
10.0.3.1
GE 1/0/3
GE 0/0/1
GE 0/0/0
GE 1/0/2
10.0.2.1
Cloud1
FW1
GE 1/0/0
10.0.1.1
Ethernet 0/0/1
PC2
dmz
ip 10.0.2.10
Ethernet 0/0/1
PC1
trust
ip 10.0.1.10
PC2
Basic Config
Command
MCPacket
UdpPacket
Console
PC>ping 10.0.1.10
Ping 10.0.1.10: 32 data bytes, Press Ctrl_C to break
Request timeout!
Request timeout!
Request timeout!
Request timeout!
Request timeout!
--- 10.0.1.10 ping statistics ---
5 packet(s) transmitted
0 packet(s) received
100.00% packet loss
PC>ping 10.0.3.10
Ping 10.0.3.10: 32 data bytes, Press Ctrl_C to break
Request timeout!
From 10.0.3.10: bytes=32 seq=2 ttl=127 time<1 ms
From 10.0.3.10: bytes=32 seq=3 ttl=127 time=16 ms
From 10.0.3.10: bytes=32 seq=4 ttl=127 time=16 ms
From 10.0.3.10: bytes=32 seq=5 ttl=127 time=16 ms
--- 10.0.3.10 ping statistics ---
5 packet(s) transmitted
4 packet(s) received
20.00% packet loss
round-trip min/avg/max = 0/12/16 ms


Home
pnet
ETA-NTI-eNSP-Win7-32
cloud
untrust
ip 10.0.3.10
PC3
Ethernet 0/0/1
10.0.3.1
GE 1/0/3
GE 0/0/1
GE 0/0/0
GE 1/0/2
10.0.2.1
Cloud1
FW1
GE 1/0/0
10.0.1.1
PC2
dmz
ip 10.0.
Ethernet 0/0/1
PC1
trust
ip 10.0.1.10
PC3
Basic Config
Command
MCPacket
UdpPacket
Console
Ping 10.0.1.10: 32 data bytes, Press Ctrl_C to break
Request timeout!
Request timeout!
Request timeout!
Request timeout!
Request timeout!
--- 10.0.1.10 ping statistics ---
5 packet(s) transmitted
0 packet(s) received
100.00% packet loss
PC>ping 10.0.2.10
Ping 10.0.2.10: 32 data bytes, Press Ctrl_C to break
Request timeout!
Request timeout!
Request timeout!
Request timeout!
Request timeout!
--- 10.0.2.10 ping statistics ---
5 packet(s) transmitted
0 packet(s) received
100.00% packet loss
PC>