Smart-Pin

Model pin



Narrow, short model pin with optimum insertion into metal sleeve.

Advantages


- Extremely narrow pin and sleeve combination.
- For particularly narrow spaces.
- Pin height for low model bases saves plaster.

Technical data

Ø (Head)	1,6 mm // 0.06 "
Ø (Sleeve)	2,5 mm // 0.09 "
Ø (Pin max.)	2 mm // 0.07 "
Length (Shaft length)	12,5 mm // 0.49 "
Length (Head length)	5,5 mm // 0.21 "

Ordering information

Smart-Pin	1000 pieces	No. 3662000
Sleeves for Smart-Pin	1000 pieces	No. 3662100
Accessories		Page 127

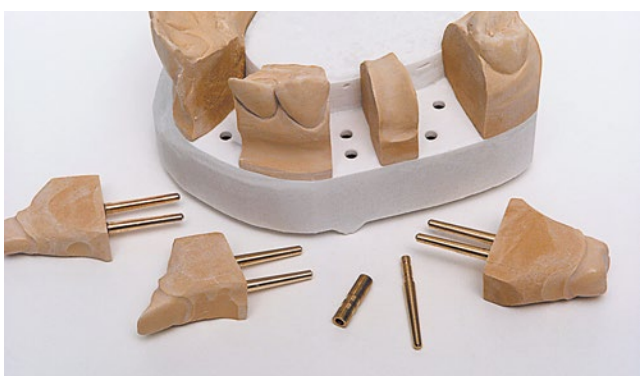

Bi-Fix-Pin

Model pin



Dual guidance model pin with fixing wire for exact positioning in the impression.

Advantages

- No drilling required.
- Reduced model production time.
- Two guidance pins to prevent rotation.

Technical data

Ø (Head)	2 mm // 0.07 "
Length (Shaft length)	17,5 mm // 0.68 "
Length (Head length)	5,5 mm // 0.21 "
Length (Needle length)	43 mm // 1.69 "
Width (Pin max.)	2,9 mm // 0.11 "

Ordering information

Bi-Fix-Pin	100 pieces	No. 3451000
Bi-Fix-Pin	1000 pieces	No. 3453000
Accessories		Page 127

