

[illegible][illegible]

The schematic diagram shows an I2C bus with four components: H1 M3, H2 M3, H3 M3, and H4 M3. The bus is connected to GND. Below the bus, there are four footprints labeled FID1, FID2, FID3, and FID4, each with a corresponding component symbol.

File: lion.kicad_sch

File: sw_source.kicad_sch

[illegible]

Je zde I2C master switch, tím by mělo být zaplňeno, aby komponenty byly "programovatelné" přímo přes USB pomocí FT232RL, který funguje jako USB-UART a zároveň USB-I2C bridge. Díky tomu by to mělo usnadnit konfiguraci.

Operating mode: 200 uA
Standby mode: 80 uA

Active: 1.5mA
Standby: 6 μ A

+3.3V
I2C: 0x44
U6
SHT31-DIS
0x44
ADDR
RESET
R
VSS
VDD
SDA
SCL
ALERT
GND

+3.3V
C16
100n

Active: 12.5 μ A
Standby: 0.14 μ A
U9 I2C: 0x76
M5561101BA03-50
VDD
PS
GND
CSB_1
SCLK
SDI/SDA
SDO
CSB_2
GND

+3.3V
C18
100n

+3.3V
Typical: 0.28 μ A
C17
100n
EXT_DETECTION-CHARGER

AB507-120-32.768KHZ-T
Y3
OSC1
OSC0
U10
PCF85263A
SCL
SDA
VDD
GND
INTA
CLK
TS
VBAT
GND

+3.3V
I2C: 0x50
0x58
AT24C564-SSHM
U5
A0
A1
A2
GND
VCC
SDA
SCL
WP
GND
GND
GND

+3.3V
C50
100n

Active: 1.0 mA
Standby: 2 μ A

+3.3V
GND

+BATT
R41
BT3
CR2032
C20
100n
GND
GND

R45
10K
R82
100R
BTN_USER_A

I2C addresses
=====

0x44: HYGROMETER
0x76: ALTIMET
0x70: I2C switch
0x6B: Charger
0x55: Gauge
0x50: EEPROM
0x58: EEPROM SN
0x51: RTC
0x71: SDreader

[illegible]

Active: 4.5 mA
Shutdown: 30 uA

Enabled by default (EN – high)

The diagram shows a Molex 46436-9327 connector, a yellow rectangular component with pins labeled A1 through B6 on the left and E1 through E6 on the bottom. It is connected to a +BATT power source and GND. The top pins (A1-A6) are connected to a 3V3_EXT and 5V_EXT power source. The bottom pins (B1-B6) are connected to a 3V3_EXT and 5V_EXT power source. The right pins (E1-E6) are connected to a 3V3_EXT and 5V_EXT power source. The connector is labeled MOLEX 46436-9327.

The diagram shows the following components and connections:

- +3.3V** supply connected to **R44 10k** resistor.
- R44 10k** resistor connected to **D6 BAS16W** diode.
- D6 BAS16W** diode connected to the **EXT_DETECT** pin.
- EXT_DETECT** pin connected to a parallel combination of **22u C21** capacitor and **R43 270** resistor.
- The parallel combination is connected to the **EXT_DETECT_CHARGER** pin.

Active: 68 μ A
Disabled: 15 μ A

U7
TMUX1574DYYR

R39
10k

~~GND~~ ~~SPL_MUX_SEL~~ 1 SEL VDD 16 $+3.3V$

MOSI_SD 2 S1A EN 15 $\downarrow$ GND

MOSI_OUT 3 S1B S4A 14 $\downarrow$ GND

MOSI_MCU 4 D1 S4B 13 $\downarrow$ GND

MISO_SD 5 S2A D4 12 $\downarrow$ GND

MISO_OUT 6 S2B S3A 11 SCLK_SD

MISO_MCU 7 D2 S3B 10 SCLK_OUT



8 GND D3 9 SCLK_MCU

$+3.3V$
C19
1u
GND


Size: A3	Page: 1/3	Date: 2025-05-14
----------	-----------	------------------




BATTERY CHARGER

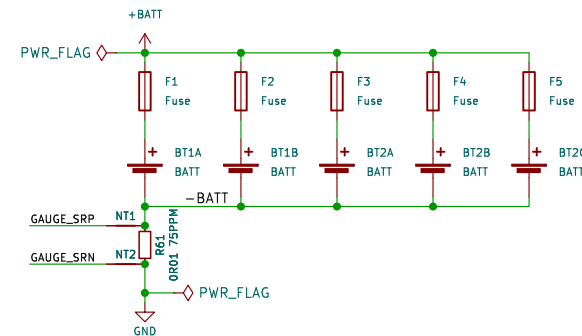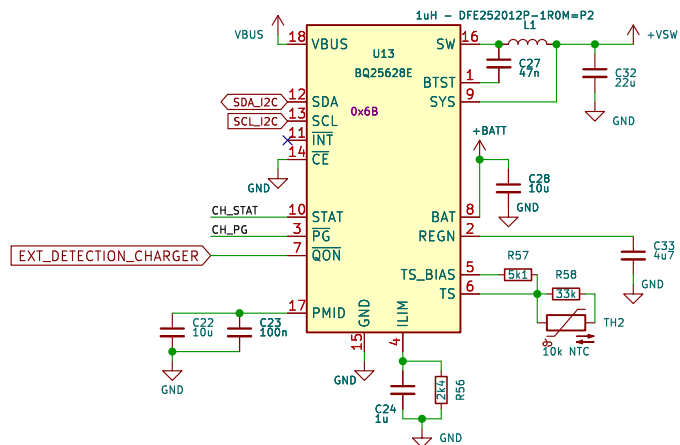

FUEL GAUGE

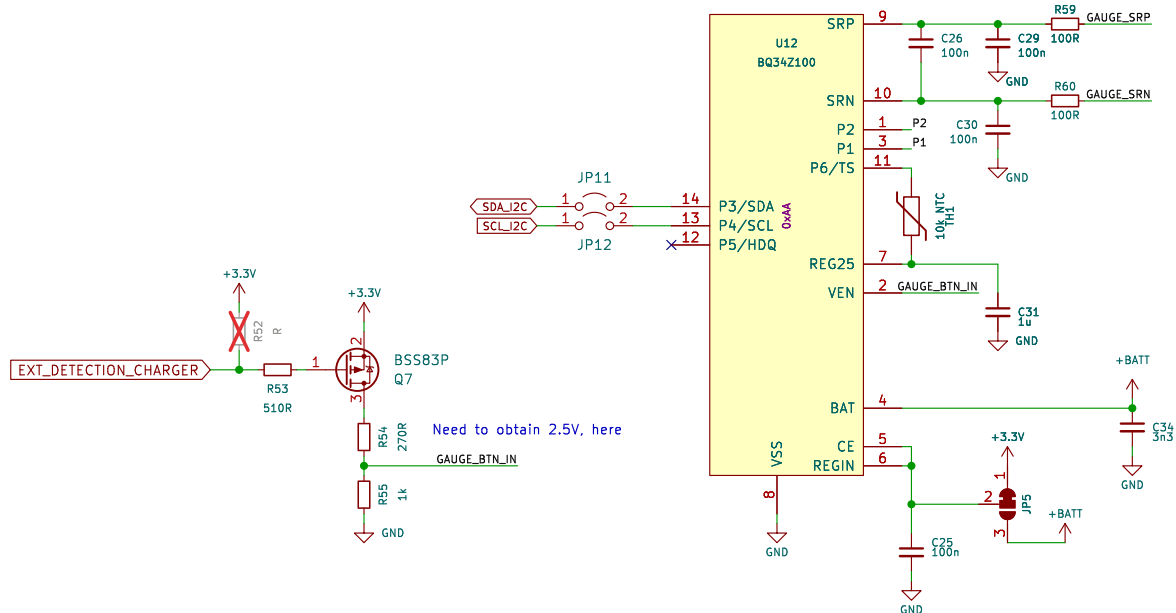

Battery Status Indicator

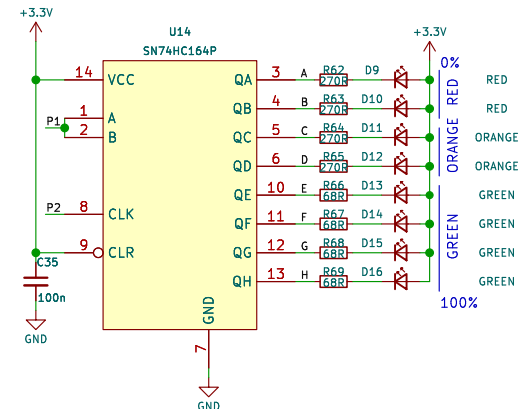

Title: BATDATUNTIO1

Universal battery and data storage unit.

Author: MLAB.cz, roman-dvorak

Size: A4

Page: 2/3

Date: 2025-05-14



