

1. Abstract

Calculation overview



Deep groove ball bearing

■ SKF Explorer

	Bearing rating life		Static safety factor	Frictional moment	Power loss
Designation	Basic	SKF life		Total	
	L_{10h} (h)	L_{10mh} (h)	S_0	M (Nmm)	P_{loss} (W)
■ <u>6005-2Z</u>	5540	3880	1.77	129	1.4

Consideration

All calculated values are best estimates resulting from the input data and assumptions, and well-recognized data sources, and well-established calculation methods.

SKF follows standards and methods suggested by Greenhouse Gas Protocol for CO₂ estimates.

For details about data, methods, and assumptions used, follow the link below.

If you intend to use these values for decision making, contact SKF for more details and correct interpretation of calculation results.

The values calculated by SKF Bearing Select should not be compared with values obtained from other tools or sources, unless you are confident about the data sources, methods and assumptions used. [More info](#)

Consideration

Grease consumption is almost zero, therefore CO₂ emissions are not calculated.

Consideration


The calculated SKF rating life L_{10mh} is shorter than the period of interest.

Consideration

Low viscosity ratio k , reduced asperity contact. It is recommended to select a higher viscosity lubricant or improve cooling. It is not appropriate to look at basic rating life only. Instead use SKF rating life method. Recommended to use anti-wear (AW) or extreme pressure (EP) additives to reduce wear [More info](#)

2. Input

2.1. Bearing data

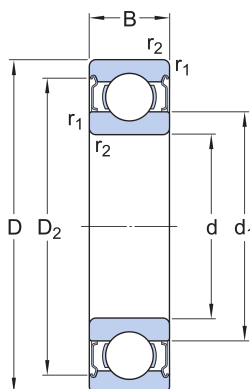

Designation	Bearing type	Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Clearance class
					Dynamic	Static		Reference	Limiting	
		d (mm)	D (mm)	B (mm)	C (kN)	C ₀ (kN)	P _u (kN)	n _{ref} (r/min)	n _{lim} (r/min)	
■ 6005-2Z	Deep groove ball bearing	25.0	47.0	12.0	11.9	6.55	0.275	32000.0	16000.0	Normal

2.2. Loads, Speed and Temperature

Rotating ring		Inner ring rotation							
Forces		Speed		Temperature		Case weight			
Radial (F _r) (kN)	Axial (F _a) (kN)	(r/min)		Inner ring (°C)	Outer ring (°C)				
LC1	3.7	100.0		30	30	1			

Maximum temperature is used for calculating the actual viscosity, κ , a_{SKF} and SKF rating life.

Mean temperature is used for calculating bearing friction and power loss.

2.3. Lubrication

Designation	Lubricant	Effective EP additives	Contamination	
	Name		Method	Cleanliness / Factor
■ 6005-2Z	MT47	False	Detailed guidelines	High cleanliness

2.4. CO₂ emissions settings

Designation	Input energy mix manually	Geographical location	Period of interest [Years]	Time operational [%]
■ 6005-2Z	False	European Union	1	100

2.5. Fits and tolerances

	Requirements	Tolerance Class		Calculated interference	Include Smoothing
Designation	Guidance	Housing	Shaft		
■ 6005-2Z	False	G7	g6	True	True

3. Results

3.1. Loads & static safety

	Load ratio	Static safety factor	Equivalent dynamic load	Equivalent static load
Designation	C/P	S ₀	P (kN)	P ₀ (kN)
■ 6005-2Z	3.22	1.77	3.7	3.7

3.2. Bearing minimum load

	Reaction forces		Minimum load	
Designation	Radial	Axial		Requirements
	F _r (kN)	F _a (kN)	F _{rm} (kN)	met?
■ 6005-2Z	3.7	0.0	0.0177	yes

3.3. Adjusted reference speed

	Adjusted reference speed	Adjustment factors	
Designation		For bearing load P	For oil viscosity
	n _{ar} (r/min)	f _p	f _v
■ 6005-2Z	13700	0.41	1.03

3.4. Lubrication conditions

Designation	Operating viscosity			Viscosity ratio
	Actual	Rated	Rated @ 40 °C	
	ν (mm ² /s)	ν_1 (mm ² /s)	ν_{ref} (mm ² /s)	κ
■ 6005-2Z	128	147	85.0	0.87

3.5. Bearing rating life

Designation	Bearing rating life		SKF life modification factor	Contamination factor
	Basic	SKF		
	L_{10h} (h)	L_{10mh} (h)	a_{skf}	η_c
■ 6005-2Z	5540	3880	0.7	0.45

Consideration

Low viscosity ratio κ , reduced asperity contact. It is recommended to select a higher viscosity lubricant or improve cooling. It is not appropriate to look at basic rating life only. Instead use SKF rating life method. Recommended to use anti-wear (AW) or extreme pressure (EP) additives to reduce wear [More info](#)

3.6. Bearing friction & power loss

Designation	Frictional moment		Friction sources				Power loss
	Total	At start 20-30°C and zero speed	Rolling	Sliding	Seals	Drag loss	
	M (Nmm)	M_{start} (Nmm)	M_{rr} (Nmm)	M_{sl} (Nmm)	M_{seal} (Nmm)	M_{drag} (Nmm)	P_{loss} (W)
■ 6005-2Z	129	195	11.1	118	0	0	1.4

3.7. Bearing frequencies

Designation	Rotational frequencies				Frequency of over-rolling		
	Inner ring	Outer ring	Rolling element set & cage	Rolling element about its axis	Point on inner ring	Point on outer ring	Rolling element
	f_i (Hz)	f_e (Hz)	f_c (Hz)	f_r (Hz)	f_{ip} (Hz)	f_{ep} (Hz)	f_{rp} (Hz)
■ 6005-2Z	1.667	0.0	0.677	4.29	9.895	6.772	8.58

3.8. Estimation of CO₂ emissions over period of interest

Designation	CO ₂ emissions caused by bearing production	CO ₂ emissions during bearing operation - over period of interest			Resources consumed during bearing operation - over period of interest	
		Frictional power loss	Grease consumption	Sum of CO ₂ during operation	Energy	Grease
	kg of CO ₂	kg of CO ₂	kg of CO ₂	kg of CO ₂	kWh	kg
■ 6005-2Z	*0.3 (Learn more)	5.5	0.0	5.5	11.9	0.0

* Value is not designation specific, but based on bearing mass

Consideration

All calculated values are best estimates resulting from the input data and assumptions, and well-recognized data sources, and well-established calculation methods.

SKF follows standards and methods suggested by Greenhouse Gas Protocol for CO₂ estimates.

For details about data, methods, and assumptions used, follow the link below.

If you intend to use these values for decision making, contact SKF for more details and correct interpretation of calculation results.

The values calculated by SKF Bearing Select should not be compared with values obtained from other tools or sources, unless you are confident about the data sources, methods and assumptions used. [More info](#)

Consideration

Grease consumption is almost zero, therefore CO₂ emissions are not calculated.

Consideration

The calculated SKF rating life $L_{10\text{ mh}}$ is shorter than the period of interest.

3.9. Fits and tolerances

Note

Typically, it is not sufficient to use an interference fit alone to axially locate a bearing ring on a cylindrical seat.

3.9.1. Tolerances

Designation	Shaft outer diameter		Bearing bore		Bearing outer diameter		Housing bore		Smoothing	
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Shaft and bearing bore	Bearing outer ring and housing
	(μm)	(μm)	(μm)	(μm)	(μm)	(μm)	(μm)	(μm)	(μm)	(μm)
■ 6005-2Z	-20	-7	-10	0	-11	0	9	34	7	12

Consideration

For the tolerances calculation, the normal tolerance for the bearing bore and outer diameter is used.

3.9.2. Fits, Probable Interference (+) / Clearance (-)

Designation	Shaft			Housing		
	Probable minimum	Middle	Probable maximum	Probable minimum	Middle	Probable maximum
	(μm)	(μm)	(μm)	(μm)	(μm)	(μm)
■ 6005-2Z	-24	-16	-7	-53	-39	-25

LIMITED WARRANTY : The SKF Bearing Select software tool of the SKF Company supports the calculation and selection of bearings.

This software is provided 'as is' with out any warranty of any sort, implicitly as well as explicitly.

Please note that the obtained results can be affected by many external parameters and/or the quality of the assumptions taken into account. The results obtained using this software must be validated by the user who accepts the fact that the use of this software and the exploitation

of the obtained results are under the user's entire and sole responsibility.

© SKF is a registered trademark of the SKF Group. © SKF Group 2022.