Mounting holes



Telemetry

File: Telemetry.kicad_sch

Power_management

File: Power_management.kicad_sch

Microcontroller

File: Microcontroller.kicad_sch

Peripherals

File: Peripherals.kicad_sch

Connectors

File: Connectors.kicad_sch

Title: DATALOGGER02A

Universal battery powered SDcard datalogger.

Author: Mlab www.mlab.cz

mlab

Size: A4	Page: 1/6	Date: 2025-09-06

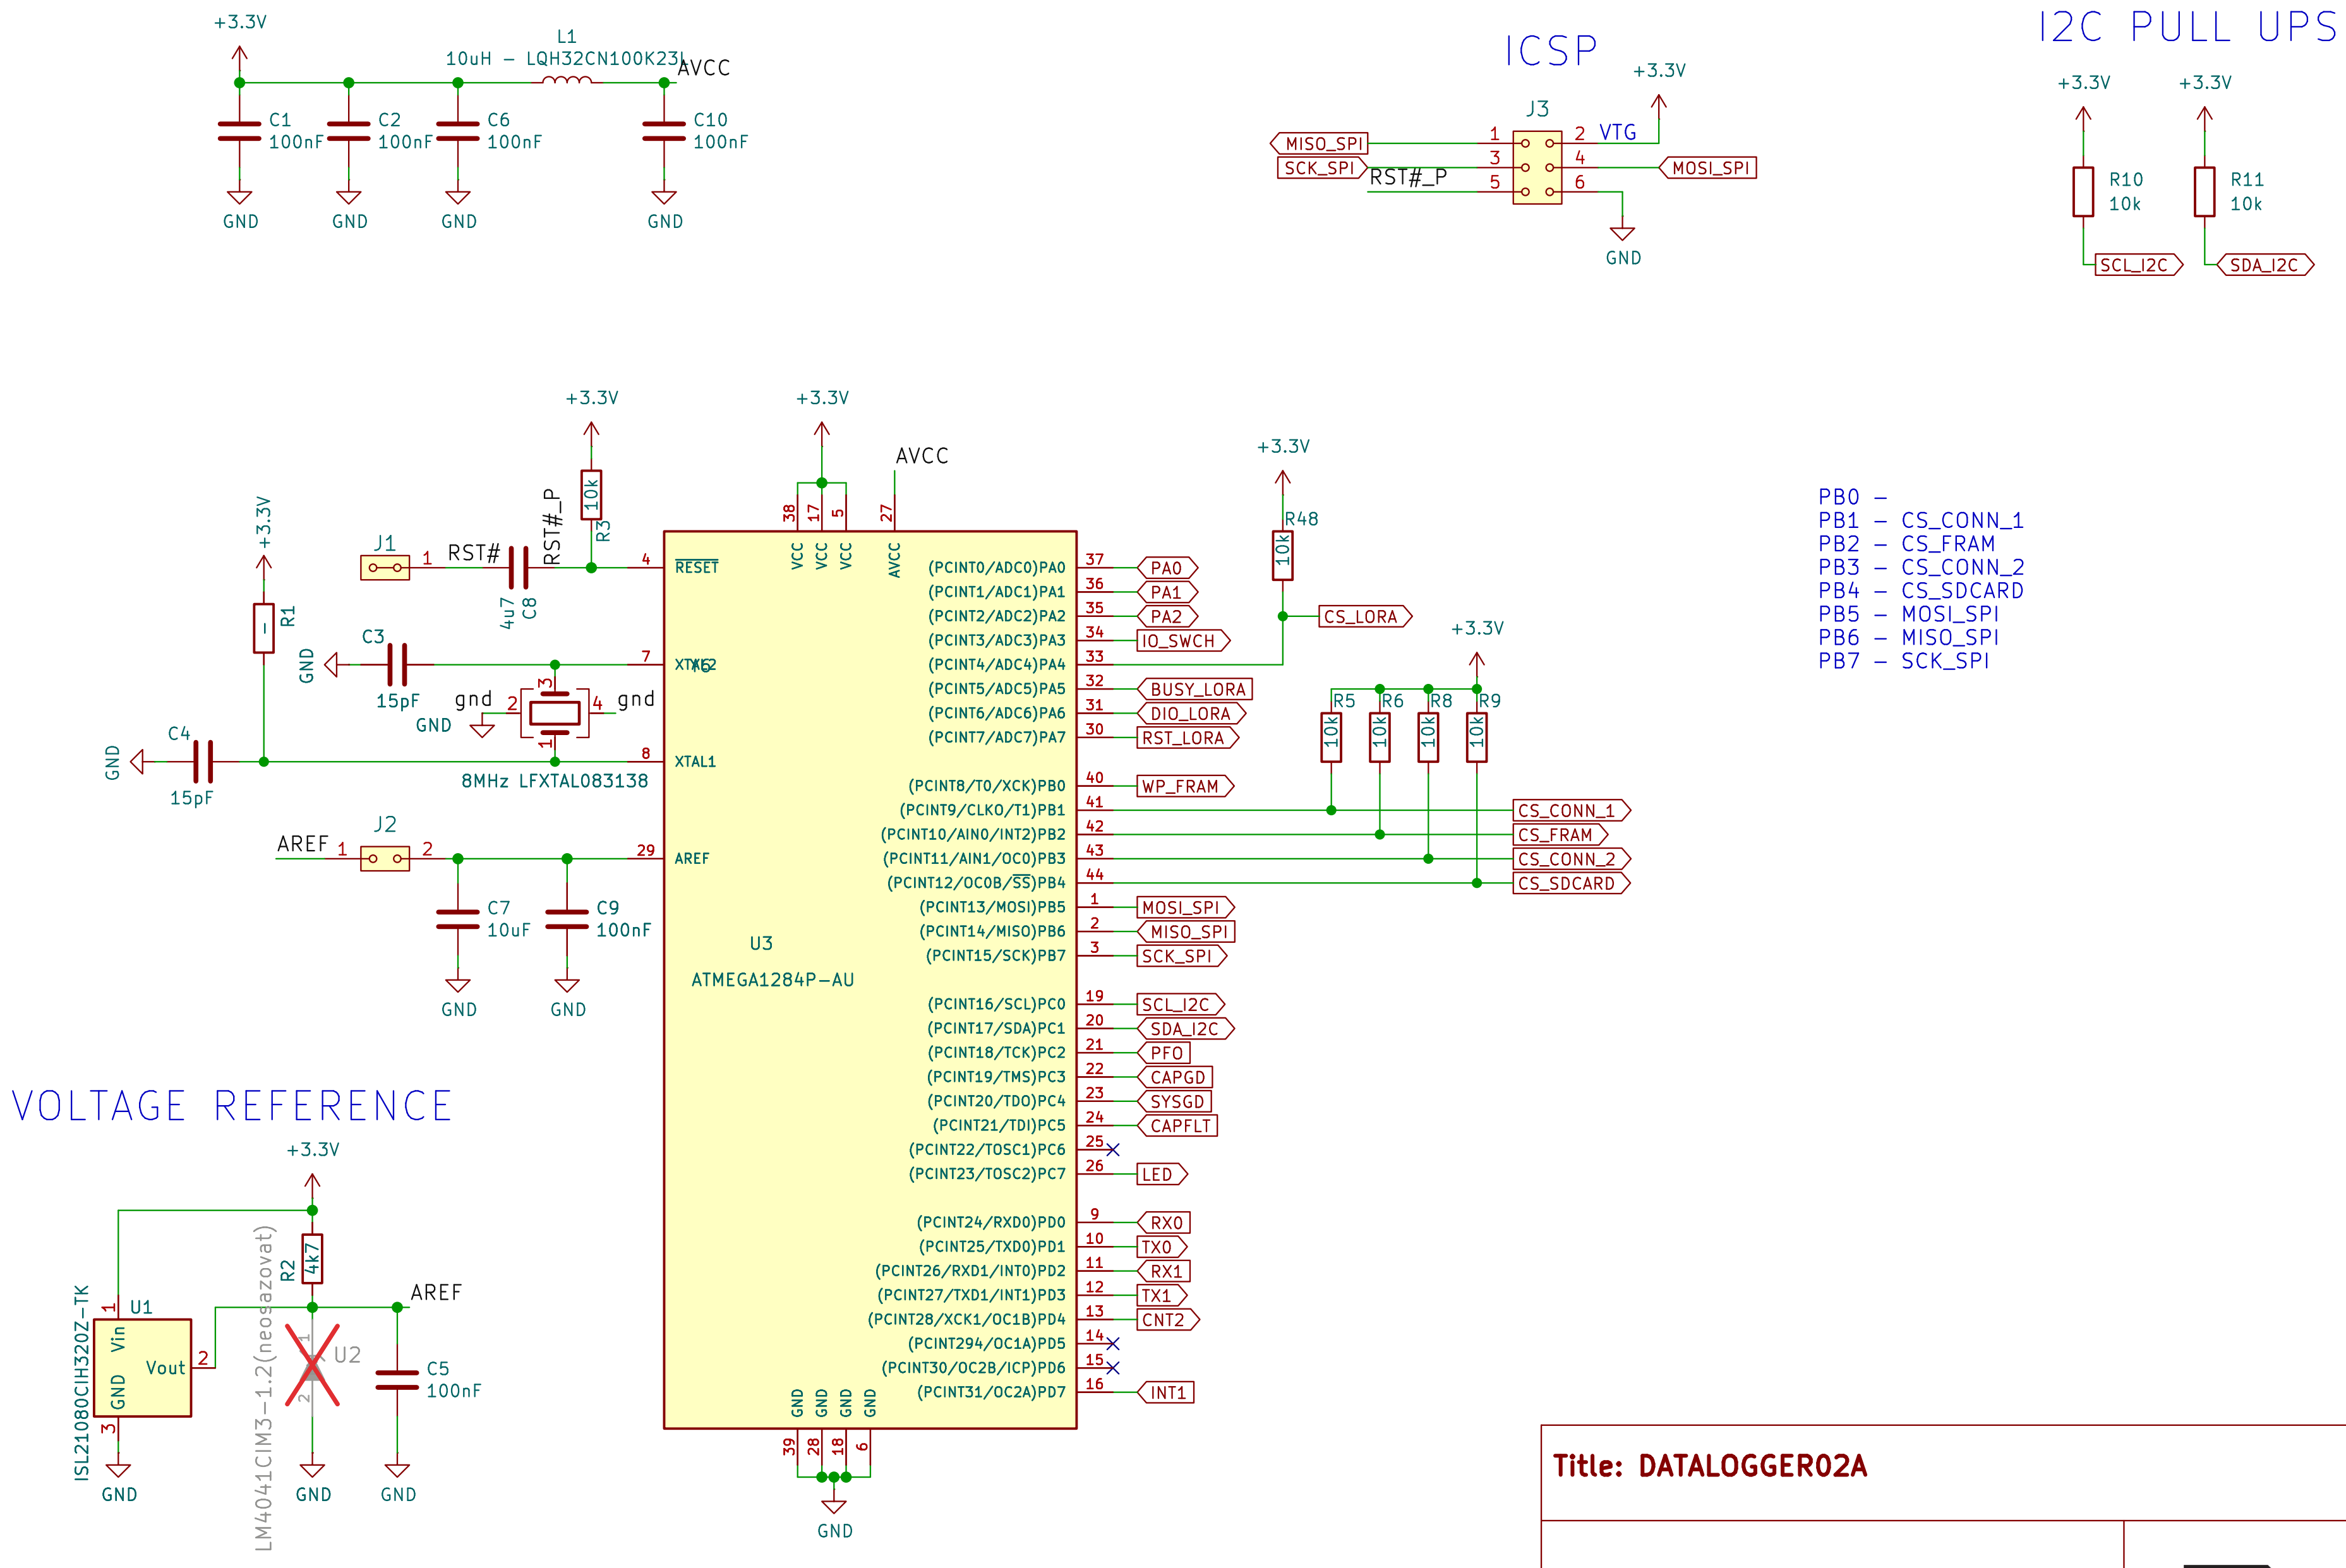

Title: DATALOGGER02A

Author:

Size: A4 | Page: 3/6 | Date: 2025-09-06

mlab

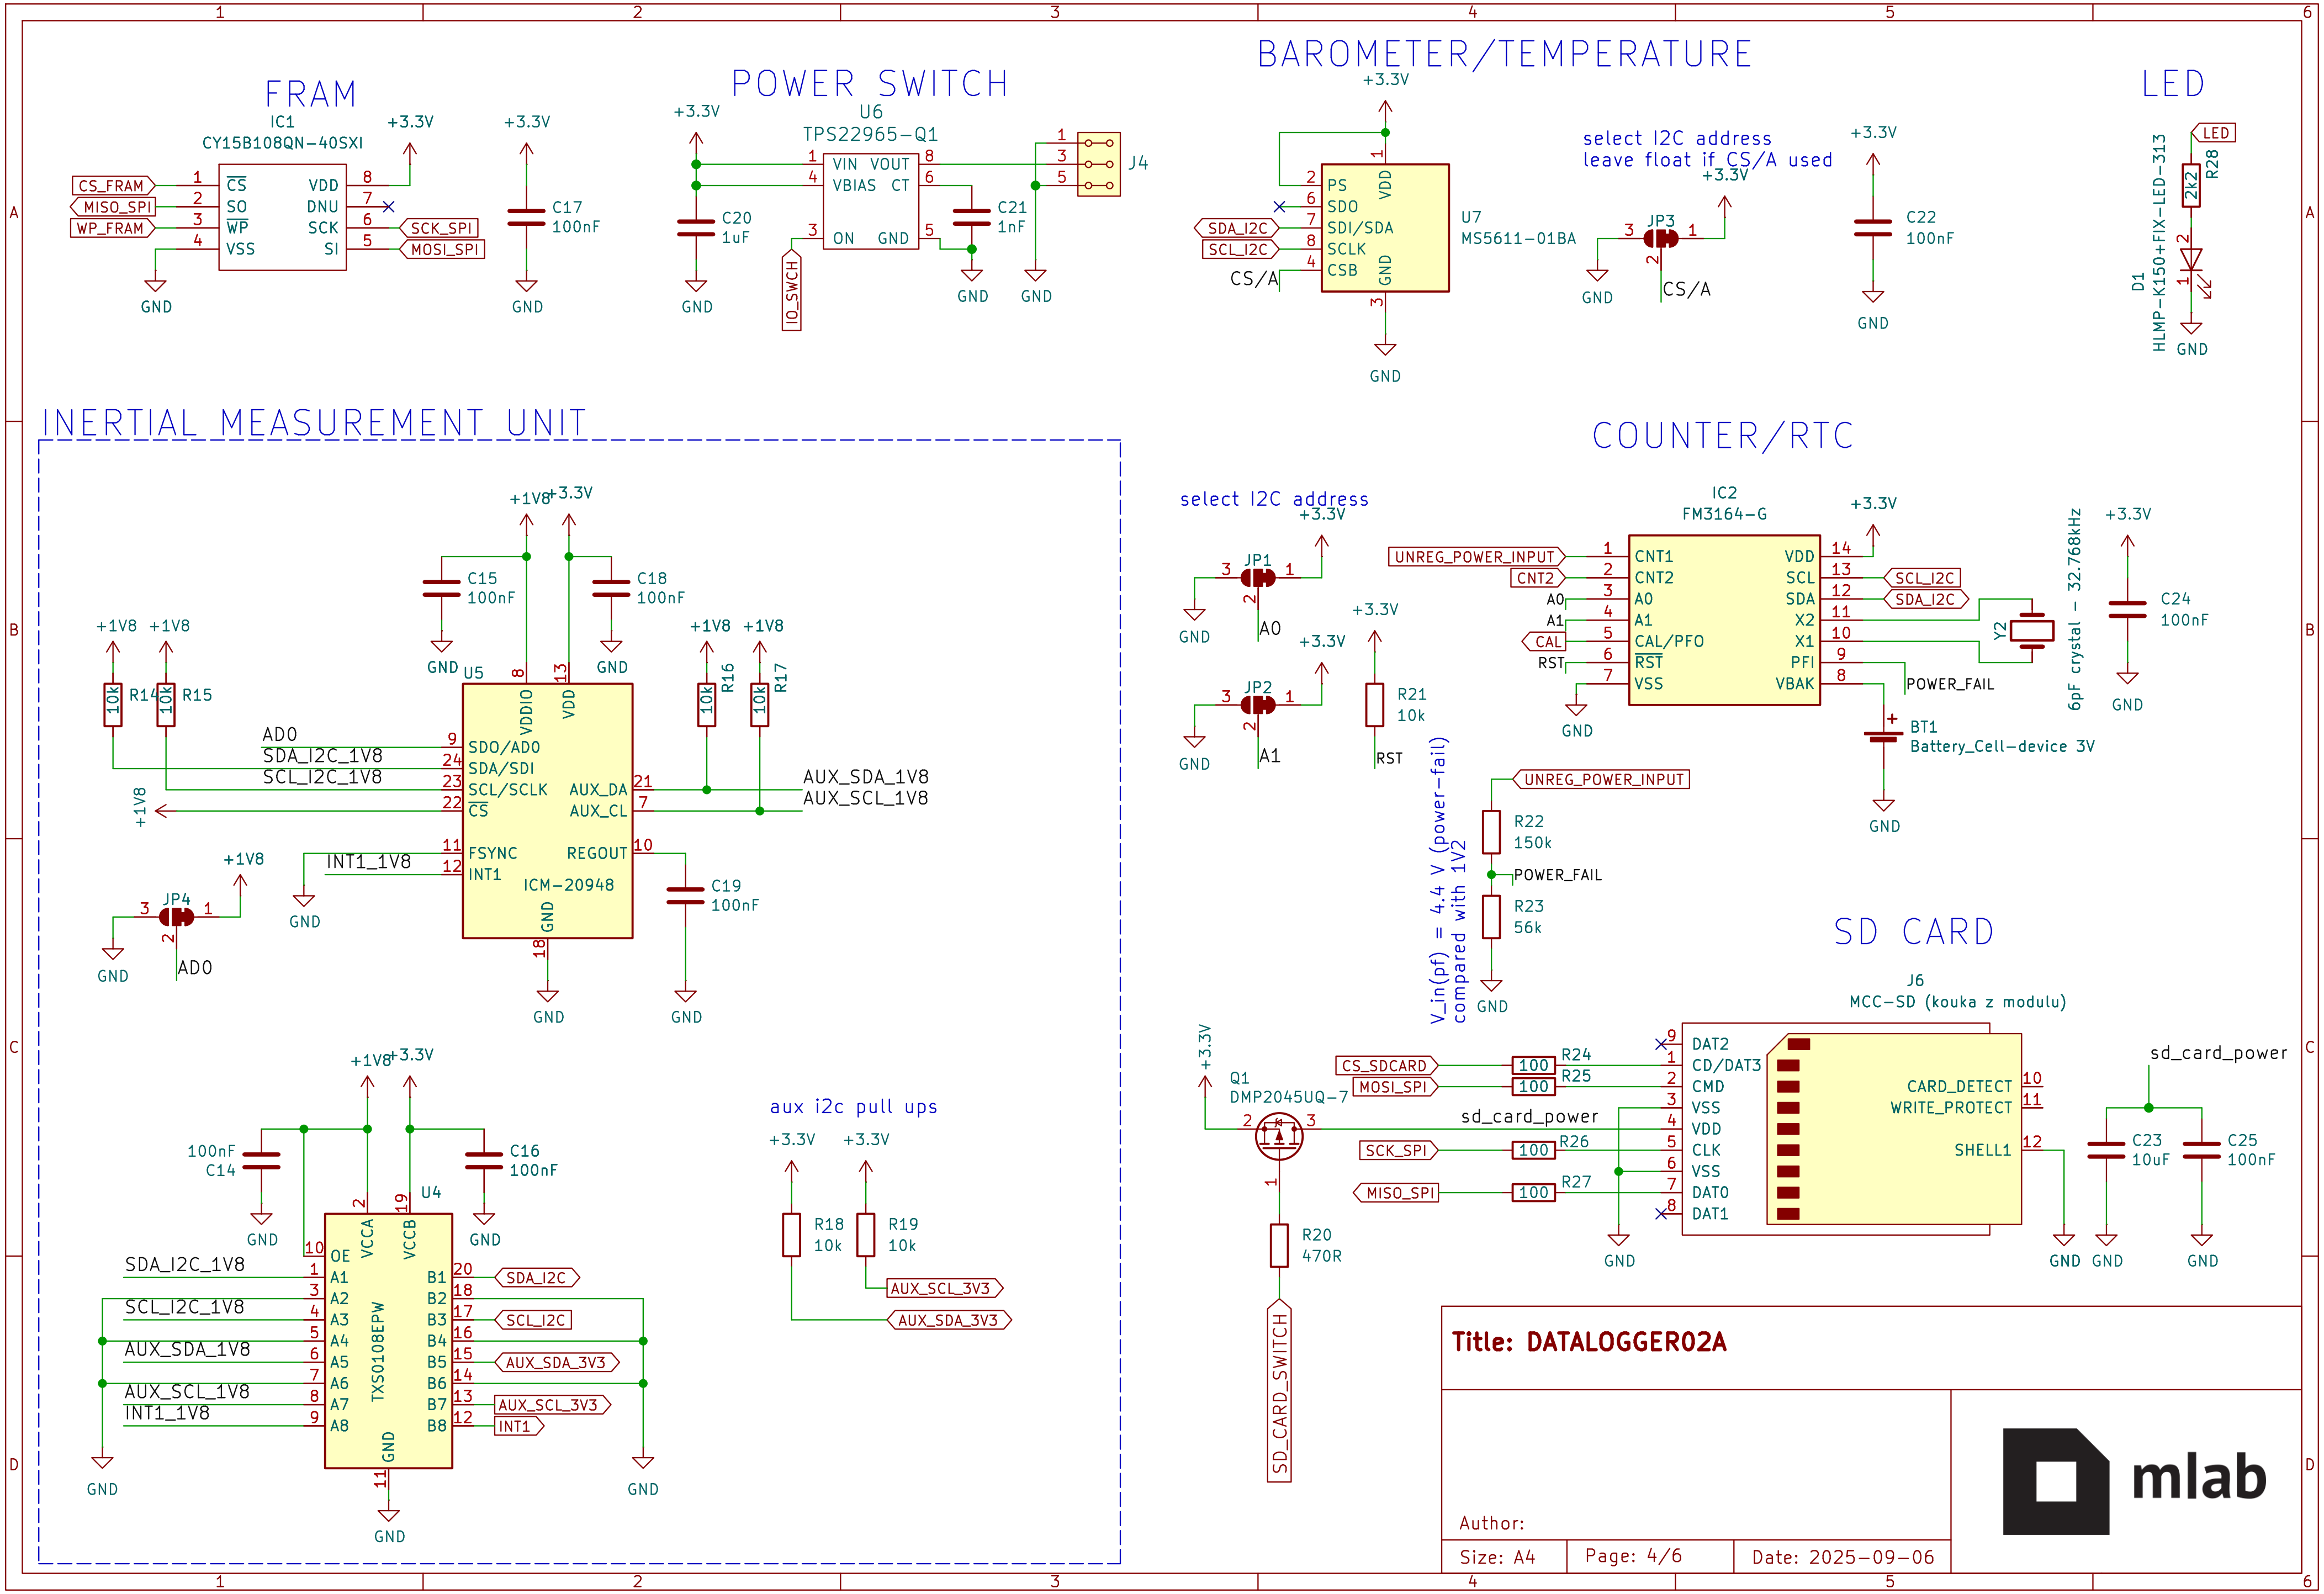

Title: DATALOGGER02A

Author:

Size: A4 | Page: 4/6 | Date: 2025-09-06

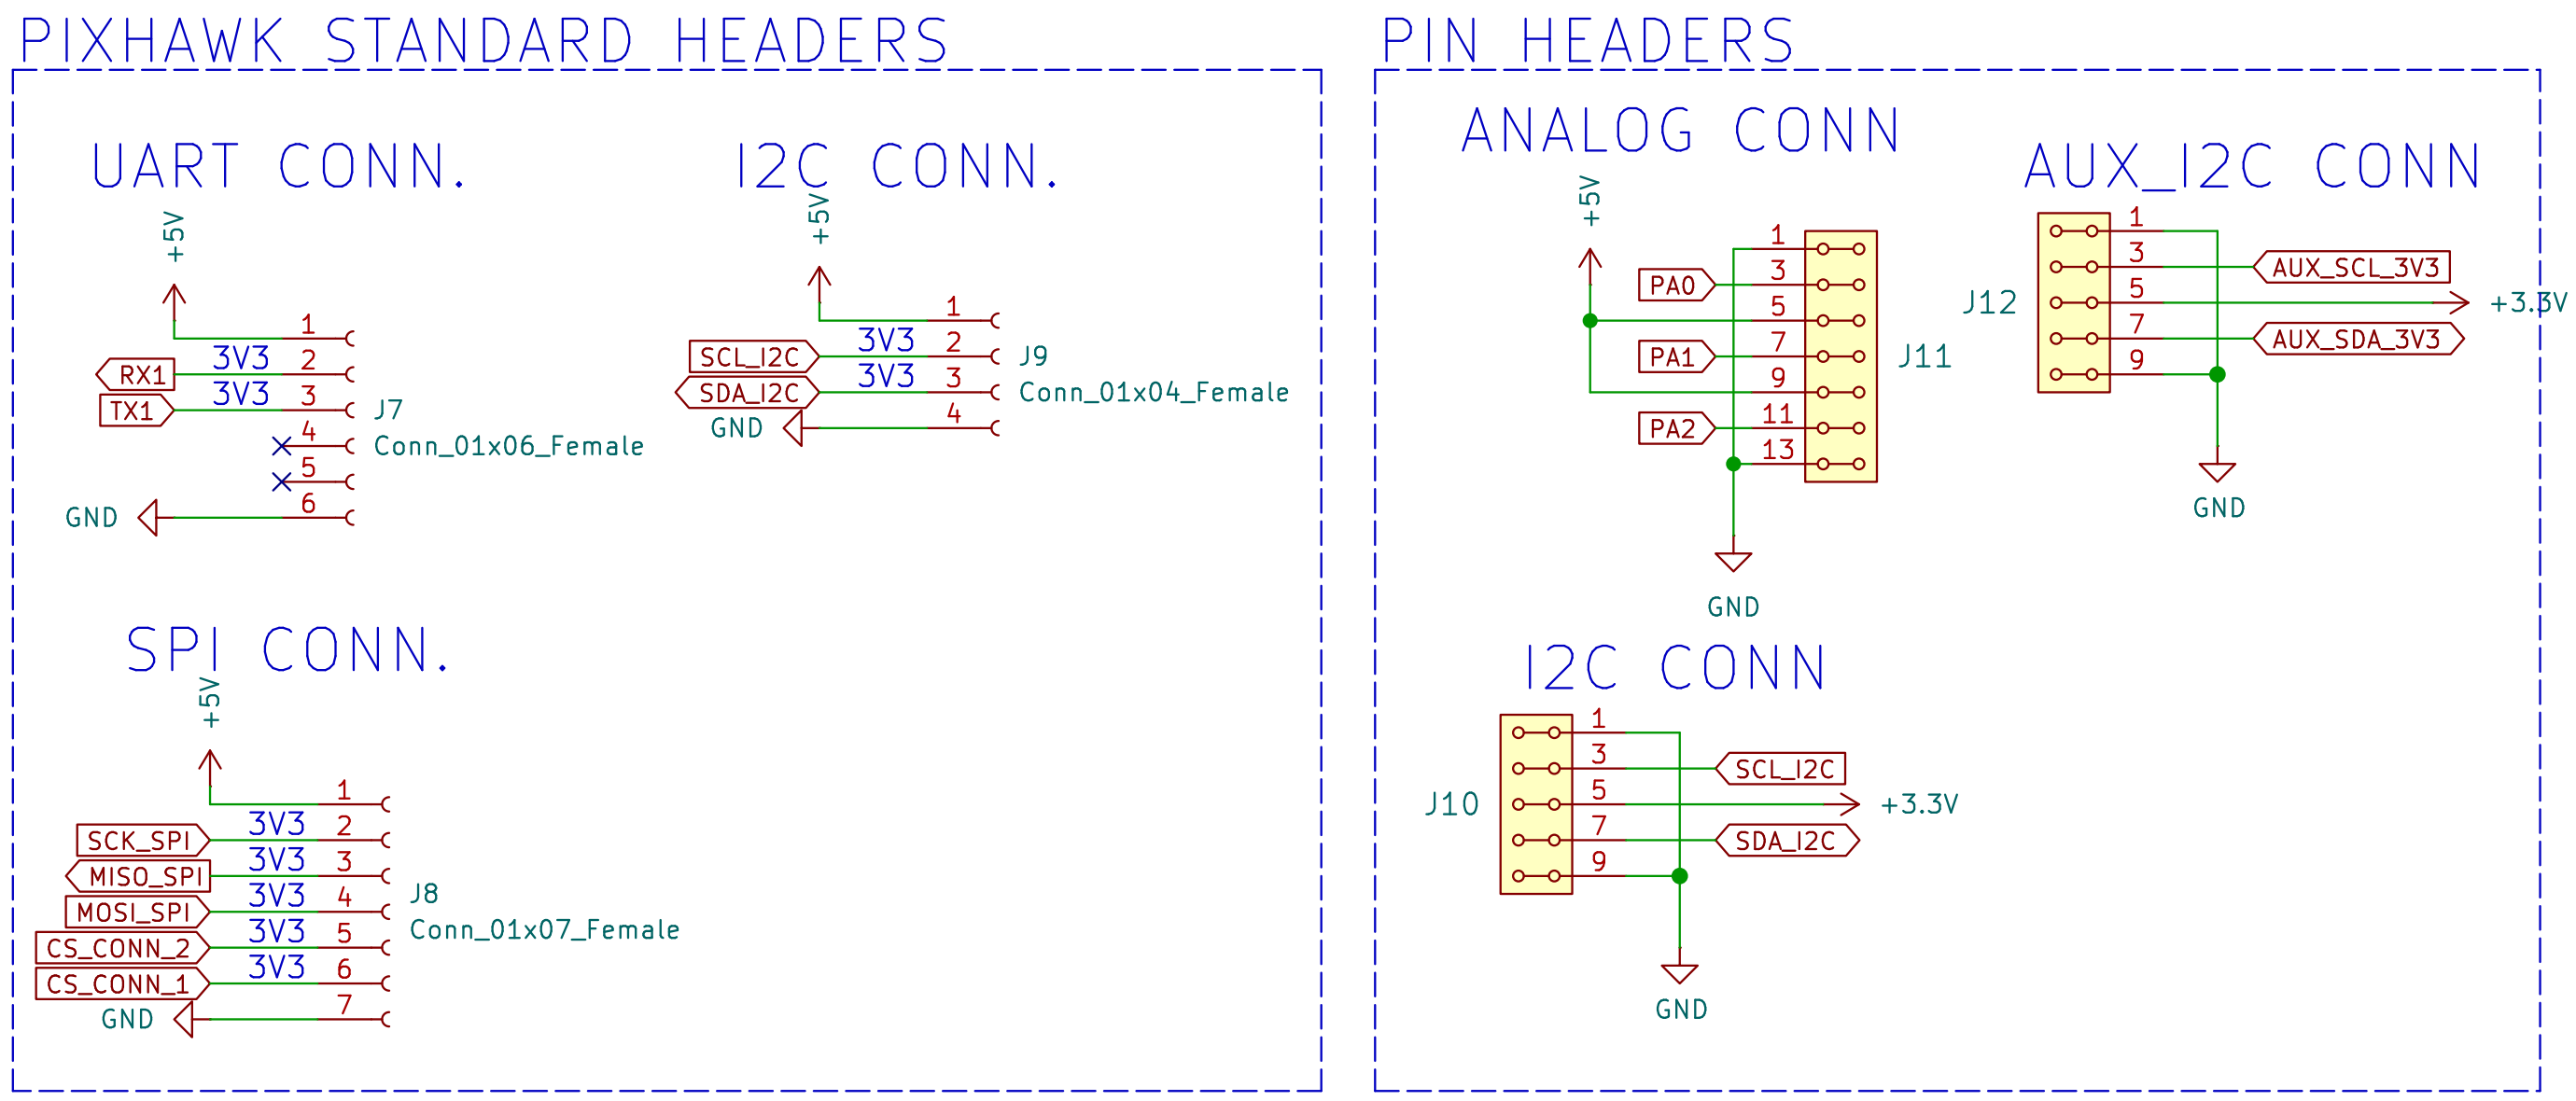

Title: DATALOGGER02A

Author:

Size: A4 | Page: 5/6 | Date: 2025-09-06

mlab

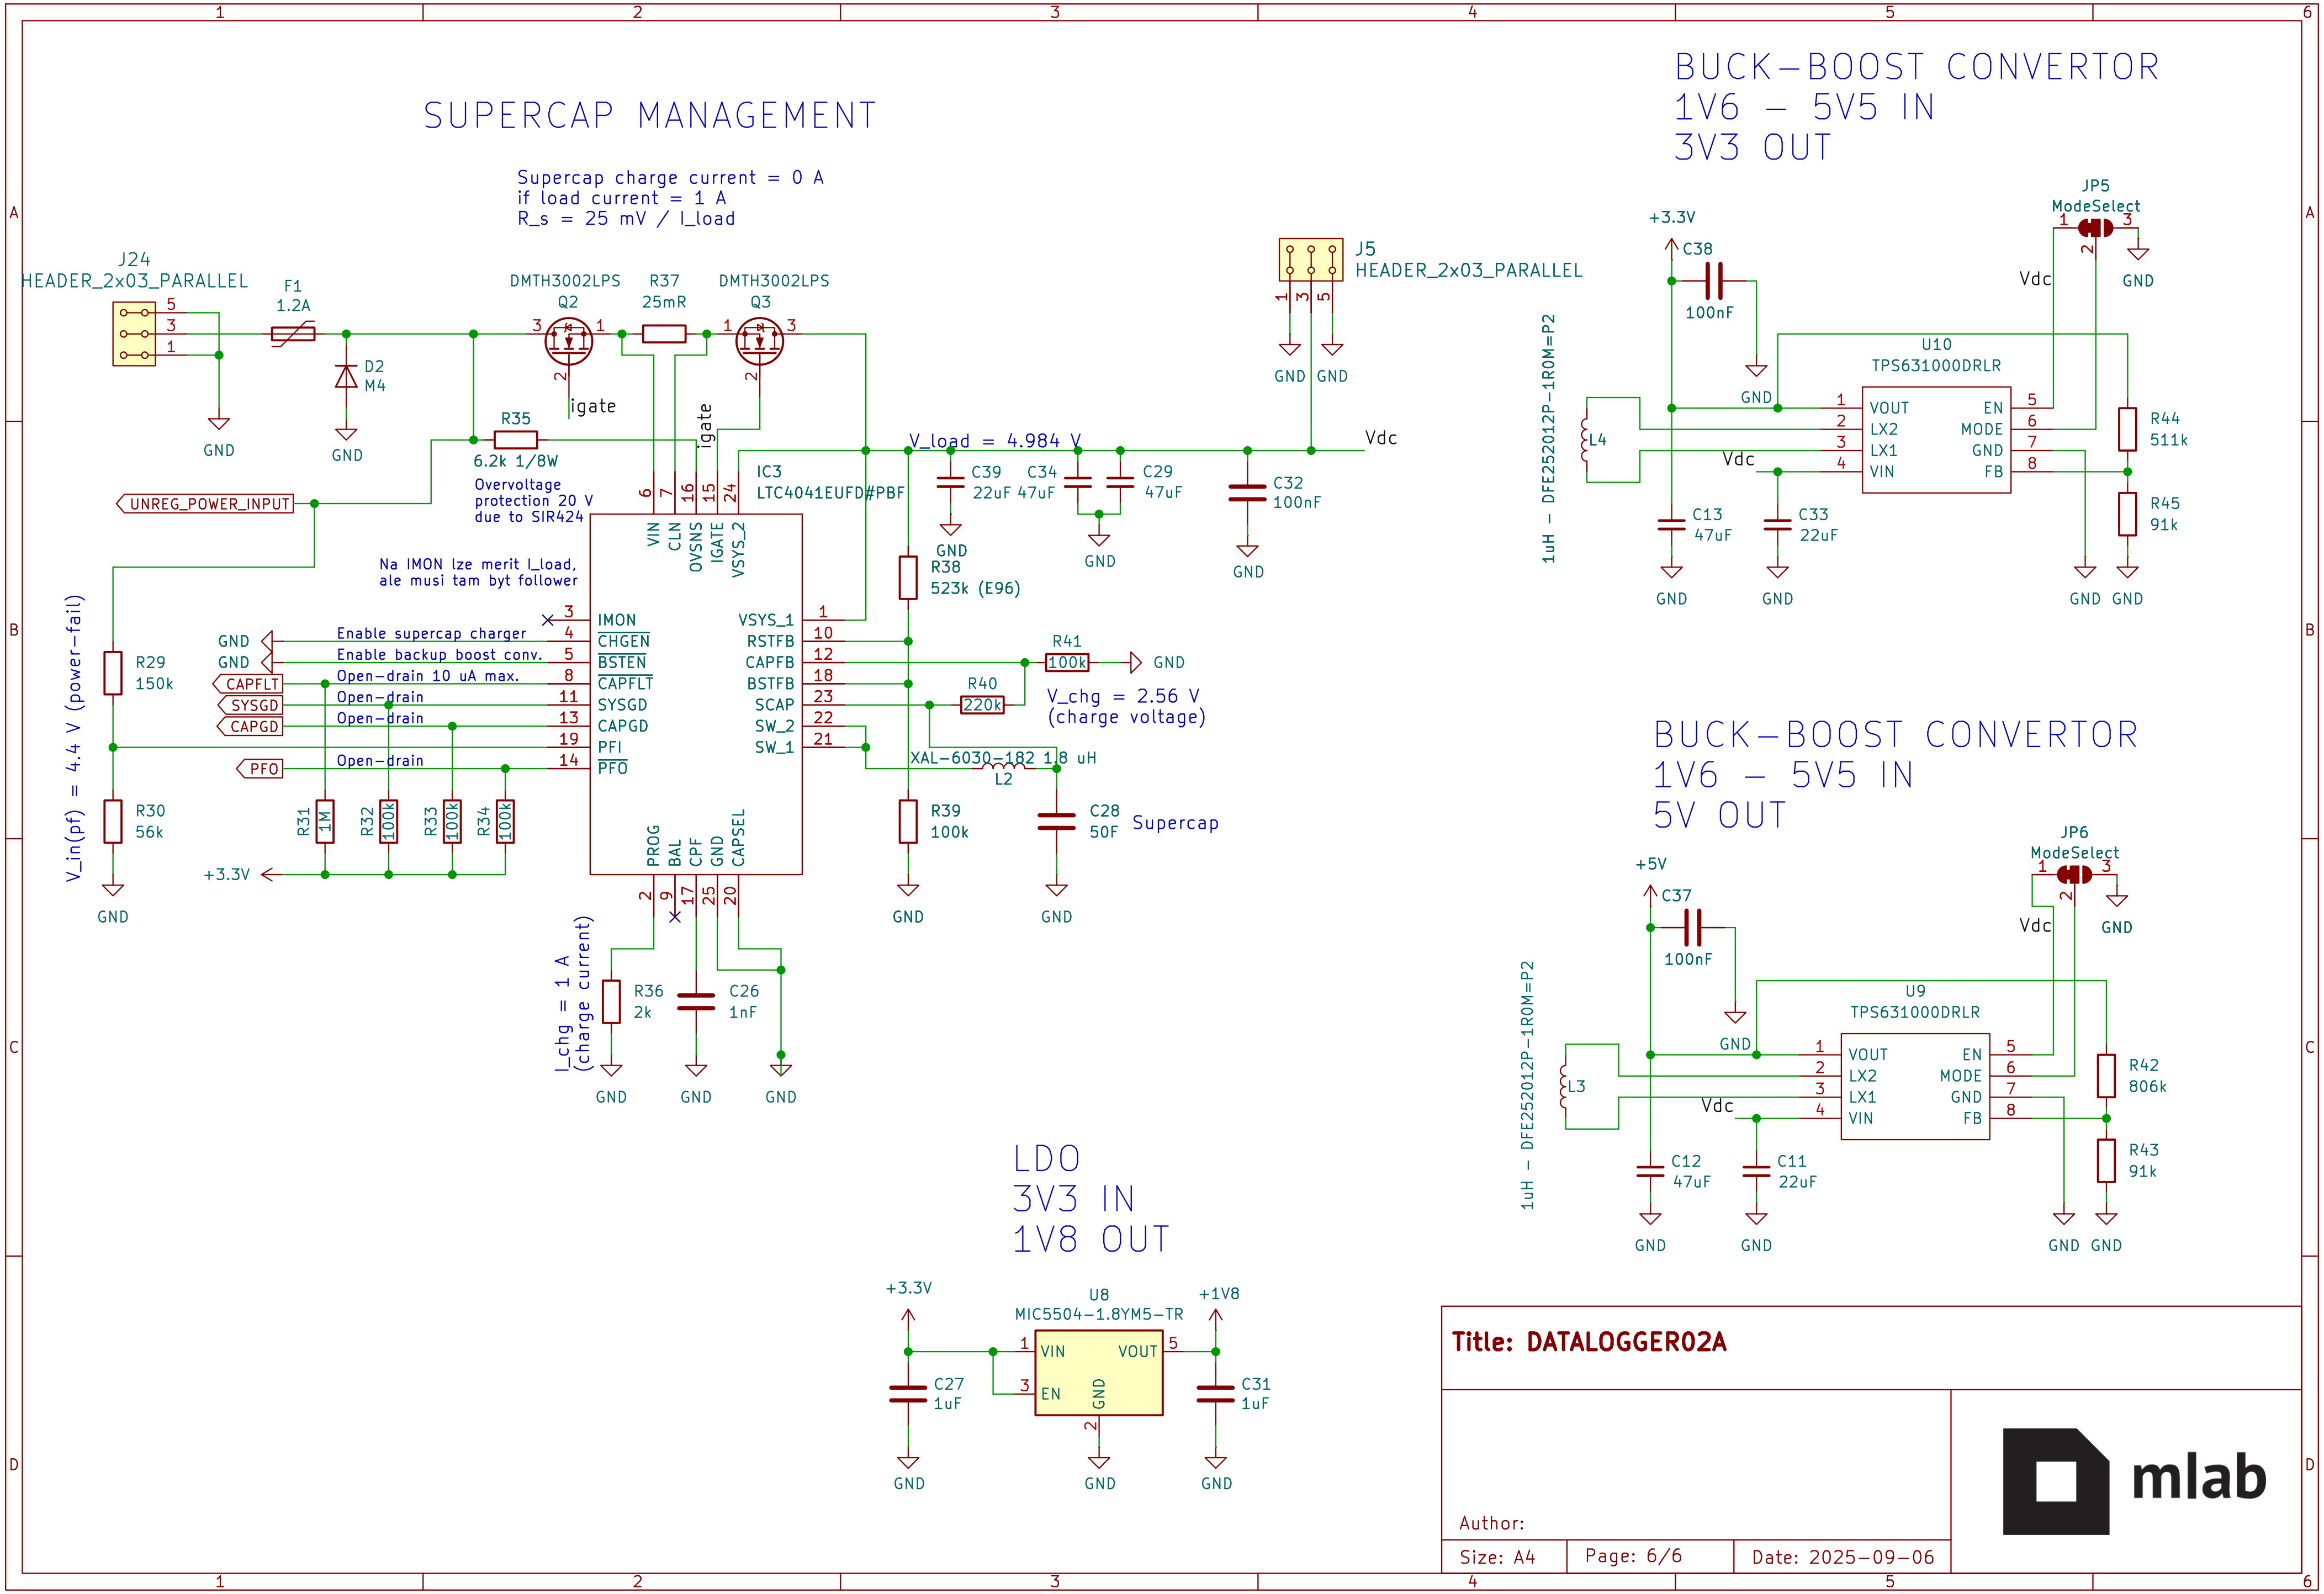
SUPERCAP MANAGEMENT
Supercap charge current = 0 A
if load current = 1 A
R_s = 25 mV / I_load
J24
HEADER_2x03_PARALLEL
F1
1.2A
D2
M4
DMTH3002LPS
Q2
R37
25mR
DMTH3002LPS
Q3
igate
R35
6.2k 1/8W
Overvoltage
protection 20 V
due to SIR424
UNREG_POWER_INPUT
IC3
LTC4041EUFD#PBF
VIN
CLN
OVSNS
IGATE
VSYS_2
IMON
CHGEN
BSTEN
CAPFLT
SYSGD
CAPGD
PFI
PFO
VSYS_1
RSTFB
CAPFB
BSTFB
SCAP
SW_2
SW_1
PROG
BAL
CPF
GND
CAPSEL
Na IMON lze merit I_load,
ale musi tam byt follower
Enable supercap charger
Enable backup boost conv.
Open-drain 10 uA max.
Open-drain
Open-drain
Open-drain
CAPFLT
SYSGD
CAPGD
PFO
R29
150k
R30
56k
V_in(pf) = 4.4 V (power-fail)
R31
1M
R32
100k
R33
100k
R34
100k
+3.3V
V_load = 4.984 V
C39
22uF
C34
47uF
C29
47uF
C32
100nF
J5
HEADER_2x03_PARALLEL
Vdc
R38
523k (E96)
R41
100k
R40
220k
V_chg = 2.56 V
(charge voltage)
XAL-6030-182 1.8 uH
L2
R39
100k
C28
50F
Supercap
R36
2k
C26
1nF
I_chg = 1 A
(charge current)
GND
BUCK-BOOST CONVERTOR
1V6 - 5V5 IN
3V3 OUT
+3.3V
C38
100nF
JP5
ModeSelect
U10
TPS631000DRLR
VOUT
LX2
LX1
VIN
EN
MODE
GND
FB
R44
511k
R45
91k
L4
1uH - DFE252012P-1R0M=P2
C13
47uF
C33
22uF
BUCK-BOOST CONVERTOR
1V6 - 5V5 IN
5V OUT
+5V
C37
100nF
JP6
ModeSelect
U9
TPS631000DRLR
R42
806k
R43
91k
L3
1uH - DFE252012P-1R0M=P2
C12
47uF
C11
22uF
LDO
3V3 IN
1V8 OUT
+3.3V
U8
MIC5504-1.8YM5-TR
VIN
VOUT
EN
GND
+1V8
C27
1uF
C31
1uF
Title: DATALOGGER02A
Author:
Size: A4
Page: 6/6
Date: 2025-09-06
mlab

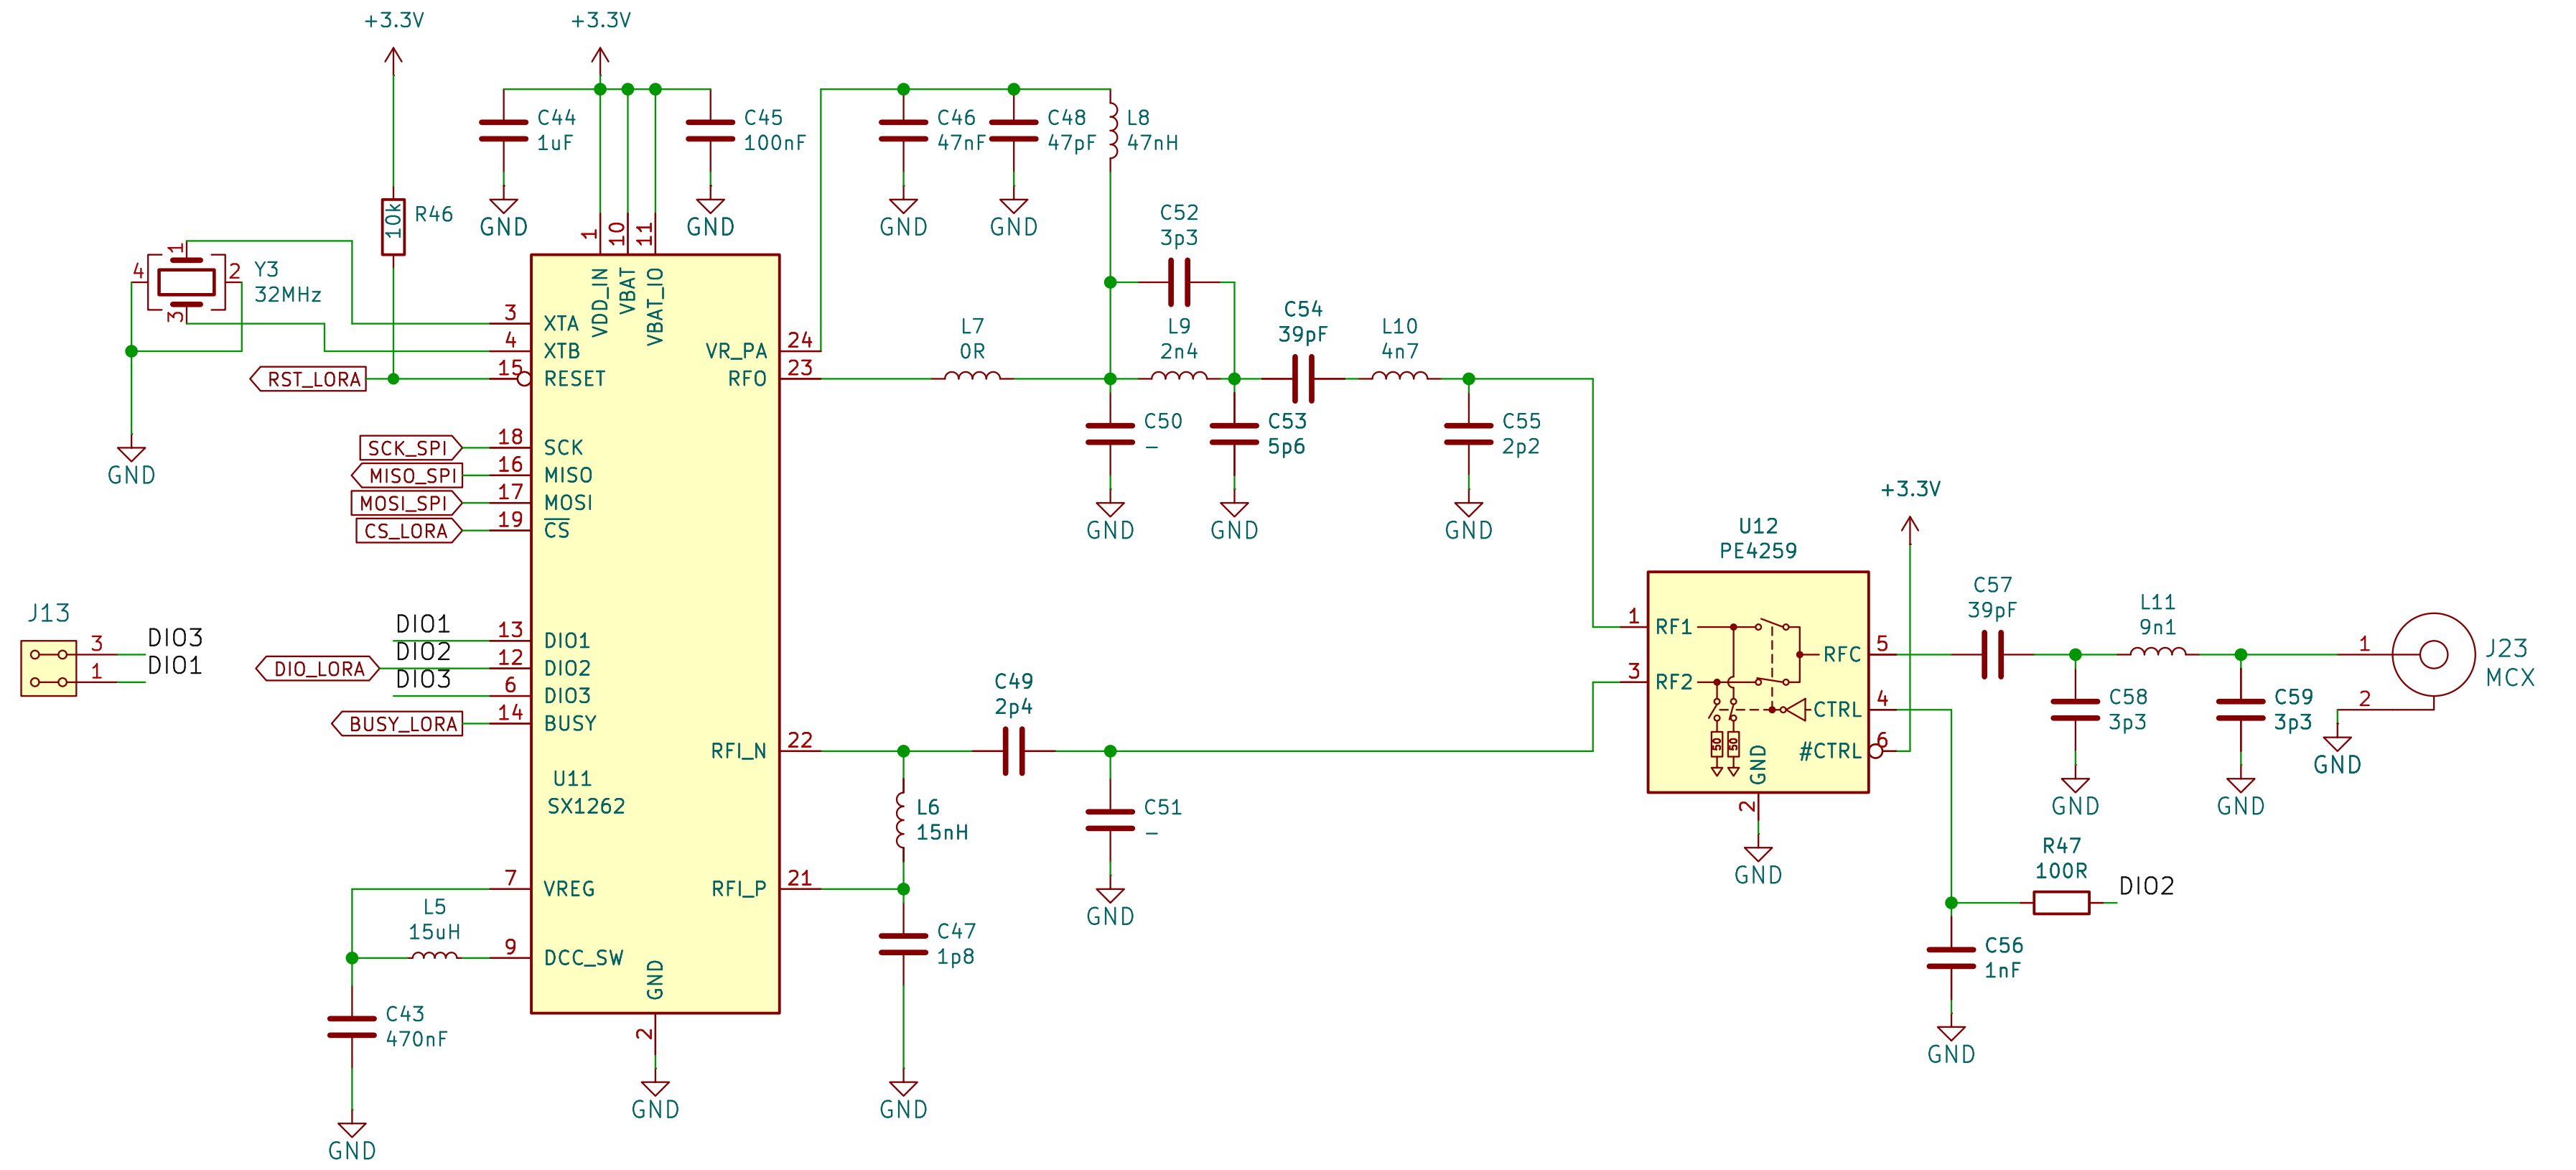

Title: DATALOGGER02A

Author:

Size: A4 | Page: 6/6 | Date: 2025-09-06

mlab