Signals Project Report

Ain Shams University
Faculty of Engineering

Under the Supervision of
Prof. Ahmed Othman

Team Members

Name	Code	Section
Mohamad Ibrahim	*2401339*	*7*
Mohammad Abduljalil Mohammad Al Saeid	*2400877*	*7*
Mena Elia	*24******	*7*
Mohammad Hany	*2400615*	*7*
Moaz Wael	*240*****	*7*
Moaaz Mostafa Ibrahim	*2400862*	*7*

0 Tools Used

To be able to implement this project in python multiple libraries must be imported for audio file reading/writing, FFT, array manipulation, and graphing. For audio files, `soundfile` was used. `Numpy` was used for FFT, IFFT, and array manipulation, along with `matplotlib` for plotting.

1 Time Domain Signal

A few lines of code can be used to extract the audio signal and plot it provided the audio file is in `.wav` format. After reading the file, we must change the shape (dimensions) of the array to a 1D array representing a mono audio signal.

```
x_t, f_s = sf.read('Moaaz.wav')

# Convert to mono
x_t = x_t.mean(axis=1) if x_t.ndim > 1 else x_t
# Define time domain
t = np.linspace(0, len(x_t) / f_s, num=len(x_t))
```

We can then plot[1] the signal as shown in figure (1).

```
time_fig, time_ax = plt.subplots()

time_ax.plot(t, x_t, color='k')
time_ax.set_xlabel('Time [s]')
time_ax.set_ylabel('Amplitude')
time_ax.set_title('Audio Signal')

time_fig.savefig('Moaaz_Signal.png')
plt.close(time_fig)
```

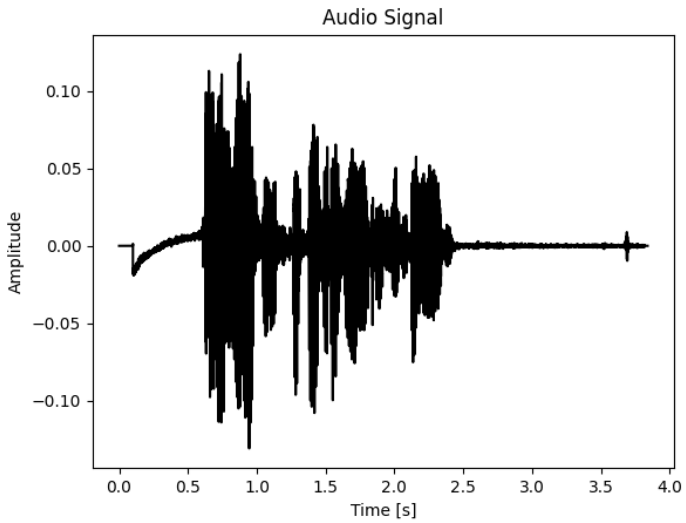


Figure 1: Time Domain Signal

[1]This plotting code will be used many times throughout the report. We will only show it this time but any plot in the report was generated similarly.

Lastly, we need to calculate the energy of the signal in the time domain using `np.sum(x_t**2)`.

$$E = \sum_{n=-\infty}^{\infty} |x(n)|^2 \approx 46.3$$

2 Frequency Domain Signal

Using `numpy`, we apply the Fourier transform to the audio signal to obtain its frequency spectrum. Then we plot the signal in the frequency domain. To better examine the frequencies, we also present a zoomed-in version of the plot in figure (2).

```
import numpy.fft as FT
# FT centered around zero frequency
X_f = FT.fftshift(FT.fft(x_t))
# Define frequency domain
f = np.linspace(-f_s/2, f_s/2, len(X_f), endpoint=False)
```

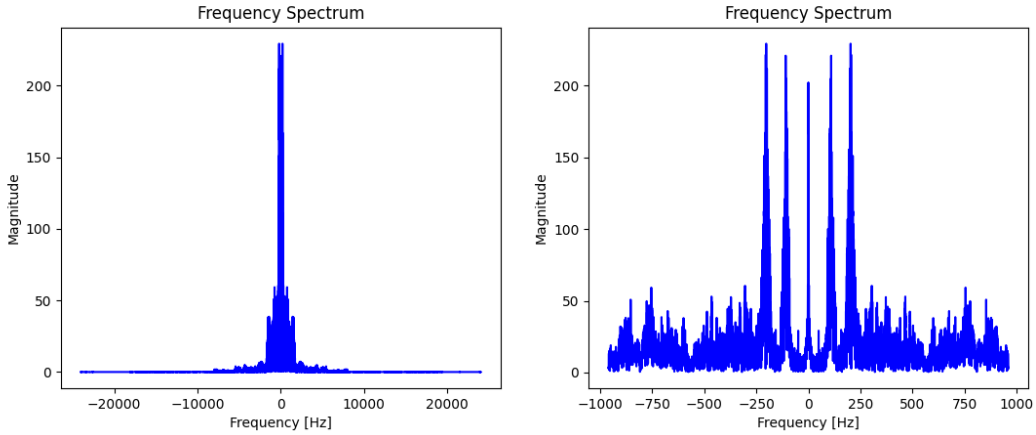


Figure 2: Frequency Domain Signal

If we calculate the energy of the signal in the frequency domain over a single period.

$$E = \sum_{k=0}^{N-1} |X(k)|^2 \approx 8533804.3$$

But Perseval's theorem says that the energy in both domains should be equal! Now we must remember that a computer doesn't calculate CTFT, it calculates DTFT where Perseval's theorem has different statement.

Theorem (Perseval's Theorem for DTFT)**.**

$$\sum_{n=-\infty}^{\infty} |x(n)|^2 = \frac{1}{2\pi} \int_{-\pi}^{\pi} |X(e^{j\omega})|^2 d\omega$$

So if we calculate the *average power* of the frequency domain signal using `np.mean(np.abs(X_f)**2)` we can verify Perseval's theorem in this case.

$$\bar{P} = \frac{1}{N} \sum_{k=0}^{N-1} |X(k)|^2 \approx 46.3$$

But to find the exact frequency with maximum contribution to the signal we can use a very useful function in `numpy` called `argmax`.

```
index_max = np.argmax(np.abs(X_f))
f_max = f[index_max]
```

And we find that frequency to be ≈ 202.6 Hz.

3 Notch Filter

Given the Fourier transform of the signal we can implement an ideal notch filter by simply removing any desired frequency band. We implemented this notch filter with a bandwidth of 50, 100, and 200 Hz with the shown results.

```
bw = 50 # Notch filter bandwidth
window = bw//df
lower_bound = int(index_max - window//2)
upper_bound = int(index_max + window//2)

Notch_50Hz = X_f.copy()
Notch_50Hz[lower_bound:upper_bound] = 0
Notch_50Hz[len(X_f) - upper_bound:len(X_f) - lower_bound] = 0
```

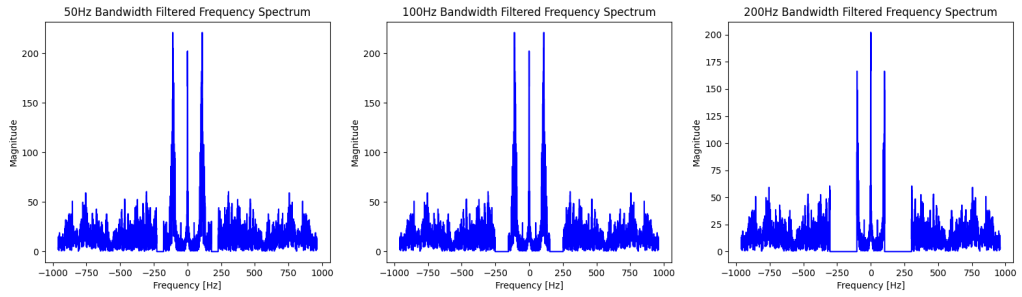


Figure 3: Frequency Spectrum after Notch Filtering

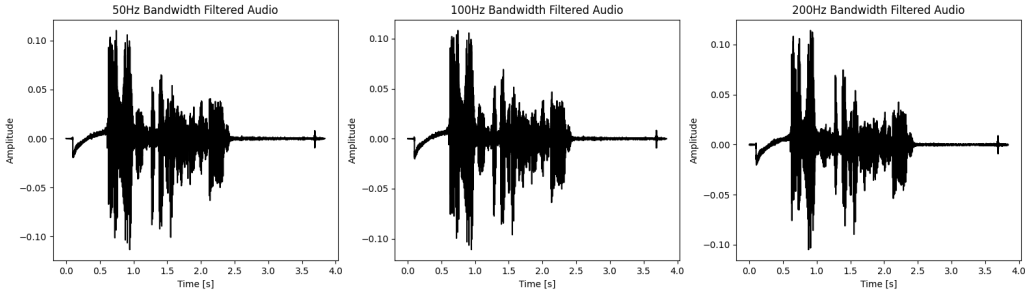


Figure 4: Time Domain Signal after Notch Filtering