




Cairo University
Faculty of Engineering



Introduction to Communications

PROJECT # 3

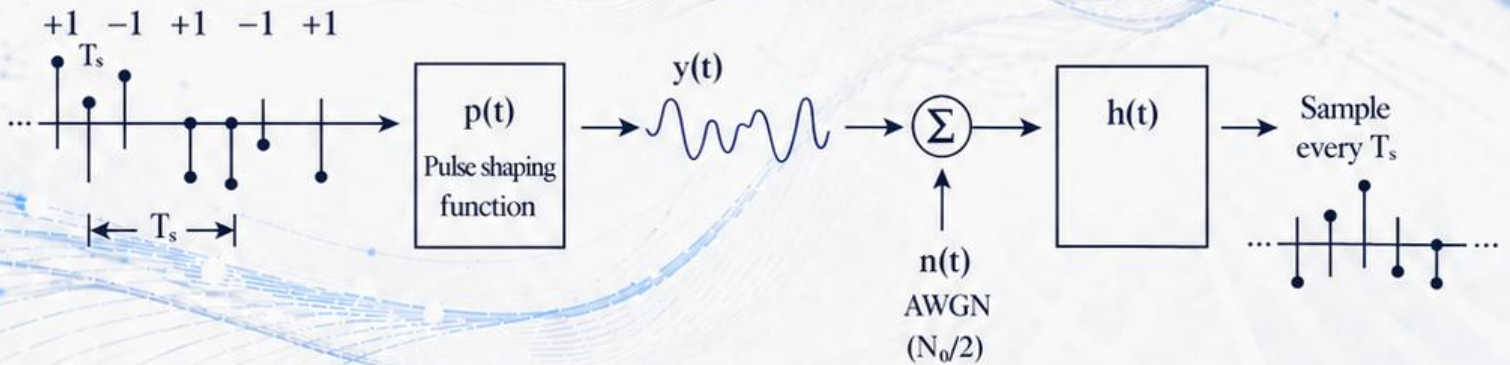

Names:

1. صلاح وحيد صلاح سعد
2. محمد رافت محمد البسيوني
3. محمد علي وحيد محمد
4. احمد حسام الدين حسن محمد

Codes:

1. 91241268
2. 91240657
3. 91240677
4. 91240073

❖ Table of Contents

<u>1. Introduction and Project Overview</u>	2
<u>2. Theoretical Background</u>	2
• 2.1 PAM Signaling and Pulse Shaping	
• 2.2 Optimal Receiver Design	
• 2.3 ISI and Nyquist Criterion	
<u>3. Task 1 — Matched Filters and Correlators</u>	2
• 3.1 Signal Generation	
• 3.2 Requirement 1a: Filter Output Comparison	
• 3.3 Requirement 1b: Matched Filter vs. Correlator	
<u>4. Task 2 — Noise Analysis and BER</u>	7
• 4.1 Simulation Setup	
• 4.2 Requirement 2: BER Curves	
<u>5. Task 3 — ISI and Raised Cosine Filters</u>	8
• 5.1 System Configuration	
• 5.2 Requirement 3: Eye Patterns	
<u>6. Equations Used</u>	10
<u>7. Summary and Conclusions</u>	11
<u>8. References</u>	11
<u>9. MATLAB Codes</u>	11

INTRODUCTION TO COMMUNICATIONS PROJECT #3

1. Introduction and Project Overview

This project evaluates fundamental digital communication components using MATLAB. The analysis covers optimal receiver design (Matched Filters and Correlators), Bit Error Rate (BER) performance in AWGN channels, and the mitigation of Inter-Symbol Interference (ISI) using Square-Root Raised Cosine (SRRC) filtering.

2. Theoretical Background

2.1 PAM Signaling and Pulse Shaping

In binary PAM, bits 0,1 are mapped to bipolar symbols $a_k \in \{+1, -1\}$. The transmitted signal $y[n]$ is the convolution of an upsampled impulse train with a pulse shape $p[n]$. This project uses a normalized pulse $p[n] = [5, 4, 3, 2, 1] / \sqrt{55}$, ensuring unit energy ($E_b = 1$).

2.2 Optimal Receiver Design

- **Matched Filter (MF):** Maximizes Signal-to-Noise Ratio (SNR) at the sampling instant. The impulse response is the time-reversed pulse: $h[n] = p[N-1-n]$.
- **Correlator:** An equivalent implementation that multiplies the received signal by $p[n]$ and integrates over T_s .
- **Theoretical BER:** For binary antipodal signaling in AWGN

2.3 ISI and Nyquist Criterion

ISI occurs when pulse energy spills into adjacent symbol periods. To eliminate ISI, the overall system response $h_{\text{overall}}(t)$ must satisfy the Nyquist criterion: $h_{\text{overall}}(kT_s) = 0$ for $k \neq 0$. This is achieved using **Raised Cosine (RC)** filters, often split into two **Square-Root Raised Cosine (SRRC)** filters at the Tx and Rx

3. Task 1 — Matched Filters and Correlators

3.1 Signal Generation

This section walks through each step of the signal generation chain, as described in the project specification and implemented in the MATLAB code.

Step 1 — Generate 10 Random Binary Bits

The randi function generates 10 random bits uniformly drawn from {0, 1}. This models the source of digital information to be transmitted.

```
N = 10;
bits = randi([0 1], 1,N);
```

Step 2 — Convert to Bipolar Symbols (+1 / -1)

Binary bits are mapped to bipolar symbols using the linear transformation $a = 2 \cdot b - 1$. This maps bit '1' to symbol +1 and bit '0' to symbol -1, which is the standard representation for binary polar (antipodal) signaling.

```
symbols = 2*bits - 1;
```

Step 3 — Upsampling (Generating Impulses Every T_s)

The MATLAB upsample(symbols, 5) command inserts 4 zeros between each symbol value. This models the impulse train representation: an impulse of magnitude +1 or -1 occurs every $T_s = 1$ second, with 5 samples per symbol period (sampling interval = 200 ms).

```
impulses = upsample(symbols, samples_per_sym);
```

The result is a sparse array of length $10 \times 5 = 50$ samples, where only every 5th sample is non-zero (equal to the symbol value), and all others are zero.

Step 4 — Pulse Shaping via Convolution

Convolving the upsampled symbol sequence with the pulse $p[n]$ effectively places a scaled copy of p at each non-zero impulse location. The result $y[n]$ is the discrete-time transmitted PAM signal.

```
p = [5 4 3 2 1] / sqrt(55);
y = conv(upsampled_symbols, p);
```

After convolution, y has length = $\text{length}(\text{upsampled_symbols}) + \text{length}(p) - 1 = 50 + 5 - 1 = 54$ samples. Each symbol contributes a pulse of shape p scaled by +1 or -1.

Step 5 — Applying the Filters

Two receiving filters are applied to $y[n]$:

- Matched filter: $h_{\text{matched}} = \text{fliplr}(p) = [1 \ 2 \ 3 \ 4 \ 5]/\text{sqrt}(55)$. This is the time-reverse of p .

- Rectangular filter: $h_{\text{rect}} = [1 \ 1 \ 1 \ 1 \ 1]/\sqrt{5}$. A uniform average over one symbol period, also energy-normalized.

```
h_mf = flipplr(p);

h_rect = ones(1, samples_per_sym) / sqrt(samples_per_sym);

out_mf = conv(y, h_mf);

out_rect = conv(y, h_rect);
```

3.2 Requirement 1a: Filter Output Comparison

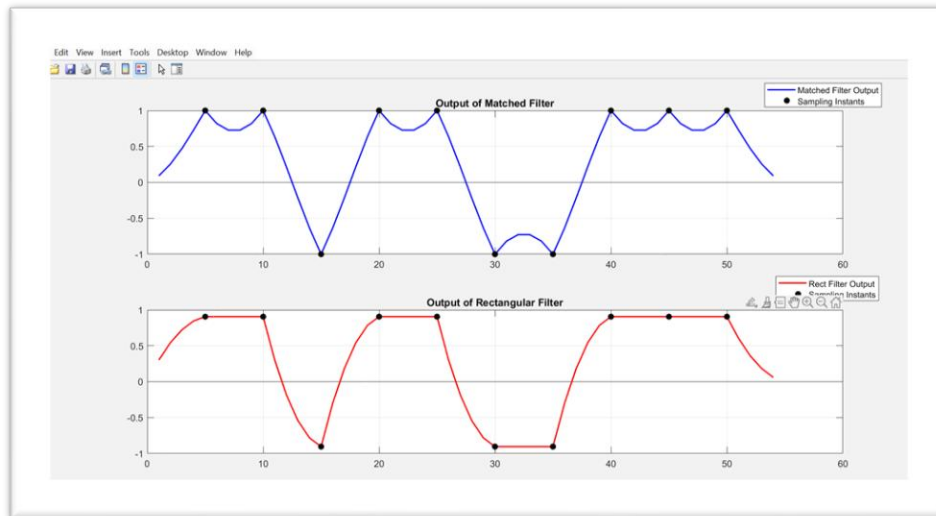


Figure 1: Matched filter vs rectangular filter

Results:

The two filters — matched and rectangular — are plotted on two subplots of the same figure. At the optimal sampling instants (every 5th sample after filter settling), the matched filter output has a larger magnitude than the rectangular filter. This is because the matched filter is designed to maximize SNR, which in a noise-free system corresponds to maximizing the signal energy at the sampling point relative to the input.

The matched filter produces peaks that are sharper and better separated at the sampling instants, making symbol detection more reliable. The rectangular filter, while simpler, does not align its frequency response with the transmitted pulse spectrum, resulting in a suboptimal (lower) peak at the sampling instant.

3.2 Requirement 1b: Matched Filter vs. Correlator

The correlator is implemented using a for-loop that processes the signal in windows of 5 samples (one symbol period). For each window, it multiplies by $p[n]$ and computes the cumulative sum (integration). The final value in each window is the 'dump' output — identical to the matched filter sample at the optimal instant.

```
out_corr = zeros(1, length(y));  
  
for k = 1:N  
    idx = (k-1)*samples_per_sym + 1 : k*samples_per_sym;  
    out_corr(idx) = cumsum(y(idx) .* p);  
end
```

The loop index runs from 1 to the last valid start of a 5-sample window. The cumsum function implements the discrete-time equivalent of integration: it returns a running sum that accumulates from the start of the window. At the 5th sample of each window, the cumsum output equals the full inner product of the received signal segment with $p[n]$, which is the correlator decision variable.

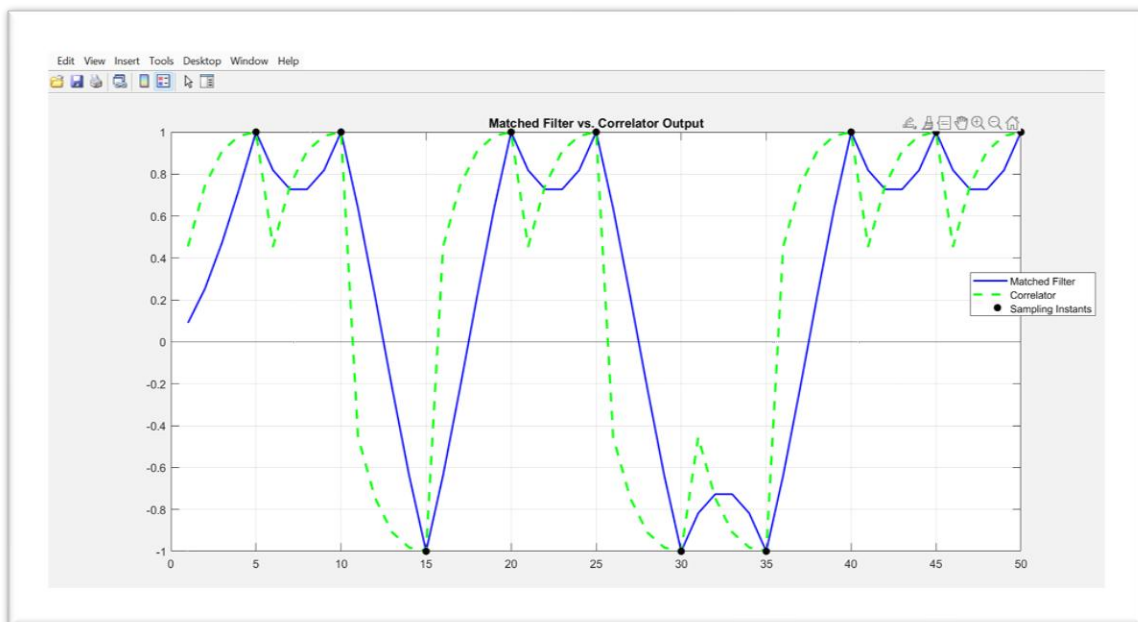


Figure 2: Matched filter vs correlator

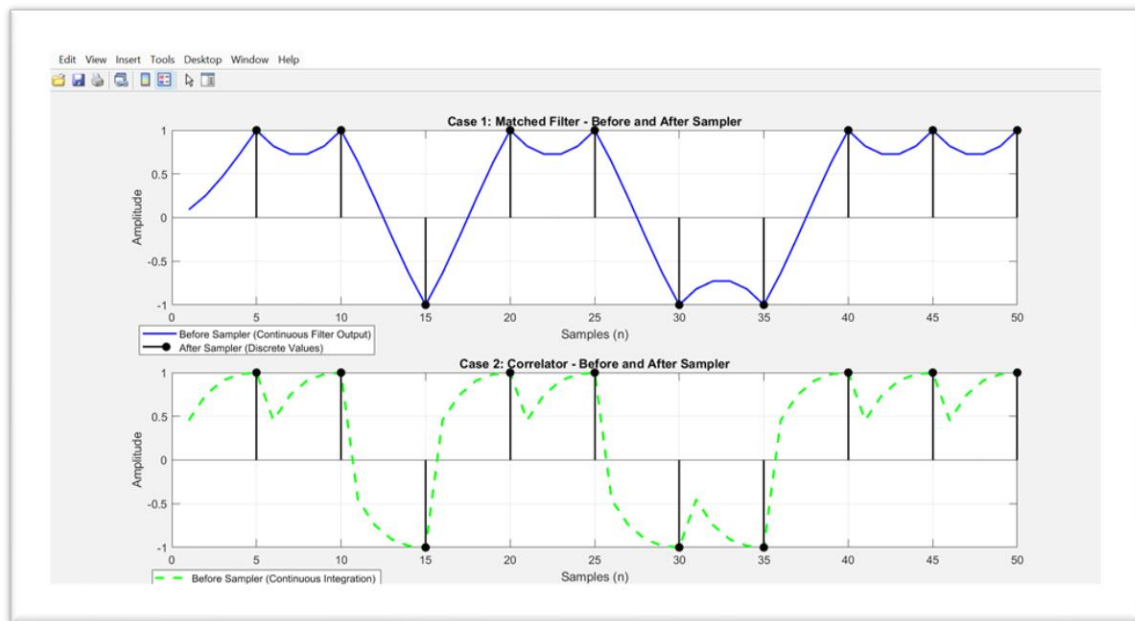


Figure 3: before & after sampling for matched filter & correlator

Result:

- Figure 2: Matched Filter vs. Correlator

This plot overlays the matched filter (solid blue) and correlator (dashed green) outputs. While their intermediate trajectories differ, they intersect perfectly at every sampling instant (black dots). This visualizes their theoretical equivalence: both methods yield the exact same decision statistic at the end of the symbol period, which is why they are used interchangeably in digital receivers.

- Figure 3: Pre- and Post-Sampling Stages

This figure isolates the continuous and discrete phases of both receiver architectures to confirm the sampling process:

- Case 1 (Matched Filter):** The continuous blue line represents the filter output, which peaks at the end of the symbol duration where SNR is maximized. The black stems represent the discrete output after the sampler closes, capturing only these peak decision values.
- Case 2 (Correlator):** The continuous dashed green line represents the "Integrate" phase, accumulating signal energy over time. The black stems represent the "Dump/Sample" phase, capturing the final integrated value exactly at T_s just before the memory resets for the next symbol.

4. Task 2 — Noise Analysis and BER

4.1 Simulation Setup

To ensure statistical accuracy, 10,000 bits are simulated across an E_b/N_0 range of -2 dB to +5 dB.

Parameter	Value	Notes
Number of bits	10,000	Ensures statistically reliable BER
Upsampling factor	5	5 samples per symbol
E_b/N_0 range	-2 dB to +5 dB	8 points, 1 dB step
Pulse energy (E_b)	1	Normalized pulse
Noise mean	0	Zero-mean AWGN
Noise variance	$N_0/2$	Per AWGN channel model

4.2 Requirement 2: BER Curves

The simulation compares the Measured MF BER, Measured Rectangular BER, and the Theoretical Curve.

- **Matched Filter:** The curve closely tracks the theoretical $0.5\text{erfc}(\sqrt{E_b/N_0})$.
- **Rectangular Filter:** Consistently exhibits a higher BER. The distance between this curve and the MF curve represents the **matching loss** due to the suboptimal filter shape.

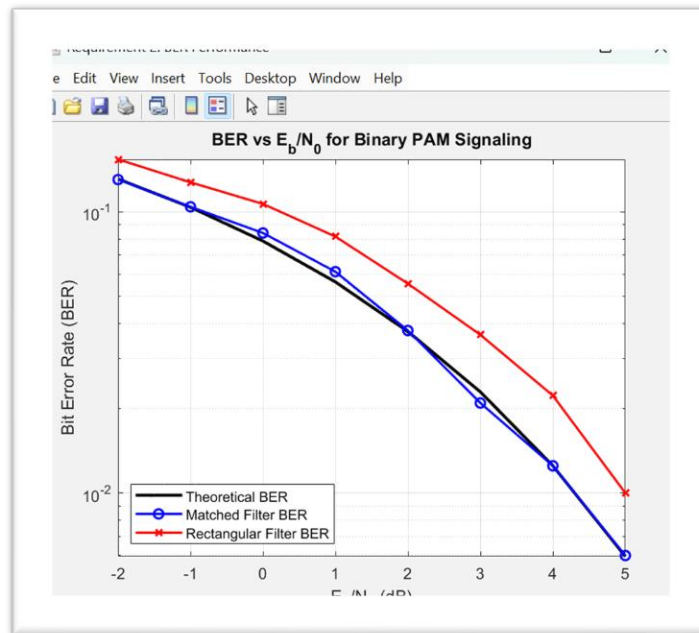


Figure 4: BER Vs. E_b/N_0

5. Task 3 — ISI and Raised Cosine Filters

5.1 System Configuration

The system utilizes SRRC filters at both Tx (Point A) and Rx (Point B). The combination forms a full Raised Cosine response. Four cases are analyzed based on Roll-off (R) and Delay.

5.2 Requirement 3: Eye Diagram Analysis

Case	Roll-off R	Delay	Bandwidth	Time Truncation
a	0 (Nyquist)	2	Minimum ($1/2T_s$)	Short (severe)
b	0 (Nyquist)	8	Minimum ($1/2T_s$)	Longer (moderate)
c	1 (Maximum)	2	Double ($1/T_s$)	Short (mild)
d	1 (Maximum)	8	Double ($1/T_s$)	Longer (negligible)

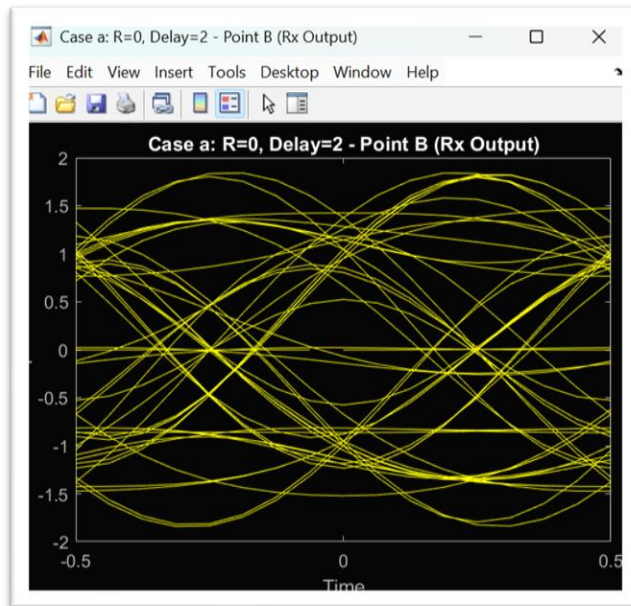


Figure 7: Case A ($R=0$, Delay=2)

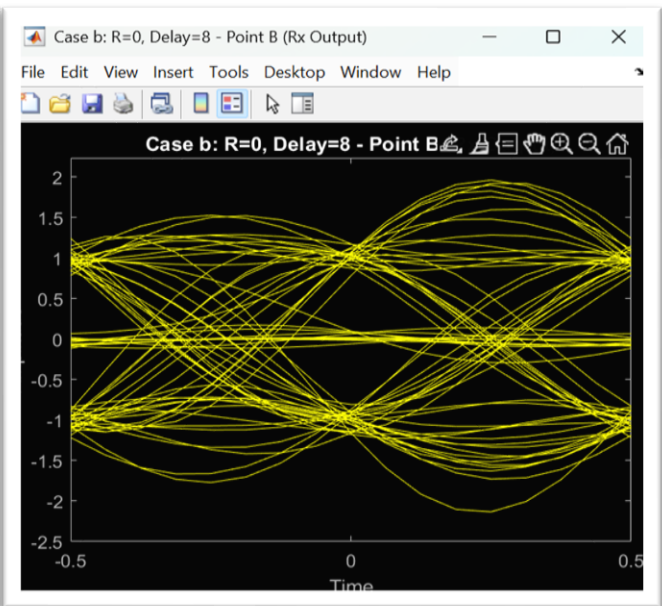


Figure 6: Case B ($R=0$, Delay=8)

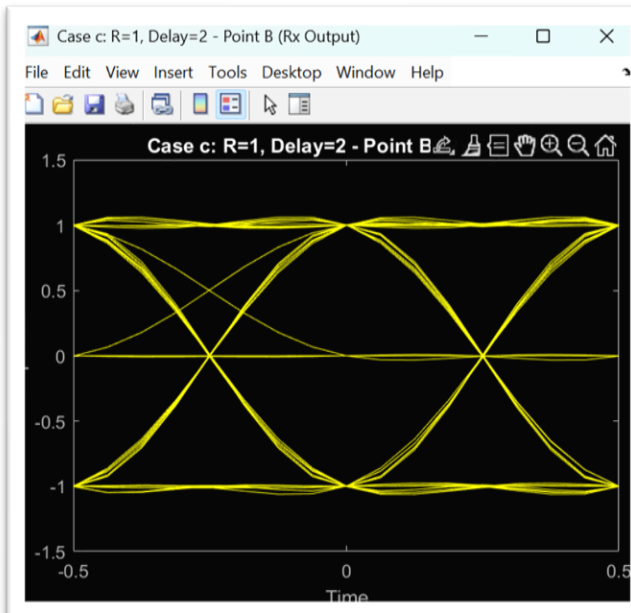


Figure 5: Case C ($R=1$, Delay=2)

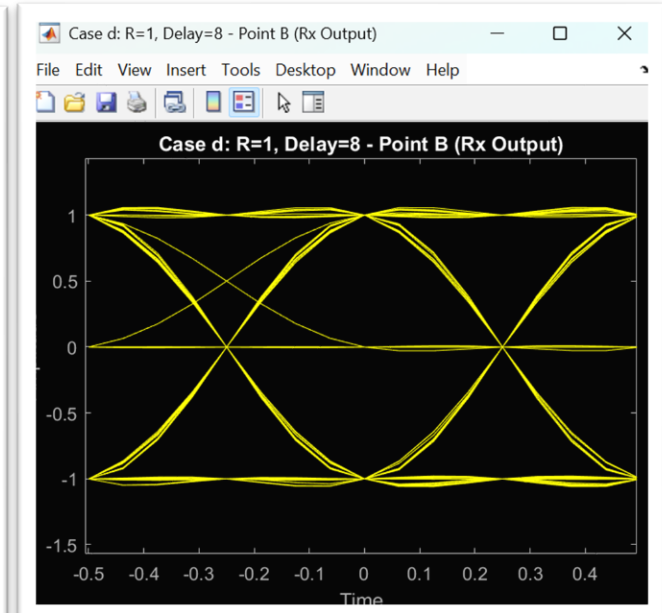


Figure 8: Case D ($R=1$, Delay=8)

The eye diagrams generated for the four test cases illustrate the critical relationship between the roll-off factor (R) and filter length (delay) in managing ISI. Below is the comparative analysis of the results observed at Point B (Receiver Output):

- **Case (a) [$R=0$, Delay=2]: Nearly Closed Eye.** The eye is significantly closed due to severe Inter-Symbol Interference (ISI). This occurs because the ideal $R=0$ pulse is a sinc function with slow decay; truncating it to only ± 2 symbol periods results in a very poor approximation.

- **Case (b) [R=0, Delay=8]: Moderately Open Eye.** Increasing the filter delay to 8 captures more of the slowly decaying sinc tails, which reduces truncation error. Consequently, the eye opens considerably compared to Case (a), proving that longer filter lengths are vital for narrow-band (R=0) configurations.
- **Case (c) [R=1, Delay=2]: Open Eye.** Despite the short delay, the eye is substantially open. The fast time-domain decay associated with maximum roll-off (R=1) makes the pulse shape inherently robust to truncation.
- **Case (d) [R=1, Delay=8]: Maximum Eye Opening.** This best-case configuration demonstrates near-ideal ISI-free transmission. The eye is wide open with minimal distortion, and the optimal sampling instant at the center is clearly defined.

6. Equations used

- **The Matched Filter Equation**

The impulse response of the optimal matched filter is a time-reversed and delayed version of the pulse shaping function $p(t)$. In discrete MATLAB code, we used **fliplr()** to achieve this:

$$h(t) = p(T_s - t)$$

- **The Correlator Equation**

The output of the correlator at the sampling instant T_s is the integral of the product of the received signal $y(t)$ and the pulse $p(t)$. In the code, we used `cumsum()` and element-wise multiplication `.*` to simulate this:

$$Z(T_s) = \int_0^{T_s} y(t)p(t)dt$$

- **Additive White Gaussian Noise (AWGN) Variance**

To simulate the channel, we added noise with a power spectral density (PSD) of N_0 . The relationship between E_b/N_0 and the noise variance

$$\sigma^2 = \frac{N_0}{2}$$

Where N_0 is calculated from the energy per bit E_b as:

$$N_0 = \frac{E_b}{10^{\frac{(E_b/N_0)dB}{10}}}$$

- **Theoretical Bit Error Rate (BER)**

For Binary PAM (Polar signaling: +1, -1) sent over an AWGN channel and received using an optimal matched filter, the theoretical probability of error is calculated using the complementary error function (erfc in MATLAB):

$$P_e = Q\left(\sqrt{\frac{2E_b}{N_0}}\right) = \frac{1}{2} \text{erfc} \sqrt{\frac{E_b}{N_0}}$$

7. Summary and Conclusions

The simulation confirms that the **Matched Filter** is essential for minimizing BER in AWGN by maximizing sampling-instant SNR. Furthermore, **Raised Cosine** signaling effectively eliminates ISI, provided the roll-off factor and filter delay are sufficient to prevent truncation errors. For an electronics engineer, balancing R (bandwidth) and Delay (complexity/latency) is critical for practical system design.

8. References

- Haykin, S. (2013). Communication Systems (5th ed.). John Wiley & Sons.
- Lathi, B. P., & Ding, Z. (2009). Modern Digital and Analog Communication Systems (4th ed.). Oxford University Press.

9. MATLAB Codes

❖ GITHUB REPO LINK: [MATLAB SOURCE CODES](#)