



Image



Title

LM741

NarrativeText

SNOSC25D – MAY 1998 – REVISED OCTOBER 2015

Title

LM741 Operational Amplifier

Title

1 Features

ListItem

- Overload Protection on the Input and Output
- No Latch-Up When the Common-Mode Range is Exceeded

Title

2 Applications

ListItem

• Comparators

ListItem

• Multivibrators

ListItem

• DC Amplifiers

ListItem

• Summing Amplifiers

ListItem

• Integrator or Differentiators

ListItem

• Active Filters

Title

3 Description

NarrativeText

The LM741 series are general-purpose operational amplifiers which feature improved performance over industry standards like the LM709. They are direct, plug-in replacements for the 709C, LM201, MC1439, and 748 in most applications.

NarrativeText

The amplifiers offer many features which make their application nearly foolproof: overload protection on the input and output, no latch-up when the common-mode range is exceeded, as well as freedom from oscillations.

NarrativeText

The LM741C is identical to the LM741 and LM741A except that the LM741C has their performance ensured over a 0°C to +70°C temperature range, instead of –55°C to +125°C.

FigureCaption

Device Information⁽¹⁾

Table

PART NUMBER	PACKAGE	BODY SIZE (NOM)
LM741	TO-99 (8)	9.08 mm × 9.08 mm
	CDIP (8)	10.16 mm × 6.502 mm
	PDIP (8)	9.81 mm × 6.35 mm


ListItem

(1) For all available packages, see the orderable addendum at the end of the data sheet.

FigureCaption

Typical Application

Image

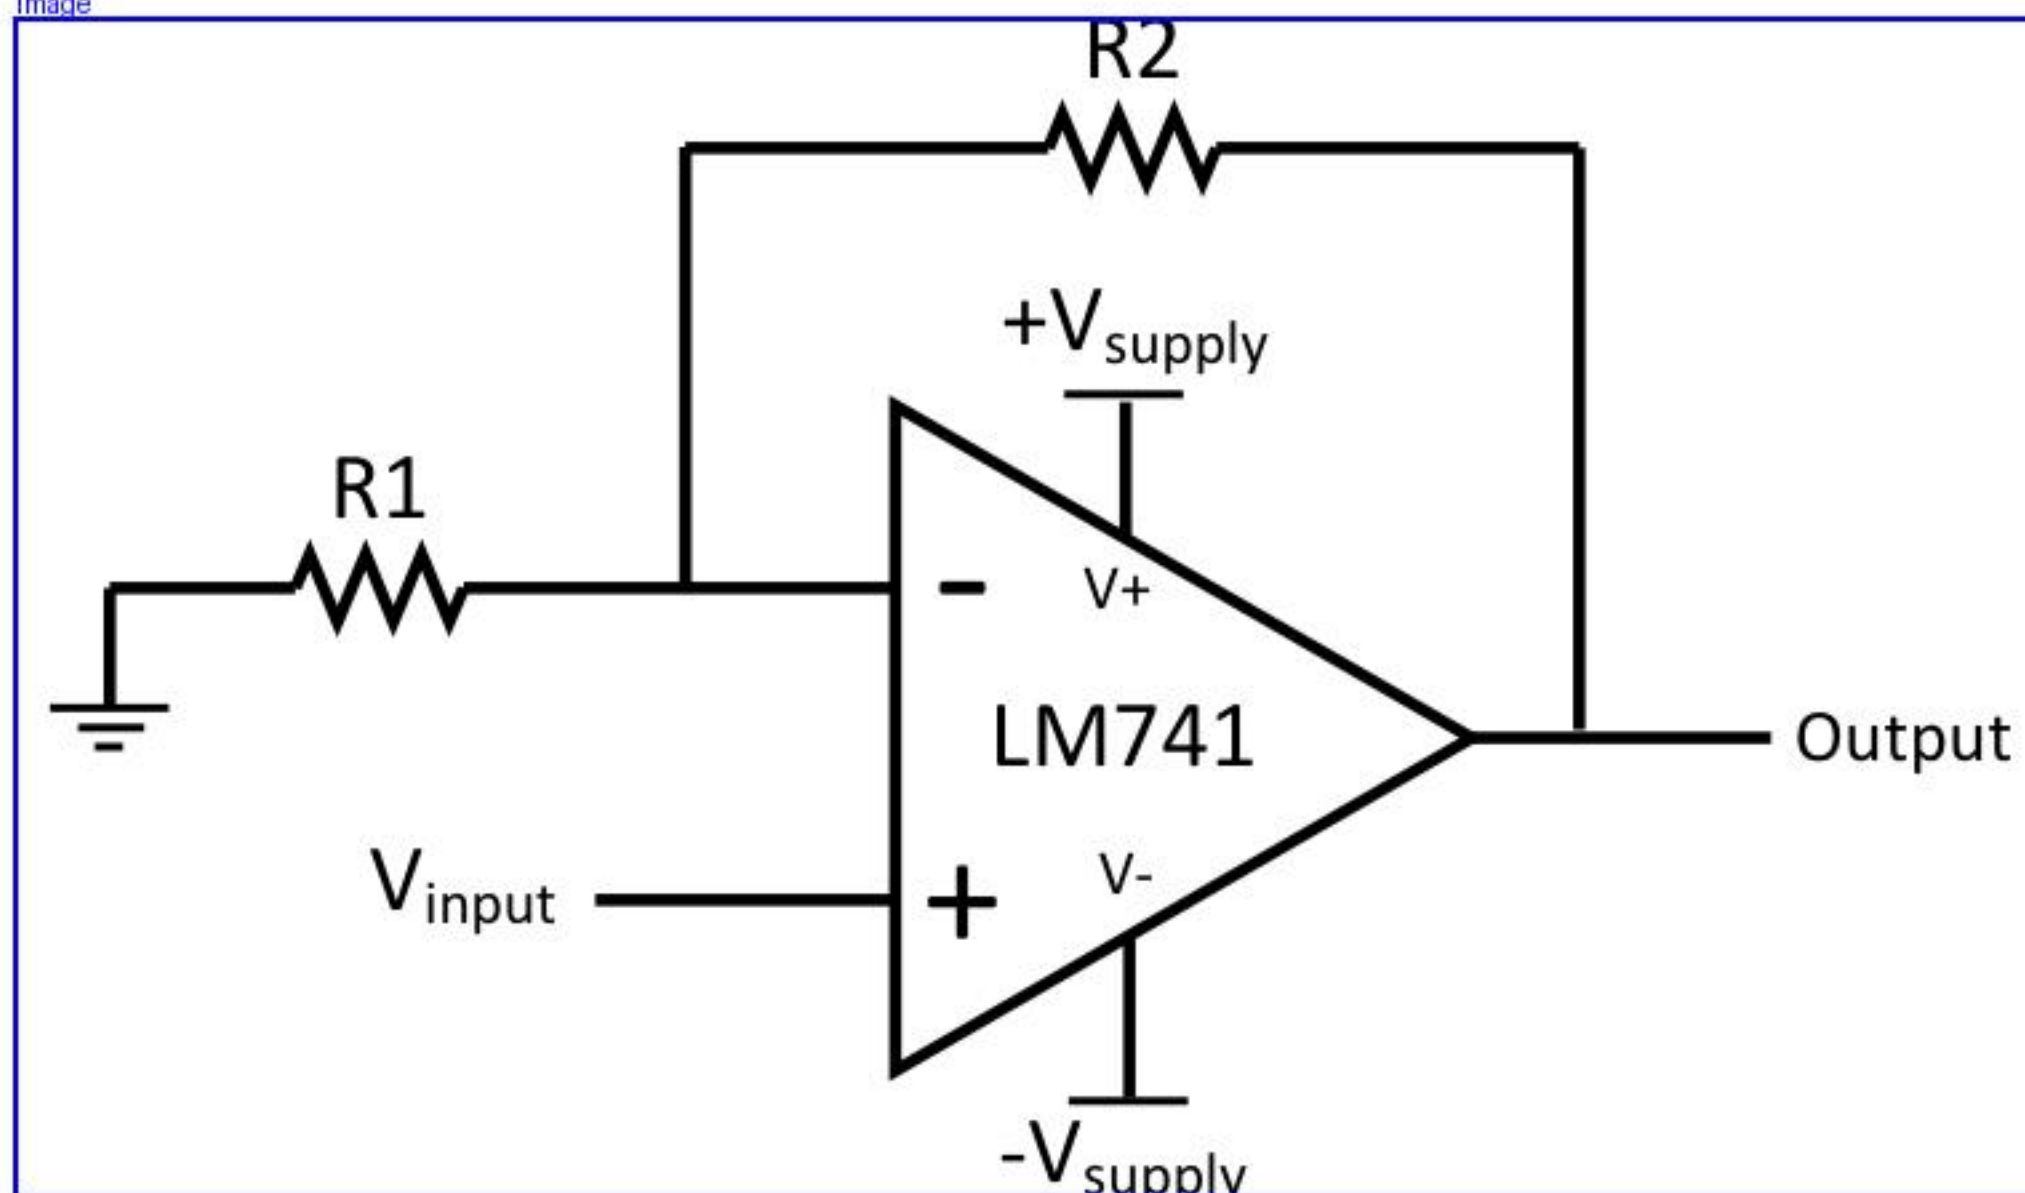

NarrativeText



An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

Table of Contents

List Item

1	Features	1
2	Applications	1
3	Description	1
4	Revision History	2
5	Pin Configuration and Functions	3
6	Specifications	4
6.1	Absolute Maximum Ratings	4
6.2	ESD Ratings	4
6.3	Recommended Operating Conditions	4
6.4	Thermal Information	4
6.5	Electrical Characteristics, LM741	5
6.6	Electrical Characteristics, LM741A	5
6.7	Electrical Characteristics, LM741C	6
7	Detailed Description	7
7.1	Overview	7
7.2	Functional Block Diagram	7

Table

7.3	Feature Description	7
7.4	Device Functional Modes	8
8	Application and Implementation	9
8.1	Application Information	9
8.2	Typical Application	9
9	Power Supply Recommendations	10
10	Layout	11
10.1	Layout Guidelines	11
10.2	Layout Example	11
11	Device and Documentation Support	12
11.1	Community Resources	12
11.2	Trademarks	12
11.3	Electrostatic Discharge Caution	12
11.4	Glossary	12
12	Mechanical, Packaging, and Orderable Information	12

Title

4 Revision History

Narrative Text

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Title

Changes from Revision C (October 2004) to Revision D

Title

Page

List Item

Added Applications section, Pin Configuration and Functions section, ESD Ratings table, Feature Description section, Device Functional Modes, Application and Implementation section, Power Supply Recommendations section, Layout section, Device and Documentation Support section, and Mechanical, Packaging, and Orderable Information section	1
Removed NAD 10-Pin CLGA pinout	3
Removed obsolete M (S0-8) package from the data sheet	4
Added recommended operating supply voltage spec	4
Added recommended operating temperature spec	4

Title

Changes from Revision C (March 2013) to Revision D

UncategorizedText


Page

List Item

Added Applications section, Pin Configuration and Functions section, ESD Ratings table, Feature Description section, Device Functional Modes, Application and Implementation section, Power Supply Recommendations section, Layout section, Device and Documentation Support section, and Mechanical, Packaging, and Orderable Information section	1
Removed NAD 10-Pin CLGA pinout	3
Removed obsolete M (S0-8) package from the data sheet	4
Added recommended operating supply voltage spec	4
Added recommended operating temperature spec	4


Title
5 Pin Configuration and Functions

UncategorizedText
**LMC Package
8-Pin TO-99
Top View**

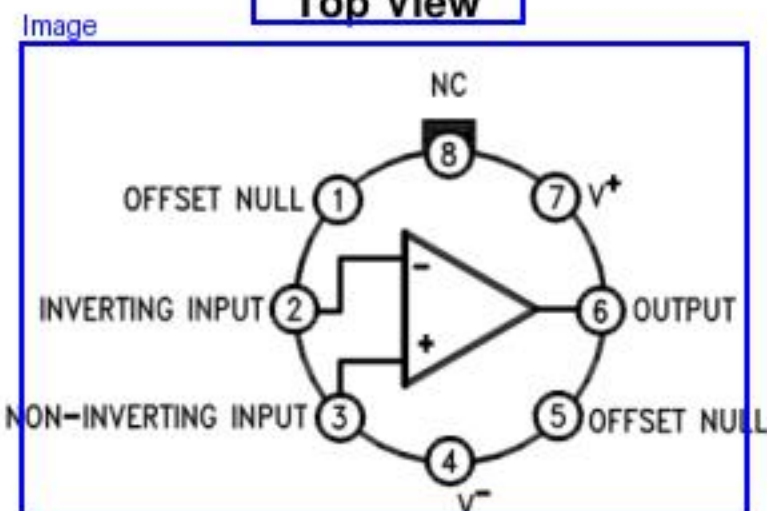

FigureCaption
LM741H is available per JM38510/10101

UncategorizedText
**NAB Package
8-Pin CDIP or PDIP
Top View**

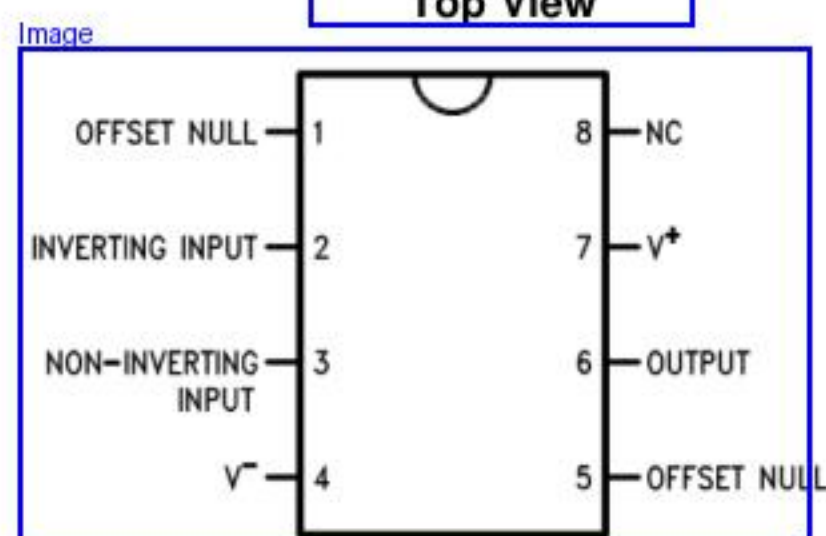

FigureCaption
Pin Functions

Table

PIN		I/O	DESCRIPTION
NAME	NO.		
INVERTING INPUT	2	I	Inverting signal input
NC	8	N/A	No Connect, should be left floating
NONINVERTING INPUT	3	I	Noninverting signal input
OFFSET NULL	1, 5	I	Offset null pin used to eliminate the offset voltage and balance the input voltages.
OFFSET NULL			
OUTPUT	6	O	Amplified signal output
V+	7	I	Positive supply voltage
V-	4	I	Negative supply voltage

Title

6 Specifications

Title

6.1 Absolute Maximum Ratings

Narrative Text

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾⁽²⁾⁽³⁾

		MIN	MAX	UNIT
Supply voltage	LM741, LM741A		±22	V
	LM741C		±18	
Power dissipation ⁽⁴⁾			500	mW
Differential input voltage			±30	V
Input voltage ⁽⁵⁾			±15	V
Output short circuit duration			Continuous	
Operating temperature	LM741, LM741A	–50	125	°C
	LM741C	0	70	
Junction temperature	LM741, LM741A		150	°C
	LM741C		100	
Soldering information	PDIP package (10 seconds)		260	°C
	CDIP or TO-99 package (10 seconds)		300	°C
Storage temperature, T _{stg}		–65	150	°C

List Item

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

List Item

(2) For military specifications see RETS741X for LM741 and RETS741AX for LM741A.

List Item

(3) If Military/Aerospace specified devices are required, please contact the TI Sales Office/Distributors for availability and specifications.

List Item

(4) For operation at elevated temperatures, these devices must be derated based on thermal resistance, and T_j max. (listed under “Absolute Maximum Ratings”). $T_j = T_A + (\theta_{JA} P_D)$.

List Item

(5) For supply voltages less than ±15 V, the absolute maximum input voltage is equal to the supply voltage.

Title

6.2 ESD Ratings

		VALUE	UNIT
V _(ESD)	Electrostatic discharge Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±400	V

List Item

(1) Level listed above is the passing level per ANSI, ESDA, and JEDEC JS-001. JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

Title

6.3 Recommended Operating Conditions

Narrative Text

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
Supply voltage (VDD-GND)	LM741, LM741A	±10	±15	±22	V
	LM741C	±10	±15	±18	
Temperature	LM741, LM741A	–55		125	°C
	LM741C	0		70	

Title

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		LM741			UNIT
		LMC (TO-99)	NAB (CDIP)	P (PDIP)	
		8 PINS	8 PINS	8 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	170	100	100	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	25	—	—	°C/W

List Item

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

6.5 Electrical Characteristics, LM741⁽¹⁾

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input offset voltage	$R_S \leq 10 \text{ k}\Omega$	$T_A = 25^\circ\text{C}$		1	5 mV
		$T_{AMIN} \leq T_A \leq T_{AMAX}$			6 mV
Input offset voltage adjustment range	$T_A = 25^\circ\text{C}$, $V_S = \pm 20 \text{ V}$			± 15	mV
Input offset current	$T_A = 25^\circ\text{C}$			20	200 nA
	$T_{AMIN} \leq T_A \leq T_{AMAX}$			85	500 nA
Input bias current	$T_A = 25^\circ\text{C}$			80	500 nA
	$T_{AMIN} \leq T_A \leq T_{AMAX}$				1.5 μA
Input resistance	$T_A = 25^\circ\text{C}$, $V_S = \pm 20 \text{ V}$	0.3	2		$\text{M}\Omega$
Input voltage range	$T_{AMIN} \leq T_A \leq T_{AMAX}$	± 12	± 13		V
Large signal voltage gain	$V_S = \pm 15 \text{ V}$, $V_O = \pm 10 \text{ V}$, $R_L \geq 2 \text{ k}\Omega$	$T_A = 25^\circ\text{C}$		50	200 V/mV
		$T_{AMIN} \leq T_A \leq T_{AMAX}$		25	
Output voltage swing	$V_S = \pm 15 \text{ V}$	$R_L \geq 10 \text{ k}\Omega$		± 12	± 14 V
		$R_L \geq 2 \text{ k}\Omega$		± 10	± 13 V
Output short circuit current	$T_A = 25^\circ\text{C}$			25	mA
Common-mode rejection ratio	$R_S \leq 10 \Omega$, $V_{CM} = \pm 12 \text{ V}$, $T_{AMIN} \leq T_A \leq T_{AMAX}$	80	95		dB
Supply voltage rejection ratio	$V_S = \pm 20 \text{ V}$ to $V_S = \pm 5 \text{ V}$, $R_S \leq 10 \Omega$, $T_{AMIN} \leq T_A \leq T_{AMAX}$	86	96		dB
Transient response	Rise time	$T_A = 25^\circ\text{C}$, unity gain		0.3	μs
	Overshoot			5%	
Slew rate	$T_A = 25^\circ\text{C}$, unity gain			0.5	V/ μs
Supply current	$T_A = 25^\circ\text{C}$			1.7	2.8 mA
Power consumption	$V_S = \pm 15 \text{ V}$	$T_A = 25^\circ\text{C}$		50	85 mW
		$T_A = T_{AMIN}$		60	100 mW
		$T_A = T_{AMAX}$		45	75 mW

List Item

(1) Unless otherwise specified, these specifications apply for $V_S = \pm 15 \text{ V}$, $-55^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (LM741/LM741A). For the LM741C/LM741E, these specifications are limited to $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$.

6.6 Electrical Characteristics, LM741A⁽¹⁾

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input offset voltage	$R_S \leq 50 \Omega$	$T_A = 25^\circ\text{C}$		0.8	3 mV
		$T_{AMIN} \leq T_A \leq T_{AMAX}$			4 mV
Average input offset voltage drift				15	$\mu\text{V}/^\circ\text{C}$
Input offset voltage adjustment range	$T_A = 25^\circ\text{C}$, $V_S = \pm 20 \text{ V}$	± 10			mV
Input offset current	$T_A = 25^\circ\text{C}$			3	30 nA
	$T_{AMIN} \leq T_A \leq T_{AMAX}$				70 nA
Average input offset current drift				0.5	nA/ $^\circ\text{C}$
Input bias current	$T_A = 25^\circ\text{C}$			30	80 nA
	$T_{AMIN} \leq T_A \leq T_{AMAX}$				0.21 μA
Input resistance	$T_A = 25^\circ\text{C}$, $V_S = \pm 20 \text{ V}$	1	6		$\text{M}\Omega$
	$T_{AMIN} \leq T_A \leq T_{AMAX}$, $V_S = \pm 20 \text{ V}$	0.5			
Large signal voltage gain	$V_S = \pm 20 \text{ V}$, $V_O = \pm 15 \text{ V}$, $R_L \geq 2 \text{ k}\Omega$	$T_A = 25^\circ\text{C}$		50	V/mV
		$T_{AMIN} \leq T_A \leq T_{AMAX}$		32	
	$V_S = \pm 5 \text{ V}$, $V_O = \pm 2 \text{ V}$, $R_L \geq 2 \text{ k}\Omega$, $T_{AMIN} \leq T_A \leq T_{AMAX}$			10	

List Item

(1) Unless otherwise specified, these specifications apply for $V_S = \pm 15 \text{ V}$, $-55^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (LM741/LM741A). For the LM741C/LM741E, these specifications are limited to $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$.

Electrical Characteristics, LM741A⁽¹⁾ (continued)

Table

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output voltage swing		$V_S = \pm 20\text{ V}$	$R_L \geq 10\text{ k}\Omega$	± 16			V
			$R_L \geq 2\text{ k}\Omega$	± 15			
Output short circuit current		$T_A = 25^\circ\text{C}$		10	25	35	mA
		$T_{\text{AMIN}} \leq T_A \leq T_{\text{AMAX}}$		10		40	
Common-mode rejection ratio		$R_S \leq 50\ \Omega$, $V_{\text{CM}} = \pm 12\text{ V}$, $T_{\text{AMIN}} \leq T_A \leq T_{\text{AMAX}}$		80	95		dB
Supply voltage rejection ratio		$V_S = \pm 20\text{ V}$ to $V_S = \pm 5\text{ V}$, $R_S \leq 50\ \Omega$, $T_{\text{AMIN}} \leq T_A \leq T_{\text{AMAX}}$		86	96		dB
Transient response	Rise time	$T_A = 25^\circ\text{C}$, unity gain			0.25	0.8	μs
	Overshoot				6%	20%	
Bandwidth ⁽²⁾		$T_A = 25^\circ\text{C}$		0.437	1.5		MHz
Slew rate		$T_A = 25^\circ\text{C}$, unity gain		0.3	0.7		V/ μs
Power consumption		$V_S = \pm 20\text{ V}$	$T_A = 25^\circ\text{C}$		80	150	mW
			$T_A = T_{\text{AMIN}}$			165	
			$T_A = T_{\text{AMAX}}$			135	

List Item

(2) Calculated value from: BW (MHz) = 0.35/Rise Time (μs).

6.7 Electrical Characteristics, LM741C⁽¹⁾

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
Input offset voltage		$R_S \leq 10\text{ k}\Omega$	$T_A = 25^\circ\text{C}$		2	6	mV
			$T_{AMIN} \leq T_A \leq T_{AMAX}$			7.5	mV
Input offset voltage adjustment range		$T_A = 25^\circ\text{C}$, $V_S = \pm 20\text{ V}$			± 15		mV
Input offset current		$T_A = 25^\circ\text{C}$			20	200	nA
		$T_{AMIN} \leq T_A \leq T_{AMAX}$				300	
Input bias current		$T_A = 25^\circ\text{C}$			80	500	nA
		$T_{AMIN} \leq T_A \leq T_{AMAX}$				0.8	μA
Input resistance		$T_A = 25^\circ\text{C}$, $V_S = \pm 20\text{ V}$		0.3	2		M Ω
Input voltage range		$T_A = 25^\circ\text{C}$		± 12	± 13		V
Large signal voltage gain		$V_S = \pm 15\text{ V}$, $V_O = \pm 10\text{ V}$, $R_L \geq 2\text{ k}\Omega$	$T_A = 25^\circ\text{C}$	20	200		V/mV
			$T_{AMIN} \leq T_A \leq T_{AMAX}$	15			
Output voltage swing		$V_S = \pm 15\text{ V}$	$R_L \geq 10\text{ k}\Omega$	± 12	± 14		V
			$R_L \geq 2\text{ k}\Omega$	± 10	± 13		
Output short circuit current		$T_A = 25^\circ\text{C}$			25		mA
Common-mode rejection ratio		$R_S \leq 10\text{ k}\Omega$, $V_{CM} = \pm 12\text{ V}$, $T_{AMIN} \leq T_A \leq T_{AMAX}$		70	90		dB
Supply voltage rejection ratio		$V_S = \pm 20\text{ V}$ to $V_S = \pm 5\text{ V}$, $R_S \leq 10\text{ }\Omega$, $T_{AMIN} \leq T_A \leq T_{AMAX}$		77	96		dB
Transient response	Rise time	$T_A = 25^\circ\text{C}$, Unity Gain			0.3		μs
	Overshoot				5%		
Slew rate		$T_A = 25^\circ\text{C}$, Unity Gain			0.5		V/ μs
Supply current		$T_A = 25^\circ\text{C}$			1.7	2.8	mA
Power consumption		$V_S = \pm 15\text{ V}$, $T_A = 25^\circ\text{C}$			50	85	mW

List Item

(1) Unless otherwise specified, these specifications apply for $V_S = \pm 15\text{ V}$, $-55^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ (LM741/LM741A). For the LM741C/LM741E, these specifications are limited to $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$.

7 Detailed Description


7.1 Overview

Narrative Text

The LM741 devices are general-purpose operational amplifiers which feature improved performance over industry standards like the LM709. It is intended for a wide range of analog applications. The high gain and wide range of operating voltage provide superior performance in integrator, summing amplifier, and general feedback applications. The LM741 can operate with a single or dual power supply voltage. The LM741 devices are direct, plug-in replacements for the 709C, LM201, MC1439, and 748 in most applications.

Title

7.2 Functional Block Diagram

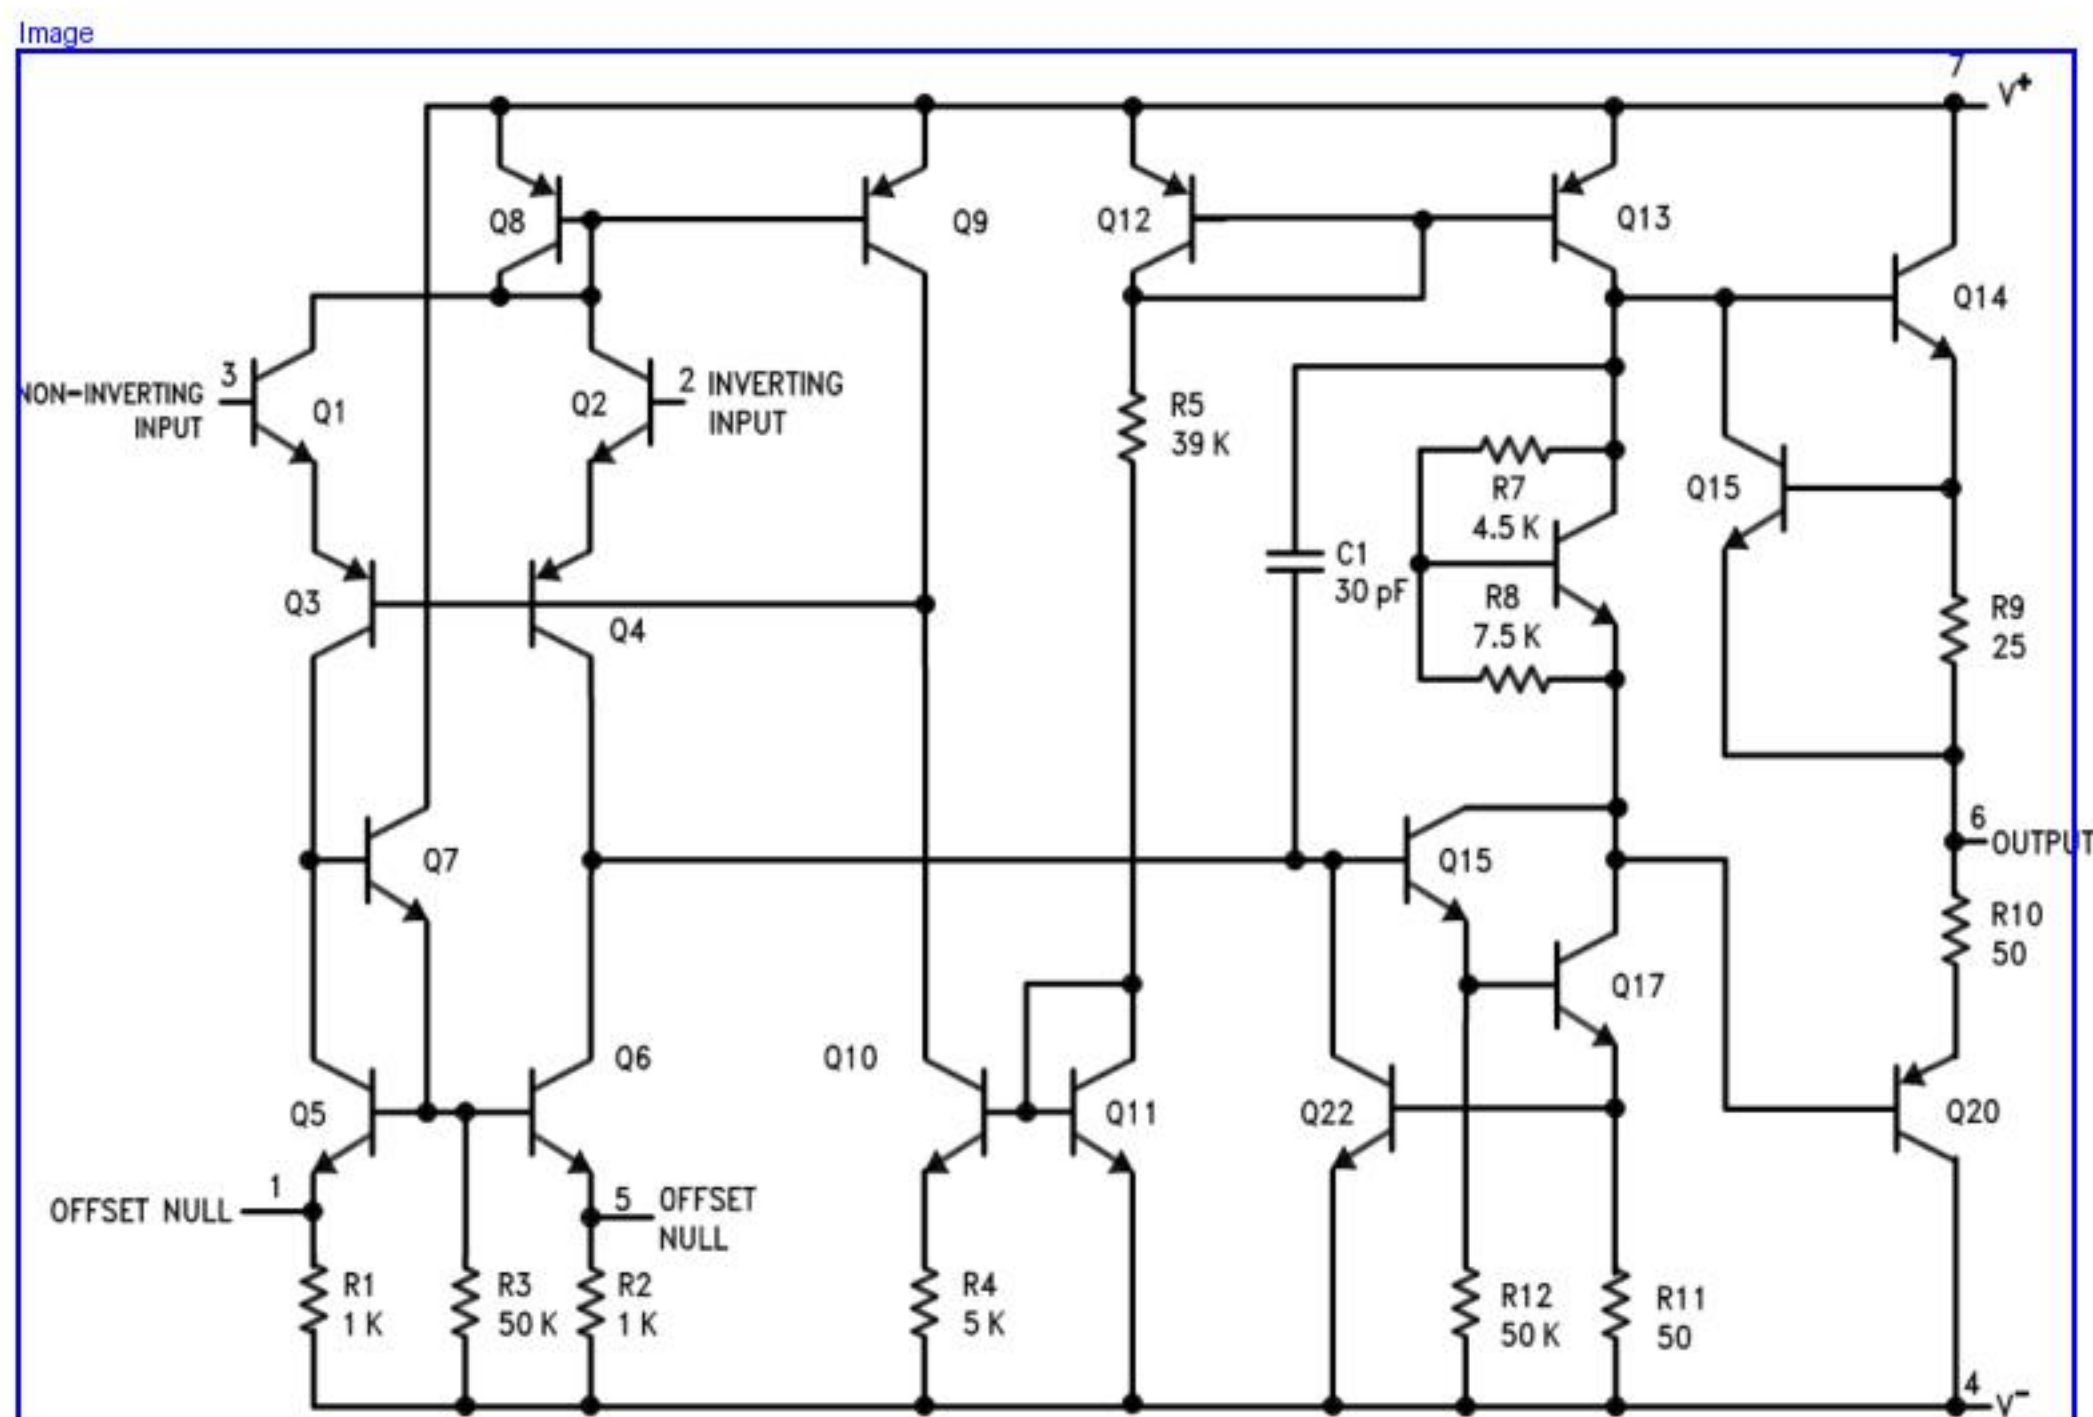

Title

7.3 Feature Description

Title

7.3.1 Overload Protection

Narrative Text

The LM741 features overload protection circuitry on the input and output. This prevents possible circuit damage to the device.

Title

7.3.2 Latch-up Prevention

Narrative Text

The LM741 is designed so that there is no latch-up occurrence when the common-mode range is exceeded. This allows the device to function properly without having to power cycle the device.

Title

7.3.3 Pin-to-Pin Capability

Narrative Text

The LM741 is pin-to-pin direct replacements for the LM709C, LM201, MC1439, and LM748 in most applications. Direct replacement capabilities allows flexibility in design for replacing obsolete parts.

Title

7.4 Device Functional Modes

Title

7.4.1 Open-Loop Amplifier

Narrative Text

The LM741 can be operated in an open-loop configuration. The magnitude of the open-loop gain is typically large thus for a small difference between the noninverting and inverting input terminals, the amplifier output will be driven near the supply voltage. Without negative feedback, the LM741 can act as a comparator. If the inverting input is held at 0 V, and the input voltage applied to the noninverting input is positive, the output will be positive. If the input voltage applied to the noninverting input is negative, the output will be negative.

Title

7.4.2 Closed-Loop Amplifier

Narrative Text

In a closed-loop configuration, negative feedback is used by applying a portion of the output voltage to the inverting input. Unlike the open-loop configuration, closed loop feedback reduces the gain of the circuit. The overall gain and response of the circuit is determined by the feedback network rather than the operational amplifier characteristics. The response of the operational amplifier circuit is characterized by the transfer function.

Title 8 Application and Implementation


Title NOTE

NarrativeText
Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

Title 8.1 Application Information

NarrativeText
The LM741 is a general-purpose amplifier that can be used in a variety of applications and configurations. One common configuration is in a noninverting amplifier configuration. In this configuration, the output signal is in phase with the input (not inverted as in the inverting amplifier configuration), the input impedance of the amplifier is high, and the output impedance is low. The characteristics of the input and output impedance is beneficial for applications that require isolation between the input and output. No significant loading will occur from the previous stage before the amplifier. The gain of the system is set accordingly so the output signal is a factor larger than the input signal.

Title 8.2 Typical Application

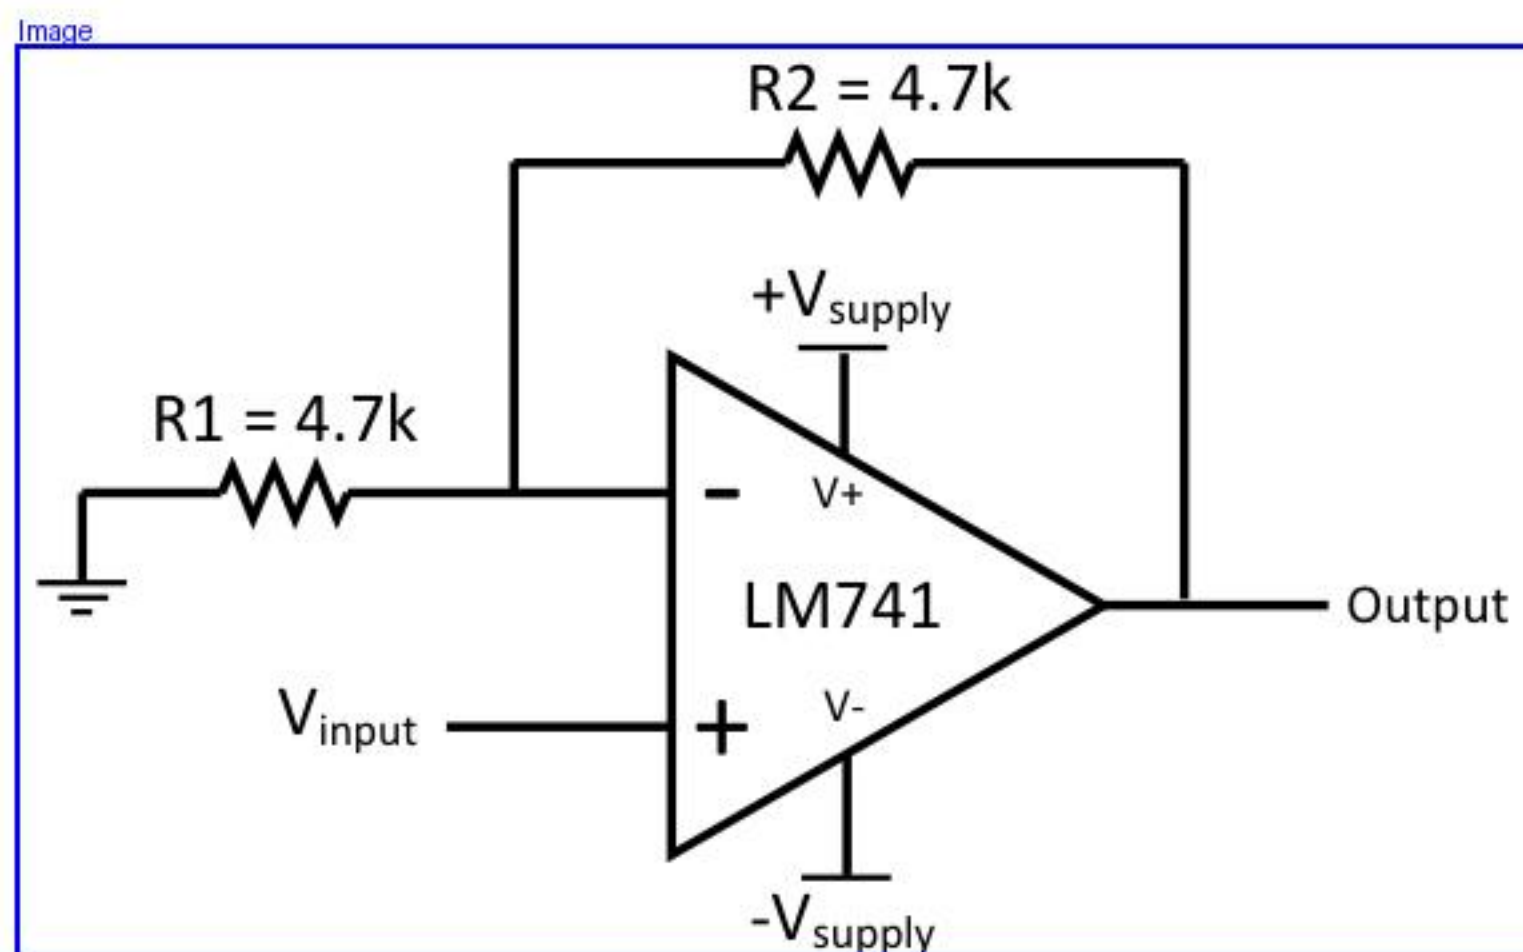

FigureCaption
Figure 1. LM741 Noninverting Amplifier Circuit

Title 8.2.1 Design Requirements

NarrativeText
As shown in Figure 1, the signal is applied to the noninverting input of the LM741. The gain of the system is determined by the feedback resistor and input resistor connected to the inverting input. The gain can be calculated by Equation 1:

$$\text{Gain} = 1 + (R2/R1)$$

UncategorizedText
1

NarrativeText
The gain is set to 2 for this application. R1 and R2 are 4.7-k resistors with 5% tolerance.

Title 8.2.2 Detailed Design Procedure

NarrativeText
The LM741 can be operated in either single supply or dual supply. This application is configured for dual supply with the supply rails at ± 15 V. The input signal is connected to a function generator. A 1-V_{pp}, 10-kHz sine wave was used as the signal input. 5% tolerance resistors were used, but if the application requires an accurate gain response, use 1% tolerance resistors.

Typical Application (continued)

8.2.3 Application Curve

The waveforms in Figure 2 show the input and output signals of the LM741 non-inverting amplifier circuit. The blue waveform (top) shows the input signal, while the red waveform (bottom) shows the output signal. The input signal is 1.06 V_{pp} and the output signal is 1.94 V_{pp}. With the 4.7-kΩ resistors, the theoretical gain of the system is 2. Due to the 5% tolerance, the gain of the system including the tolerance is 1.992. The gain of the system when measured from the mean amplitude values on the oscilloscope was 1.83.

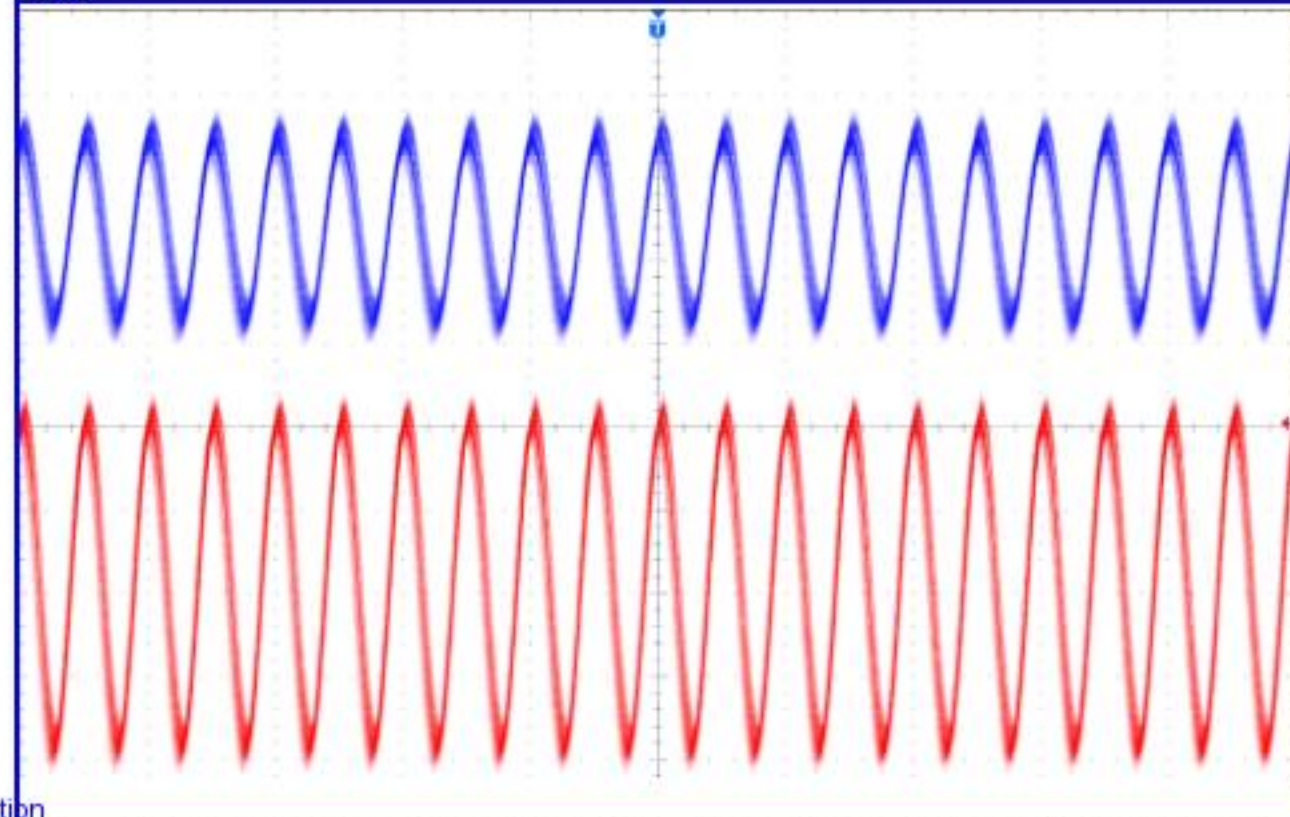


Figure 2. Waveforms for LM741 Noninverting Amplifier Circuit

9 Power Supply Recommendations


For proper operation, the power supplies must be properly decoupled. For decoupling the supply lines, a 0.1-μF capacitor is recommended and should be placed as close as possible to the LM741 power supply pins.

Title 10 Layout

Title 10.1 Layout Guidelines

Narrative Text
As with most amplifiers, take care with lead dress, component placement, and supply decoupling in order to ensure stability. For example, resistors from the output to an input should be placed with the body close to the input to minimize pick-up and maximize the frequency of the feedback pole by minimizing the capacitance from the input to ground. As shown in Figure 3, the feedback resistors and the decoupling capacitors are located close to the device to ensure maximum stability and noise performance of the system.

Title 10.2 Layout Example

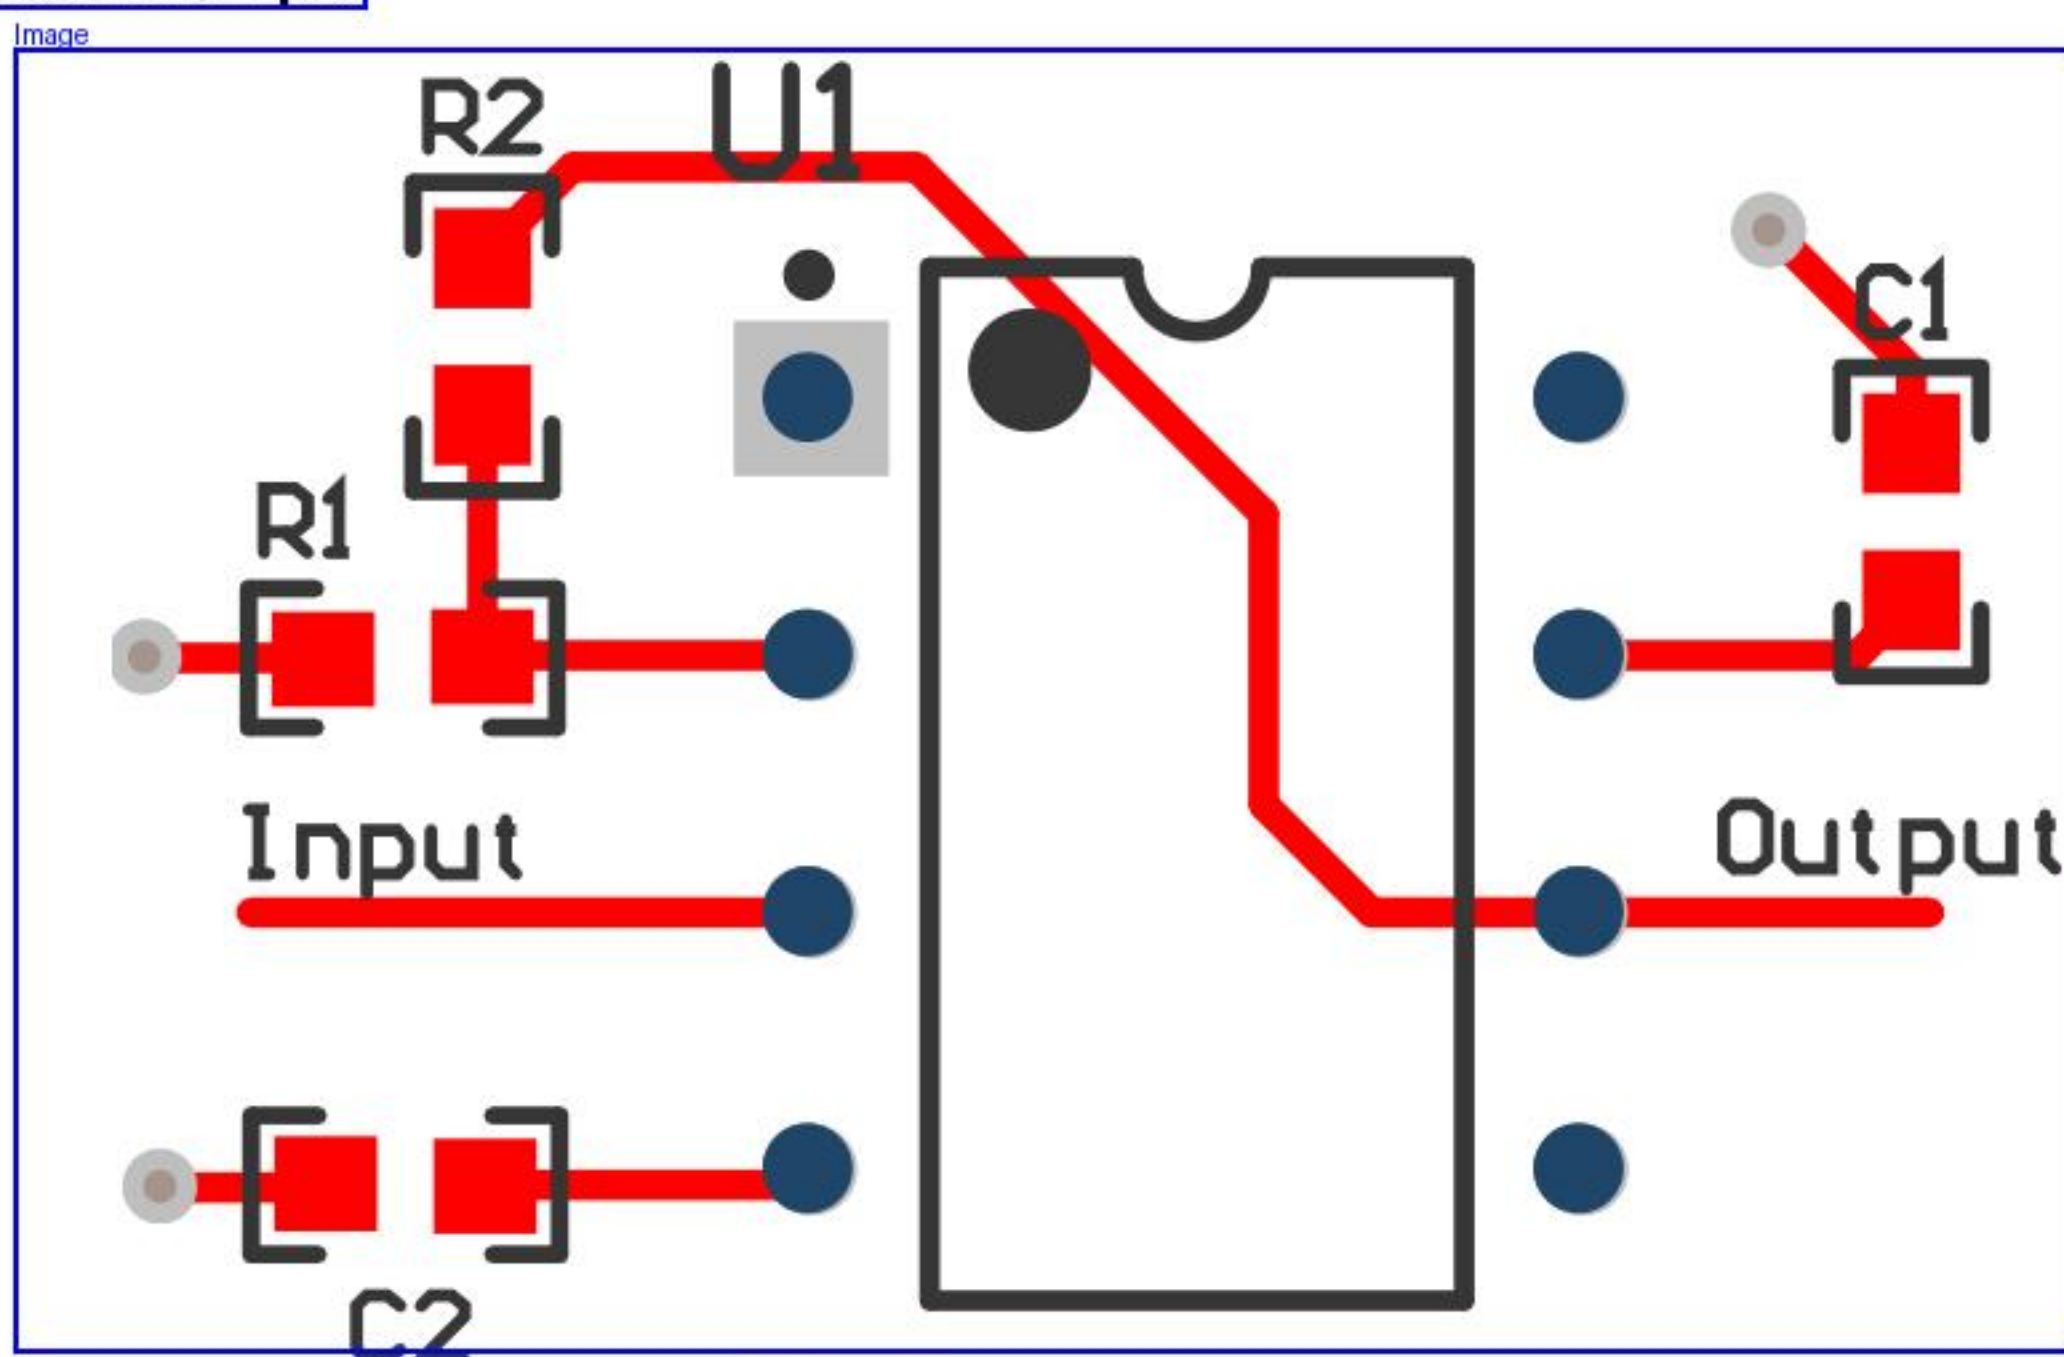

FigureCaption
Figure 3. LM741 Layout

Title

11 Device and Documentation Support

Title

11.1 Community Resources

Narrative Text

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

List Item

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

List Item

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

Title

11.2 Trademarks

Narrative Text

E2E is a trademark of Texas Instruments.
 All other trademarks are the property of their respective owners.

Title

11.3 Electrostatic Discharge Caution

Uncategorized Text

Narrative Text

 These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Title

11.4 Glossary

Narrative Text

SLYZ022 — *TI Glossary*.

Narrative Text

This glossary lists and explains terms, acronyms, and definitions.

Title

12 Mechanical, Packaging, and Orderable Information

Narrative Text

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Title
PACKAGING INFORMATION

Table

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
LM741C-MWC	Active	Production	WAFERSALE (YS) 0	1 null	Yes	Call TI	Level-1-NA-UNLIM	-40 to 85	
LM741C-MWC.B	Active	Production	WAFERSALE (YS) 0	1 null	-	Call TI	Level-1-NA-UNLIM	-40 to 85	
LM741CN/NOPB	Active	Production	PDIP (P) 8	40 TUBE	Yes	NIPDAU	Level-1-NA-UNLIM	0 to 70	LM 741CN
LM741CN/NOPB.B	Active	Production	PDIP (P) 8	40 TUBE	Yes	NIPDAU	Level-1-NA-UNLIM	0 to 70	LM 741CN
LM741CN/NOPBG4	Active	Production	PDIP (P) 8	40 TUBE	Yes	NIPDAU	Level-1-NA-UNLIM	-40 to 85	LM 741CN
LM741CN/NOPBG4.B	Active	Production	PDIP (P) 8	40 TUBE	Yes	NIPDAU	Level-1-NA-UNLIM	-40 to 85	LM 741CN

Title
(1) **Status:** For more details on status, see our [product life cycle](#).

Narrative Text
(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

Title
(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

Narrative Text
(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Narrative Text
(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

Narrative Text
(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Narrative Text
Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Narrative Text
Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative




Narrative Text
and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

Narrative Text
In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

Title

TUBE

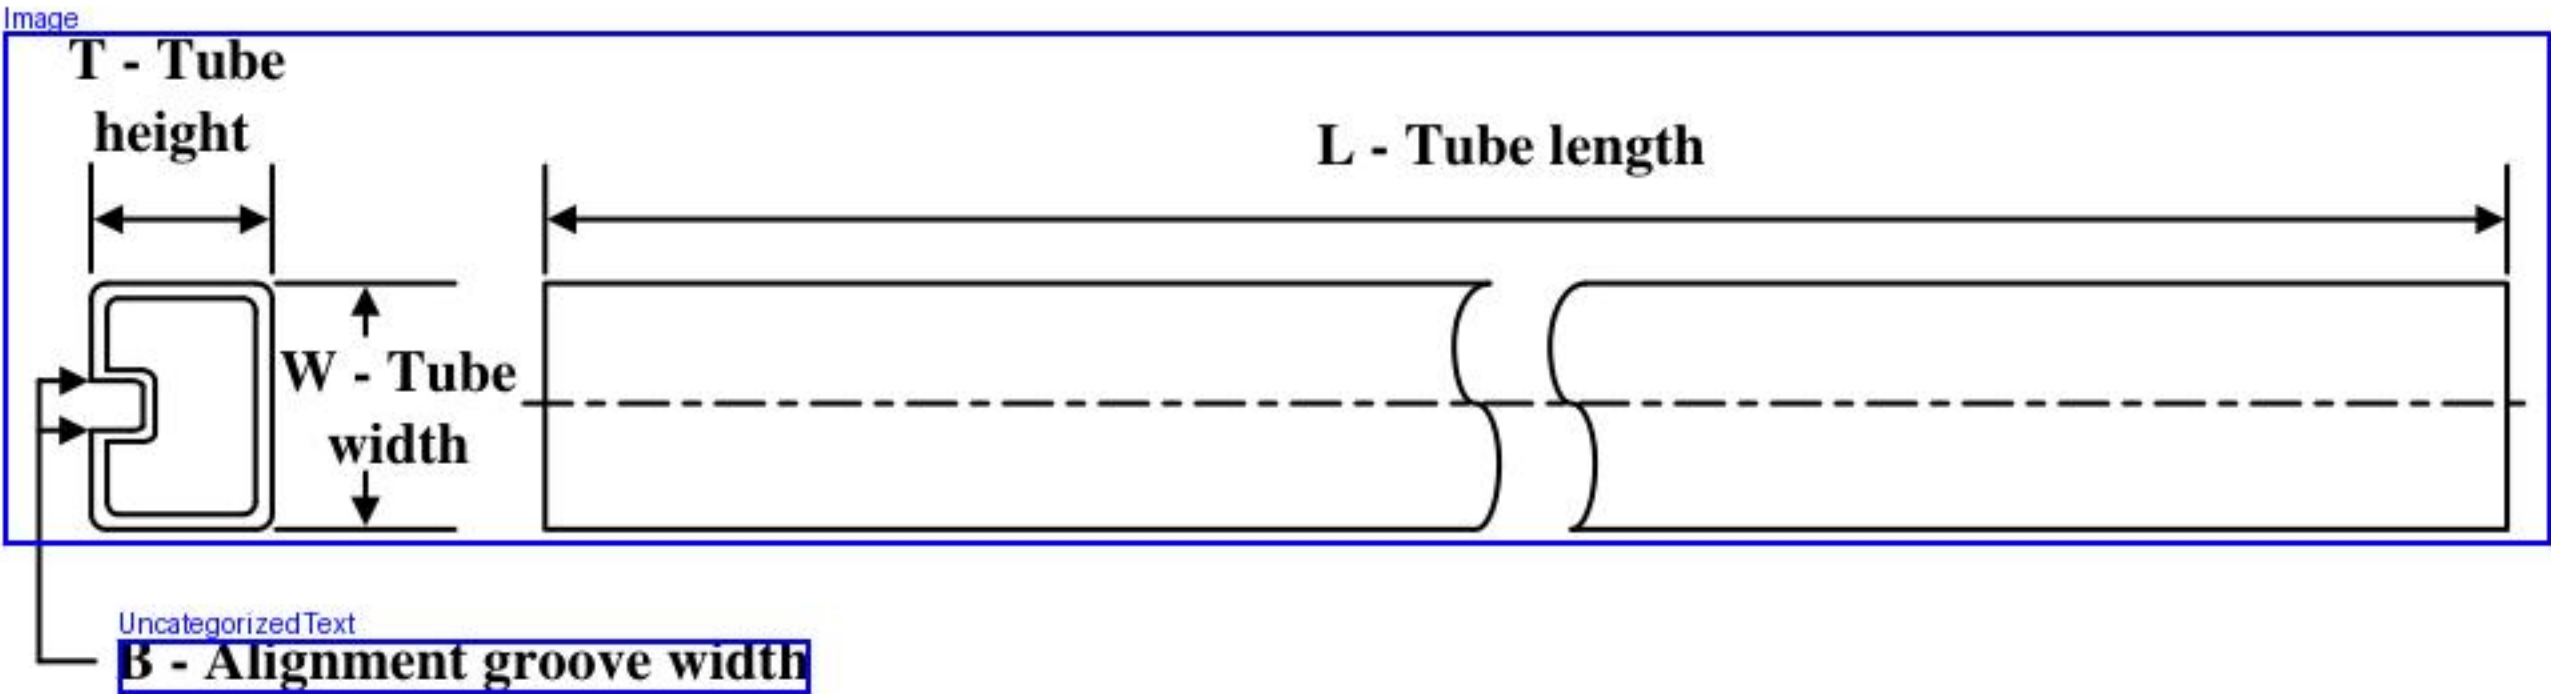

UncategorizedText

All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
LM741CN/NOPB	P	PDIP	8	40	502	14	11938	4.32
LM741CN/NOPB.B	P	PDIP	8	40	502	14	11938	4.32
LM741CN/NOPBG4	P	PDIP	8	40	502	14	11938	4.32
LM741CN/NOPBG4.B	P	PDIP	8	40	502	14	11938	4.32


UncategorizedText

P (R-PDIP-T8)

Narrative Text

PLASTIC DUAL-IN-LINE PACKAGE

Image

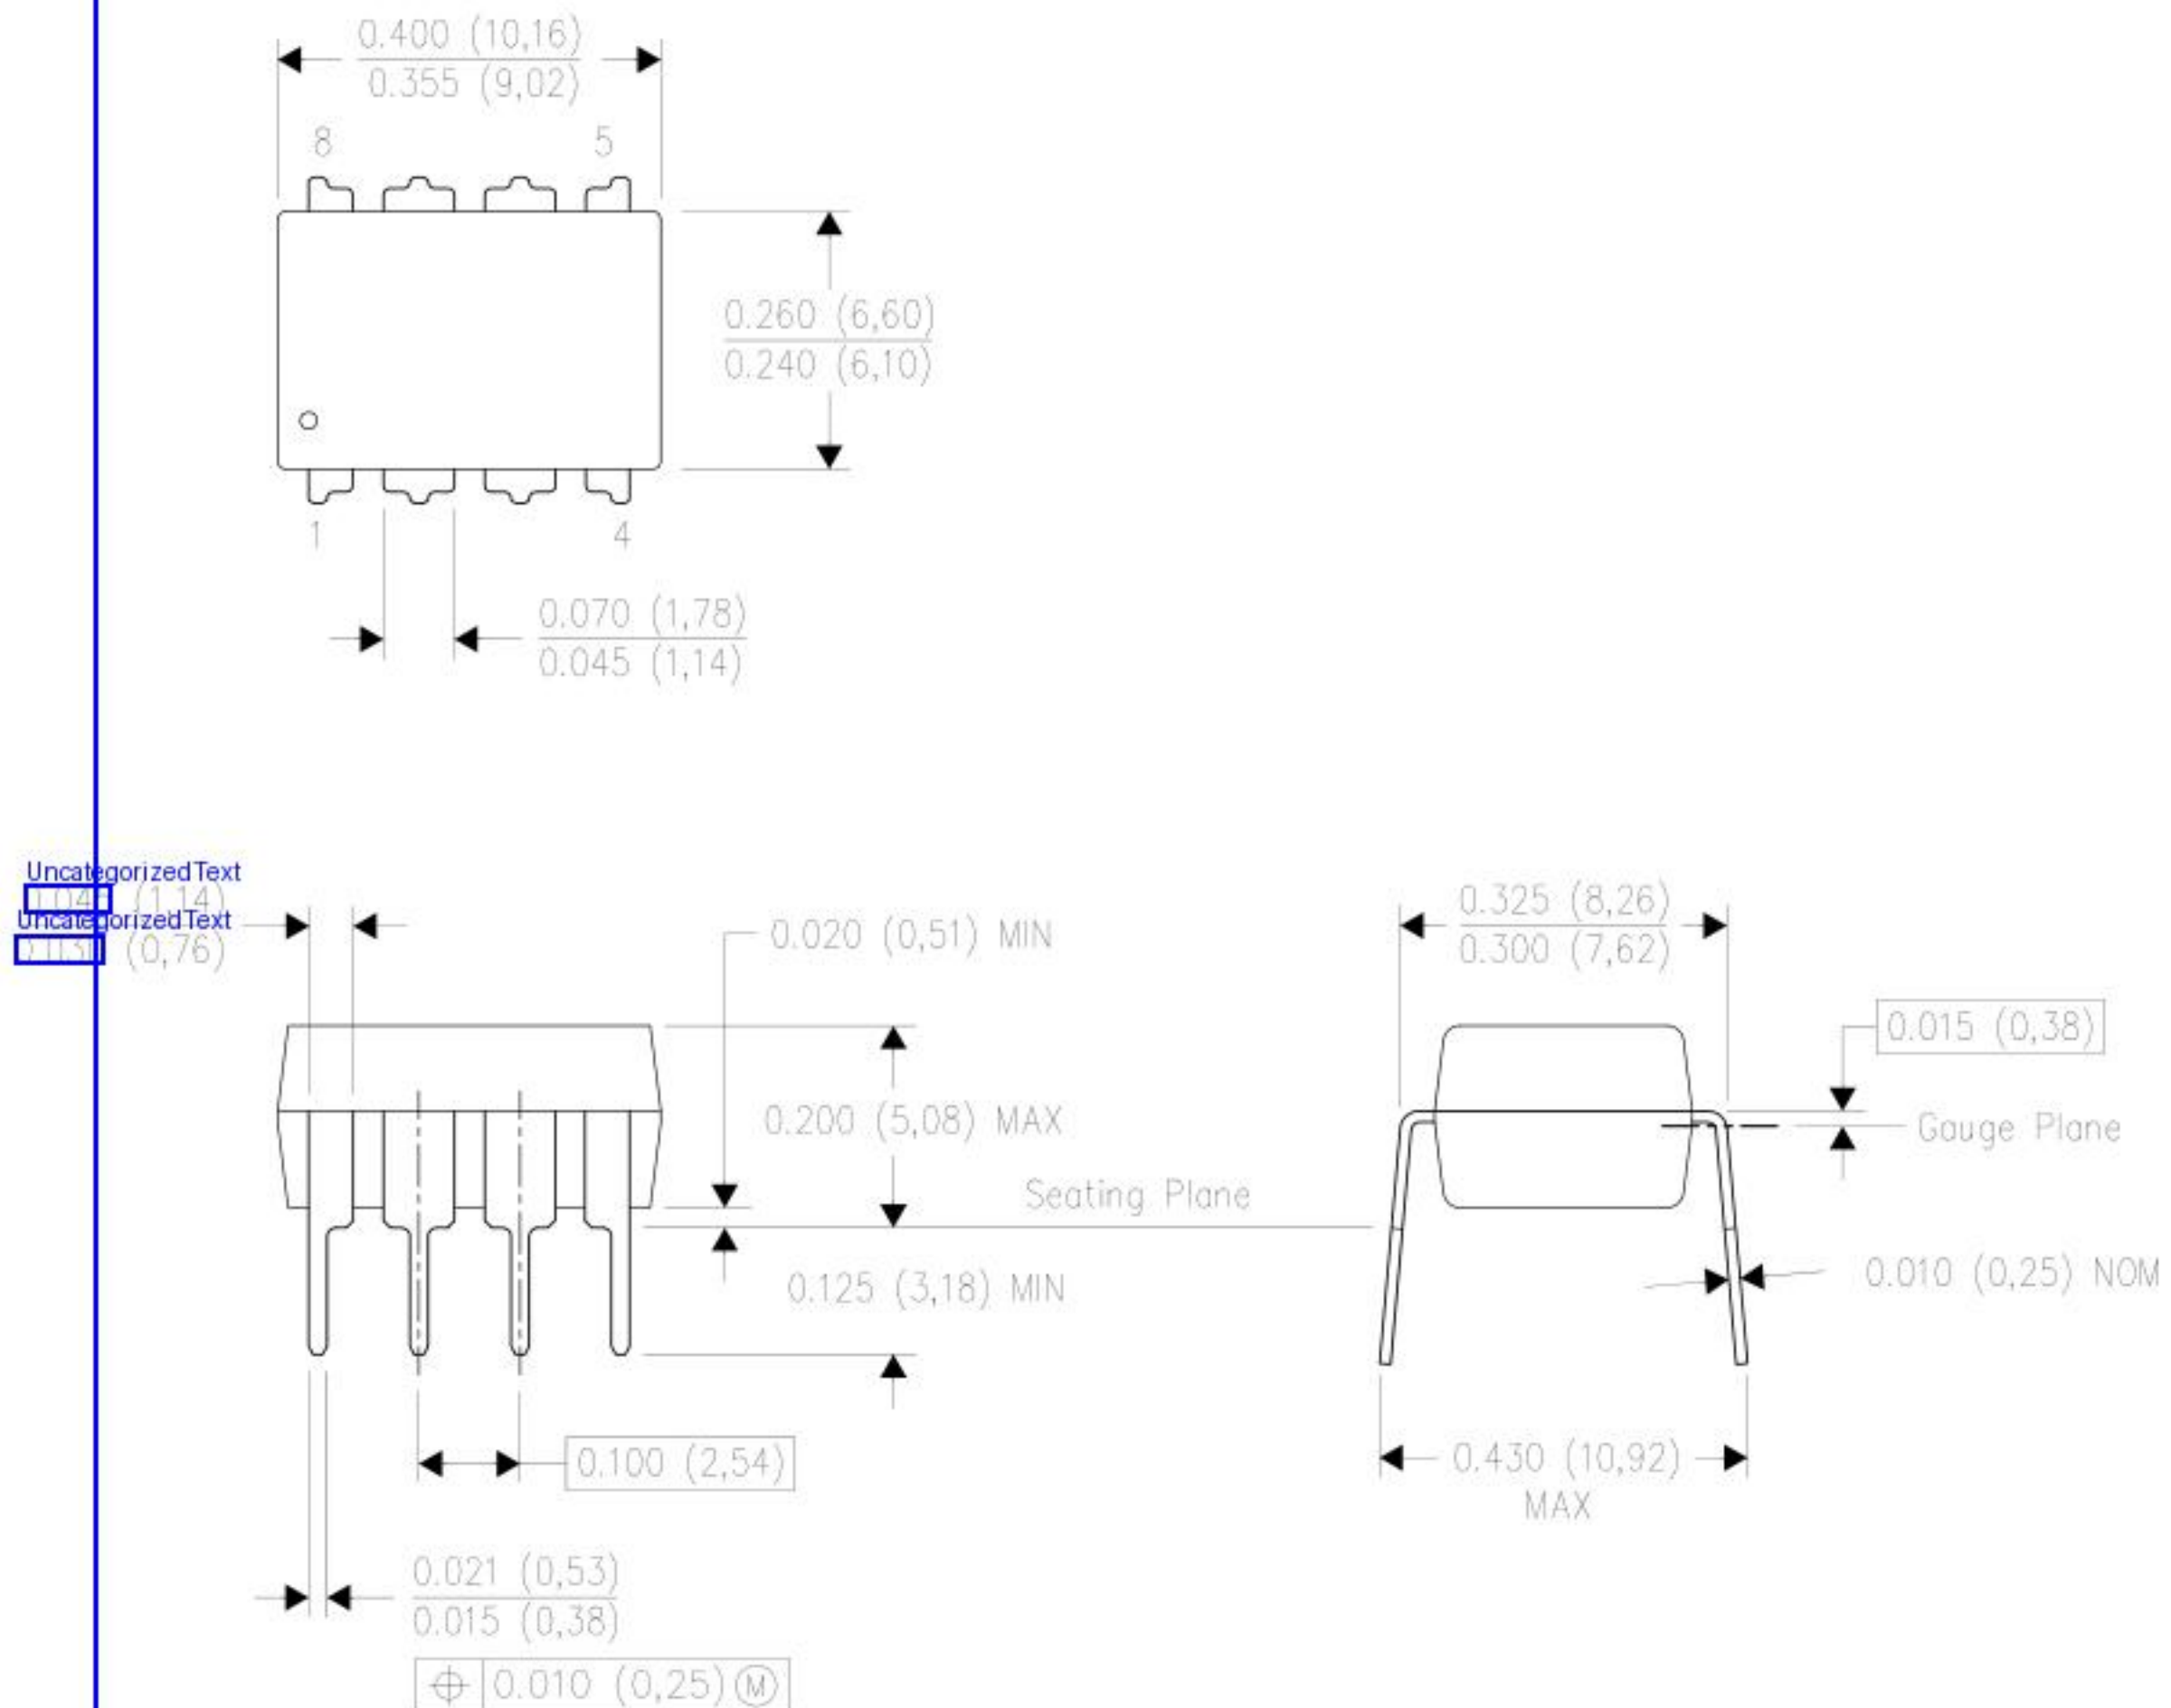

UncategorizedText

4040082/E 04/2010

UncategorizedText

NOTES

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Falls within JEDEC MS-001 variation BA.

Image

Title

IMPORTANT NOTICE AND DISCLAIMER

Narrative Text

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

Narrative Text

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

Narrative Text

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

Narrative Text

TI's products are provided subject to TI's [Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

Narrative Text

TI objects to and rejects any additional or different terms you may propose.

Narrative Text

Copyright © 2025, Texas Instruments Incorporated

Narrative Text

Last updated 10/2025