
FOCUS wired control carrier — engineering prototype

Pico H fits J1/J2; USB powers ONLY Pico. Camera USB goes directly to host.

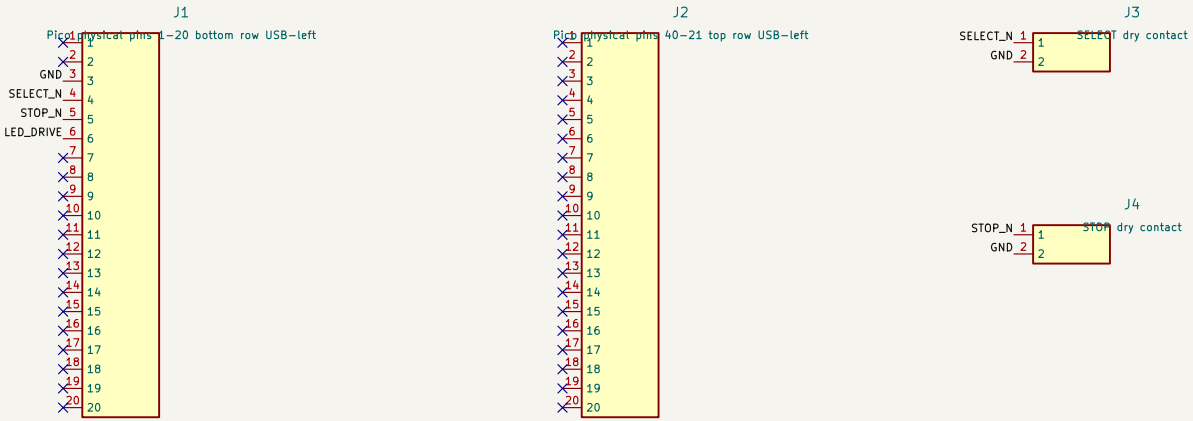

J1 socket pin n = Pico pin n. J2 socket pin n = Pico pin (41−n).

GP2 select; GP3 stop/mute; internal pullups required. Dry contacts to GND.

GP4 -> R1 -> LED anode. D1 pin1 cathode, pin2 anode.

Unused Pico pins intentionally not connected. No battery, radio or audio path on carrier.

J3/J4 connect normally−open OFFBOARD switches. Module not soldered to carrier.

Sheet: /
File: focus_control.kicad_sch

Title:

Size: A4 | Date: | **Rev:**
KiCad E.D.A. 10.0.7 | Id: 1/1