


optional button signal output. connect to BC250 power button solder pads to route signal from an external button.

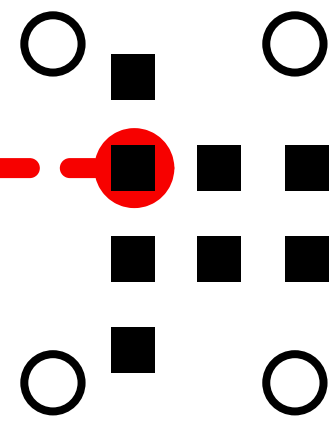


solder point: BC250
bottom side, at the
power/reset button
solder pads.

*power LED output is limited to **15mA** via onboard resistor — sufficient for most backlit buttons (5–12V versions).

to connect a high-power LED, RGB controller, or other load — short solder jumper **J1** to bypass the resistor.

⚠ CAUTION: maximum continuous load with J1 shorted must not exceed **250mA**.

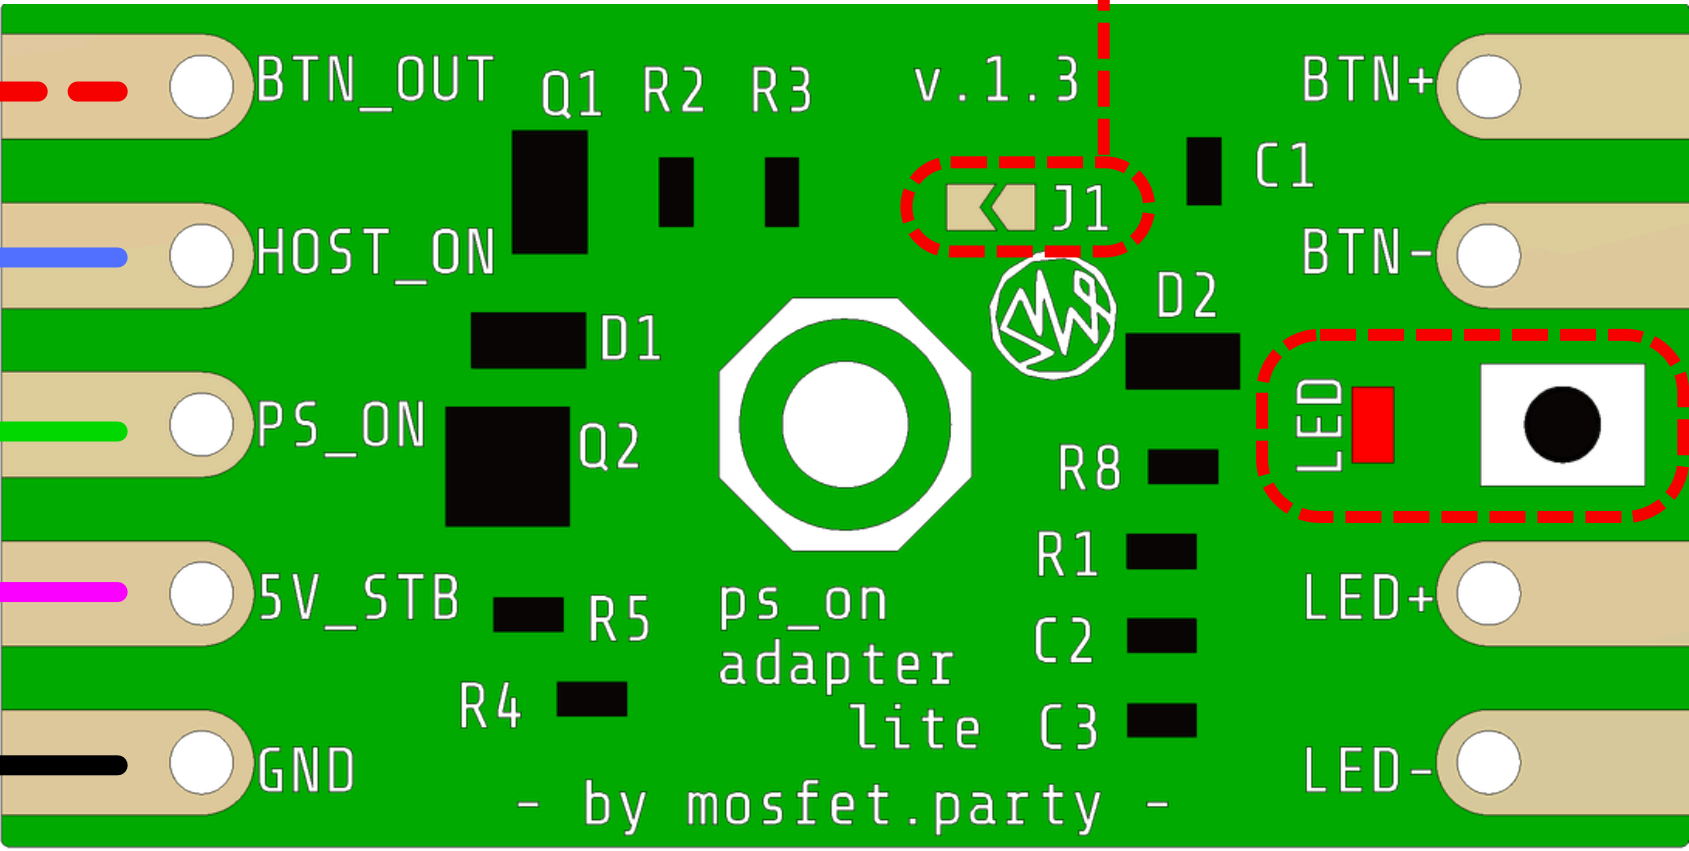


external power
button input

built-in power
button and LED

+
power LED output* (5v,
15mA)
-


(+3.3V) 1	13 (+3.3V)
(+3.3V) 2	14 (-12V)
(Ground) 3	15 (Ground)
(+5V) 4	16 (PS-ON)
(Ground) 5	17 (Ground)
(+5V) 6	18 (Ground)
(Ground) 7	19 (Ground)
(PG) 8	20 (-5V)
(+5VSB) 9	21 (+5V)
(+12V) 10	22 (+5V)
(+12V) 11	23 (+5V)
(+3.3V) 12	24 (Ground)

24pin ATX power supply connector (pin side view)

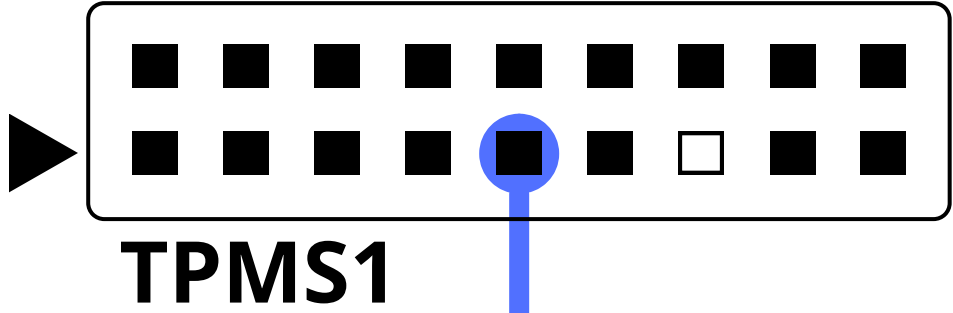

TPMS1

alternative
⚠ **WARNING: use only one connector.**
Simultaneous connection of both will
result in board damage.

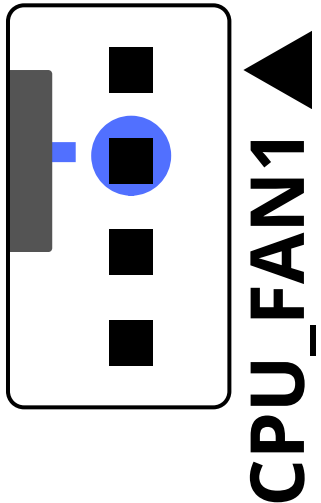

CPU_FAN1

BC250 power on signal