


BOARDS – FEATHER

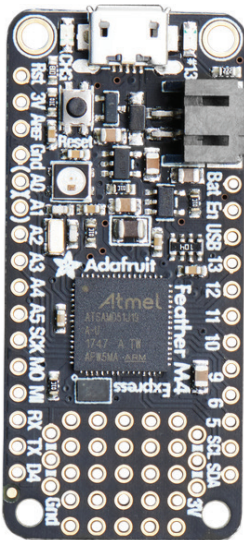

Feather M4 Express Pinout

Legend:

- Power
- GND
- Port Pin
- Interrupt
- Serial (TX/RX) (P0)
- Timer/TMR (P0)
- Pin Function
- Analog Output
- Control Pin
- IDE
- PWM Pin
- Power Supply

On-Board Components

- QSPI Flash Memory
- Battery Voltage Divider
- Built-In NeoPixel

Optional LiPo Battery

- Connect to GND to disable 3.3V regulator

Connect to 5V USB Port

- Connected to Positive Terminal of LiPo Battery
- 3.3V output from regulator

Pinout Courtesy of Adafruit

	Feather M4 Express	Feather NRF52840	Feather STM32F405	Feather HUZZAH32
Digi-Key Part Number	• 1528-2648-ND	• 1528-2828-ND	• 1528-4382-ND	• 1528-2181-ND
Processor	• ATSAM51-Cortex M4	• ARM® Cortex®-M4 • Bluetooth • LE module - nRF52840	• STM32F405 Cortex M4 with FPU • 168 MHz speed	• ESP32-based Feather using WROOM32 module • Tensilica LX6
Memory	• 512 KB flash • 192 KB RAM • 2 MB SPI FLASH	• 1 MB flash • 256 KB SRAM	• 192 KB RAM total • 128 KB RAM • 1 MB Flash • 64 KB program-only/cache RAM	• 512 KB RAM • 4 MB Flash
Peripherals	• 21 GPIO in total • Dual 1 MSPS 12-bit true analog DAC (A0 and A1) • Dual 1 MSPS 12-bit ADC • 6 x hardware SERCOM • 16 x PWM outputs – for servos, LEDs, etc. • I ² S input and output	• 21 GPIO • 6 x 12-bit ADC pins • 12 PWM outputs	• I ² C • UART • GPIO • ADCs • DACs	• 21 GPIO • I ² C • UART • GPIO • 10x Cap Touch interface • PWM on every IO • 12 ADC input
USB	• USB native support • USB bootloader • Serial port debugging	• Native Open Source USB stack – pre-programmed with UF2 bootloader	• USB-C power and data • First USB-C Feather!	• USB native support • USB bootloader • Serial port debugging
Power	• Built-in 100 mA lipoly charger • 3.3 V input	• 1.7 V to 3.3 V operation • Internal linear and DC/DC voltage regulators	• 3.3 V logic • Almost all pins are 5 V compliant	

