

Digital Signal Processing (DSP) - Session 5

Plot the Graph of $|X(z)|$ for the z-transform with Python and matplotlib

$|X(z)|$, the magnitude of $X(z)$, is a real and positive function of z . Since z represents a point in the complex plane, $|X(z)|$ is a two-dimensional function and describes a “surface.”

For example, plot the graph of $|X(z)|$ for the z-transform

$$X(z) = \frac{z^{-1} - z^{-2}}{1 - 1.2732z^{-1} + 0.81z^{-2}} = \frac{z - 1}{z^2 - 1.2732z + 0.81}$$

which has one zero at $z_1 = 1$ and two poles at $p_1 = 0.9e^{j\pi/4}, p_2 = 0.9e^{-j\pi/4}$.


Reference: <https://matplotlib.org/stable/gallery/mplot3d/subplot3d.html>

```
import matplotlib.pyplot as plt
import numpy as np
from matplotlib import cm

# set up a figure twice as wide as it is tall
fig = plt.figure(figsize=plt.figaspect(0.5))

# set up the Axes
ax = fig.add_subplot(1, 1, 1, projection='3d')

# plot a 3D surface like in the example mplot3d/surface3d_demo
X = np.arange(-5, 5, 0.1)
Y = np.arange(-5, 5, 0.1)
X, Y = np.meshgrid(X, Y)
H = X+Y*1j
Z = np.abs((H**-1-H**-2)/(1-1.2732*H**-1+0.81*H**-2))
surf = ax.plot_surface(X, Y, Z, rstride=1, cstride=1, cmap=cm.coolwarm,
linewidth=0, antialiased=False)
ax.set_zlim(-1, 10)
fig.colorbar(surf, shrink=0.5, aspect=10)
```

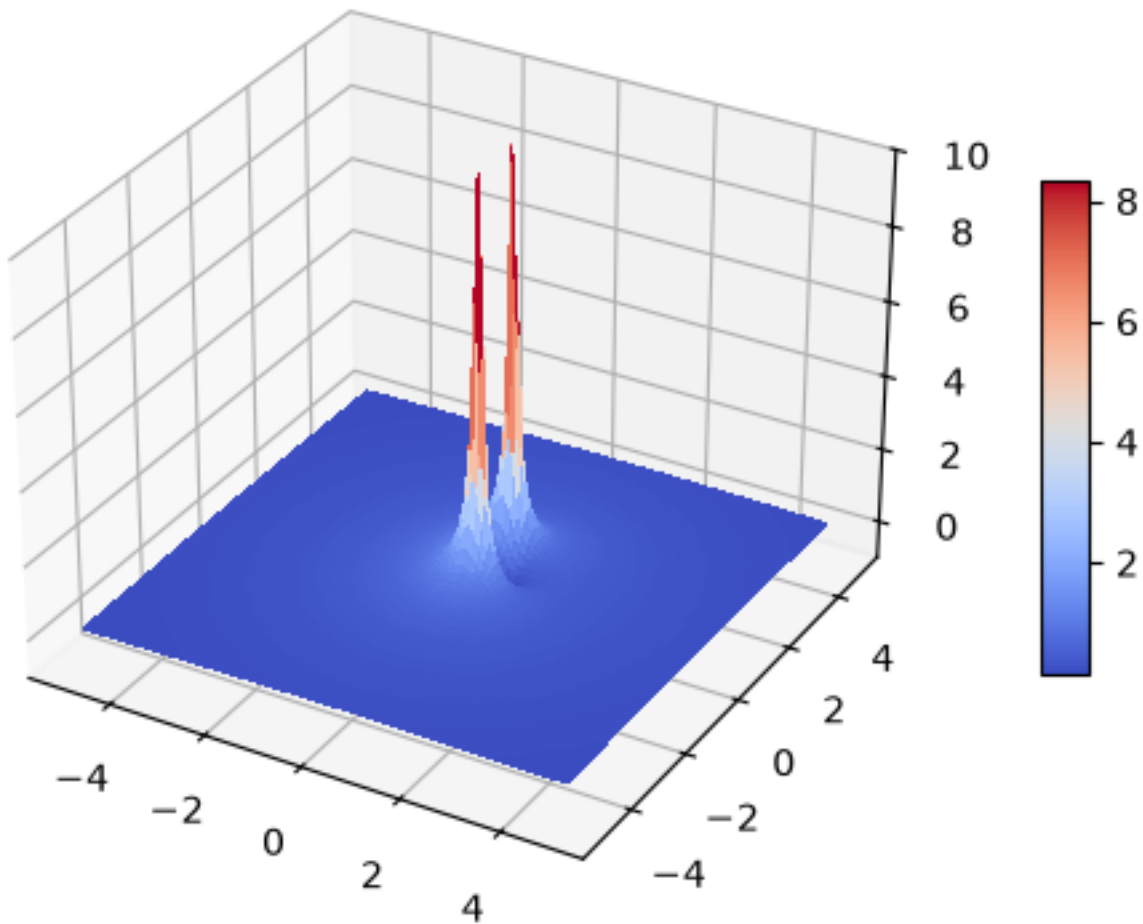

Note the high peaks near the singularities (poles) and the deep valley close to the zero.

Frequency Analysis of Signals

Frequency Analysis involves decomposing a signal into its frequency (sinusoidal) components to provide a mathematical and pictorial representation of its frequency content, often called its **spectrum**. This spectrum acts as a “signature” for the signal, as different signal waveforms have different spectra.

The Prism Analogy: As a glass prism causes a beam of sunlight to refract into a spectrum of colors, frequency analysis tools (like the Fourier series or transform) analyze time-domain waveforms into their component frequencies. Recombining these components to reconstruct the original signal is a process known as **Fourier synthesis**.

Importance for LTI Systems: Decomposing signals into sinusoids (or complex exponentials) is essential because when a sinusoid is passed through a **Linear Time-Invariant (LTI) system**, the output is a sinusoid of the same frequency, differing only in amplitude and phase.

We consider four cases based on whether the time variable is **continuous or discrete** and

whether the signal is **periodic or aperiodic**:

1. Continuous-Time Periodic Signals
2. Continuous-Time Aperiodic Signals
3. Discrete-Time Periodic Signals
4. Discrete-Time Aperiodic Signals

The Fourier Series for Continuous-Time Periodic Signals

The Fourier series is a mathematical representation used to decompose a continuous-time periodic signal into a linear weighted sum of harmonically related complex exponentials or sinusoids.

Synthesis Equation

$$x(t) = \sum_{k=-\infty}^{\infty} c_k e^{j2\pi k F_0 t}$$

This equation, called the **Fourier Series**, shows how a periodic signal $x(t)$ is constructed (synthesized) from its basic “building blocks”. These blocks are exponential signals $e^{j2\pi k F_0 t}$ where k ranges from $-\infty$ to ∞ . F_0 represents the **fundamental frequency**, which is the reciprocal of the fundamental period T_p ($F_0 = 1/T_p$). The coefficients c_k act as weighting factors that specify the shape of the resulting waveform.

Analysis Equation

$$c_k = \frac{1}{T_p} \int_{T_p} x(t) e^{-j2\pi k F_0 t} dt$$

This equation is used to determine the **Fourier coefficients** c_k from a given periodic signal $x(t)$. The integration is performed over any single period of length T_p . Physically, each c_k represents the amplitude and phase associated with the k -th harmonic component of the signal. c_k is also used as features in Machine Learning models.

Key Spectral Representations

The information contained in the complex-valued Fourier coefficients c_k can be visualized through different types of spectra:

- **Amplitude (Magnitude) Spectrum:** This is a plot of the magnitude of the coefficients, $|c_k|$, against the frequency kF_0 . It represents the “strength” of each harmonic component. For real-valued signals, this spectrum is always a **symmetric (even) function**.
- **Phase Spectrum:** This is a plot of the phase angles, $\theta_k = \angle c_k$, against frequency. It represents the relative time-shift of each harmonic. For real-valued signals, the phase spectrum is an **antisymmetric (odd) function**.
- **Power Density Spectrum:** This diagram plots $|c_k|^2$ as a function of frequency, showing how the total average power of the periodic signal is distributed among its various frequency components. Because power only exists at discrete values (multiples of F_0), it is often called a **line spectrum**.

Key Properties

- **Line Spectrum Characteristic:** Periodic signals possess discrete spectra where the spectral lines are equally spaced by the fundamental frequency F_0 .
- **Symmetry for Real Signals:** If the signal $x(t)$ is real, then $c_{-k} = c_k^*$ (complex conjugates). This implies that the magnitude spectrum is even ($|c_k| = |c_{-k}|$) and the phase spectrum is odd ($\theta_k = -\theta_{-k}$).
- **Parseval's Relation for Power Signals:** The total average power P_x of a periodic signal can be calculated by summing the power of all its individual harmonic components:

$$P_x = \frac{1}{T_p} \int_{T_p} |x(t)|^2 dt = \sum_{k=-\infty}^{\infty} |c_k|^2$$

This establishes the principle of **conservation of energy** between the time and frequency domains.

Convergence and Dirichlet Conditions

For the Fourier series to exactly equal $x(t)$ at every value of t , the signal must satisfy the **Dirichlet conditions**:

1. The signal $x(t)$ must have a finite number of discontinuities within any period.
2. The signal $x(t)$ must contain a finite number of maxima and minima during any period.
3. The signal $x(t)$ must be absolutely integrable over a period. All periodic signals of practical interest generally satisfy these conditions.

Example 1.1

Determine the Fourier series and the power density spectrum of the rectangular pulse train signal $x(t)$ with amplitude A and pulse width τ , periodic with fundamental period T_p , as illustrated in Fig 1.3.

Solution

1. **Identify Signal Properties:** The signal $x(t)$ is periodic with fundamental period T_p and fundamental frequency $F_0 = 1/T_p$. It is an **even signal** $x(t) = x(-t)$, so it is convenient to integrate over the interval $[-T_p/2, T_p/2]$.
2. **Apply the Fourier Analysis Equation:** The Fourier coefficients c_k are determined using the analysis equation:

$$c_k = \frac{1}{T_p} \int_{-T_p/2}^{T_p/2} x(t) e^{-j2\pi k F_0 t} dt$$

3. **Determine c_0 (DC Component):** For $k = 0$, the coefficient represents the average value of the signal over one period:

$$c_0 = \frac{1}{T_p} \int_{-T_p/2}^{T_p/2} x(t) dt = \frac{1}{T_p} \int_{-\tau/2}^{\tau/2} A dt = \frac{A\tau}{T_p}$$

4. **Determine c_k for $k \neq 0$:** Substitute the signal definition into the analysis equation:

$$c_k = \frac{1}{T_p} \int_{-\tau/2}^{\tau/2} A e^{-j2\pi k F_0 t} dt$$

$$c_k = \frac{A}{T_p} \left[\frac{e^{-j2\pi k F_0 t}}{-j2\pi k F_0} \right]_{-\tau/2}^{\tau/2}$$

$$c_k = \frac{A}{-j2\pi k F_0 T_p} (e^{-j\pi k F_0 \tau} - e^{j\pi k F_0 \tau})$$

5. **Simplify Using Euler's Identity:** Rearrange the terms to form the sine function, noting that $F_0 T_p = 1$:

$$c_k = \frac{A}{\pi k} \left(\frac{e^{j\pi k F_0 \tau} - e^{-j\pi k F_0 \tau}}{j2} \right)$$

$$c_k = \frac{A\tau}{T_p} \frac{\sin(\pi k F_0 \tau)}{\pi k F_0 \tau}, \quad k = \pm 1, \pm 2, \dots$$

The coefficients are real-valued and takes the form of the sinc function $\text{sinc}(\phi) = \frac{\sin(\phi)}{\phi}$ with zero crossings at $kF_0 = m/\tau$.

6. **Determine the Power Density Spectrum** The power density spectrum $|c_k|^2$ represents the power distribution across discrete frequencies kF_0 :

$$|c_k|^2 = \begin{cases} \left(\frac{A\tau}{T_p} \right)^2, & k = 0 \\ \left(\frac{A\tau}{T_p} \right)^2 \left(\frac{\sin(\pi k F_0 \tau)}{\pi k F_0 \tau} \right)^2, & k = \pm 1, \pm 2, \dots \end{cases}$$

The Fourier Transform for Continuous-Time Aperiodic Signals

The Fourier transform is a mathematical tool used to represent aperiodic (non-periodic), finite-energy signals in the frequency domain. Unlike periodic signals, which have discrete “line” spectra, aperiodic signals possess a **continuous spectrum**.

Synthesis Equation (Inverse Transform)

$$x(t) = \int_{-\infty}^{\infty} X(F) e^{j2\pi Ft} dF$$

This equation describes the **synthesis** problem: how an aperiodic signal $x(t)$ is reconstructed from its frequency components. Because the signal is not periodic, its frequency content is not limited to discrete harmonics; instead, it is composed of a **continuum of infinitesimal complex exponentials** $e^{j2\pi Ft}$. Consequently, the reconstruction is performed through **integration** over all frequencies from $-\infty$ to ∞ rather than a summation.

Analysis Equation (Direct Transform)

$$X(F) = \int_{-\infty}^{\infty} x(t) e^{-j2\pi Ft} dt$$

This equation, called the **Fourier Transform**, is used for **spectral analysis**. It determines the function $X(F)$, which represents the **frequency content** of the signal $x(t)$. Physically, $X(F)$ acts

as a “signature” for the signal, providing a mathematical and pictorial representation of its frequency components.

Key Spectral Representations

The complex-valued function $X(F)$ is typically expressed in polar form to visualize the signal’s characteristics:

- **Amplitude (Magnitude) Spectrum:** Denoted as $|X(F)|$, this represents the distribution of the magnitudes of the frequency components. For real-valued signals, this spectrum exhibits **even symmetry** ($|X(F)| = |X(-F)|$).
- **Phase Spectrum:** Denoted as $\theta(F)$ or $\angle X(F)$, this represents the phase shift associated with each frequency. For real signals, the phase spectrum has **odd symmetry** ($\angle X(-F) = -\angle X(F)$).
- **Energy Density Spectrum:** Defined as $S_{xx}(F) = |X(F)|^2$, this function describes how the total energy of a signal is distributed across different frequencies. It contains no phase information and is always purely real and non-negative.

Key Properties

- **Continuous Spectrum:** Because aperiodic signals have an infinite period ($T_p \rightarrow \infty$), the spacing between spectral lines in a periodic representation tends toward zero, resulting in a continuous frequency range.
- **Uncertainty Principle:** There is an inverse relationship between a signal’s duration in time and its bandwidth in frequency; for example, if a signal is compressed (shortened) in time, its Fourier transform is expanded (widened) in frequency.
- **Parseval’s Relation for Energy Signals:** The total energy E_x of the signal can be calculated in either the time or frequency domain:

$$E_x = \int_{-\infty}^{\infty} |x(t)|^2 dt = \int_{-\infty}^{\infty} |X(F)|^2 dF$$

This establishes the **principle of conservation of energy** across both domains.

Convergence and Dirichlet Conditions

For the Fourier transform to exist, the signal $x(t)$ generally must satisfy the **Dirichlet conditions**:

1. The signal must have a **finite number of finite discontinuities**.
2. The signal must have a **finite number of maxima and minima**.
3. The signal must be **absolutely integrable**, meaning $\int_{-\infty}^{\infty} |x(t)| dt < \infty$. A weaker condition is that the signal has **finite energy**; nearly all finite-energy signals encountered in practice have a valid Fourier transform.

Example 1.2

Determine the Fourier transform and the energy density spectrum of a rectangular pulse signal defined as:

$$x(t) = \begin{cases} A, & |t| \leq \tau/2 \\ 0, & |t| > \tau/2 \end{cases}$$

Solution

1. **Check Existence Conditions:** The signal is **aperiodic** and satisfies **Dirichlet conditions**, meaning its Fourier transform exists.
2. **Apply the Fourier Transform Formula:** Using the analysis equation for continuous-time aperiodic signals:

$$X(F) = \int_{-\infty}^{\infty} x(t)e^{-j2\pi Ft} dt$$

3. **Evaluate the Integral:** Since the signal is zero outside $|t| > \tau/2$, integrate over the pulse width:

$$X(F) = \int_{-\tau/2}^{\tau/2} Ae^{-j2\pi Ft} dt$$

$$X(F) = A \left[\frac{e^{-j2\pi Ft}}{-j2\pi F} \right]_{-\tau/2}^{\tau/2}$$

$$X(F) = \frac{A}{-j2\pi F} (e^{-j\pi F\tau} - e^{j\pi F\tau})$$

4. **Simplify Using Euler's Identity:** Rearrange the terms to form the sine function:

$$X(F) = \frac{A}{\pi F} \left(\frac{e^{j\pi F\tau} - e^{-j\pi F\tau}}{j2} \right)$$

$$X(F) = A\tau \frac{\sin(\pi F\tau)}{\pi F\tau}$$

This result is real-valued and follows the $(\sin \phi)/\phi$ shape, with zero crossings at multiples of $1/\tau$.

5. **Determine the Energy Density Spectrum:** The energy density spectrum $S_{xx}(F)$ represents the distribution of energy across frequencies and is defined as the magnitude squared of the Fourier transform:

$$S_{xx}(F) = |X(F)|^2$$

Substituting the derived $X(F)$:

$$S_{xx}(F) = (A\tau)^2 \left(\frac{\sin(\pi F\tau)}{\pi F\tau} \right)^2$$

The Fourier Series for Discrete-Time Periodic Signals

The **Discrete-Time Fourier Series (DTFS)** is the mathematical tool used to represent a discrete-time periodic signal as a linear weighted sum of harmonically related complex exponentials.

Synthesis Equation

$$x(n) = \sum_{k=0}^{N-1} c_k e^{j2\pi kn/N}$$

This equation, called the **Fourier Series** describes the **synthesis** (reconstruction) of the periodic sequence $x(n)$ from its frequency components. A fundamental difference from the continuous-time Fourier series is that the discrete-time version contains at most N **distinct frequency components**, where N is the fundamental period. This is because discrete-time complex exponentials $e^{j2\pi kn/N}$ separated by N in frequency are identical ($s_{k+N}(n) = s_k(n)$). Consequently, the reconstruction is a **finite sum** over a single period of the frequency index k .

Analysis Equation

$$c_k = \frac{1}{N} \sum_{n=0}^{N-1} x(n) e^{-j2\pi kn/N}$$

This equation is used for **spectral analysis** to determine the **Fourier coefficients** c_k . These coefficients provide a description of the signal $x(n)$ in the frequency domain, where each c_k represents the amplitude and phase associated with the k -th harmonic component. The index k corresponds to the frequency $\omega_k = 2\pi k/N$.

Key Spectral Representations

The complex-valued coefficients c_k are typically visualized using the following plots:

- **Amplitude (Magnitude) Spectrum:** A plot of the magnitude $|c_k|$ against the frequency index k . It indicates the relative strength of each harmonically related component. For real-valued signals, this spectrum exhibits **even symmetry** ($|c_k| = |c_{N-k}|$).
- **Phase Spectrum:** A plot of the phase angles $\angle c_k$ against frequency. It represents the relative phase shift of each harmonic. For real signals, it exhibits **odd symmetry** ($\angle c_k = -\angle c_{N-k}$).
- **Power Density Spectrum:** A plot of the squared magnitudes $|c_k|^2$ against frequency. It describes how the average power of the periodic signal is distributed among its N frequency components.

Key Properties

- **Periodic Spectrum:** In discrete-time, the spectrum c_k is itself a **periodic sequence** with the same fundamental period N as the signal ($c_{k+N} = c_k$). This reflects the finite unique frequency range $(-\pi, \pi)$ of discrete-time signals.
- **Symmetry for Real Signals:** If $x(n)$ is real, then $c_k = c_{-k}^*$ (or $c_k = c_{N-k}^*$ due to periodicity). This means the signal's frequency content is completely specified by only half a period of the spectrum ($k = 0$ to $N/2$).
- **Parseval's Relation for Power Signals:** The total average power P_x of the periodic signal can be calculated in either the time or frequency domain:

$$P_x = \frac{1}{N} \sum_{n=0}^{N-1} |x(n)|^2 = \sum_{k=0}^{N-1} |c_k|^2$$

This establishes that the average power in the signal is equal to the **sum of the powers** of its individual frequency components.

Example 2.2 Periodic "Square-Wave" Signal

Determine the Fourier series coefficients and the power density spectrum of the periodic discrete-time square-wave signal $x(n)$ with period N , defined over one fundamental period as:

$$x(n) = \begin{cases} A, & 0 \leq n \leq L-1 \\ 0, & L \leq n \leq N-1 \end{cases}$$

Solution

1. **Apply the Fourier Analysis Equation** The coefficients c_k are determined using:

$$c_k = \frac{1}{N} \sum_{n=0}^{N-1} x(n) e^{-j2\pi kn/N}, \quad k = 0, 1, \dots, N-1$$

2. **Substitute the Signal Values** Since the signal is zero for $n \geq L$, the summation limits are reduced:

$$c_k = \frac{1}{N} \sum_{n=0}^{L-1} A e^{-j2\pi kn/N}, \quad k = 0, 1, \dots, N-1$$

3. **Evaluate the Geometric Summation** For $k = 0$:

$$c_0 = \frac{AL}{N}$$

For $k = 1, 2, \dots, N-1$:

$$c_k = \frac{A}{N} \sum_{n=0}^{L-1} (e^{-j2\pi k/N})^n = \frac{A}{N} \frac{1 - e^{-j2\pi kL/N}}{1 - e^{-j2\pi k/N}}$$

4. **Simplify Using Trigonometric Identities** Rearrange the expression to form sine functions:

$$\begin{aligned} \frac{1 - e^{-j2\pi kL/N}}{1 - e^{-j2\pi k/N}} &= \frac{e^{-j\pi kL/N} e^{j\pi kL/N} - e^{-j\pi kL/N}}{e^{-j\pi k/N} e^{j\pi k/N} - e^{-j\pi k/N}} \\ &= e^{-j\pi k(L-1)/N} \frac{\sin(\pi kL/N)}{\sin(\pi k/N)} \end{aligned}$$

5. **Final Fourier Series Coefficients** Combining the results:

$$c_k = \begin{cases} \frac{AL}{N}, & k = 0, \pm N, \pm 2N, \dots \\ \frac{A}{N} e^{-j\pi k(L-1)/N} \frac{\sin(\pi kL/N)}{\sin(\pi k/N)}, & \text{otherwise} \end{cases}$$

6. **Determine the Power Density Spectrum** The power density spectrum $|c_k|^2$ is the magnitude squared of the coefficients:

$$|c_k|^2 = \begin{cases} \left(\frac{AL}{N}\right)^2, & k = 0, \pm N, \pm 2N, \dots \\ \left(\frac{A}{N}\right)^2 \left(\frac{\sin \pi kL/N}{\sin \pi k/N}\right)^2, & \text{otherwise} \end{cases}$$

The Fourier Transform for Discrete-Time Aperiodic Signals

The **Discrete-Time Fourier Transform (DTFT)** is the mathematical tool used to represent aperiodic, finite-energy sequences in the frequency domain. Physically, $X(\omega)$ represents the **frequency content** of the signal $x(n)$, providing a decomposition of the sequence into its constituent frequency components.

Synthesis Equation (Inverse Transform)

$$x(n) = \frac{1}{2\pi} \int_{2\pi} X(\omega) e^{j\omega n} d\omega$$

This equation describes the **synthesis** (reconstruction) of the sequence $x(n)$ from its continuous frequency representation $X(\omega)$. Because the discrete-time signal is represented by a **continuum of frequency components**, the reconstruction is performed through **integration** over a single 2π period (typically $-\pi$ to π) rather than a summation. The factor $1/2\pi$ serves as a normalization constant.

Analysis Equation (Direct Transform)

$$X(\omega) = \sum_{n=-\infty}^{\infty} x(n) e^{-j\omega n}$$

This equation, called the **Fourier Transform**, is used for **spectral analysis** to determine the function $X(\omega)$ from a given sequence $x(n)$. Unlike the continuous-time Fourier transform, this analysis involves a **summation** of terms because the signal is discrete in time. $X(\omega)$ acts as a frequency-domain “signature” for the discrete sequence.

Key Spectral Representations

The complex-valued function $X(\omega)$ is typically expressed in polar form to visualize the characteristics of the signal:

- **Amplitude (Magnitude) Spectrum:** Denoted as $|X(\omega)|$, this shows the magnitude of each frequency component. For real-valued signals, the magnitude spectrum exhibits **even symmetry** ($|X(-\omega)| = |X(\omega)|$).
- **Phase Spectrum:** Denoted as $\theta(\omega)$ or $\angle X(\omega)$, this represents the phase shift associated with each frequency. For real signals, the phase spectrum exhibits **odd symmetry** ($\theta(-\omega) = -\theta(\omega)$).
- **Energy Density Spectrum:** Defined as $S_{xx}(\omega) = |X(\omega)|^2$, this function describes how the total energy of the aperiodic signal is distributed across frequencies. It contains no phase information and is always purely real and non-negative.

Key Properties

- **Periodic Spectrum:** A fundamental property of discrete-time signals is that their spectra are always **periodic with period 2π** . Consequently, the frequency range is finite and unique over any interval of length 2π , such as $(-\pi, \pi)$.
- **Symmetry for Real Signals:** If $x(n)$ is real, the spectrum possesses **Hermitian symmetry** ($X^*(\omega) = X(-\omega)$), meaning the magnitude is even and the phase is odd. Because of this, the signal is completely specified by its spectrum in the range $0 \leq \omega \leq \pi$.

- **Parseval's Relation for Energy Signals:** The total energy E_x of a discrete-time signal can be calculated in either the time or frequency domain:

$$E_x = \sum_{n=-\infty}^{\infty} |x(n)|^2 = \frac{1}{2\pi} \int_{-\pi}^{\pi} |X(\omega)|^2 d\omega$$

This establishes the **principle of conservation of energy** across both domains.

Convergence of the Transform

For the DTFT to exist and converge, the sequence must satisfy certain conditions:

- **Uniform Convergence:** This is guaranteed if the sequence $x(n)$ is **absolutely summable**, meaning $\sum_{n=-\infty}^{\infty} |x(n)| < \infty$.
- **Mean-Square Convergence:** For sequences that are not absolutely summable but have **finite energy** (square-summable), the transform converges in the mean-square sense. In such cases, oscillatory behavior known as the **Gibbs phenomenon** may occur at points of discontinuity in $X(\omega)$.

*** Example 2.4***

Determine the Fourier transform and the energy density spectrum of the sequence:

$$x(n) = \begin{cases} A, & 0 \leq n \leq L-1 \\ 0, & \text{otherwise} \end{cases}$$

Solution

1. **Check Convergence Conditions:** The sequence is **absolutely summable**, confirming the Fourier transform exists:

$$\sum_{n=-\infty}^{\infty} |x(n)| = \sum_{n=0}^{L-1} |A| = L|A| < \infty$$

The signal has **finite energy** $E_x = |A|^2 L$.

2. **Apply the Fourier Transform Formula:** Using the analysis equation for discrete-time aperiodic signals:

$$X(\omega) = \sum_{n=-\infty}^{\infty} x(n)e^{-j\omega n}$$

Substituting the signal definition:

$$X(\omega) = \sum_{n=0}^{L-1} Ae^{-j\omega n}$$

3. **Evaluate the Geometric Summation:** Apply the finite geometric series formula:

$$X(\omega) = A \frac{1 - e^{-j\omega L}}{1 - e^{-j\omega}}$$

4. **Simplify Using Trigonometric Identities:** Factor out the half-angle exponentials from the numerator and denominator:

$$X(\omega) = A \frac{e^{-j\omega L/2}(e^{j\omega L/2} - e^{-j\omega L/2})}{e^{-j\omega/2}(e^{j\omega/2} - e^{-j\omega/2})}$$

$$X(\omega) = Ae^{-j(\omega/2)(L-1)} \frac{\sin(\omega L/2)}{\sin(\omega/2)}$$

5. **Determine the Magnitude and Phase Spectra:** The magnitude spectrum is:

$$|X(\omega)| = \begin{cases} |A|L, & \omega = 0 \\ |A| \left| \frac{\sin(\omega L/2)}{\sin(\omega/2)} \right|, & \text{otherwise} \end{cases}$$

The phase spectrum is:

$$\angle X(\omega) = \angle A - \frac{\omega}{2}(L-1) + \angle \left(\frac{\sin(\omega L/2)}{\sin(\omega/2)} \right)$$

6. **Determine the Energy Density Spectrum** The energy density spectrum $S_{xx}(\omega)$ is the magnitude squared of the Fourier transform:

$$S_{xx}(\omega) = |X(\omega)|^2$$

Substituting the derived magnitude:

$$S_{xx}(\omega) = |A|^2 \left(\frac{\sin(\omega L/2)}{\sin(\omega/2)} \right)^2$$

Relationship of the Fourier Transform to the z-Transform

The Fourier transform is mathematically equivalent to the **z-transform evaluated on the unit circle**.

$$X(z)|_{z=e^{j\omega}} = X(\omega)$$

To see this relationship, we represent the complex variable z in polar form as $z = re^{j\omega}$, where r is the magnitude and ω is the angle. When we substitute this into the z-transform equation, we get:

$$X(z)|_{z=re^{j\omega}} = \sum_{n=-\infty}^{\infty} [x(n)r^{-n}]e^{-j\omega n}$$

This expression is the Fourier transform of the signal $x(n)$ weighted by an exponential factor r^{-n} . When the magnitude $r = 1$, the variable z lies exactly on the unit circle ($z = e^{j\omega}$), and the equation reduces to the standard **Discrete-Time Fourier Transform (DTFT)**.

Key Conditions and Interpretations

- **Region of Convergence (ROC) Requirement:** The Fourier transform $X(\omega)$ only exists if the **unit circle is contained within the region of convergence** of the z-transform $X(z)$. If the ROC does not include $|z| = 1$, the power series for the Fourier transform will not converge.
 - **Visual Representation:** In a 3D plot of the z-transform magnitude $|X(z)|$, the Fourier transform can be viewed as a “**slice**” or a **cross-section** taken along the path of the unit circle. The “peaks” in the Fourier spectrum often correspond to poles of the z-transform that are located near the unit circle.
 - **Generalized View:** The z-transform can be interpreted as a more general tool than the Fourier transform. While the Fourier transform analyzes a signal in terms of **constant-amplitude complex exponentials** ($e^{j\omega}$), the z-transform uses **complex exponentials with varying envelopes** ($z = re^{j\omega}$), allowing for the analysis of a broader class of signals, including those that are not absolutely summable.
 - **Stability Connection:** For a causal LTI system to be **BIBO stable**, all its poles must lie inside the unit circle, which ensures that the ROC includes the unit circle and thus a valid frequency response (Fourier transform) exists.
-

Exercises

3-point Moving Average (FIR)

Determine $h[n]$ of this system:

$$y[n] = \frac{1}{3}(x[n] + x[n-1] + x[n-2])$$

We can use the two methods:

1. Using the Unit Sample (Impulse) Signal Definition

By definition, the impulse response $h[n]$ is the system’s output $y[n]$ when the input is the unit sample function $\delta[n]$:

$$x[n] = \delta[n] = \begin{cases} 1, & n = 0 \\ 0, & n \neq 0 \end{cases}$$

1. Substitute $x[n] = \delta[n]$ into the difference equation:

$$h[n] = \frac{1}{3}\delta[n] + \frac{1}{3}\delta[n-1] + \frac{1}{3}\delta[n-2]$$

2. Evaluate $h[n]$ for individual values of n :

- For $n = 0$: $h[0] = \frac{1}{3}\delta[0] + \frac{1}{3}\delta[-1] + \frac{1}{3}\delta[-2] = \frac{1}{3}(1) + 0 + 0 = \frac{1}{3}$
- For $n = 1$: $h[1] = \frac{1}{3}\delta[1] + \frac{1}{3}\delta[0] + \frac{1}{3}\delta[-1] = 0 + \frac{1}{3}(1) + 0 = \frac{1}{3}$
- For $n = 2$: $h[2] = \frac{1}{3}\delta[2] + \frac{1}{3}\delta[1] + \frac{1}{3}\delta[0] = 0 + 0 + \frac{1}{3}(1) = \frac{1}{3}$

- For all other n : $h[n] = 0$

Final Answer:

$$h[n] = \begin{cases} \frac{1}{3}, & n = 0, 1, 2 \\ 0, & \text{otherwise} \end{cases}$$

Alternatively represented as:

$$h[n] = \left\{ \frac{1}{3}, \frac{1}{3}, \frac{1}{3} \right\}_{\uparrow}$$

2. Using the z-Transform Definition

The transfer function $H(z)$ is defined as the ratio of the z-transform of the output to the z-transform of the input:

$$H(z) = \frac{Y(z)}{X(z)}$$

The impulse response $h[n]$ is the inverse z-transform of $H(z)$:

$$h[n] = \mathcal{Z}^{-1}\{H(z)\}$$

1. Take the z-transform of both sides of the difference equation:

Using the time-shifting property $\mathcal{Z}\{x[n - k]\} = z^{-k}X(z)$:

$$Y(z) = \frac{1}{3}X(z) + \frac{1}{3}z^{-1}X(z) + \frac{1}{3}z^{-2}X(z)$$

2. Factor out $X(z)$ to find $H(z)$:

$$Y(z) = X(z) \left(\frac{1}{3} + \frac{1}{3}z^{-1} + \frac{1}{3}z^{-2} \right)$$

$$H(z) = \frac{Y(z)}{X(z)} = \frac{1}{3} + \frac{1}{3}z^{-1} + \frac{1}{3}z^{-2}$$

3. Take the inverse z-transform ($\mathcal{Z}^{-1}$) term-by-term:

Using the standard z-transform pair $\mathcal{Z}^{-1}\{z^{-k}\} = \delta[n - k]$:

$$h[n] = \mathcal{Z}^{-1} \left\{ \frac{1}{3} + \frac{1}{3}z^{-1} + \frac{1}{3}z^{-2} \right\}$$

$$h[n] = \frac{1}{3}\delta[n] + \frac{1}{3}\delta[n - 1] + \frac{1}{3}\delta[n - 2]$$

Final Answer:

$$h[n] = \begin{cases} \frac{1}{3}, & 0 \leq n \leq 2 \\ 0, & \text{otherwise} \end{cases}$$

We can plot the Impulse Response and the Step Response of the system as follows:

```
import numpy as np
import matplotlib.pyplot as plt
from scipy import signal

# Moving Average (length = 3)
num = [1/3, 1/3, 1/3] # numerator
den = [1, 0, 0]       # denominator padded

# Impulse response
t, h = signal.dimpulse((num, den, 1))
h = np.squeeze(h)


# Step response
t, s = signal.dstep((num, den, 1))
s = np.squeeze(s)

# Plot impulse and step response
fig, (ax1, ax2) = plt.subplots(1, 2, figsize=(10,4))

# Impulse response
ax1.stem(t, h, linefmt='C0-', markerfmt='C0o', basefmt='C0-')
ax1.set_title("Impulse Response")
ax1.set_xlabel("n")
ax1.set_ylabel("h[n]")
ax1.grid(True)

# Step response
ax2.stem(t, s, linefmt='C1-', markerfmt='C1s', basefmt='C1-')
ax2.set_title("Step Response")
ax2.set_xlabel("n")
ax2.set_ylabel("s[n]")
ax2.grid(True)

plt.tight_layout()
plt.show()
```

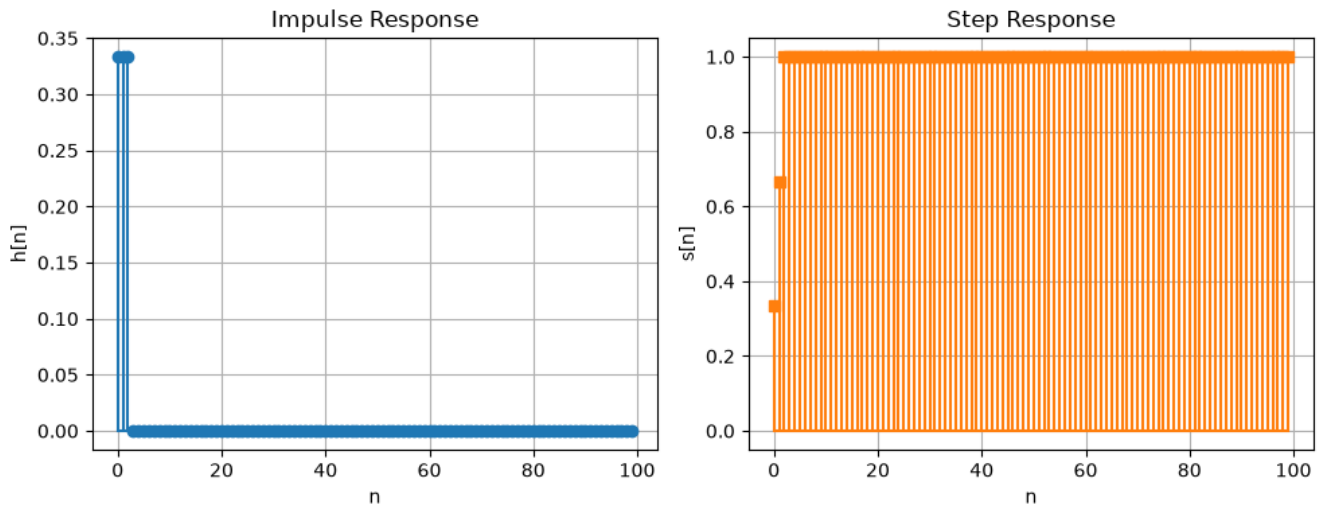

Causal First-Order IIR

Determine $h[n]$ of this system:

$$y[n] = ay[n-1] + bx[n], \quad \text{initial rest } (y[n] = 0 \text{ for } n < 0)$$

1. Take the z-transform of both sides of the difference equation:

Applying the time-shifting property $\mathcal{Z}\{y[n-1]\} = z^{-1}Y(z)$:

$$Y(z) = az^{-1}Y(z) + bX(z)$$

2. Rearrange terms to form the system transfer function $H(z) = \frac{Y(z)}{X(z)}$:

$$Y(z) - az^{-1}Y(z) = bX(z)$$

$$Y(z)(1 - az^{-1}) = bX(z)$$

$$H(z) = \frac{Y(z)}{X(z)} = \frac{b}{1 - az^{-1}}$$

3. Take the inverse z-transform ($\mathcal{Z}^{-1}$) of $H(z)$:

Using the standard z-transform pair $\mathcal{Z}^{-1}\left\{\frac{1}{1-az^{-1}}\right\} = a^n u[n]$ for a causal system:

$$h[n] = \mathcal{Z}^{-1}\{H(z)\} = b \cdot \mathcal{Z}^{-1}\left\{\frac{1}{1-az^{-1}}\right\} = ba^n u[n]$$

Final Result

$$h[n] = ba^n u[n]$$

Pole-Zero Plot

Determine the pole-zero plot of this system:

$$H(z) = \frac{1 - 0.5z^{-1}}{1 - 0.7z^{-1} - z^{-2}} = \frac{z^2 - 0.5z}{z^2 - 0.7z - 1}$$

We find the zeros (roots of the numerator) and the poles (roots of the denominator) in the complex z -plane.

1. Find the Zeros

Set the numerator $N(z) = 0$:

$$z^2 - 0.5z = 0 \implies z(z - 0.5) = 0$$

- **Zero z_1 :** $z_1 = 0$
- **Zero z_2 :** $z_2 = 0.5$

2. Find the Poles

Set the denominator $D(z) = 0$:

$$z^2 - 0.7z - 1 = 0$$

Using the quadratic formula $z = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$ with $a = 1$, $b = -0.7$, $c = -1$:

$$z = \frac{-(-0.7) \pm \sqrt{(-0.7)^2 - 4(1)(-1)}}{2(1)}$$

$$z = \frac{0.7 \pm \sqrt{0.49 + 4}}{2} = \frac{0.7 \pm \sqrt{4.49}}{2}$$

Since $\sqrt{4.49} \approx 2.11896$:

- **Pole p_1 :**

$$p_1 = \frac{0.7 + 2.11896}{2} = \frac{2.81896}{2} \approx 1.4095$$

- **Pole p_2 :**

$$p_2 = \frac{0.7 - 2.11896}{2} = \frac{-1.41896}{2} \approx -0.7095$$

3. Final Results

1. Locations on the Real Axis:

- **Zeros:** Marked with o at (0,0) and (0.5,0).
- **Poles:** Marked with x at (−0.7095,0) and (1.4095,0).

2. System Stability:

- A causal LTI system is BIBO stable if and only if all poles lie **strictly inside the unit circle** ($|p| < 1$).
- Here, $|p_1| = 1.4095 > 1$, which is outside the unit circle $|z| = 1$.
- **Conclusion:** The causal system is **unstable**.

```
import numpy as np
import matplotlib.pyplot as plt
from scipy import signal

# Example system:  $H(z) = (1 - 0.5 z^{-1}) / (1 - 0.7 z^{-1} - z^{-2})$ 
num = [1, -0.5]
den = [1, -0.7, -1]

# Get zeros, poles, gain
z, p, _ = signal.tf2zpk(num, den) # transfer to pole-zero plot

zeros_r, zeros_theta = np.abs(z), np.angle(z)
poles_r, poles_theta = np.abs(p), np.angle(p)

# Draw unit circle
theta = np.linspace(0, 2*np.pi, 400)
plt.polar(theta, np.ones_like(theta), 'k--', linewidth=1)
plt.polar(zeros_theta, zeros_r, 'bo', label="Zeros")
plt.polar(poles_theta, poles_r, 'rx', label="Poles")
plt.title("Pole-Zero Plot in Z-Domain")
plt.legend(loc="upper right")
plt.show()
```

Pole-Zero Plot in Z-Domain

