

SOLAR GENSET

NUR ALIA SYAFIKA BINTI SHAMSUL BAHARI

KOLEJ KEMAHIRAN TINGGI MARA KEMAMAN

DLI

SOLAR GENSET

APRIL 2021

SOLAR GENSET

NUR ALIA SYAFIKA BINTI SHAMSUL BAHARI

A report submitted in partial fulfilment of the requirement for the award of the
Diploma in Plant Engineering Technology (Instrumentation and Control)

KOLEJ KEMAHIRAN TINGGI MARA KEMAMAN

APRIL 2021

TABLE OF CONTENT

CHAPTER	PAGE
ABSTRAK	i
ABSTRACT	ii
ACKNOWLEDGEMENT	iii
TABLE OF CONTENT	iv
LIST OF TABLES	vii
LIST OF FIGURES	viii
LIST OF SYMBOLS	x
LIST OF ABBREVIATIONS	x
LIST OF APPENDICES	xi
1. INTRODUCTION	1
1.1 Introduction project	1
1.2 Problem Statement	2
1.3 Objective of Project	2
1.4 Scope of Project	2
2. LITERATURE REVIEW	3
2.1 Introduction	3
2.2 Solar Energy	4
2.2.1 Review of Photovoltaic Energy	5
2.2.2 Function of Solar Energy	5
2.3 Solar Irradiance	8
2.3.1 Solar Irradiance Data Sets	10
2.4 PV Module Temperature	12
2.5 Air Mass	14

2.5.1	Standardized Solar Spectrum and Solar Irradiation	15
2.5.2	Intensity Calculations Based on the Air Mass	16
2.6	Fill Factor	18
2.7	Efficiency	21
2.8	Photovoltaic Charge Controller	22
2.8.1	DC- DC Converters	23
2.8.2	Buck (Step-Down) Converter	23
2.9	Battery	24
2.9.1	The Battery	25
2.9.2	Different types of batteries	26
2.9.3	The lead acid battery	26
2.9.4	The cell connections in the battery	27
2.9.5	Characteristics of the battery	27
2.9.6	Discharging	29
2.9.7	Charging	30
2.9.8	Battery capacity	32
3.	METHODOLOGY	36
3.1	Introduction	36
3.2	Project Planning	36
3.3	Flowchart	37
3.4	Flow Chart of The Output System	38
3.5	Flow Chart of The Input System	38
3.6	Prototype Circuit Diagram	39
3.7	Hardware	40
3.7.1	Solar Penal	40
3.7.2	Battery	41
3.7.3	Inverter DC To AC Voltage	42
3.7.4	Charge Controller	43
3.8	Project Design	44
4.	RESULT AND ANALYSIS	45
4.1	Introduction	45
4.2	Test System	46
4.3	Data Analysis	47

4.3.1	Battery Charge Test Analysis	47
4.3.2	Battery Discharge Test Analysis	51
5.	DISCUSSION	54
5.1	Introduction	54
5.2	Discussion	55
6.	CONCLUSION AND RECOMMENDATION	56
6.1	Introduction	56
6.2	Conclusion	56
6.3	Recommendation	57
	REFERENCES	58

LIST OF TABLES

TABLE		PAGE
Table 4.1	Battery charge test analysis with solar system the first day	42
Table 4.2	Battery charge test analysis with solar system the second day	42
Table 4.3	Battery discharge test analysis	51

LIST OF FIGURES

FIGURE		PAGE
Figure 2.1	Photovoltaic cell	6
Figure 2.2	Comparison of TMY and average solar radiation data	11
Figure 2.3	Thermo graphic image of sixteen cell modules with integral bypass diode cells under reverse bias conditions. Each colour change corresponds to a 40°C change in temperature	13
Figure 2.4	Hypotenuse Air Mass	14
Figure 2.5	Graph of cell output current (red line) and power (blue line) as function of voltage	19
Figure 2.6	A basic buck converter topology circuit	24
Figure 2.7	Effective R_e as a function of SOC	28
Figure 2.8	Effective R_e as a function of cell life	28
Figure 2.9	Voltage discharge performance of a sealed lead acid battery	30
Figure 2.10	The battery discharge characteristics	32
Figure 2.11	Typical discharge time for a sealed lead acid cell	33
Figure 2.12	Charge and discharge of the battery	33
Figure 2.13	Cell capacity during its lifetime	35
Figure 3.1	Prototype Circuit Diagram Project	39
Figure 3.2	Monocrystalline Solar Panel 12V 50W	40
Figure 3.3	Lead Acid Battery 12 V 35 AH	41
Figure 3.4	Inverter 12 V DC To 220 V AC 1000 Watt	42
Figure 3.5	PWM Solar Charge Controller 12 VDC 10 A	43
Figure 3.6	Left view of the project	44

Figure 3.7	Top view of the project	44
Figure 4.1	Control System and Output 220 V Ac	46
Figure 4.2	Connection Control System with Solar Penal 50 watt	46
Figure 4.3	Voltage graph on the first day	48
Figure 4.4	Voltage graph on the second day	49
Figure 4.5	Level battery graph on the first day	49
Figure 4.6	Level battery graph on the second day	50
Figure 4.7	The graph shows the battery discharge voltage	52
Figure 4.8	The graph shows the battery discharge battery level	53

LIST OF SYMBOLS AND ABBREVIATIONS

SYMBOLS

V	Voltage
A	Ampere
P	Power
Q	Energy
FF	Fill Factor
I_G	Global Irradiance
I_D	Intensity

LIST OF APPENDICES

APPENDIX		PAGE
Appendix A	Circuit Diagram	61
Appendix B1	Specifications 12V 500-Watt Pure Sine Wave Inverter	62
Appendix B2	Specifications 50-Watt 12 Volt Monocrystalline Solar Panel	63
Appendix C1	Gantt Chart Semester 4	64
Appendix C2	Gantt Chart Semester 5	65

ABSTRAK

Projek ini adalah merupakan satu projek yang dapat menyalur elektrik kepada peniaga tanpa menggunakan mesin generator yang bising untuk berniaga. Tujuan projek ini adalah untuk memudahkan para peniaga berniaga dalam keadaan yang sedikit aman dan nyaman tanpa sebarang pencemaran. Untuk reka bentuk project ini menggunakan solar panel untuk menyerap cahaya matahari sebagai sumber tenaga bagi menghasilkan tenaga elektrik atau haba. Ia digunakan sebagai sebuah komponen dalam sebuah sistem fotovolta yang lebih besar bagi menjana tenaga elektrik untuk kegunaan komersial dan kediaman. Sebuah modul fotovoltan terdiri daripada sel suria yang dibungkus dan dihimpan dalam set 6x10. Pengembangan terbaru Panel Suria Portable Modul ini merupakan suatu tatasusunan sistem fotovoltan yang menghasilkan serta membekalkan elektrik suria untuk tujuan komersial dan domestik. Setiap modul ini dinilai berdasarkan kuasa keluaran arus terusnya di bawah keadaan ujian piawai (standard test conditions, STC) yang berada di antara 100 dan 365 watt. Maka terciptalah sebuah mesin baru yang lebih efektif dan mudah dibawa semasa berlaku kecemasan sejajar dengan industri 4.0 masa kini. (W).

ABSTRACT

This project is a project that can supply electricity to traders without using noisy generator machines for business. The purpose of this project is to make it easier for traders to do business in a slightly peaceful and comfortable environment without any pollution. For the design of this project using solar panels to absorb sunlight as a source of energy to produce electricity or heat. It is used as a component in a larger photovoltaic system to generate electricity for commercial and residential use. A photovoltaic module consists of solar cells packaged and assembled in a 6x10 set. The latest development of the Portable Solar Panel This module is an array of photovoltaic systems that produce and supply solar electricity for commercial and domestic purposes. Each of these modules is assessed based on the power of the direct current output under standard test conditions (STC) which is between 100 and 365 watts (W). Thus created a new machine that is more effective and easier to carry during emergencies in line with today's industry 4.0.

ACKNOWLEDGEMENT

Alhamdulillah all praise and gratitude to Allah S.W.T for giving me health and strength. To complete my final year project for these semesters. In preparing this thesis, I was in contact with many people, researchers, academicians, and practitioners. They have contributed towards my understanding and thoughts. I would like to express my deepest appreciation to my supervisor, Puan Hazila Binti Nayan for the guidance, encouragement, critics, motivation and friendship to complete this project. Without their continued support and interest, this thesis would not have been same as presented here. A special thanks goes to my parent that always by my side giving me their full in completing my project. Last but not least, a further appreciation and Control Department for the helping hand and also their support during my hard time in completing this project. Unfortunately, it is not possible to list all them in this limited space.

CHAPTER 1

INTRODUCTION

1.1 Background Project

Following solar genset it's a new technology need to exposed to public because its will be the best machine at the future. a solar generator works by capturing energy from the sun via solar panels, storing the energy in its in-built battery, and converting the energy into AC power through an inverter before being released for use in household appliances and other electronic devices. In remote areas or regions where the electricity supply is patchy or extremely expensive, grids powered by diesel gensets are an absolute must. The cost per kilowatt hour of electricity from a diesel genset is largely changeable, depending as it does on fuel and other variable costs. For this reason, there is a clear financial justification for integrating a Save Energy PV-Genset solution into almost every diesel-powered system. Every unused diesel kWh saves money.

The main problem with generator is it needs petrol or diesel to generate electricity. Furthermore, the general requires maintenance and periodical servicing. Besides releasing gaseous pollutants, generators are also noisy, oil, heavy and consume space during its operation. So, I decide to proceed my idea to make a new solar genset to facilitate trades.

1.2 Problem Statement

- I. Noise pollution from night market or from another stall
- II. Generator leaks
- III. Running out of fuel

1.3 Objective

- I. To save petrol use
- II. To upgrade the new generator
- III. To reduce the noise energy

1.4 Scope of Project

- I. Use motor inside the generator
- II. Use solar to saving electricity
- III. To avoid from pollution

CHAPTER 2

LITERATURE REVIEW

2.1 Introduction

Literature review is the source of knowledge and information that we have get. We have to investigate the history of some equipment or components or materials which are involved in Instrumentation and Control course. So that, we have searched some journals for the equipment or components or materials. Then we have read and analysis how to use them, how their operation and what benefits we can get from them if we use them

A literature review is a body of text that aims to review the critical point of current knowledge includes substantive finding as well as theoretical and methodological contributions to a particular topic. Literature review are secondary sources, and as such, do not report any new or original experiment work. A well-structured literature review is characterized by a logical flow a of ideas, current and relevant references with consistent, appropriate referencing style, proper use of terminology and an unbiased and comprehensive view of the previous research on the topic.

2.2 Solar Energy

Solar energy is the light and radiant heat from the Sun that influences Earth's climate and weather and sustains life. Solar power is sometimes used as a synonym for solar energy or more specifically to refer to electricity generated from solar radiation. Solar radiation is secondary resources like as wind and wave power, hydroelectricity and biomass account for most of the available flow of renewable energy on Earth. Solar energy technologies can provide electrical generation by heat engine or photovoltaic means, space heating and cooling in active and passive solar buildings, potable water via distillation and disinfection, day lighting, hot water, thermal energy for cooking, and high temperature process heat for industrial purposes.

Solar energy refers primarily to the use of solar radiation for practical ends. All other renewable energies other than geothermal derive their energy from energy received from the sun. Solar technologies are broadly characterized as either passive or active depending on the way they capture, convert and distribute sunlight. Active solar techniques use photovoltaic panels, pumps, and fans to convert sunlight into useful outputs.

Passive solar techniques include selecting materials with favorable thermal properties, designing spaces that naturally circulate air, and referencing the position of a building to the Sun. Active solar technologies increase the supply of energy and are considered supply side technologies, while passive solar technologies reduce the need for alternate resources and are generally considered demand side technologies.

2.2.1 Review of Photovoltaic Energy

A definition of a photovoltaic (PV) system is a system that converts directly solar radiation into electricity. Since it was first found, in 1839 by Edmond Becquerel, and after improvements made in the almost 100 following years, the photovoltaic energy has raised a constantly growing interest all over the world. The possibility to generate electrical energy in practically any place in the world was extremely appealing. With the major drawback of the high cost of solar cells, the almost exclusive use of PV energy was made by space industry to fuel satellites, where no budget constraints were applied. The efficiency of solar cells more than double from 6% in 1954 to 13.5%, but still too expensive. Today the top efficiency of silicon cells is around 27.6%.

Ironically, it was in offshore oilrigs and isolated on-shore gas and oil fields, among others, where PV systems were used, replacing the toxic and short-lived batteries. Nowadays, total PV installed capacity is estimated to reach 50.9 GWp, representing a growth of 62.1% comparing to 2010. The continuously increasing price of oil, the global warming, the Kyoto Protocol, and the recent nuclear disaster that occurred in Fukushima Japan, turns the attention of the world to renewable energies.

2.2.2 Functional of Solar Energy

Photovoltaic energy is the conversion of sunlight into electricity. A photovoltaic cell, commonly called a solar cell or PV, is the technology used to convert solar energy directly into electrical power.

Sunlight is composed of photons, or particles of solar energy. These photons contain various amounts of energy corresponding to the different wavelengths of the solar spectrum. When photons strike a photovoltaic cell, they may be reflected, pass right through, or be absorbed. Only the absorbed photons provide energy to generate electricity.

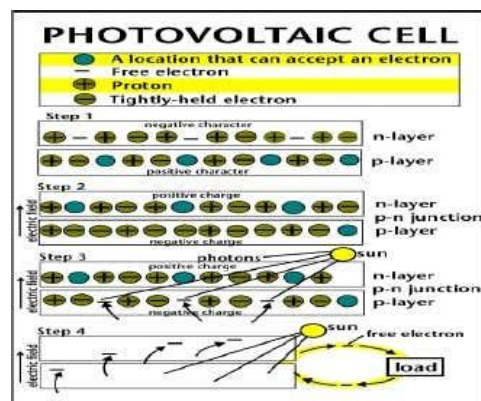


Figure 2.1 Photovoltaic cell

When enough sunlight energy is absorbed by the material that is a semiconductor, electrons are come out from the material's atoms. Special treatment of the material surface during manufacturing makes the front surface of the cell more receptive to free electrons, so the electrons naturally migrate to the surface. When the electrons leave their position, holes are formed.

When many electrons, each carrying a negative charge, travel toward the front surface of the cell, the resulting imbalance of charge between the cell's front and back surfaces creates a voltage potential like the negative and positive terminals of a battery. When the two surfaces are connected through an external load, electricity flows. Photovoltaic cells, like batteries, generate direct current (DC) which is generally used for small loads like electronic equipment.

When DC from photovoltaic cells is used for commercial applications or sold to electric utilities using the electric grid, it must be converted to alternating current (AC) using inverters. Advantages of photovoltaic systems are:

1. Conversion from sunlight to electricity is direct, so that bulky mechanical generator systems are unnecessary.
2. PV arrays can be installed quickly and, in any size, required or allowed
3. The environmental impact is minimal, requiring no water for system cooling and generating no by-products.

2.3 Solar Irradiance

Total solar irradiance is defined as the amount of radiant energy emitted by the Sun over all wavelengths that fall each second on 11 sq ft (1 sq m) outside the earth's atmosphere.

By way of further definition, irradiance is defined as the amount of electromagnetic energy incident on a surface per unit time per unit area. Solar refers to electromagnetic radiation in the spectral range of approximately 1-9 ft (0.30-3 m), where the shortest wavelengths are in the ultraviolet region of the spectrum, the intermediate wavelengths in the visible region, and the longer wavelengths are in the near infrared. Total means that the solar flux has been integrated over all wavelengths to include the contributions from ultraviolet, visible, and infrared radiation.

By convention, the surface features of the Sun are classified into three regions: the photosphere, the chromospheres, and the corona. The photosphere corresponds to the bright region normally visible to the naked eye. About 3,100 mi (5,000 km) above the photosphere lies the chromospheres, from which short-lived, needle-like projections may extend upward for several thousands of kilometers. The corona is the outermost layer of the Sun; this region extends into the region of the planets. Most of the surface features of the Sun lie within the photosphere, though a few extend into the chromospheres or even the corona.

The average amount of energy from the Sun per unit area that reaches the upper regions of the earth's atmosphere is known as the solar constant; its value is approximately 1,367 watts per square meter. As earth-based measurements of this quantity are of doubtful

accuracy due to variations in the earth's atmosphere, scientists have come to rely on satellites to make these measurements.

Although referred to as the solar constant, this quantity actually has been found to vary since careful measurements started being made in 1978. In 1980, a satellite-based measurement yielded the value of 1,368.2 watts per square meter. Over the next few years, the value was found to decrease by about 0.04% per year. Such variations have now been linked to several physical processes known to occur in the Sun's interior, as will be described below.

From the earth, it is only possible to observe the radiant energy emitted by the Sun in the direction of our planet; this quantity is referred to as the solar irradiance. This radiant solar energy is known to influence the earth's weather and climate, although the exact relationships between solar irradiance and long-term climatological changes such as global warming, are not well understood.

The total radiant energy emitted from the Sun in all directions is a quantity known as solar luminosity. The luminosity of the Sun has been estimated to be 3.8478×10^{26} watts. Some scientists believe that long-term variations in the solar luminosity may be a better correlate to environmental conditions on Earth than solar irradiance, including global warming. Variations in solar luminosity are also of interest to scientists who wish to gain a better understanding of stellar rotation, convection, and magnetism.

Because short-term variations of certain regions of the solar spectrum may not accurately reflect changes in the true luminosity of the Sun, measurements of total solar

irradiance, which by definition take into account the solar flux. Contributions over all wavelengths, provide a better representation of the total luminosity of the Sun.

Short-term variations in solar irradiation vary significantly with the position of the observer, so such variations may not provide a very accurate picture of changes in the solar luminosity but the total solar irradiance at any given position gives a better representation because it includes contributions over the spectrum of wavelengths represented in the solar radiation.

Variations in the solar irradiance are at a level that can be detected by ground-based astronomical measurements of light. Such variations have been found to be about 0.1% of the average solar irradiance. Starting in 1978, space-based instruments aboard the Nimbus 7, Solar Maximum Mission, and other satellites began making the sort of measurements (reproducible to within a few parts per million each year) that allowed scientists to acquire a better understanding of variations in the total solar irradiance.

2.3.1 Solar Irradiance Data Sets

The most accurate measurements of solar radiation are obtained by a pyrometer placed at a location for a number of years, usually on the order of a decade or more, measuring the direct radiation every few minutes. However, the volume of data generated by this technique makes it impractical (and unnecessary) to provide the full data set for each location for PV system design. Instead, the data can be presented in several other formats.

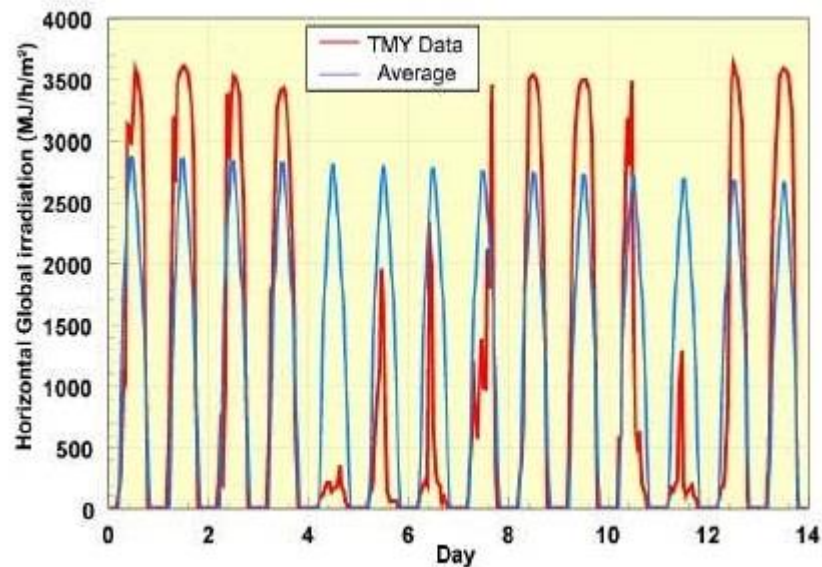


Figure 2.2 Comparison of TMY and average solar radiation data

The most conceptually straight forward method of reducing the data set is to average the data. Over the measuring period. This form of data is called average daily, monthly or yearly radiation data. Although this data is useful for basic system design, the day-to-day variation in the solar radiations lost. The loss of the day-to-day variation is critical since the design and performance of a system with, for example, 5 kWh/day nearly every day is quite different than one with 8 kWh/day on some days followed by several cloudy days with 2 kWh/day.

The most common format for solar radiation data is TMY data (or TMY2 data used by the National Renewable Energy Laboratories in the USA) which includes daily variability in the data. TMY data sets are described in the following page. However, average solar radiation data, particularly for each month of the year is also extensively used in rough estimates on the amount of PV panels required.

An additional useful, although less common data which can be determined from the full radiation data sets, is the probability of having a certain number of cloudy days which occur in a row. whereby the definition of a cloudy day is usually a day where less than 50% of the theoretically expected radiation is received.

For example, at a certain location, 4 cloudy days in a row may occur once a year and 5 cloudy days in a row may occur once every 5 years. This information is particularly useful in estimating storage sufficient requirements. However, this information is less commonly tabulated and, if used, must be determined from the original data sets.

2.4 PV Module Temperature

An unwanted side-effect of the encapsulation of solar cells into a PV module is that the encapsulation alters the heat flow into and out of the PV module, thereby increasing the operating temperature of the PV module. These increases in temperature have a major impact on the PV module by reducing its voltage, thereby lowering the output power. In addition, increases in temperature are implicated in several failure or degradation modes of PV modules, as elevated temperatures increase stresses associated with thermal expansion and also increase degradation rates by a factor of about two for each 10°C increase in temperature.

The operating temperature of a module is determined by the equilibrium between the heat produced by the PV module, the heat lost to the environment and the ambient operating temperature. The heat produced by the module depends on the operating point of the module,

the optical properties of the module and solar cells, and the packing density of the solar cells in the PV module.

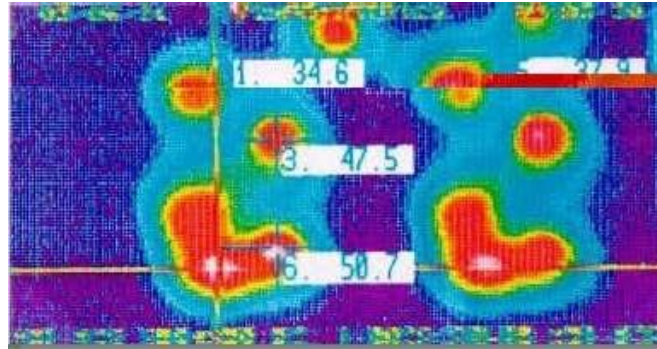


Figure 2.3 Thermo graphic image of sixteen cell modules with integral bypass diode cells under reverse bias conditions. Each colour change corresponds to a 40°C change in temperature

The heat lost to the environment can proceed via one of three mechanisms; conduction, convection and radiation. These loss mechanisms depend on the thermal resistance of the module materials, the emissive properties of the PV module, and the ambient conditions (particularly wind speed) in which the module is mounted. These factors are discussed in the following pages.

2.5 Air Mass

The Air Mass is the path length which light takes through the atmosphere normalized to the shortest possible path length (that is, when the sun is directly overhead). The Air Mass quantifies the reduction in the power of light as it passes through the atmosphere and is absorbed by air and dust. The Air Mass is defined as:

The Air Mass is the path length which light takes through the atmosphere normalized to the shortest possible path length (that is, when the sun is directly overhead). The Air Mass quantifies the reduction in the power of light as it passes through the atmosphere and is absorbed by air and dust. The Air Mass is defined as:

$$AM = I \cos \theta$$

where θ is the angle from the vertical (zenith angle) When the sun is directly overhead, the Air Mass is 1.

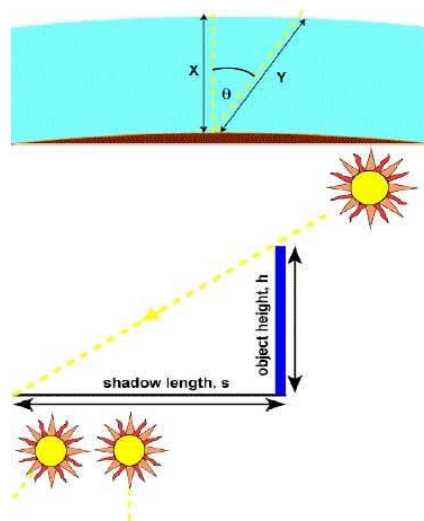


Figure 2.4 Hypotenuse Air Mass

Air mass is the length of the hypotenuse divided by the object height h , and from Pythagoras's theorem we get:

$$\text{Air Mass} = \frac{1}{\sin \theta}$$

The above calculation for air mass assumes that the atmosphere is a flat horizontal layer, but because of the curvature of the atmosphere, the air mass is not quite equal to the atmospheric path length when the sun is close to the horizon. At sunrise, the angle of the sun from the vertical position is 90° and the air mass is infinite, whereas the path length clearly is not. An equation which incorporates the curvature of the earth is:

$$\text{Air Mass} = \frac{1}{\sin \theta} + 0.5057296 - 0.07995 \theta - 1.6364 \theta^2$$

2.5.1 Standardized Solar Spectrum and Solar Irradiation

The efficiency of a solar cell is sensitive to variations in both the power and the spectrum of the incident light. To facilitate an accurate comparison between solar cells measured at different times and locations, a standard spectrum and power density has been defined for both radiation outside the Earth's atmosphere and at the Earth's surface.

The standard spectrum at the Earth's surface is called AM1.5G, (the G stands for global and includes both direct and diffuse radiation) or AM1SD (which includes direct radiation only). The intensity of AM1SD radiation can be approximated by reducing the AMO spectrum by 28% (18% due to absorption and 10% to scattering). The global spectrum is 10% higher than the direct spectrum. These calculations give approximately 970 W/m² for AM1SG. However, the standard AM1SG spectrum has been normalized to give 1kW/m² due

to the convenience of the round number and the fact that there are inherently variations in incident solar radiation.

The standard spectrum outside the Earth's atmosphere is called AMO, because at no stage does the light pass through the atmosphere. This spectrum is typically used to predict the expected performance of cells in space.

2.5.2 Intensity Calculations Based on the Air Mass

The intensity of the direct component of sunlight throughout each day can be determined as a function of air mass from the experimentally determined equation:

$$I_D = 1.353 \cdot 0.7^{AM^{0.678}}$$

I_D is the intensity on a plane perpendicular to the sun's rays in units of kW/m²

AM is the air mass

1.353 kW/m² is the solar constant

0.7 arises from the fact that about 70% of the radiation incident on the atmosphere is transmitted to the Earth.

0.678 is an empirical fit to the observed data and takes into account the non-uniformities in the atmospheric layers

Where I_0 is the intensity on a plane perpendicular to the Sun's rays in units of kW/m² and AM is the air mass. The value of 1.353 kW/m² is the solar constant and the number 0.7 arises from the fact that about 70% of the radiation incident on the atmosphere is transmitted to the Earth. The extra power term of 0.678 is an empirical fit to the observed data and takes into account the non-uniformities in the atmospheric layers.

Sunlight intensity increases with the height above sea level. The spectral content of sunlight also changes making the sky bluer on high mountains. Much of the southwest of the United States is two kilometers above sea level, adding significantly to solar isolation. A simple empirical fit to observed data and accurate to a few kilometers above sea level is given by:

$$I_D = 1.353 \cdot [(1 - ah)0.7^{AM^{0.678}} + ah]$$

I_D is the intensity on a plane perpendicular to the sun's rays in units of kW/m²

AM is the air mass

1.353 kW/m² is the solar constant

0.7 arises from the fact that about 70% of the radiation incident on the atmosphere is transmitted to the Earth.

0.678 is an empirical fit to the observed data and takes into account the non-uniformities in the atmospheric layers

$$a = 0.14$$

h is the location height above sea level in kilometres

Even on a clear day, the diffuse radiation is still about 10% of the direct component. Thus, on a clear day the global irradiance on a module perpendicular to the sun's rays is:

$$I_G = 1.1 \cdot I_D$$

I_G = Global Irradiance

I_D = Intensity

2.6 Fill Factor

The short-circuit current and the open-circuit voltage are the maximum current and voltage respectively from a solar cell. However, at both of these operating points, the power from the solar cell is zero. The "fill factor", more commonly known by its abbreviation "FF", is a parameter which, in conjunction with V and L determines the maximum power from a solar cell. The FF is defined as the ratio of the maximum power from the solar cell to the product of V and L. Graphically, the FF is a measure of the "squareness" of the solar cell and is also the area of the largest rectangle which will fit in the IV curve. The FF is illustrated below. As FF is a measure of the squareness of the IV curve, a solar cell with a highest voltage has a larger possible FF since the "rounded" portion of the IV curve takes up less area.

The maximum theoretical FF from a solar cell can be determined by differentiating the power from a solar cell with respect to voltage and finding where this is equal to zero. Hence:

$$\frac{d(P)}{dV} = 0$$

Giving:

$$V_{mp} = V_{oc} - \frac{nkT}{q} \ln \left(\frac{V_{mp}}{nkT/q} + 1 \right)$$

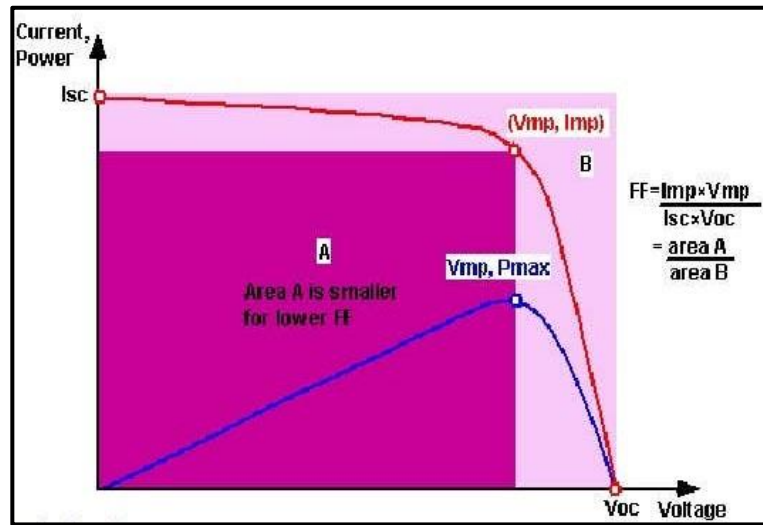


Figure 2.5 Graph of cell output current (red line) and power (blue line) as function of voltage

Also shown are the cell short-circuit current (I_{sc}) and open-circuit voltage (V_{oc}) points, as well as the maximum power point (V_{mp} , I_{mp}). However, the above technique does not yield a simple or closed form equation. The equation above only relates V_{oc} to V_{mp} and extra equations are needed to find L and FF . A more commonly used expression for the FF can be determined empirically as:

$$FF = \frac{V_{oc} - \ln(V_{oc} + 0.72)}{V_{oc} + 1}$$

The above equations show that a highest voltage will have a highest possible FF. However, large variations in open-circuit voltage within a given material system are relatively uncommon. For example, at one sun, the difference between the maximum open-circuit voltage measured for a silicon laboratory device and a typical commercial solar cell is about 120 mV, giving maximum FF's respectively of 0.85 and 0.83. However, the variation in maximum FF can be significant for solar cells made from different materials. For example, a GaAs solar cell may have an FF approaching 0.89.

The above equation also demonstrates the importance of the ideality factor, also known as the "n-factor" of a solar cell. The ideality factor is a measure of the junction quality and the type of recombination in a solar cell. For the simple recombination mechanisms discussed in Types of Recombination, the n-factor has a value of 1. However, some recombination mechanisms, particularly if they are large, may introduce recombination mechanisms of 2. A high n-value not only degrades the FF, but since it will also usually signal high recombination, it gives low open-circuit voltages.

2.7 Efficiency

The efficiency is the most commonly used parameter to compare the performance of one solar cell to another. Efficiency is defined as the ratio of energy output from the solar cell to input energy from the sun. In addition to reflecting the performance of the solar cell itself, the efficiency depends on the spectrum and intensity of the incident sunlight and the temperature of the solar cell. Therefore, conditions under which efficiency is measured must be carefully controlled in order to compare the performance of one device to another, Terrestrial solar cells are measured under AM1.5 conditions and at a temperature of 25°C Solar cells intended for space use are measured under AMO conditions. Recent top efficiency solar cell results are given in the page Solar Cell Efficiency Results.

The efficiency of a solar cell is determined as the fraction of incident power which is converted to electricity and is defined as:

$$P_{max} = V_{oc}I_{sc}FF$$

$$n = \frac{V_{oc}I_{sc}FF}{P_{in}}$$

Where:

V_{oc} is the open – circuit voltage

I_{sc} is the short – circuit current

FF is the fill factor

n is the efficiency

The input power-for efficiency calculations are 1 kW/m^2 or 100 mW/cm^2 Thus the input power for a 100 x 100 mm cell is 10 W and for a 156 x 156 mm cell is 24.3 W.

2.8 Photovoltaic Charge Controller

A charge controller is needed in photovoltaic system to safely charge sealed lead acid battery. The most basic function of a charge controller is to prevent battery overcharging. If battery is allowed to routinely overcharge, their life expectancy will be dramatically reduced. A charge controller will sense the battery voltage, and reduce or stop the charging current when the voltage gets high enough. This is especially important with sealed lead acid battery where we cannot replace the water that is lost during overcharging. Unlike Wind or Hydro System charge controller, PV charge controller can open the circuit when the battery is full without any harm to the modules.

Most PV charge controller simply opens or restricts the circuit between the battery and PV array when the voltage rises to a set point. Then, as the battery absorbs the excess electrons and voltage begins dropping, the controller will turn back on. Some charge controllers have these voltage points factory-preset and non-adjustable, other controllers can be adjustable.

2.8.1 DC – DC Converters

There is various dc to dc converters topologies like buck converter, boost converter, buck-boost converter and others converter topology are used in PV charge controller. Since solar panels are only capable of producing a DC voltage, the DC-DC converter becomes quite useful by providing the flexibility to adjust the DC voltage or current at any point in the circuit. DC-DC converters are often preferred in modern electronics since they are smaller, light weight, provide a high-quality output, and more efficient.

2.8.2 Buck (Step-Down) Converter

One of the research projects made is about buck converter topology which is one of many topologies that were used in PV charge controller development. A buck converter is called a step-down DC to DC converter because the output voltage is less than the input. Its design is similar to the step-up boost converter, and like the boost converter it is a switched-mode power supply that uses two switches (a transistor and a diode) and an inductor and a capacitor.

A buck converter can be remarkably efficient (easily up to 95% for integrated circuits) and self-regulating. Most buck converters are designed for continuous-current mode operation compared to the discontinuous-current mode operation. The continuous-current mode operation is characterized by inductor current remains positive throughout the switching period. Conversely, the discontinuous-current mode operation is characterized by inductor current returning to zero during each period.

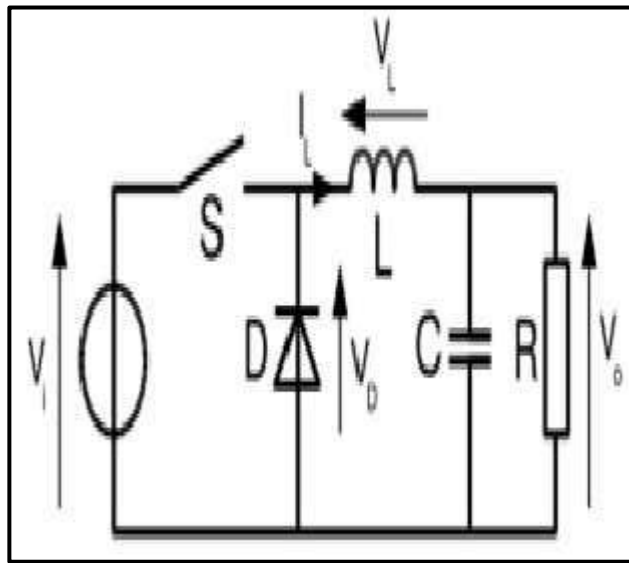


Figure 2.6 A basic buck converter topology circuit

2.9 The battery: When is it needed, and how does it function?

The module in a PV system generates electricity when the sun shines on it, but in the evening, when the user needs the electricity for example for lighting, there is almost no current coming out of the module (Markvart 2003). Therefore, in most PV systems there is a need for some kind of energy storage. There are different ways of storing energy, for example using the electricity to pump up water, in which case the energy is stored as potential energy in the water. The method that is most usual in PV systems is using an electrochemical battery. The battery is charged during the day, and it can be discharged during the evening. This section describes some of the main battery characteristics. The section is based on theory from GEP's (1992) "Rechargeable Batteries, Application Handbook", on Markvart's (2003) "Solar Electricity" and Patel's (1999) "Wind and Solar Power".

2.9.1 The battery

The battery is the most expensive life cycle component of the SHS system. It accounts for approximately 13% of the initial cost, but around 30% of the life cycle cost (Diaz and Lorenzo 2001). The batteries used in SHS should allow for deep discharge without seriously reducing the lifetime of the battery. It is recommended in UNBS (2000a) that the batteries used in the PV systems should be designed for PV applications. The batteries that are most usual in solar home systems in developing countries are the ones locally produced (Vervaart and Nieuwenhout 2001). Common battery types in Uganda are three types of lead acid batteries, solar batteries, car batteries, modified car batteries and truck batteries²⁰ (Sandgren 2001). Lead acid batteries are generally the most commonly used battery in SHS (Diaz and Lorenzo 2001). To reduce the cost of the SHS it is important that the battery is used in an optimal way, to ensure that the life time will be as long as possible. The battery lifetime depends on various factors, including battery type, correct sizing of the system, local environment, charge regulation and maintenance.

The performance characteristics of a battery mentioned in Patel (1999) and Louineau (1998) are typically:

- Charge/discharge voltages
- Charge/discharge ratio²¹
- Efficiency
- Internal impedance R_e
- Temperature rise
- Lifetime in number of cycles


- Self-discharge
- Consumption of distilled water

2.9.2 Different types of batteries

Batteries can be primary or secondary type, which means they are none rechargeable or rechargeable, respectively. Secondary batteries are those used in PV systems. In the market there are various types of secondary batteries, for example nickel cadmium (NiCd), lead-acid (Pb), nickel metal hydride (NiMH) and lithium-ion batteries. Here only the lead acid battery will be discussed further.

2.9.3 The lead acid battery

The lead acid battery is as mentioned the most common battery used in PV systems, mostly because it has high performance compared to its cost, but it has the least energy density by weight and by volume. The lead acid battery is available in various terminal voltages, e.g., 6V, 12V and 24V, and in various capacity rates, e.g., 75 Ah, 100 Ah and 115 Ah. The lead acid battery is made up of cells, one cell has two electrodes + and –, one electrode has lead and the other lead dioxide, and the electrolyte consists of sulphuric acid diluted with water. The chemical reactions that take place in the battery are:



2.9.4 The cell connections in the battery

For example, a typical 12V lead acid battery consist of six 2V cells, where each cell has both a positive and a negative terminal. When connecting the cells together, there are two options; connecting them in series or in parallel. If the series connection is chosen, the positive terminal of one cell is connected to the negative terminal of another cell, and if the parallel connection is chosen, then the negative terminals are connected together and the positive terminals are connected together. In a series connection the voltages are added, but in the parallel connection the voltage remains constant but the current can be added.

2.9.5 Characteristics of the battery

The efficiency of a battery is defined as the ratio of the delivered energy to the energy that the battery is charged with:

$$E = \frac{Ah_{out}}{Ah_{in}}$$

Where the energy can be calculated in ampere hours. The battery efficiency is usually around 85-90%. The internal resistance in the battery is the total resistance of all resistance contributors in the battery, for example the resistivity at the terminals and the ionic resistance in the electrolyte. The internal resistance increases with deeper state of charge, because when the battery is discharged the sulphate ions concentration decreases, which corresponds with an increased R_e , as shown in Figure 2.7.

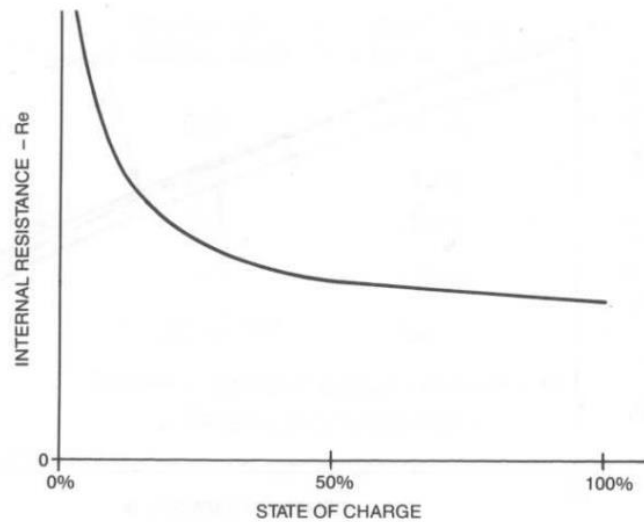


Figure 2.7 Effective R_e as a function of SOC. Figure from Gates Energy Products (1992):
 “Rechargeable Batteries”, p. 168.

As the battery gets older R_e increases; the contact resistance between the active material in the plates and the plate grid increases. As observed in Figure 2.8, this increase is quite slow in the beginning of the battery lifetime but increases as the battery lifetime gets closer to the end.

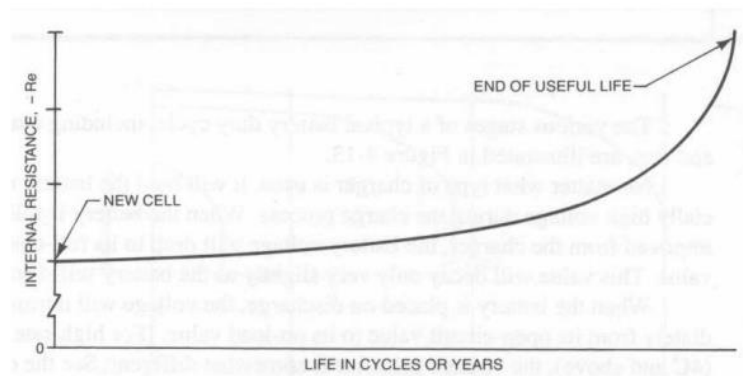


Figure 2.8 Effective R_e as a function of cell life. Figure from Gates Energy Products (1992):

“Rechargeable Batteries”, p. 168.

2.9.6 Discharging

If a 100 Ah battery is discharged at C/10 rate the discharge current is 10A, and if the discharge rate is C/20 the discharge current is 5A. Sealed lead acid batteries are usually rated at 10 or 20 Ah.

The state of charge (SOC) is defined as

$$SOC = \frac{\text{Ah capacity remaining in the battery}}{\text{Rated Ah capacity}}$$

The battery capacity decreases with increasing discharge current and vice versa, as shown in Figure 2.10. The voltage drop is greatest in the first period of discharge, then it goes into a more stabilized phase until it starts to drop significantly at the knee of the discharge curve, as shown in Figure 2.9.

The duration of the discharge is depended on the discharge rate. As shown in Figure 2.11, it is a linear relationship. The cycling procedures have impact on the battery lifetime, which has to be considered in the system design. To obtain a long life for the battery the daily depth of discharge should be less than 20%.

2.9.7 Charging

A lead acid battery can be charged at a rate that does not cause excessive gassing, overcharging or high temperatures in the battery. In Vervaart and Nieuwenhout (2001), the following steps are mentioned for charging a lead acid battery:

1. Main charge, used for charging the battery up to a level when gassing starts and the voltage rises

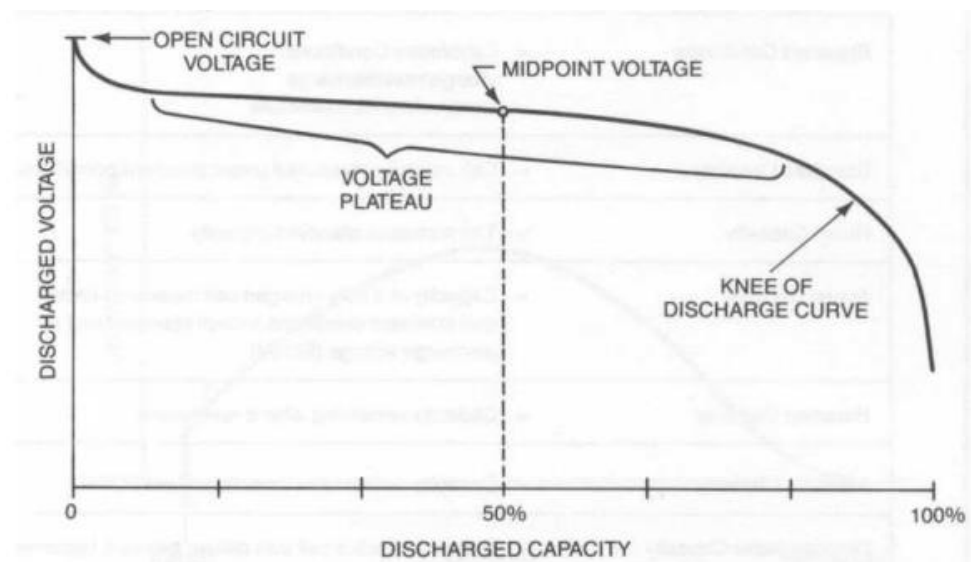


Figure 2.9 Voltage discharge performance of a sealed lead acid battery. Figure from Gates Energy Products (1992): “Rechargeable Batteries”, p. 159.

2. Top-up charge, to reach the 100% state of charge from a level of 90-95%
3. Maintenance charge, used for maintaining the full capacity in a battery that is already fully charged, but not frequently used for some period
4. Equalizing charge

The parameters operating when the battery is being charged are the current, voltage and temperature. The battery should not be charged with too high voltages, because the corrosion in the battery can increase which leads to a shorter lifetime for the battery. The battery can be damaged by overcharging or by undercharging. It has been observed that undercharging of the battery is a greater problem than overcharging. When charging the battery, it is possible that some generation of gas takes place. This can reduce the battery efficiency, but is generally not a big problem.

The voltage control, when the battery is being charged, assumes that the battery charge is the same for each cell in the battery, but this may not always be the case. It is therefore recommended that, if possible, the voltage of each unit in the battery should be measured regularly. If one unit is not fully charged, this can cause sulphation's in the battery (Vervaart and Nieuwenhout 2001).

2.9.8 Battery capacity

The nominal capacity for the battery is specified for a reference discharge period in hours, with a cell temperature of 20°C and a minimum voltage of 1.80V per cell (IEC 1999).

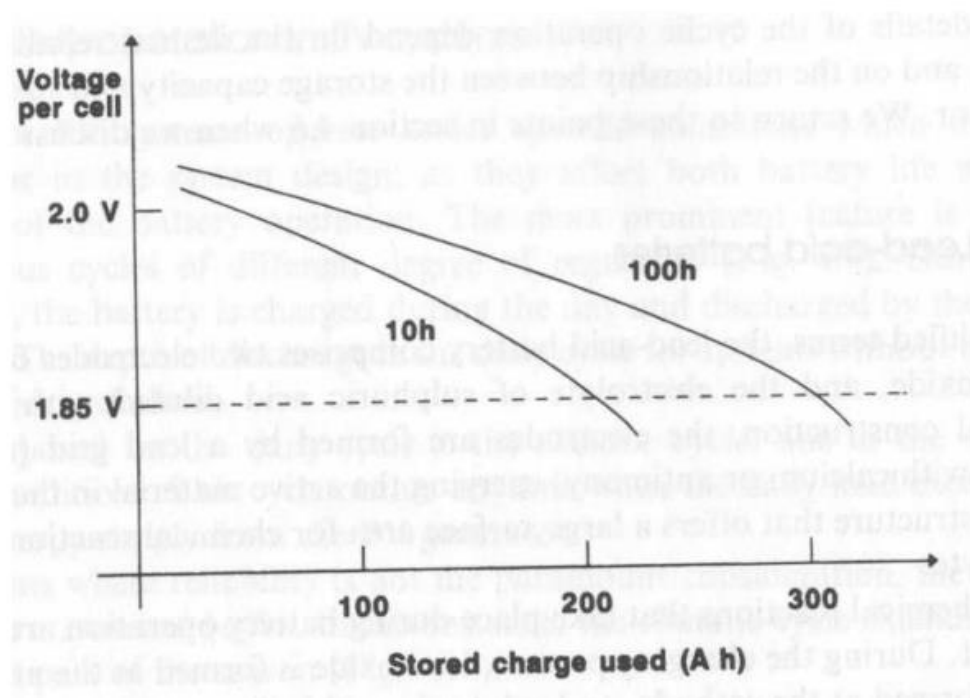


Figure 2.10 The battery discharge characteristics. Figure from Markvart(2000), p. 96.

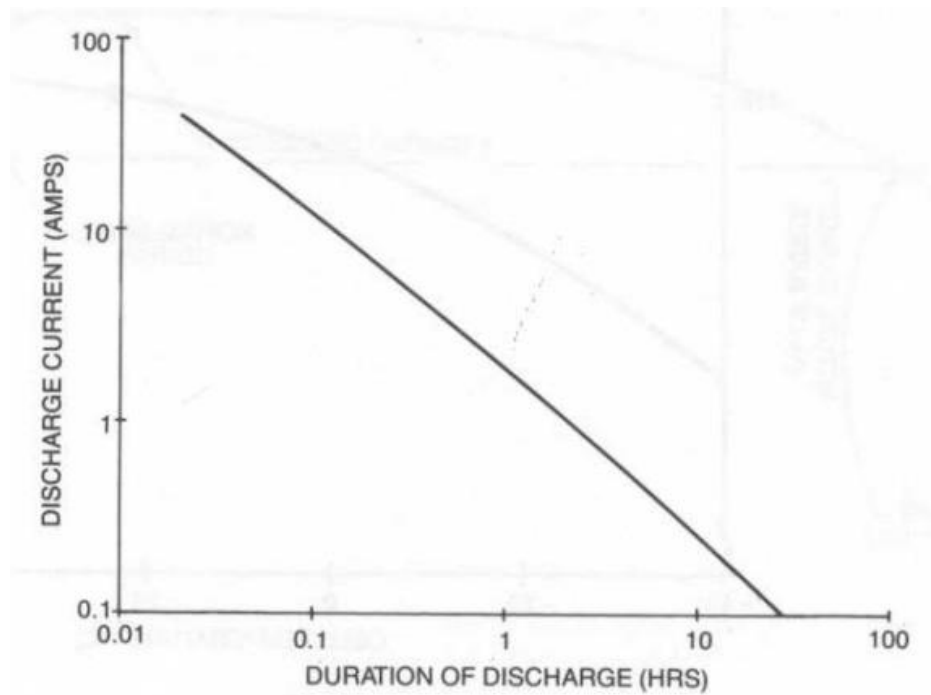


Figure 2.11 Typical discharge time for a sealed lead acid cell. Figure from Gates Energy Products (1992): “Rechargeable Batteries”, p. 163.

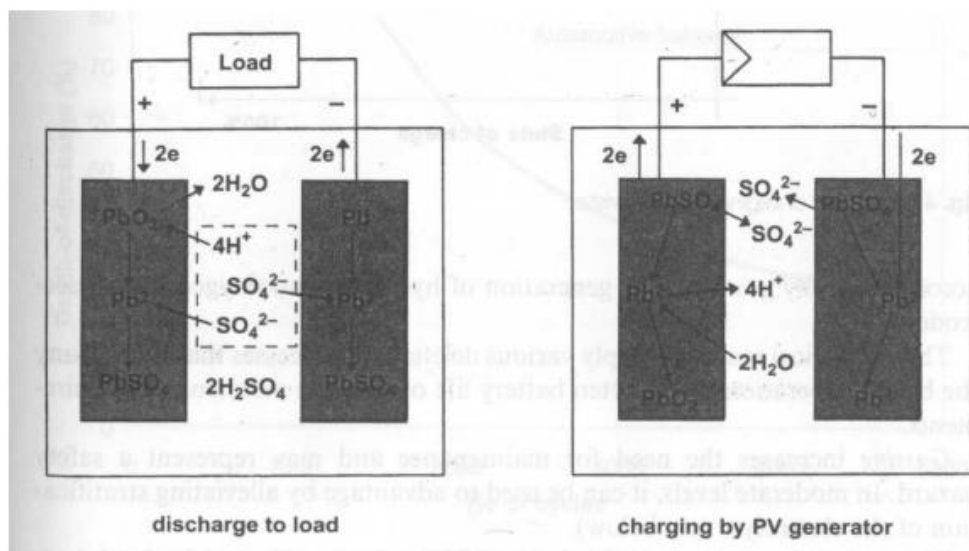


Figure 2.12 Charge and discharge of the battery. Figure from Markvart (2000), p. 95.

The capacity of a cell is essentially the number of electrons that can be obtained from it. The current is defined as the number of electrons per unit of time, thus the cell capacity (relative to a time interval $[0, t]$) is the current i supplied by the cell integrated over time:

$$Capacity = \int_0^t i \, d_T$$

This equation applies both to the charge and discharge capacity of the battery. A new battery will not operate under full capacity before it has been charged/discharged up to 50 times. This effect can be in the range of 10–20 % of the nominal capacity (Vervaart and Nieuwenhout 2001).

In Figure 2.13 the typical cell capacity during its lifetime is illustrated. The battery is assumed dead when its actual capacity falls to 80% but is often used much longer (Diaz and Lorenzo 2001).

If the charge/discharge rates are not controlled well the battery performance can suffer, some of the problems can be

- Low charge efficiency, low SOC
- Loss of capacity to maintain Ah charge
- Excessive gassing and heating

Battery capacity is sensitive to temperature if the temperature gets much higher than 20°C the corrosion in the battery can increase. If the temperature in the battery is 30°C the corrosion effect is twice as high as at 20°C (Vervaart and Nieuwenhout 2001).

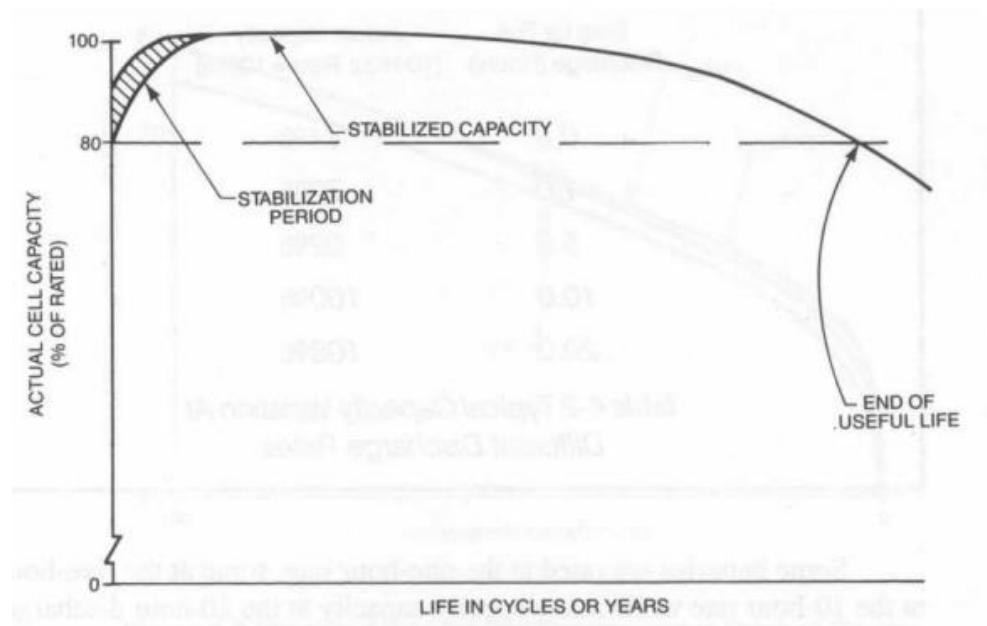


Figure 2.13 Cell capacity during its lifetime. Figure from Gates Energy Products (1992):
“Rechargeable Batteries”, p. 165.

CHAPTER 3

METHODOLOGY

3.1 Introduction


Methodology is method that we use to find information and knowledge about our project. So, we have been searching in the internet, read some books and also ask our supervisor. Then, from knowledge and information that we get, we can save our environment when we use solar system. We also can identify the equipment that we want to use. Lastly, we can develop a successful project.

In this chapter, the methodology of this project will be discussed in detail the approach and method that will be used in this project which include the project flow and grant chart this semester.

3.2 Project Planning

Project planning is part of project management, which relates to the use of schedules such as Gant chart to plan and subsequently report progress. A project plan is formal, approved document used to guide both project execution and project control. The primary used of the project plan are to document planning assumptions and decisions, facilities communication among stakeholders, and holders, and documents approved scope, cost, and schedule baselines. A project plan may be summarized or detailed.

3.3 Flowchart

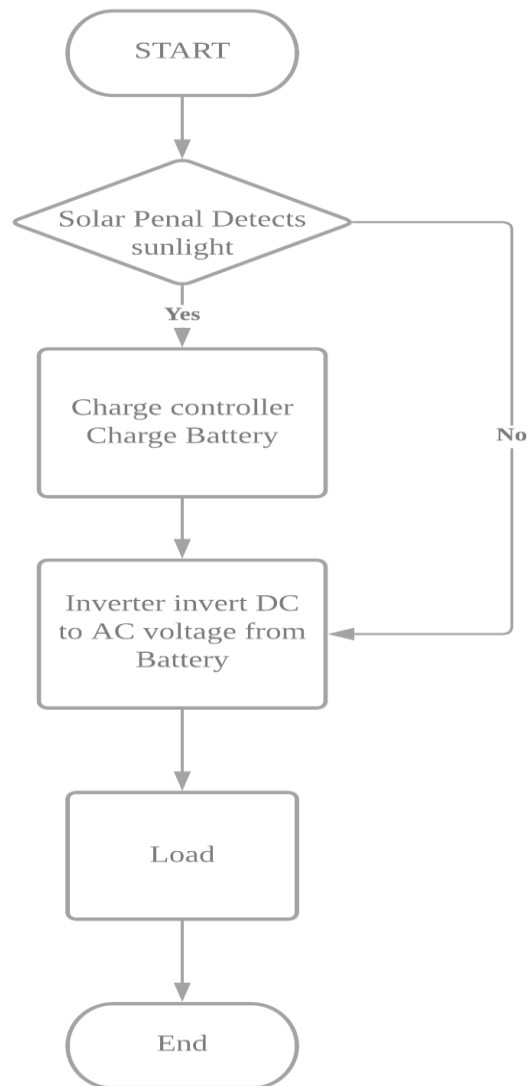

3.4 Flow Chart of The Output System

This is flow char of process for our final year project to achieve the goals. Based on the flow chart, we have an efficiency flow from the beginning to start this project until end.

3.5 Flow Chart of The Input System

This is flow char of process for our final year project to achieve the goals. Based on the flow chart, we have an efficiency flow from the beginning to start this project until end.

3.6 Prototype Circuit Diagram

Figure 3.1 shows a circuit diagram that has been sketched by Fritzing software in this project, a 50-watt solar cell is used to generate the voltage generated by the waves and the sun connected to a 12V 10A pwm solar controller. The voltage is generated by two natural energies that are allowed to create renewable energy that can run continuously. In this project as well, the pwm solar controller serves as a 12V 35AH battery charger. To convert Direct current voltage to Alternating Current voltage by using a 1000-Watt power inverter.

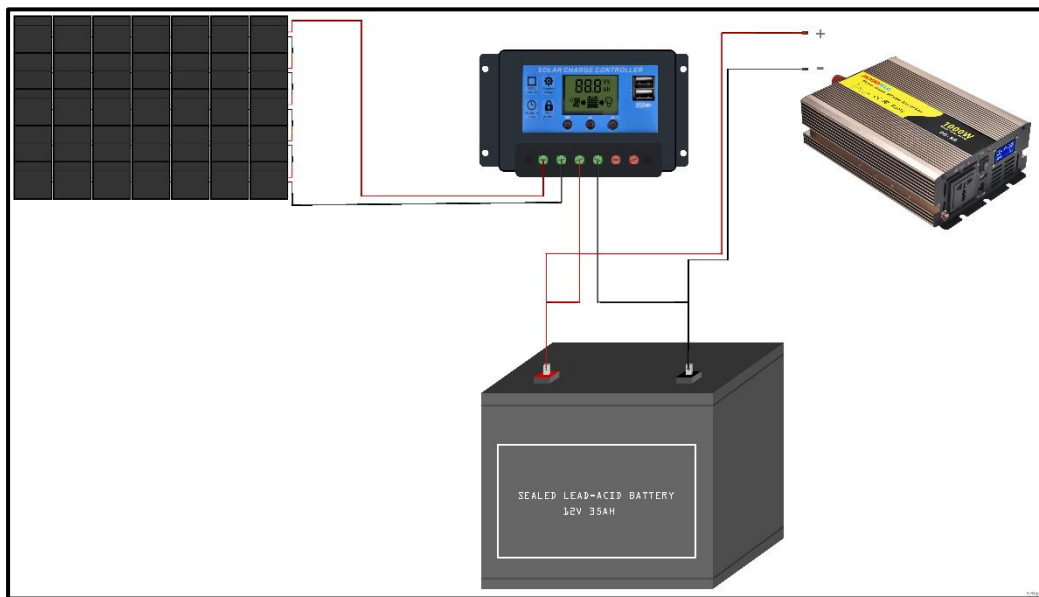


Figure 3.1 Prototype Circuit Diagram Project

3.7 Hardware

3.7.1 Solar Panel

There are many types of solar cell that have been created and polycrystalline solar cell was chosen to generate electric from sunlight for this project. It is because this solar cell was cheaper compared to 32 monocrystalline and ultra-thin solar panel. This solar cell produced 12V output voltage with dimension seven inches wide and seven inches long. It was placed at the top of container.



Figure 3.2 Monocrystalline Solar Panel 12V 50W

3.7.2 Battery

Battery 12 V was used in this project shown in Figure 3.2 to store energy of DC voltage that came from magnetic coil and solar cell and give supply to provide power to an output load in this project which is inverter. Every power supply must maintain their energy to continuously supply its load as well as any energy it consumed while performing the process. In this project, battery acted as storage to keep the output voltage from the generator and transferred it to convert DC to AC voltage.



Figure 3.3 Lead Acid Battery 12 V 35 AH

3.7.3 Inverter DC To AC Voltage

Inverter is an electronic device that used to convert the direct current (DC) comes from charge controller to alternating current (AC) most of the because home appliances use AC for the operating current. The product of this project was applicable at home and can also reduce electricity bills. Figure 3.3 shows the physical of the inverter.



Figure 3.4 Inverter 12 V DC To 220 V AC 1000 Watt

3.7.4 Charge Controller

Charge regulator in Figure 3.11 functioned to limit the rate of voltage. In this project, charge controller was set until 12 V because the input of the inverter only 12 V.



Figure 3.5 PWM Solar Charge Controller 12 VDC 10 A

3.8 Project Design



Figure 3.6 Left view of the project



Figure 3.7 Top view of the project

CHAPTER 4

RESULT AND ANALYSIS

4.1 Introduction

In this chapter, to test this whole project there should be two tests. first test the battery charge by taking voltage and battery level data at a 25-degree solar penal angle. Second test the battery discharge by taking voltage and battery level data using a 30-Watt Ac lamp load. The purpose of this test is to find out how long the used battery can be fully charged and to find out how long the battery can produce energy for a predetermined load.

In this test we took three days. The first test takes two days and the second test takes one day. Why for the first test should take two days because in the solar system the most suitable time to get a light intensity of 1000 W/m² from 11.00 am to 4.00 pm.

4.2 Test System



Figure 4.1 Control System and Output 220 V Ac



Figure 4.2 Connection Control System with Solar Penal 50 watt

4.3 Data Analysis

4.3.1 Battery Charge Test Analysis

angle	Voltage (V)	Level Battery (%)	time (h)
25	18.2 V	2%	10.00 AM
25	20.4 V	18%	11.00 AM
25	21.3 V	29%	12.00 PM
25	23.4 V	45%	1.00 PM
25	22.7 V	58%	2.00 PM
25	22.3 V	63%	3.00 PM
25	21.4 V	79%	4.00 PM

Table 4.1 Battery charge test analysis with solar system the first day

angle	Voltage (V)	Level Battery (%)	time (h)
25	20.3 V	79%	10.00 AM
25	23.3 V	89%	11.00 AM
25	23.7 V	100%	12.00 PM

Table 4.2 Battery charge test analysis with solar system the second day

The obtained results listed in Table 4.1 and Table 4.2 show that solar panels can generate voltage from sunlight due to the heat generated. To get the max energy from the solar panel the light intensity needs to get 1000 W/m². Solar has a disadvantage in terms of extremely high temperatures in 75 Celsius which allows the voltage to drop sharply.

In this test also the time taken for a full charge in 8 hours by using a solar panel 50W and a battery capacity of 35 AH.

Calculation of time for battery charge

Formula: $P = IV$ and $Q = P \times t$

$$12\text{ V} \times 35\text{ AH} = 420\text{ WH}$$

$$420\text{ WH} \div 50\text{ W} = 8.4\text{ H}$$

Where,

$$1\text{ H} = 60\text{ minutes}$$

$$0.4\text{ H} = 24\text{ minutes}$$

Time of battery full charge = 8 hours 24 minutes

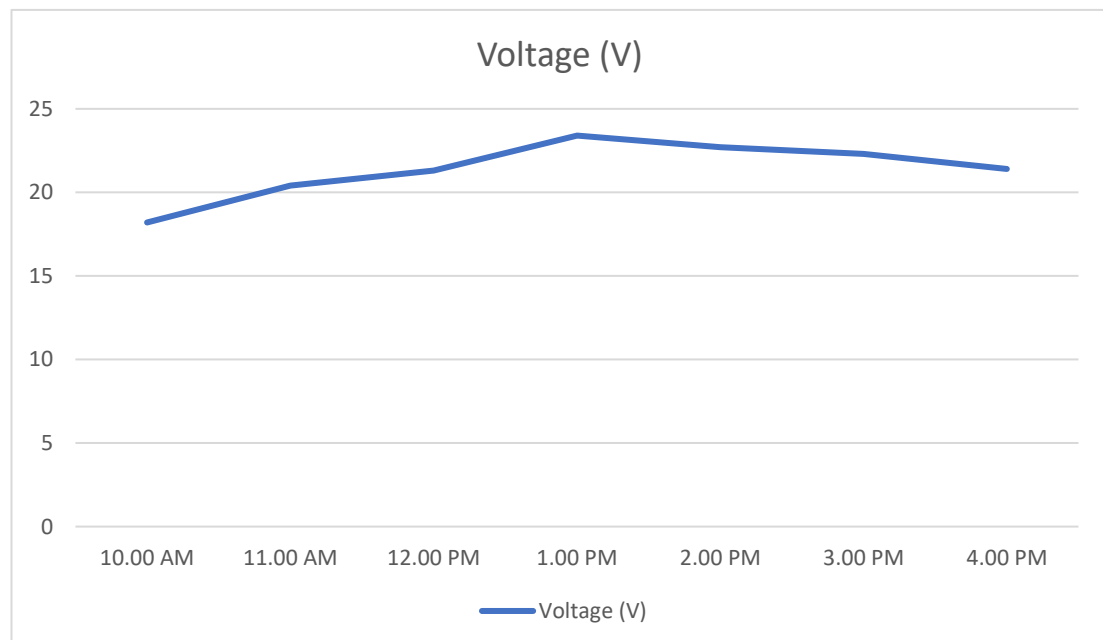


Figure 4.3 Voltage graph on the first day

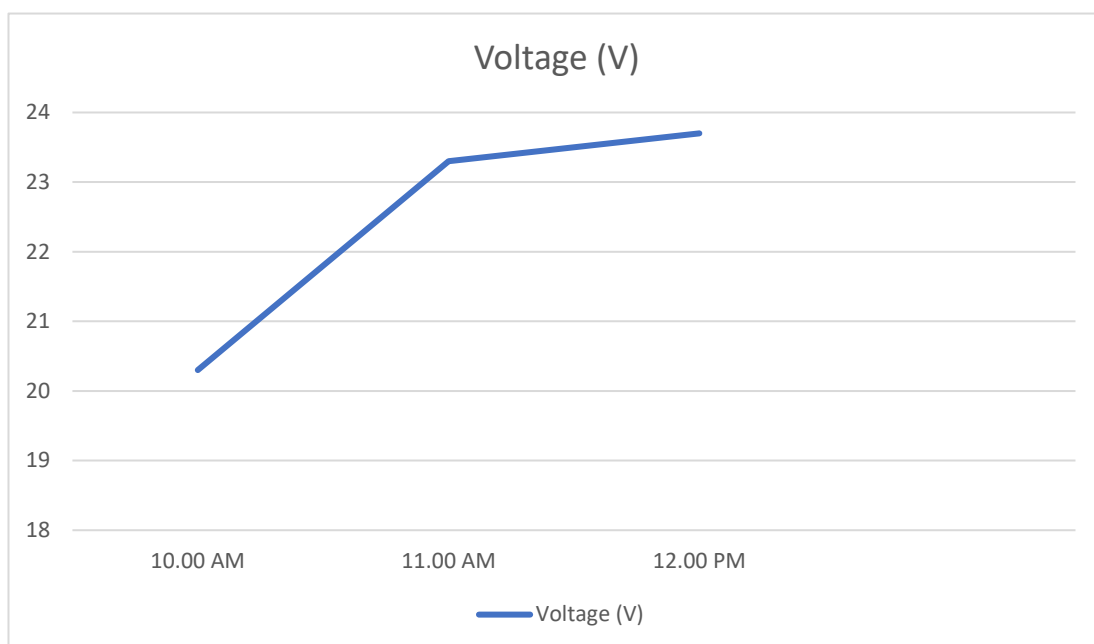


Figure 4.4 Voltage graph on the second day

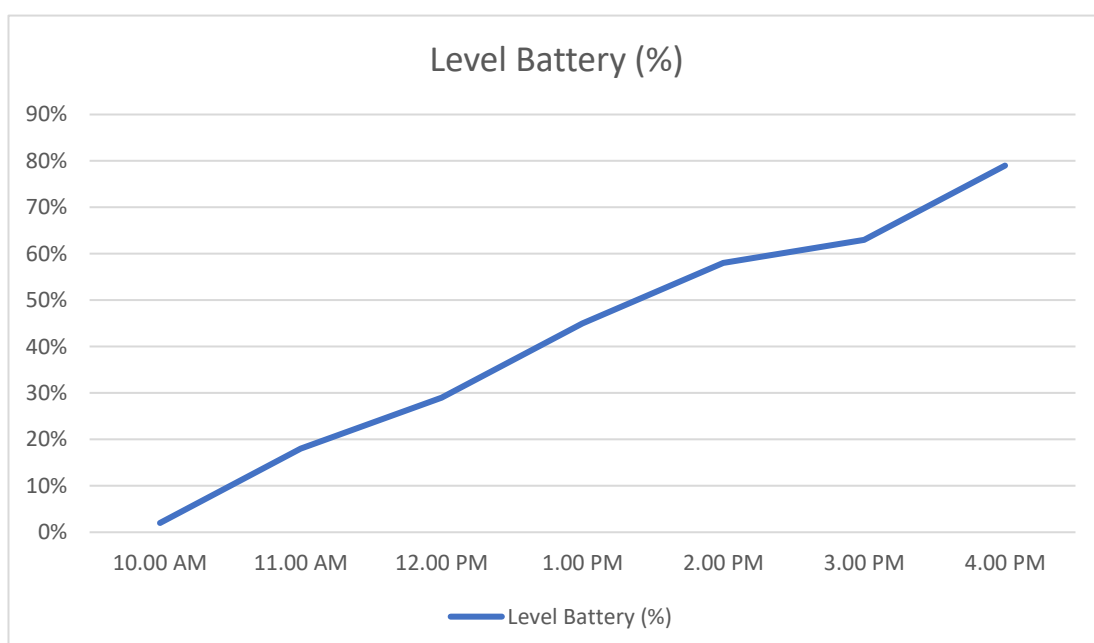


Figure 4.5 Level battery graph on the first day

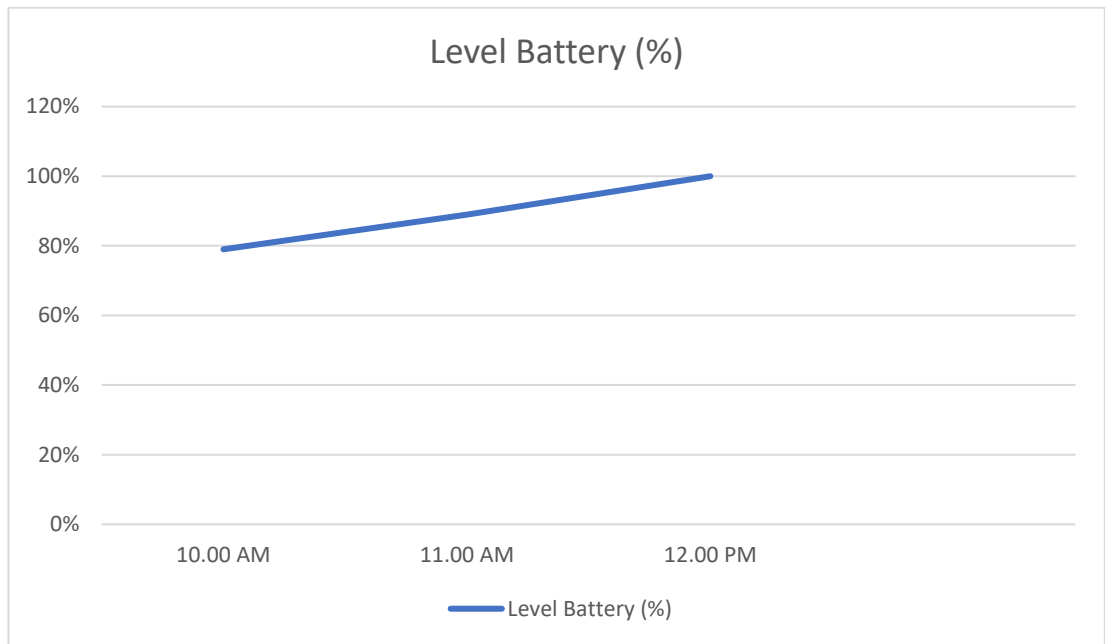


Figure 4.6 Level battery graph on the second day

4.3.2 Battery Discharge Test Analysis

Voltage (V)	Level Battery (%)	Time (h)
12.8 V	100%	8.00 pm
12.6 V	95%	9.00 pm
12.4 V	90%	10.00 pm
12.0 V	80%	11.00 pm
11.8 V	73%	12.00 am
11.6 V	68%	1.00 am
11.3 V	50%	2.00 am
11.1 V	42%	3.00 am
10.9 V	30%	4.00 am
10.7 V	12%	5.00 am
10.4 V	0%	6.00 am

Table 4.3 Battery discharge test analysis

The obtained results listed in Table 4.3 show a 12V 35AH battery discharge with a 30-Watt ac lamp load. in this test, to fully discharge the battery took 10 hours. If you follow the calculation of the time to discharge the 12V 35AH battery for more than 10 hours, in this test, it can only produce 10 hours. Although the battery capacity is 35AH, but in the battery specifications we can only use 80% of the battery capacity.

In this test as well, a lot of energy used is free because it uses an inverter to convert dc to ac. besides that in a 12 V battery system when the voltage is 10.5 V below the capacity of the battery is empty.

Calculation of time for battery discharge

Formula: $P = IV$ and $Q = P \times t$

$$12\text{ V} \times 35\text{ AH} = 420\text{ WH}$$

$$100\% = 420\text{ WH}$$

$$80\% = 336\text{ WH}$$

$$336\text{ WH} \div 30\text{ W} = 11.3\text{ H}$$

Where,

$$1\text{ H} = 60\text{ minutes}$$

$$0.3\text{ H} = 18\text{ minutes}$$

Time of battery total discharge = 11 hours 18 minutes

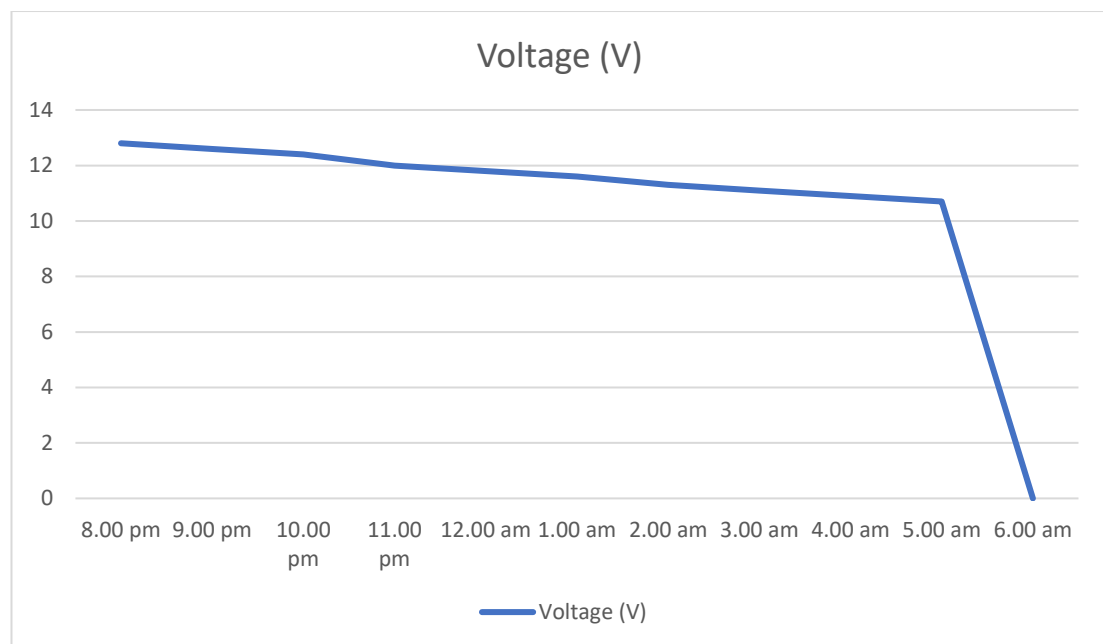


Figure 4.7 The graph shows the battery discharge voltage

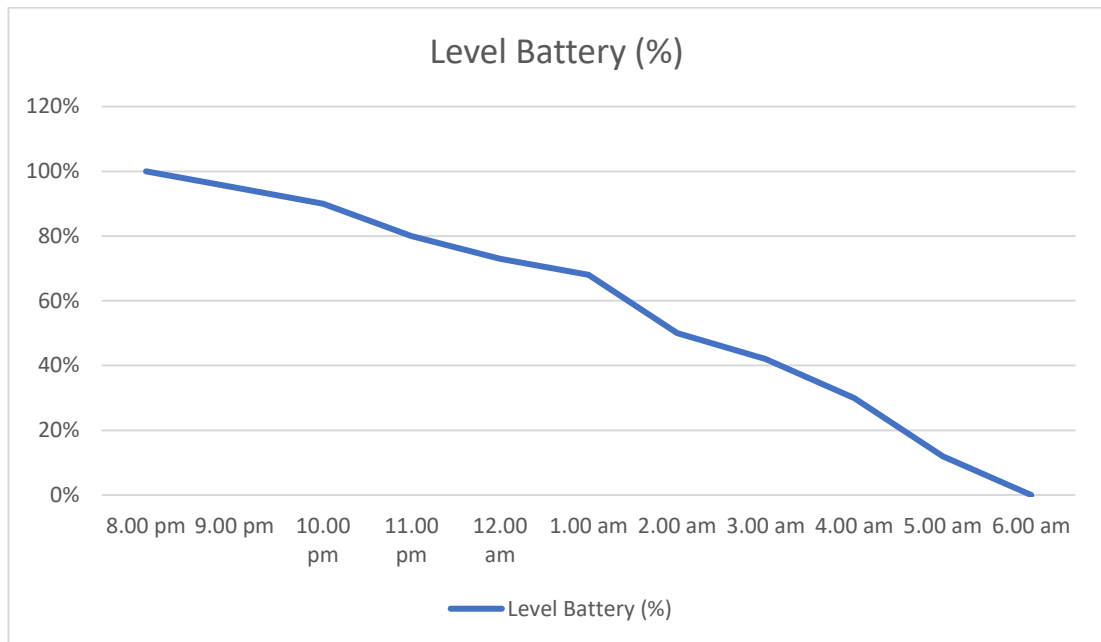


Figure 4.8 The graph shows the battery discharge battery level

CHAPTER 5

DISCUSSION

5.1 Introduction

In this chapter, we have discussed about the problems that arise during construction to the project development process from the beginning to the end of the project and the ways how to solve each problem. While we were building this project, we faced an unavoidable problem because the learning process was still going on. We have also learned how to solve problems and challenges in the making of this project. With the help of lecturers, internet and journals. We have provided many solutions for each given challenge and helped improve or upgrade the system for this project.

5.2 Discussion

During the course of the test many weaknesses were experienced in the first solar system in terms of the position of the solar panel which did not follow the position of the sunlight. both solar cannot produce energy if in rainy and cloudy weather conditions. third in the solar system, solar panel cannot produce energy if solar panel in high temperature 75 Celsius.

In the test also to produce ac voltage using a battery inverter that is used too quickly loses energy because the inverter releases a lot of energy. When freeing a lot of energy to produce longer energy need to use a large capacity battery.

CHAPTER 6

CONCLUSION AND RECOMMENDATION

6.1 Introduction

In this chapter, the conclusion and future recommendation will be discussed. In conclusion, the objective of this project will be analysed to see it was being achieved or not. The future recommendation for this project will be suggest to improving the quality and also the performance of the project design.

6.2 Conclusion

The 240 V power generator uses solar that has been fully tested and successfully run. During functional testing and measurement, the output value of the sensing system also works well. With this development prototype, it can be concluded that one of the alternative ways in reducing electricity bills is by using renewable energy. Electrical energy is produced and generated by the sun which is derived from natural energy. From this natural energy, it is converted into electrical energy that can be used in our daily lives. Thus, the first objective is achieved the completion of the second test has successfully produced the set results. For the second objective has been achieved after the results from the generator system can be measured successfully. For the third objective in the system that has been

produced there is no combustion process and the sound energy is not too strong so the objective has also been achieved.

6.3 Recommendation

After implementing this prototype, there are some recommendations that can be improved for future used in order to generate more voltages that bring more power. There are several recommendations in developing 240 V power generator by using solar.

For further development, the project can be developed as-

- Addition of the internet of things system.
- The addition of an inverter that can produce greater energy.
- Addition of a socket that produces a dc voltage such as USB.

REFERENCES


- [1] Dirk Uwe Sauer (2003), "Electrochemical Storage for Photovoltaics". A. Luque and S. Hegedus (Ed.), Handbook of Photovoltaics Science and Engineering (pp.799-862). Englewood Cliffs John Wiley & Sons.
- [2] Gavin D.J Harper & Willie Nelson, "Solar Energy Projects For The Evil Genius", McGraw Hill (2003).
- [3] Geoff Stapleton, "Grid-Connected PV System Design and Installation – 1st Edition", (2007), 149-166.
- [4] M. Leijon, O. Danielsson, M. Eriksson, K. Thorburn, H. Bernhoff, J. Isberg, J. Sundberg, I. Ivanova, E. Sjöstedt, and O. Ågren. An electrical approach to wave energy conversion. Renewable Energy, 31(9):1309 – 1319, 2006.
- [5] Telkes, Maria. "Solar Thermoelectric Generator." Journal of Applied Physics 23:6 (June 1954): 765-777.
- [6] M. S. A. B. Balbir Singh Mahinder Singh, Nursyarizal Mohd Nor and Nor Athirah Zainal, "Development of two-axis sun tracking system," presented at the American Institute of Physics Conference, 2012.
- [7] U. S. a. P. M. Jansson, "Performance Measurement of Amorphous and Monocrystalline Silicon PV Modules in Eastern U.S.," presented at the International Instrumentation and Measurement Technology Conference, 2009.
- [8] D. D. N. a. B. Lehman, "Modeling and Simulation of Solar PV arrays under Changing Illumination Conditions," July 16-19, 2006 2006.

- [9] N. Barsoum, "Fabrication of Dual-Axis Solar Tracking Controller Project," Intelligent Control and Automation.
- [10] Langseth, B. (2003). Electrification in Uganda, Master's thesis, Norwegian University of Science and Technology.
- [11] Nieuwenhout, F., Dijk, A., Hankins, M., Wade, H., van Roekel, G., Dijk, V. A., Sharma, B. D., Arriaza, H., Hirsch, D. and Lasschuit, P. E. (2001). Experience with solar home systems in developing countries: A review, *Progress in Photovoltaics* 9: 455–474.
- [12] UNBS (2000a). Uganda Standard Specifications for Fluorescents Lights for use in PV systems. Uganda National Bureau of Standards.
- [13] Stapleton, G., Gunaratne, L. and Konings, P. (2002). The Solar Entrepreneur's Handbook, Global Sustainable Energy Solutions Pty Ltd.
- [14] UNBS (2000b). Uganda Standard Specifications for the Installation of PV systems. Uganda National Bureau of Standards.
- [15] Green, D. (2004). Thailand's solar white elephants: An analysis of 15 years of solar battery charging programmes in northern Thailand, *Energy Policy* 36(6): 747–760.
- [16] Bbumba, S. N. M. (1999). Uganda's strategy for acceleration grid-based renewable power generation for a clean environment.
- [17] Diaz, P. and Lorenzo, E. (2001). Solar home system battery and charge regulator testing, *Progress in Photovoltaics*.

[18] Green, D. (2004). Thailand's solar white elephants: An analysis of 15 years of solar battery charging programmes in northern Thailand, *Energy Policy* 36(6): 747–760.

APPENDIX A

Appendix A: Circuit Diagram

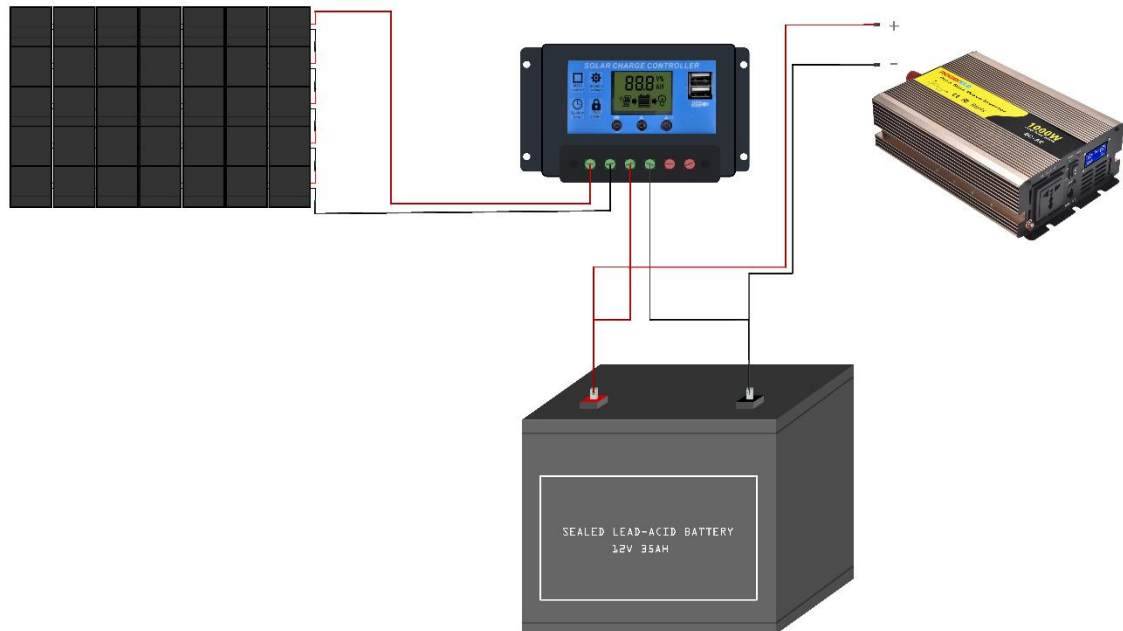

Electronics

APPENDIX B1

Appendix B1: Specifications 12V 500-Watt Pure Sine Wave Inverter

Specification

Model	ATO-PSWI-5001
Output Power	500 Watt
Peak Power	1000 Watt
Input Voltage	DC 12V
Outlet Type	Universal socket *1
Input Voltage	DC 12V (9.5-15.5V)
AC Output Voltage	1- Phase (L + N, G)= 110V, 230V $\pm 5\%$ Do Not provide split phase configuration (L1, L2 + N, G)
No-load Current (less-than)	$\leq 0.4A$
Output Frequency	50Hz or 60Hz
Output Wave	Pure Sine Wave
Waveform Distortion	THD $\leq 3\%$
USB Port	5V, 2.1A
Max Working Efficiency	95%
Undervoltage Protection	First alarm (breaking alarm sound is one), LED red light flashes, voltage continues to decrease and shut down
Overload Protection	Continuous alarm, LED flashing red, off
Over Temperature Protection	First alarm (broken alarm sound is two), the temperature continues to rise, LED red light flashes and turns off
Short Circuit Protection	Short circuit protection without breaking the circuit
Reverse protection	Fuse blown
Undervoltage Alarm Range	10.5 \pm 0.5V
Undervoltage Protection Range	9.5 \pm 0.5V
Overvoltage Protection Range	15.5 \pm 0.5V
Undervoltage Recovery Range	13 \pm 0.5V
Overvoltage Recovery Range	14V \pm 0.2V
Operating Temperature	-10°C~ +50°C
Cooling Way	Intelligent cold wind
Warranty	12 Months
Storage Temperature	-30°C~ +70°C
Humidity	$\leq 90\%$, non-condensing
Dimensions (W*H*D)	260mm*115mm*59mm
Gross Weight	1.7kg
Accessories	2 Pure copper connection wires + 4 spare fuses


APPENDIX B2

Appendix B2: Specifications 50-Watt 12 Volt Monocrystalline Solar Panel

SPECIFICATIONS	
Output Cables: 1.31 ft	Connectors: solar Connectors
Maximum Power: 50W	Maximum System Voltage: 600V DC (UL)
Optimum Operating Voltage (Vmp): 18.6V	Open-Circuit Voltage (Voc): 22.3V
Optimum Operating Current (Imp): 2.69A	Short-Circuit Current (Isc): 2.94A
Weight: 7.72 lb / 3.5 kg	Dimensions: 22.9 x 20.0 x 1.2 in
Operating Temperature: -40°F to 194°F(-40°C to +90°C)	Panel Leads (Pair): 14AWG (4 m / 1.3 ft long)


APPENDIX C1

Appendix C1: Gantt Chart Semester 4

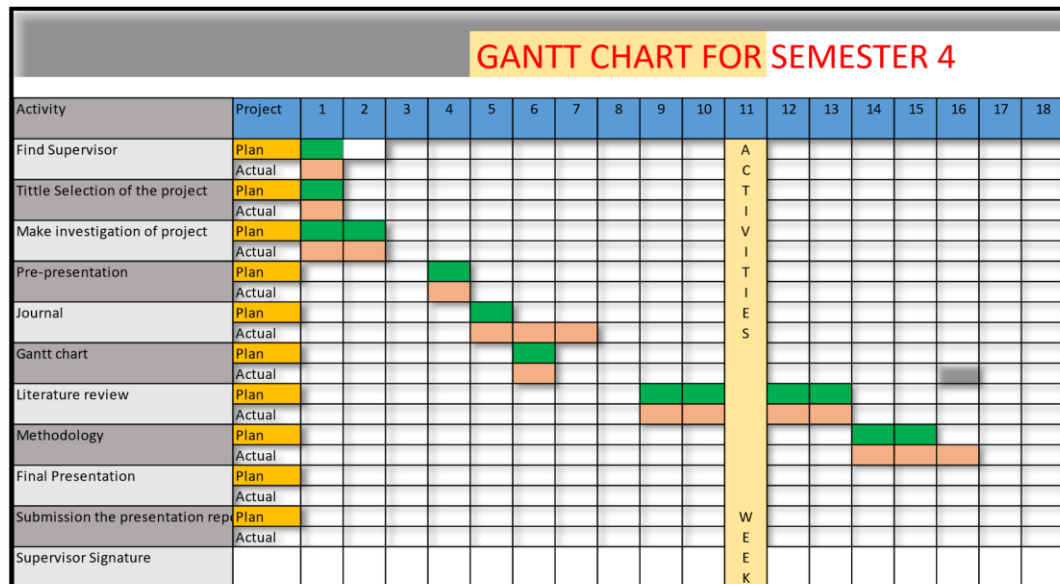

APPENDIX C2

Appendix C2: Gantt Chart Semester 5

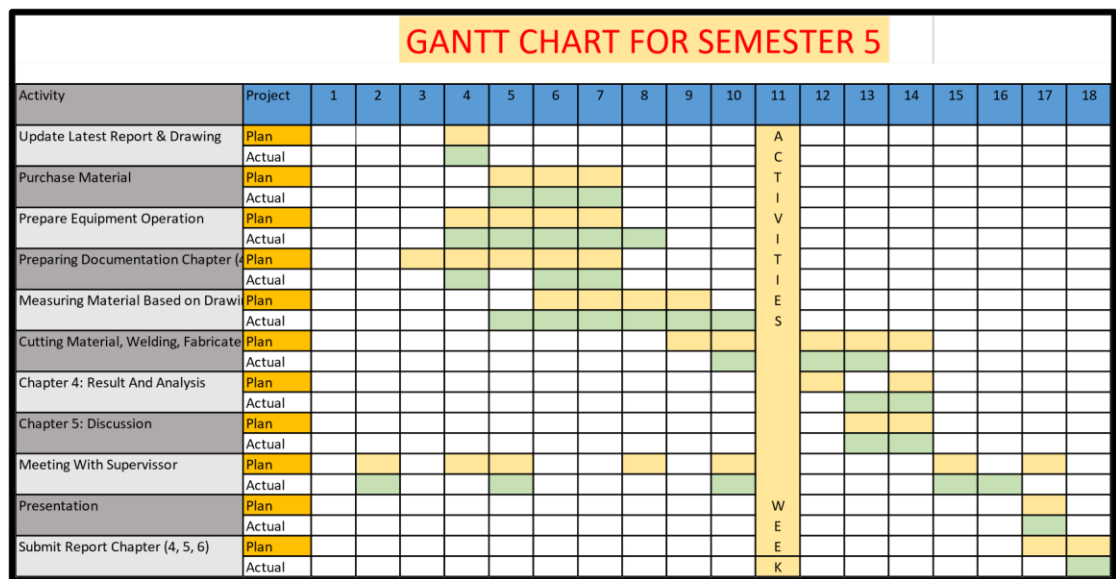



KOLEJ KEMAHIRAN TINGGI MARA KEMAMAN

FINAL SUBMISSION FOR FINAL YEAR PROJECT REPORT FORM

Part A – Candidate's Particulars
(To be completed by the candidate (s))

Name : 1. _____
/ Matric No. 2. _____
3. _____
4. _____
5. _____

Title of Final Year Project : _____

Part B – Supervisor's Recommendation
(To be completed by the supervisor (s))

I have checked the candidate's report and hereby certify that the candidate (s) has done all corrections suggested by the Examiner's Committee.

First Supervisor's Signature

Second Supervisor's Signature (if any)

Name:

Name:

Date:

Date:

Part C – Head of Programme's Approval
(To be completed by Head of Programme)

I have checked the candidate's report and hereby certify that the candidate (s) has done all corrections suggested by the Examiner's Committee.

Head of Programme's Signature

Head of Programme's Stamp

Date

Part D – Final Submission of Final Year Project Report
(To be filled by candidate (s). Please ensure that Part B and Part C has been filled)

I hereby submit three (3) copies of my/our team report in a hardbound cover and a set of softcopy version (CD Rom) which has been approved by supervisor (s) and Head of Programme.

Candidate/Team Leader's Signature

Name:

Date: