

# westlicht PER|FORMER

## USER MANUAL



This document is written for firmware version 0.2.2


## Table Of Contents

- [Introduction](#)
  - [Overview](#)
- [Concepts](#)
  - [Project](#)
  - [Track](#)
  - [Note Track](#)
  - [Curve Track](#)
  - [MIDI/CV Track](#)
  - [Stochastic Track](#)
  - [Pattern](#)
  - [Snapshot](#)
  - [Fills](#)
  - [Song](#)
  - [Scale](#)
  - [Clock](#)
  - [Routing](#)
  - [Controller](#)
  - [File Management](#)
- [User Interface](#)
  - [Overview](#)
  - [Navigation](#)
  - [Page Layout](#)
  - [List Pages](#)
  - [Copy/Paste](#)
- [Pages](#)
  - [Project](#)
  - [Layout](#)
  - [Track](#)
  - [Sequence](#)
  - [Steps](#)
  - [Generators](#)
  - [Song](#)
  - [Tempo](#)
  - [Pattern](#)
  - [Performer](#)
  - [Routing](#)
  - [Midi Output](#)
  - [User Scale](#)
  - [Overview](#)
  - [Monitor](#)
  - [Clock](#)
  - [System](#)
- [Appendix](#)
  - [Recording](#)
  - [Divisors](#)
  - [Run Modes](#)
  - [Play Modes](#)
  - [Rotation](#)
  - [Step Conditions](#)
  - [Metropolix Mode](#)
  - [Scales](#)
  - [Shapes](#)

- Arpeggiator Modes
- Routing Targets
- MIDI Program Change
- Launchpad
- USB MIDI Devices
- Calibration Procedure
- Firmware Update

# Introduction

---

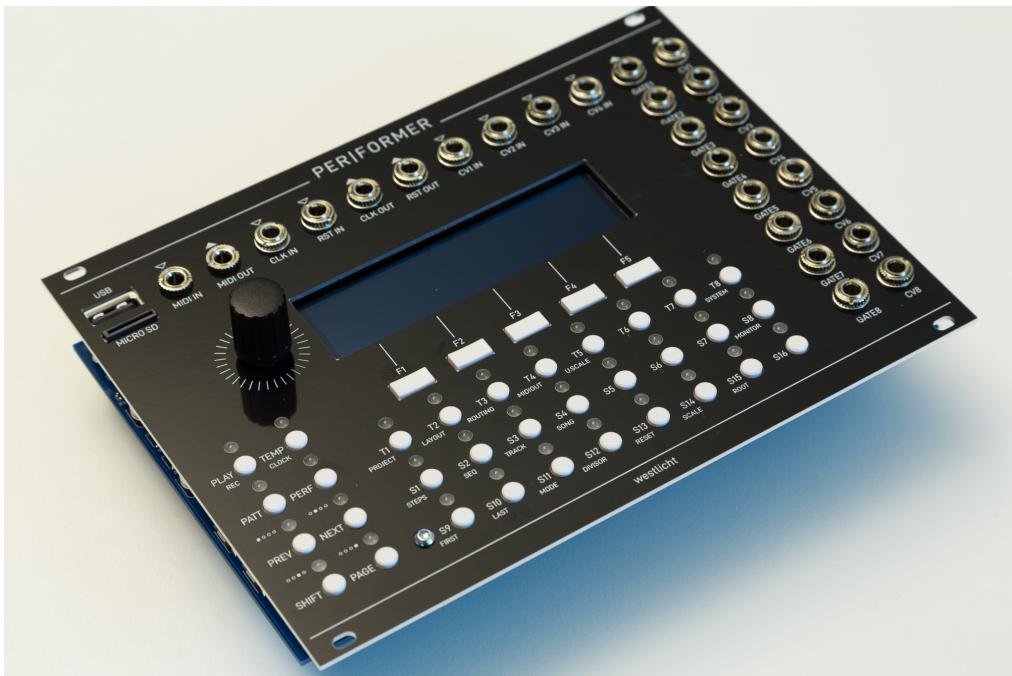

**PER|FORMER** is an open source and open hardware eurorack sequencer module. It packs a lot of functionality into a small form factor and was designed both as a versatile sequencer in the studio as well as for live performance. To fully take advantage of all the features available in this module, it is highly recommended to study this document carefully.

The [Concepts](#) chapter introduces the overall architecture and functionality of the sequencer. The [User Interface](#) chapter gives an overview of the user interface and introduces key concepts of how to use the sequencer. The [Pages](#) chapter goes into more detail in terms of functionality and user interface of the various modes and contexts in the sequencer and introduces common workflows. Finally, the [\[Appendix\]](#) contains reference tables for some of the parameters commonly used in the sequencer as well as additional information on how to use the Novation Launchpad, calibrate the CV outputs and update the firmware.

## Overview

Here is a brief summary of what you get with the **PER|FORMER** sequencer.

## Features

- 8 track sequencer
- 16 sequences per track
- 64 steps per sequence
- Multiple track and sequence modes
- Note and modulation sequencing
- Arpeggiator
- Snapshot system
- Sequence generators
- Routing system for CV inputs and external MIDI controllers
- Novation Launchpad support
- Generate MIDI output from multiple sequences

- Flexible clock system

## User Interface

- Large and bright 256x64 pixel OLED display
- Encoder with push button
- 32 buttons with bi-color LEDs
- 5 function buttons with labels on display

## Inputs and Outputs

- 8 CV outputs (-5V to 5V)
- 8 gate outputs (5V)
- 4 CV inputs (-5V to 5V)
- Clock and reset/run input
- Clock and reset/run output
- MIDI input and output (MIDI TRS 3.5mm jacks)
- USB Host for MIDI over USB
- microSD Card Slot

## Specifications

- Width: 34 HP
- Depth: 25mm
- Power: 100mA @ +12V, 15mA @ -12V (not including USB host power)

# Concepts

---

This chapter introduces the basic concepts of the sequencer and should familiarize readers with the overall functionality of the sequencer. More in-depth information about specific features are provided in the following chapters.

## Project

A project represents the complete state of the sequencer, with the exception of calibration data. Only one project can be loaded at any given time and all data is volatile, meaning that all changes are lost when the unit is powered off. To persist a project it needs to be stored to the SD card (see [Project](#) page).

Projects are split into two data regions. The first region contains all the global data such as project settings, layout settings, MIDI output settings, routing settings, song data and play state. The second region contains the data for the 8 tracks, where each track contains the track settings and 16 sequences. Each sequence in turn contains the sequence settings and up to 64 steps.

Note: Calibration data is stored in the flash memory of the micro controller and can be backed up and restored from the SD card. This allows exchanging the SD card while running the sequencer or run the sequencer without an SD card at all and still have it properly calibrated.

## Track

A track is responsible for generating note or modulation signals used to control other modules in the eurorack system using the CV/gate outputs. The **PERFORMER** sequencer can run up to 8 tracks, that primarily use step sequencing to generate these signals, where each track can run independent of the other tracks. This means that every sequence in a track can have a different time division, run mode, duration or scale among other properties.

### Track Mode

Each of the 8 tracks can be configured to one of the following modes:

- Note
- Curve
- MIDI/CV
- Stochastic

In Note mode, the default mode, a track uses advanced step sequencing to generate rhythms and melodies. Curve mode also uses step sequencing, but each step is defined as a curve shape, making this mode very versatile for generating modulation signals. In MIDI/CV mode, a track acts as a MIDI to CV converter, which can be useful when attaching a MIDI keyboard to play some voices live or sequence them from an external MIDI sequencer. In Stochastic mode the track act as a stochastic cv generator based on notes probabilities

### Track Routing

In the default configuration, each track controls one of the CV/gate output pairs of the sequencer to control a single voice. However, this configuration can be changed to allow for more flexible routing of the virtual track outputs to the physical CV/gate outputs. For example, a MIDI/CV track can control more than one physical CV/gate output to allow polyphonic operation or output a velocity signal in addition to the pitch signal.

### Track Linking

In Note or Curve mode, a track generates a single CV signal, typically a pitch or modulation signal. To control a voice with multiple signals, for example a pitch and velocity signal, two tracks have to be used in combination. The first track is used to

generate the pitch signal while the second track generates the velocity signal. Using two tracks allows to use different sequence lengths, time division and other properties that affect playback. If that is not desired, the second track can be linked to the first track, essentially doubling the playback behavior.

Track modes, the physical routing to CV/gate outputs and track linking can be configured on the [Layout](#) page.

## Note Track

By default, all tracks are configured as note tracks. In this mode, the track uses step sequencing to generate gate and CV signals. A sequence consists of a maximum of 64 steps and there is a total of 16 sequences per track.

Each step is defined through a number of properties, also called layers, to control the generated gate and CV signals.

The *Gate* layer defines what steps of the sequence create a gate signal. To introduce some random variation, the *Gate Probability* layer is used to control how often an active gate is actually generated.

The *Gate Offset* layer is used to offset gate signals into the future, adding a positive or a negative delay before triggering a note.

The *Length* layer controls the duration of the gate signal and allows to tie notes together if set to the maximum. Again, to introduce some random variation, the *Length Variation Range* and *Length Variation Probability* layers control a maximum random deviation of the gate length and the probability of actually randomizing the gate length.

The *Retrigger* layer allows each gate signal to be retriggered multiple times within the duration of the step, allowing for faster gates and ratcheting effects. Retriggered notes are only output within the current *Length* of the step. This allows to output a burst of notes only at the beginning of the step. Retriggering can also be randomized using the *Retrigger Probability* layer.

Inside the *Retrigger* layer a metropolix style mode can be activated when the track is in `_free_mode`.

The generated CV signal is controlled by the *Note* layer, which basically defines the voltage to be output for each step. Each note is stored as an index to an entry in a [Scale](#), allowing the generated CV signals to be used both for controlling note pitch as well as other arbitrary modulation signals. Using the *Note Variation Range* and *Note Variation Probability* layers some random variation can be applied to the CV signal. The *Slide* layer controls if the generate CV signal is changed immediately on the start of a gate or smoothly slides to the new voltage. Activating a step in the *Bypass Scale* layer will allow to bypass the selected scale and enter one of 12 chromatic notes available.

Finally, the *Condition* layer is used to conditionally trigger steps based on certain rules. This allows to create relatively short sequences that feel more complex, for example by only playing steps every few iterations. See [Step Conditions](#) for additional information.

The playback of the sequence is controlled by additional parameters:

- *Divisor* controls the rate at which steps are played back
- *Run Mode* controls the order in which steps are played back
- *First Step* and *Last Step* control what range of the sequence is played back

Sequences are edited on the [Steps](#) page and sequence parameters can be edited on the [Sequence](#) page.

## Curve Track

In *Curve* mode, a track also uses step sequencing with similar playback features to the note track. However, in this track mode the CV signal is defined by a series of curve shapes, making this mode useful to generate modulation signals. This mode also allows to output gate patterns, but it is different from how the *Note* mode works.

The generated CV signal is controlled by the *Shape* layer, which defines a curve shape to be output over the duration of one step. The *Minimum* and *Maximum* layers define the lower and upper voltage that is output for each step. To introduce some random

variation, the *Shape Variation* and *Shape Variation Probability* layers can be used to define altered shapes that are used instead of the primary shape with some probability.

The generated gate signal is controlled by the *Gate* layer. It allows to define a pattern of up to 4 gate triggers per step. To introduce some random variation, the *Gate Probability* layer is used to control how often a gate is actually played.

The playback of the sequence is controlled by the same set of parameters as in the note track.

## MIDI/CV Track

In MIDI/CV mode, a track acts as a MIDI to CV converter, taking MIDI note data from either the MIDI or USBMIDI input and converting it to voltages at the CV/gate outputs. This allows for playing voices live from a keyboard or use an external MIDI sequencer to control them. MIDI/CV mode also provides a powerful arpeggiator to further help playing live.

Note: MIDI/CV mode allows for using the **PERFORMER** module as a pure MIDI/CV converter with up to 8 CV/Gate outputs.

## Stochastic Track

In Stochastic Mode, a track acts as a stochastic CV generator based on note probabilities. Unlike other sequencer (SEQ) views which show blocks as sequence steps, the stochastic sequencer view shows 12 blocks with each block representing the 12 semitones in a western chromatic scale.

The *Gate* layer can be used to enable a note in the scale shown in the Note layer. This layer is also used to configure the probability that a gate is output when the corresponding note is played. Each gate can be configured with an offset which causes the gate to be output before or after the corresponding sequence step.

The *Retrigger* layer is used to create ratcheting effects which outputs a burst of gates when a note is played. Up to 8 ratchets can be sent per step; the probability of the retrigger happening is configured in the probability section. All ratchets are sent within the length of the specific step and do not overlap into the next step in a sequence. If the track is configured in *free\_mode* (Track->Play Mode: Free) this activates a Metropolix mode in the Retrigger layer.

The *Length* layer is used to define the length of gates. Length probability and length range can also be used to introduce gate length variations in the generated sequence.

The *Note* layer is used to configure the probability of an enabled note being played in the generated sequence. In addition to note probability, the Note layer is used to configure the probability of an octave shift and the octave range. Slide (portamento) is also configured for each note in the Note layer - this causes the CV voltage to glide up or down to the next note.

It offers basically all the Note track layer features:

The *Gate* layer defines what steps of the sequence create a gate signal. To introduce some random variation, the *Gate Probability* layer is used to control how often an active gate is actually generated.

The *Gate Offset* layer is used to offset gate signals into the future, adding a positive or a negative delay before triggering a note.

The *Length* layer controls the duration of the gate signal and allows to tie notes together if set to the maximum. Again, to introduce some random variation, the *Length Variation Range* and *Length Variation Probability* layers control a maximum random deviation of the gate length and the probability of actually randomizing the gate length. In addition a Stochastic Length Modifier parameter is available on the Stochastic Sequence Page.

The *Retrigger* layer allows each gate signal to be retriggered multiple times within the duration of the step, allowing for faster gates and ratcheting effects. Retriggered notes are only output within the current *Length* of the step. This allows to output a burst of notes only at the beginning of the step. Retriggering can also be randomized using the *Retrigger Probability* layer.

Inside the *Retrigger* layer a metropolix style mode can be activated when the track is in `_free_mode`.

The generated CV signal is controlled by the *Note Probability* defining the probability that the stochastic generator will pick the selected note. The *Slide* layer controls if the generate CV signal is changed immediately on the start of a gate or smoothly slides to the new voltage. The *Bypass Scale* is already been activated for each step and cannot be disabled. The *Octave* define the octave of each step and the *Octave Probability* defines the probability that the step changes octave.

## Pattern

In *Note* and *Curve* mode, each of the 8 tracks contains up to 16 sequences, also referred to as patterns. During playback, each track is playing one of its 16 patterns. When switching patterns, all tracks can be switched to the same pattern number or specific patterns can be selected for individual tracks. Patterns are controlled from the [Pattern](#) page.

## Snapshot

In addition to the 16 patterns per track, there is an additional snapshot pattern which can temporarily be used to edit sequences without affecting the original. When taking a snapshot, all patterns that are currently playing in each track are copied to the snapshot. Snapshots come in handy during live performance for quickly changing sequences on the fly. The changes can later be committed or reverted. Snapshots are controlled from the [Pattern](#) page.

## Fills

Fills can be used as an effective tool during live performance. They allow to temporarily change the playback of a sequence to add some variation or tension. Each track can be configured with a specific fill mode. The default mode will simply trigger every step of a sequence no matter if the gate is enabled or disabled. Other fill modes allow to temporarily play steps from the next sequence or trigger steps that have the *Fill* condition set. To make things more interesting, each track also has a *Fill Amount* associated which is a probability value that controls how often a step is affected by the selected fill mode. This for example allows to morph between two patterns by selectively playing a given amount of steps from either pattern. Fills can then be controlled from the [Performer](#) page.

## Song

Songs are used to chain together a sequence of patterns for each track. This can either be used to quickly chain together patterns during a live performance to get more variation or to create an entire arrangement of a song.

A song consists of up to 64 slots, each holding a set of patterns to be played on the 8 tracks in addition to specifying for how many bars/measures the slot is played for. Songs are controlled from the [Song](#) page.

## Scale

In contrast to many other sequencers that directly operate on chromatic note values, the **PERFORMER** sequencer is using the concept of voltage tables. Each note is stored as an index into a voltage table that does not necessarily have a specific musical meaning. While offering many of the more commonly used scales in form of presets, the sequencer also provides some scales beyond the typical western chromatic variants, for example a 24 tone equal temperament scale. The additional 4 user scales allow for even more experimentation as well as setting up voltage tables to specifically address discrete values of a CV input on another module. This allows for example to select a specific sample slot, choose a wavetable or similar applications.

A global default scale and root note can be specified on the [Project](#) page which can be overridden for individual sequences in the [Sequence](#) page. The user scales can be edited on the [User Scale](#) page. See [Scales](#) appendix for a list of all preset scales.

## Clock

The sequencer is driven by a flexible clock system. In master mode, the clock is generated internally and can be sent to external gear and modules using MIDI clock and analog clock signals. In slave mode, the clock is received from an external source via

MIDI or analog clock signals. For convenience, the clock is set to an auto mode by default that automatically switches to master mode when the sequencer is started manually or switches to the slave mode when an external clock signal is detected.

To allow for accurate timing, the internal clock is running at a resolution of 192 parts per quarter note (PPQN). In master mode, a hardware timer is used to generate a low-jitter clock signal. To drive external clock signals, the internal clock is divided down to the required PPQN of the external clock signals. In slave mode, the external clock signal is multiplied internally to generate the 192 PPQN internal clock resolution, which in turn is used to clock the sequencer as well as the external clock signals.

The clock system is configured on the [Clock](#) page.

## Routing

Many of the parameters in the sequencer can be controlled from external signals. This is useful for both experimentation and for controlling the sequencer with additional controllers in a live performance. The following sources can be used in the routing system:

- 4 CV inputs
- 8 CV outputs (allows for cross modulation without patching)
- MIDI controllers (pitch bend, controller change, individual notes)

Each *route* is a mapping from a source signal to a parameter, including a mapping of the source range to a parameter range. For example, an external CV signal can be mapped to the master clock tempo such that -5V - +5V maps to 100 - 140 BPM.

The routing system also implements a MIDI learn function, which allows to easily map MIDI controllers to specific parameters. Routes can be created and edited on the [Routing](#) page.

## Controller

In addition to the routing system, specific MIDI controllers such as the Novation Launchpad can be used to control many aspects of the sequencer. This includes editing sequences, controlling mutes, launching patterns among other things.

Note: Launchpad is currently the only supported controller but others may follow.

See [Launchpad](#) for more details.

## File Management

The SD card can be used to store various resources such as projects, sequences, user scales and system settings. Resources are stored into slots, with each type having a total of 128 slots available. The actual content on the SD card looks as follows:

- **PROJECTS/**
  - 001.PRO
  - 002.PRO
  - ...
- **SEQS/**
  - 001.NSQ
  - 001.CSQ
- **SCALES/**
  - 001.SCA
  - 002.SCA
  - ...
- **SETTINGS.DAT**


where **001.PRO** is the first project slot, **001.NSQ** is the first note sequence slot, **001.CSQ** is the first curve sequence slot, **002.SCA** is the second user scale slot and **SETTINGS.DAT** is the backup of the system settings (also stored in on-chip flash memory).

The reason for using a slot system rather than traditional filenames is in order to allow for a smooth user experience while preserving the limited resources on the system.

Note: The SD card can easily be backed up to a computer by just copying the files. Slots can freely be rearranged by just renaming the files.

# User Interface

## Overview

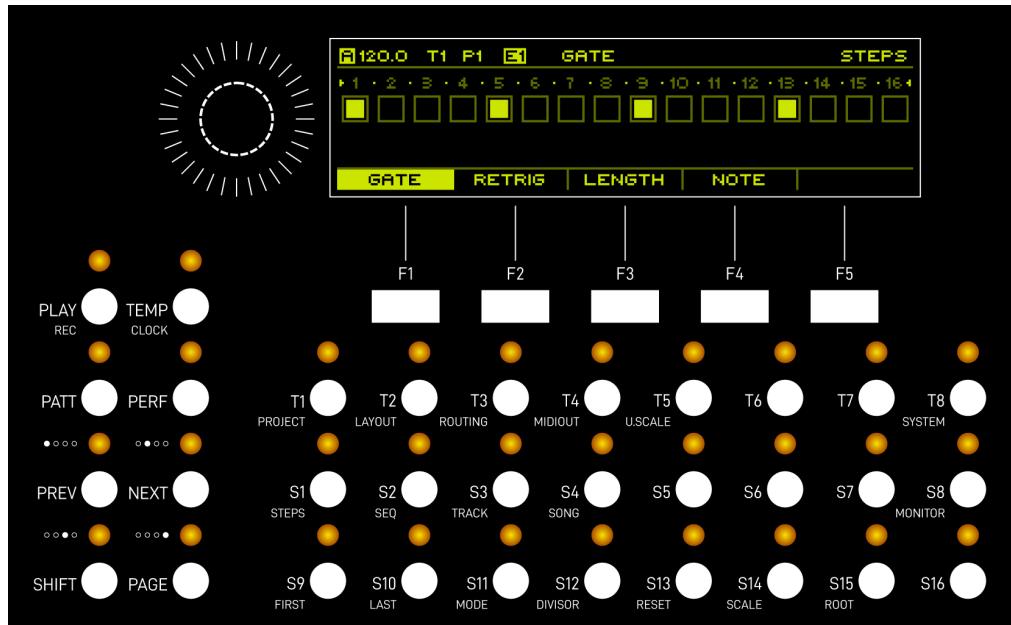

The user interface of the **PERFORMER** sequencer is made up from the following components:

- OLED display
- Rotary encoder with button
- 5 function buttons
- 32 buttons with bi-color LEDs

The rotary encoder will furthermore be denoted as **ENCODER**. The buttons are split into 4 groups:

### Function Buttons

There are 5 function buttons below the display: **F1**, **F2**, **F3**, **F4** and **F5**. The function associated with each button depends on the currently selected page and context. However, due to each function button being dynamically labeled on the display, its always easy to see what the associated functions are.

### Global Buttons

There are 8 global buttons: **PLAY**, **TEMP**, **PATT**, **PERF**, **PREV**, **NEXT**, **SHIFT** and **PAGE**.

All global buttons have fixed functions associated to them:

Button	Function
<b>PLAY</b>	Starts/stops the master clock.
<b>SHIFT</b> + <b>PLAY</b>	Pause/continue or restart master clock depending on the configured <i>Shift Mode</i> on the <a href="#">Clock</a> page.
<b>PAGE</b> + <b>PLAY</b>	Enable/disable recording mode.

Button	Function
<b>TEMP</b>	Shows the <a href="#">Tempo</a> page while being hold.
<b>PATT</b>	Shows the <a href="#">Pattern</a> page while being hold.
<b>PERF</b>	Shows the <a href="#">Performer</a> page while being hold.
<b>PREV</b> , <b>NEXT</b>	Navigate on a page, depends on current context.
<b>SHIFT</b>	Enable alternate function, depends on current context.
<b>PAGE</b>	Switch between pages.
<b>SHIFT</b> + <b>PAGE</b>	Show context menu for the active page.

## Track Buttons

There are 8 track buttons: **T1** to **T8**. These buttons are generally used to select the active track, but also to select pages in combination with the **PAGE** button and some other functions depending on the active page.

## Step Buttons

There are 16 step buttons: **S1** to **S16**. These buttons are generally used to select steps in a sequence, but also to select pages in combination with the **PAGE** button and some other functions depending on the active page.

## Navigation

The user interface is organized in multiple pages, each page giving access to a different part of the sequencer such as:

- Editing configuration options
- Editing sequences and steps
- Performance related functions such as tempo, muting or pattern selection
- Displaying various other information

The active page is selected by holding the **PAGE** button and pressing the corresponding page button:

Button	Page
<b>PAGE</b> + <b>CLOCK</b> ( <b>TEMP</b> )	<a href="#">Clock</a>
<b>PAGE</b> + <b>PATT</b>	<a href="#">Pattern</a>
<b>PAGE</b> + <b>PERF</b>	<a href="#">Performer</a>
<b>PAGE</b> + <b>PROJECT</b> ( <b>T1</b> )	<a href="#">Project</a>
<b>PAGE</b> + <b>LAYOUT</b> ( <b>T2</b> )	<a href="#">Layout</a>
<b>PAGE</b> + <b>ROUTING</b> ( <b>T3</b> )	<a href="#">Routing</a>
<b>PAGE</b> + <b>MIDIOUT</b> ( <b>T4</b> )	<a href="#">Midi Output</a>
<b>PAGE</b> + <b>U.SCALE</b> ( <b>T5</b> )	<a href="#">User Scale</a>
<b>PAGE</b> + <b>STEPS</b> ( <b>S1</b> )	<a href="#">Steps</a>
<b>PAGE</b> + <b>SEQ</b> ( <b>S2</b> )	<a href="#">Sequence</a>

Button	Page
PAGE + TRACK ( S3 )	Track
PAGE + SONG ( S4 )	Song
PAGE + MONITOR ( S8 )	Monitor
PAGE + SYSTEM ( T8 )	System
PAGE + PREV	Overview

There are 3 special pages which can be entered temporarily by just holding a single button, namely the [Tempo](#), [Pattern](#) and [Performer](#) pages. These pages give access to performance related features which need to be quickly accessible at any time.

Note: While holding **PAGE**, the LEDs are used to indicate the currently selected page as well as marking the buttons associated with a page.

## Page Layout

Pages are divided into three sections.

### Header

The *header* is used to display the global state of the sequencer and information about the active page and context.



The current clock mode and tempo are shown in the top-left corner. The clock mode can be any of the following:

- **A** Auto
- **M** Master
- **S** Slave

Instead of showing the clock mode, **R** is displayed when recording is enabled.

The currently selected track is shown as track name. The currently playing pattern on the selected track is shown as **P1 - P16**. If a song is currently playing, the playing pattern is highlighted. The currently edited pattern is shown as **E1 - E16** and is highlighted if it matches the pattern that is currently playing. If a snapshot is currently active, the pattern info is replaced with a single item **SNAP**.

The currently active page is shown in the top-right corner and optionally a sub-page or mode is shown to its left.

In follow pattern mode an indicator of the current mode will be displayed in the top right corner.

- **F** Follow mode

- **F:LP** launchpad follow mode
- **F:D+LP** Follow mode on display and launchpad

In the stochastic track an "L" will be displayed in the top right corner when the loop is engaged.

## Body

The *body* is used to display the main content for the active page.



## Footer

The footer is used to display the labels of the function buttons for the current page.



On pages such as the [Layout](#) page, the function buttons are used to switch between different sub-pages. In that case, the currently active sub-page is highlighted in the footer.

On pages that provide a context menu, the labels dynamically change to the context menu actions when **SHIFT** + **PAGE** is held or double click **PAGE** to enter the context menu for 2 seconds.

## List Pages

Pages that expose configuration options are typically presented as a list of items, each having the name shown on the left and the value on the right side.

Rotate the **ENCODER** or use **PREV**, **NEXT** to navigate up and down the list. Press **ENCODER** to enter and leave edit mode which is indicated by moving the highlight from the item name to the item value and back. While in edit mode, rotate the **ENCODER** or use **PREV**, **NEXT** to adjust the value. Hold **SHIFT** to change the value in larger or smaller steps depending on the item being edited.

## Copy/Paste

To allow moving and copying data, a copy/paste system is implemented that allows acting on the following types of objects:

- Track (see [Track](#) page)
- Sequence (see [Sequence](#) page)
- Steps (see [Steps](#) page)
- Pattern (see [Pattern](#) page)
- User Scale (see [User Scale](#) page)


Copy/paste actions are provided in the context menu when holding **SHIFT** + **PAGE** or double clicking **PAGE** (2 seconds menu availability)

Note: Due to memory limitations, the clipboard can only hold one object at a time and shares memory across all different types. This means that copying an object always results in the previously copied object being cleared from the clipboard.

# Pages

## Project

The Project page is entered using **PAGE** + **PROJECT**.

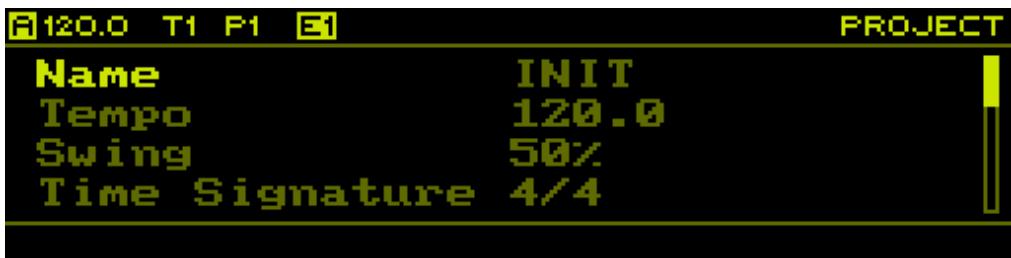

This page allows to change project wide parameters as well loading and saving projects from/to the SD card.

### Parameters

The following parameters are available:

Parameter	Range	Description
Name	-	Press <b>ENCODER</b> to enter text editor for changing the project name.
Tempo	1.0 - 1000.0 BPM	Tempo of the master clock.
Swing	50% - 75%	Global swing amount.
Time Signature	Beats/Note	Time signature defining the musical measure/bar length for <i>Sync Measure</i> and <i>Reset Measure</i> on sequences. The time signature is also used to define the length of a bar in song mode.
Sync Measure	1 - 128 bars	Multiple of measures/bars at which to execute <i>syncing</i> (see <a href="#">Pattern</a> and <a href="#">Performer</a> pages).
page).		
Scale	Scales	Default scale. Can be overwritten per sequence on the <a href="#">Sequence</a> page. The scale will be changed on encoder press.
Root Note	C, C#, D, D#, E, F, F#, G, G#, A, B	Default root note. Can be overwritten per sequence on the <a href="#">Sequence</a> page.
Monitor Mode	Always, Stopped, Off	Live monitoring mode. <i>Always</i> enables monitoring always, <i>Stopped</i> only if clock is stopped and <i>Off</i> disables it.
Record Mode	Overdub, Overwrite, Step Record	Recording mode (see <a href="#">Recording</a> ).
MIDI Input	Off, All, MIDI, USB	Select MIDI input for monitoring and recording.

Parameter	Range	Description
MIDI Pgm Chgn	Off, On	Allow send and receive program change messages
CV/Gate Input	Off, CV1/CV2, CV3/CV4	Enable CV/Gate input on CV inputs for monitoring and recording (emulating a MIDI keyboard).
Steps to Stop	off, 1 - 64	number of steps after the sequencer automatically stops - useful to record
Record Delay	off, 1 - 64	number of steps after the sequencer starts recording

Note: *Tempo* and *Swing* are routable parameters.

Double click **F[1-5]** activate a shortcut to enter project, layout, routing, midi out and u.scale pages

## Context Menu

Hold **SHIFT** + **PAGE** or double click **PAGE** (context menu will last for 2 seconds) to open the context menu and access the following functions:

Button	Function	Description
<b>F1</b>	Init	Initialize the project to its default state. This will revert all unsaved changes.
<b>F2</b>	Load	Load a project from the SD card.
<b>F3</b>	Save	Save the project to the SD card and automatically overwrite the previous slot.
<b>F4</b>	Save As	Save the project to a new slot on the SD card.
<b>F5</b>	Route	Show existing or create a new route for the currently selected parameter (only active if selected parameter is routable).

Note: Should you ever get bored sequencing, take a break and hit **PAGE** + **S16**.

## Layout

The *Layout* page is entered using **PAGE** + **LAYOUT**. This page has 4 tabs accessed through **F1**, **F2**, **F3** and **F4**.

### Track Mode

The first tab is used to configure the track mode of each track.

A	120.0	T1	P1	E1	TRACK MODE	LAYOUT
Track1					Note	
Track2					Note	
Track3					Note	
Track4					Note	
MODE	LINK	GATE	CV			

Changing track mode results in all data associated with a given track to be erased. Because of this, when setting a new track mode, it only takes effect after manually committing the change by pressing **F5**.

A	120.0	T1	P1	E1	TRACK MODE	LAYOUT
Track1					Curve	
Track2					Note	
Track3					Note	
Track4					Note	
MODE	LINK	GATE	CV	COMMIT		

## Link Track

The second tab is used to setup track linking. Each of the 8 tracks can be linked to any of the preceding tracks, taking over its playback behavior.

A	120.0	T1	P1	E1	LINK TRACK	LAYOUT
Track1					None	
Track2					None	
Track3					None	
Track4					None	
MODE	LINK	GATE	CV			

Note: A track can only be linked to a preceding track due to the internal architecture of the sequencer. This means that track 1 cannot use track linking, while track 2 can only be linked to track 1. Track 8 on the other hand can be linked to any of the tracks 1-7.

## Gate Output

The third tab is used to setup the mapping of virtual track gate outputs to the physical gate outputs. In default state, each track is linked to the corresponding gate output with the same number.

A120.0	T1	P1	E1	GATE OUTPUT	LAYOUT
Gate1				Track1:Gate	
Gate2				Track2:Gate	
Gate3				Track3:Gate	
Gate4				Track4:Gate	
MODE	LINK	GATE		CV	

## CV Output

The fourth tab is used to setup the mapping of virtual track CV outputs to the physical CV outputs. In default state, each track is linked to the corresponding CV output with the same number.


A120.0	T1	P1	E1	CV OUTPUT	LAYOUT
CV1				Track1:CV	
CV2				Track2:CV	
CV3				Track3:CV	
CV4				Track4:CV	
MODE	LINK	GATE		CV	

If using a MIDI/CV track, it can be useful to map multiple virtual outputs of the track to physical outputs to allow for polyphonic signals or add modulation signals such as velocity or aftertouch. The following shows a configuration with two note polyphony and pitch/velocity signals.

A120.0	T1	P1	E1	CV OUTPUT	LAYOUT
CV1				Track1:V/Oct1	
CV2				Track1:V/Oct2	
CV3				Track1:Vel1	
CV4				Track1:Vel2	
MODE	LINK	GATE		CV	

## Track

The *Track* page is entered using **PAGE** + **TRACK**.

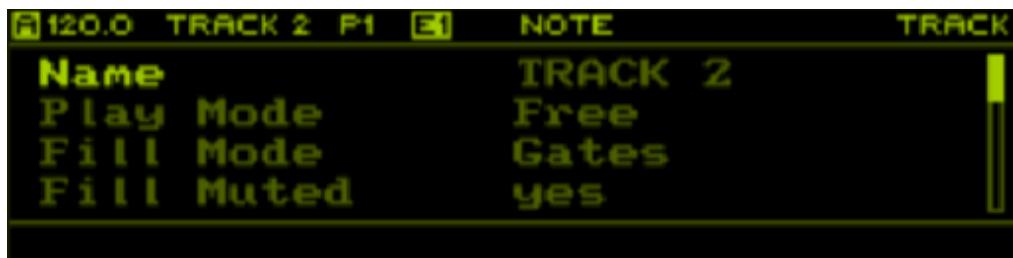


This page allows to change track wide settings. Note that the shown parameters depend on the configured *Track Mode* of the selected track. Press **T[1-8]** to change the selected track.

## Context Menu

Hold **SHIFT** + **PAGE** or double click **PAGE** (context menu will last for 2 seconds) to open the context menu and access the following functions:

Button	Function	Description
F1	Init	Initialize the selected track and all its content to the default state.
F2	Copy	Copy the selected track and all its content to the clipboard.
F3	Paste	Paste the clipboard to the selected track.
F4	Route	Show existing or create a new route for the currently selected parameter (only active if selected parameter is routable).

## Note Track

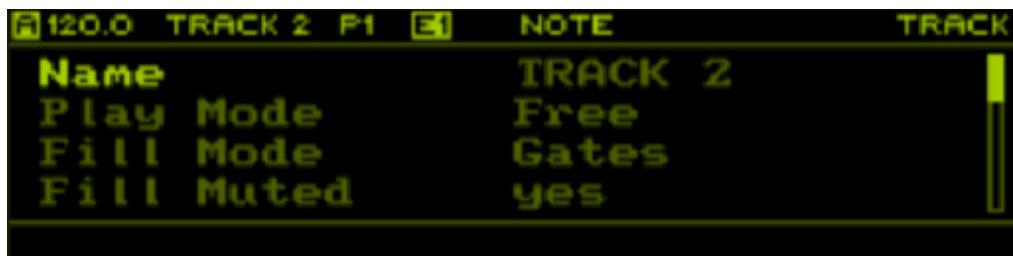

If a track is in *Note* mode, the following parameters are available:

Parameter	Range	Description
Track Name	-	Press <b>ENCODER</b> to enter text editor for changing the project name.
Play Mode	Play Modes	Mode used for playing sequences in this track.
Fill Mode	None, Gates, Next Pattern, Condition	Mode used when fill is activated for the track. <i>None</i> does nothing. <i>Gates</i> plays each step of the sequence independent of whether the step gate is active or not. <i>Next Pattern</i> uses the step data of the next pattern on the same track. <i>Condition</i> plays steps that have the <i>Fill</i> condition set, and does not play steps that have the <i>!Fill</i> condition set.

Parameter	Range	Description
CV Update Mode	Gate, Always	Mode used for updating the CV output of this track. <i>Gate</i> only updates the CV output if the step gate is active, <i>Always</i> always updates the CV output independent of the step gate.
Slide Time	0% - 100%	Duration of pitch slides for steps that have <i>Slide</i> enabled.
Octave	-10 - +10	Number of octaves to transpose the sequence up or down.
Transpose	-100 - +100	Number of notes to transpose the sequence up or down. Note that this depends on the current <a href="#">Scale</a> of the sequence.
Rotate	<a href="#">Rotation</a>	Amount of rotation applied to the sequence.
Gate P. Bias	-100% - +100%	Gate probability bias that is added to the sequence.
Retrig P. Bias	-100% - +100%	Retrigger probability bias that is added to the sequence.
Length Bias	-100% - +100%	Length bias bias that is added to the sequence.
Note P. Bias	-100% - +100%	Note variation probability bias that is added to the sequence.
Pattern Follow	Off, Display, Launchpad, Display+LP	Enable pattern follow Use <b>PAGE</b> + <b>S16</b> to cycle between modes

Note: *Slide Time*, *Octave*, *Transpose*, *Rotate*, *Gate P. Bias*, *Retrig P. Bias*, *Length Bias* and *Note P. Bias* are routable parameters. These parameters are great for live performance, as they allow to change how the sequence is played back without actually changing the sequence itself.

## Curve Track



If a track is in *Curve*, the following parameters are available:

Parameter	Range	Description
Track Name	-	Press <b>ENCODER</b> to enter text editor for changing the project name.
Play Mode	<a href="#">Play Modes</a>	Mode used for playing sequences in this track.

Parameter	Range	Description
Fill Mode	None, Variation, Next Pattern, Invert	Mode used when fill is activated for the track. <i>None</i> does nothing. <i>Variation</i> plays the curve shapes defined in the <i>Shape Variation</i> layer independent of their probability. <i>Next Pattern</i> uses the step data of the next pattern on the same track. <i>Invert</i> plays the curve shapes inverted.
Mute Mode	Last Value, 0V, Min, Max	Voltage that is output when track is muted. <i>Last Value</i> keeps the last value before mute is engaged. <i>0V</i> outputs zero volts. <i>Min</i> and <i>Max</i> sets the voltage to the minimum or maximum value of the selected voltage range.
Slide Time	0% - 100%	Global slide time (slew limiter) applied to curve.
Offset	-5.00V - 5.00V	Voltage to offset the CV output by.
Rotate	Rotation	Amount of rotation applied to the sequence.
Shape P. Bias	-100% - +100%	Shape probability bias that is added to the sequence.
Gate P. Bias	-100% - +100%	Gate probability bias that is added to the sequence.
Pattern Follow	Off, Display, Launchpad, Display+LP	Enable pattern follow. Use <b>PAGE</b> + <b>S16</b> to cycle between modes
Curve CV Input	Off, CV1, CV2, CV3, CV4	Select CV input for curve recording.

Note: *Slide Time*, *Offset*, *Rotate*, *Shape P. Bias* and *Gate P. Bias* are routable parameters.

## MIDI/CV Track



If a track is in MIDI/CV mode, the following parameters are available:

Parameter	Range	Description
Track Name	-	Press <b>ENCODER</b> to enter text editor for changing the project name.
Source	MIDI, USB	MIDI source port (hold <b>SHIFT</b> and rotate <b>ENCODER</b> to select MIDI channel).
Voices	1 - 8	Number of voices.

Parameter	Range	Description
Voice Config	Pitch, Pitch+Vel, Pitch+Vel+Press	CV signals to generate for each voice.
Note Priority	Last Note, First Note, Lowest Note, Highest Note	Determines which active notes have the highest priority to be output.
Low Note	C-1 - G9	Low MIDI note of the key range this track listens to.
High Note	C-1 - G9	High MIDI note of the key range this track listens to.
Pitch Bend	off, 1 - 48 semitones	Pitch bend range.
Mod Range	1-5V Unipolar, 1-5V Bipolar	CV output voltage range for modulation signals (velocity and pressure).
Retrigger	no, yes	Retrigger voices on each received <i>Note On</i> MIDI message.
Slide Time	0% - 100%	Duration of pitch slides for legato notes when configured in monophonic mode (e.g. 1 voice).
Transpose	-100 - +100	Number of notes to transpose the notes up or down.
Arpeggiator	no, yes	Enable arpeggiator mode.
Hold	no, yes	Hold chords in arpeggiator after keys are released.
Mode	<a href="#">Arpeggiator Modes</a>	Arpeggiator mode (sequence).
Divisor	Divisors	Divisor for arpeggiator sequence.
Gate Length	1-100%	Gate length generated notes.
Octaves	Off, Up 1-5, Up Down 1-5, Down 1-5, Down Up 1-5	Order and number of octaves to play the arpeggiator sequence over. The note order is reverse when playing <i>down</i> the octaves.

Note: *Slide Time* and *Transpose* are routable parameters.

Note: *Low Note* and *High Note* can be used to setup key ranges such that multiple MIDI/CV tracks can be played in split keyboard mode.

## Stochastic Track




If a track is in Stochastic mode, the following parameters are available:

Parameter	Range	Description
Track Name	-	Press <b>ENCODER</b> to enter text editor for changing the project name.
Play Mode	<a href="#">Play Modes</a>	Mode used for playing sequences in this track.
CV Update Mode	Gate, Always	Mode used for updating the CV output of this track. <i>Gate</i> only updates the CV output if the step gate is active, <i>Always</i> always updates the CV output independent of the step gate.
Slide Time	0% - 100%	Duration of pitch slides for steps that have <i>Slide</i> enabled.
Octave	-10 - +10	Number of octaves to transpose the sequence up or down.
Transpose	-100 - +100	Number of notes to transpose the sequence up or down. Note that this depends on the current <a href="#">Scale</a> of the sequence.
Rotate	<a href="#">Rotation</a>	Amount of rotation applied to the sequence.
Gate P. Bias	-100% - +100%	Gate probability bias that is added to the sequence.
Retrig P. Bias	-100% - +100%	Retrigger probability bias that is added to the sequence.
Length Bias	-100% - +100%	Length bias bias that is added to the sequence.
Note P. Bias	-100% - +100%	Note variation probability bias that is added to the sequence.

## Sequence

The Sequence page is entered using **PAGE** + **SEQ**.

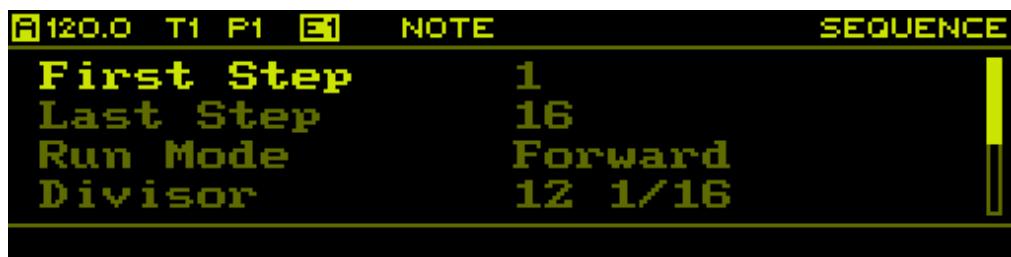

This page allows to change the sequence settings of the currently selected sequence on the selected track. Note that the shown parameters depend on the configured *Track Mode* of the selected track. Press **T[1-8]** to change the selected track. Hold **PATT** and rotate the **ENCODER** to change the selected sequence.

For quick access to most of the sequence parameters, there is also a quick edit mode on the [Steps](#) page, introduced in the next section.

## Context Menu


Hold **SHIFT** + **PAGE** or double click **PAGE** (context menu will last for 2 seconds) to open the context menu and access the following functions:

Button	Function	Description
F1	Init	Initialize the selected sequence and all its content to the default state.
F2	Copy	Copy the selected sequence and all its content to the clipboard.
F3	Paste	Paste the clipboard to the selected sequence.
F4	Duplicate	Copy the selected sequence to the next sequence on the selected track. For example copy of the first sequence to the second sequence.

On Note or Curve track double click **SHIFT** will enter the save/load context menu:

Button	Function	Description
F1	Load	Load a sequence from the SD card.
F2	Save	Save the sequence to the SD card and automatically overwrite the previous slot.
F3	Save As	Save the sequence to a new slot on the SD card.

## Note Track

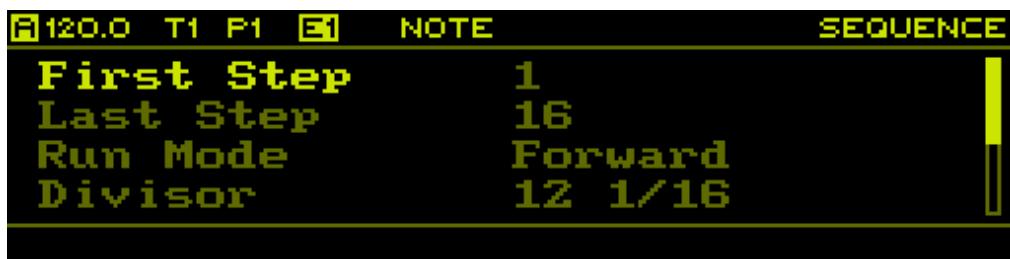

If a track is in *Note* mode, the following parameters are available:

Parameter	Range	Description
First Step	1 - 64	First step to play. Hold <b>SHIFT</b> to edit both first and last step together.
Last Step	1 - 64	Last step to play. Hold <b>SHIFT</b> to edit both first and last step together.
Run Mode	Run Modes	Mode in which to play the sequence.
Divisor	Divisors	Time divisor for this sequence.
Reset Measure	off, 1 - 128 bars	Number of measures/bars at which to reset the sequence.
Scale	Scales	Scale to use for this sequence. If set to <i>Default</i> , uses the default scale set on the <a href="#">Project</a> page. The scale will change on encoder press and new notes will be calculated based on the previous scale: if a note of the previous scale is present in the new scale it will be preserved. If a note is not present the nearest one will be picked.

Parameter	Range	Description
Root Note	C, C#, D, D#, E, F, F#, G, G#, A, B	Root note to use for this sequence. If set to . . . / . . / src / apps / sequencer / model / Routing.h_Default_, uses the default root note set on the <a href="#">Project</a> page.

Note: *First Step*, *Last Step*, *Run Mode*, *Divisor*, *Scale* and *Root Note* are routable parameters.

## Curve Track



If a track is in *Curve* mode, the following parameters are available:

Parameter	Range	Description
First Step	1 - 64	First step to play. Hold <b>SHIFT</b> to edit both first and last step together.
Last Step	1 - 64	Last step to play. Hold <b>SHIFT</b> to edit both first and last step together.
Run Mode	<a href="#">Run Modes</a>	Mode in which to play the sequence.
Divisor	<a href="#">Divisors</a>	Time divisor for this sequence.
Reset Measure	off, 1 - 128 bars	Number of measures/bars at which to reset the sequence.
Range	1V - 5V Unipolar, 1V - 5V Bipolar	Voltage range to use for this sequence.

Note: *First Step*, *Last Step*, *Run Mode* and *Divisor* are routable parameters.

## Stochastic Track

If a track is in *Stochastic* mode, the following parameters are available:

Parameter	Range	Description
Run Mode	<a href="#">Run Modes</a>	Mode in which to play the sequence.
Divisor	<a href="#">Divisors</a>	Time divisor for this sequence.
Reset Measure	off, 1 - 128 bars	Number of measures/bars at which to reset the sequence.
Scale	<a href="#">Scales</a>	Scale to use for this sequence. If set to <i>Default</i> , uses the default scale set on the <a href="#">Project</a> page. The scale will change on encoder press and new notes will be calculated based on the previous scale: if a note of the previous scale is present in the new scale it will be preserved. If a note is not present the nearest one will be picked.
Root Note	C, C#, D, D#, E, F, F#, G, G#, A, B	Root note to use for this sequence. If set to <i>Default</i> , uses the default root note set on the <a href="#">Project</a> page.
Rest Prob. 2	0-100%	The probability that the sequence will rest every 2 steps
Rest Prob. 4	0-100%	The probability that the sequence will rest every 4 steps
Rest Prob. 8	0-100%	The probability that the sequence will rest every 8 steps
Seq First Step	1 - 64	First step of the locked loop to play
Seq Last Step	1 - 64	Last step of the kicjed loop to play
L Oct. Range	-10 - 10	Lower octave bound used to generate random pitches for each stochastic step
H Oct. Range	-10 - 10	Upper octave bound ised to generate random pitches for each stochastic step
Length Mod	-200 - 200 %	Stochastic length modifier added to the step length

## Steps

The Steps page is entered using **PAGE** + **STEPS**.



This page allows editing the currently selected sequence on the currently selected track. Depending on the track mode of the selected track, this page shows a different graphical representation of the sequence. If track mode is set to *MIDI/CV*, the page is not available and selecting it will jump to the [Track](#) page.

## Layer Selection

Sequence data is organized in layers (see [Note Track](#) and [Curve Track](#)). Press **F1**, **F2**, **F3**, **F4** or **F5** to select different layers. The currently selected layer is shown in the header and the graphical representation of the sequence will change accordingly. Note that each function button can represent a group of layers, in which case pressing the same function button repeatedly will cycle through the layers contained in the group. Press **SHIFT** + **F[1-5]** to quickly switch to the first layer of a group.

The following layers are available in Note mode:

Button	Layers
<b>F1</b>	Gate, Gate Probability, Gate Offset
<b>F2</b>	Retrigger, Retrigger Probability, Repeat, Repeat Mode
<b>F3</b>	Length, Length Variation Range, Length Variation Probability
<b>F4</b>	Note, Note Variation Range, Note Variation Probability, Slide, Bypass scale

Button	Layers
F5	Condition

Note: See [Step Conditions](#) for a description of the different step conditions.

Note: See [Metropolix Mode](#) for a description of this feature.

The following layers are available in *Curve* mode:

Button	Layers
F1	Shape, Shape Variation, Shape Variation Probability
F2	Minimum
F3	Maximum
F4	Gate, Gate Probability

The following layers are available in *Stochastic* mode:

Button	Layers
F1	Gate, Gate Probability, Gate Offset
F2	Retrigger, Retrigger Probability, Repeat, Repeat Mode
F3	Length, Length Variation Range, Length Variation Probability
F4	Note Probability, Octave, Octave Probability, Slide
F5	Condition

## Section Selection

Sequences contain up to 64 steps, of which only 16 are shown on the page. Press **PREV** and **NEXT** to select one of the 4 available sections (1-16, 17-32, 33-48, 49-64). The currently selected section is indicated by the 4 LEDs in the bottom left corner as well as with the step indices above each step on the page.

## Editing Steps

To adjust the values of the currently selected layer, hold **S[1-16]** and rotate the **ENCODER**. To adjust multiple steps at the same time, hold multiple step buttons and rotate the **ENCODER**. The currently selected steps are visualized both on the page by highlighting the step indices as well as on the step LEDs which turn orange. When adjusting multiple steps, the values are adjusted relative to their current value. Depending on the track mode and the selected layer, there is some additional functionality available:

- When editing the *Gate* layer on a sequence of a *Note* track, pressing **S[1-16]** enables/disables the gate values.
- When editing a note sequence, double pressing **S[1-16]** can be used to toggle the step gate no matter what layer is edited (other than *Gate* or *Slide* layer).
- When editing any other layer on a sequence of a *Note* track, holding one or multiple step buttons and pressing the **ENCODER** enables/disables the gate values. This comes in handy for example when editing note values, as gates can easily be enabled/disabled without switching layers.

- When editing any layer on a sequence of a Note track, select with **SHIFT** + **S[1-16]** the first step, then again **SHIFT** + **S[1-16]** (also switching page with **next** or **prev**) for the last step. Clicking **SHIFT** + **F3** will tie all steps in the range (full step length except last step, same note value to all steps)
- When editing the Note layer, notes can be entered by holding **S[1-16]** and pressing keys on an external MIDI keyboard.
- When editing the Note or Note Range layer on a sequence with a chromatic scale, holding **SHIFT** and rotating the **ENCODER** will move notes up and down by octaves.
- When editing layers on a sequence of a Curve track, pressing and rotating the **ENCODER** adjusts the values in smaller steps.
- When editing the Min or Max layer on a sequence of a Curve track, pressing **SHIFT** or **ENCODER** and rotating the **ENCODER** will adjust the value in smaller steps.
- When editing the Min or Max layer on a sequence of a Curve track while holding **F2** or **F3**, the curve shape is offset up and down (adjusting min/max at the same time).
- When editing a Curve track select multiple steps **SHIFT** + **S[1-16]** then hold **SHIFT** and turn the **ENCODER** to select a shape. The shape will be spread across the selected steps.
- When editing a Curve track select multiple steps **SHIFT** + **S[1-16]** and press the **SHIFT** + **ENCODER** will reverse the shapes
- When editing a Note track select any steps you want and pressing **SHIFT** + **next|prev** will move the selected step by 1 step
- When editing a Note or a Curve track selecting any steps and using the **INIT** context menu function will init just the selected steps.
- When editing a Note or a Curve track pressing **PAGE** + **S7** will undo the last change.
- When editing a Note track holding a step and pressing **F1** - **F5** will set the note octave respectively to 1V, 2V, 3V, 4V, 5V. Can be used to fastly create accents
- When editing a Stochastic track pressing **PAGE** + **S7** will loop the sequence (length is calculated by Sequence First Step and Sequence Last Step parameters)
- When editing a Stochastic track pressing **PAGE** + **S6** will clear the loop and enter a new one
- When editing a Stochastic track pressing **PAGE** + **S5** will reseed the stochastic generator and pick a random value for the Note Probability BIAS parameter

## Advanced Step Selection

When holding **SHIFT** and pressing any of the step buttons, steps are selected in a *persistent* mode. This means that steps are kept selected even when the step buttons are released. This allows to select multiple steps across different sections. Steps can also be removed from the selection by holding **SHIFT** and pressing step buttons corresponding to selected steps again. To clear the entire selection, simply press any step button without holding **SHIFT** or quickly press **SHIFT** twice (double tap). When the selection is empty, double tap **SHIFT** to select all 64 steps.

There are two additional functions for selecting groups of steps. To select a series of steps, for example steps 1, 5, 9, 13 and so forth, hold **SHIFT** and **S1** and then double tap **S5** while holding the other two buttons. With this function, any series of steps with a common interval can be selected quickly, great to build rhythms. To select all steps that have the same value on the currently selected layer, hold **SHIFT** and double tap one of the step keys.

Note: When selecting groups of steps they are added to the current selection. This allows to quickly combine multiple groups of steps into a single selection.

## Shifting Steps

Press **SHIFT** + **PREV** or **SHIFT** + **NEXT** to shift all steps in the sequence between the current first and last step to the left or right. Steps will *wrap around* on both sides. This has a similar effect as **Rotation**, but instead of changing the playback position, shifting actually moves the steps in the sequence itself.

## Context Menu

Hold **SHIFT** + **PAGE** or double click **PAGE** (context menu will last for 2 seconds) to open the context menu and access the following functions:

Button	Function	Description
<b>F1</b>	Init	Initialize all steps of the current sequence to the default state.
<b>F2</b>	Copy	Copy the selected steps to the clipboard.
<b>F3</b>	Paste	Paste steps in the clipboard to the selected steps.
<b>F4</b>	Duplicate	Doubles the length of the sequence between <i>First Step</i> and <i>Last Step</i> and copies the first half to the second half.
<b>F5</b>	Gen	Access generators feature

Copy/Paste only works with steps selected in *persistent* mode. When more steps are pasted than copied to the clipboard, the steps will be repeated multiple times. This means that for example one can copy 2 steps and then paste them to 8 steps, creating a repetition of the two copied steps.

## Quick Access

The Steps page is one of the most frequently used pages when operating the sequencer. To change sequence parameters such as the *Run Mode*, *First Step*, *Last Step* and others, one needs to temporarily switch to the [Sequence](#) page. This breaks the workflow, especially when in a live situation, where immediate access to the most important features and parameters is paramount. To help improve the workflow, most of the sequence parameters can be accessed through a quick access function. To access a parameter, hold **PAGE** and press **S[9-16]**, similarly to switching between pages, but keep holding the **PAGE** button. The page is now overlayed with the selected parameter.



Depending on the *Track Mode*, the following parameters are available through quick access:

Button	Note Track	Curve Track
<b>S9</b>	First Step	First Step
<b>S10</b>	Last Step	Last Step
<b>S11</b>	Run Mode	Run Mode
<b>S12</b>	Divisor	Divisor
<b>S13</b>	Reset Measure	Reset Measure
<b>S14</b>	Scale	Range
<b>S15</b>	Root Note	-

Button	Note Track	Curve Track
S16	-	-

While holding the **PAGE** button, the selected sequence parameter can be adjusted by rotating the **ENCODER** or by pressing **S[1-16]** to select the most common values. Releasing the **PAGE** button will return to the normal state of the steps page.

Note: When quick access is active, the step LEDs will indicate the range of values that can be selected in green as well as the current selection in red.

Note: Pressing the **ENCODER** while rotating it has the same effect as pressing **SHIFT** when editing the same parameter through the menu.

## Generators

Generators are available to generate steps on the fly of a *note* or a *curve* track sequence.

You can access generators in each sequence layer to generate their values accessing the *context menu* **SHIFT** + **PAGE**

Option	Description
Init Layer	reset the layer
Euclidian	Euclidean generator based on bjorklunds algorithm
Random	Random generator



## Context Menu

Hold **SHIFT** + **PAGE** or double click **PAGE** (context menu will last for 2 seconds) in each generator page to open the context menu and access the following functions:

Button	Function	Description
F1	Init	Initialize all steps of the current generator to the default state. In random generator a random seed will be picked
F4	Revert	Revert changes to the last generator state
F5	Commit	Commit changes to the selected sequence

## Euclidean



The following options are available

Option	Range	Description
Steps	1 - 64	sets the steps of the euclidean sequence
Beats	1 - 64	sets the gate division of the sequence
Offset	0 - 63	sets the offset of the sequence

## Random



The following options are available

Option	Range	Description
Seed	0 - 1000	set the seed to generate random values
Smooth	0 - 10	sets how smooth each step changes in front of the next one
Bias	-10 - 10	sets the probability distribution of each random step value
Scale	0 - 100	sets the scale of the probability distribution of each random step value

Note: the random generator will generate random steps for selected steps only if any otherwise to the full sequence steps.

## Song

The Song page is entered using **PAGE** + **SONG**.

SONG									
#	N	T1	T2	T3	T4	T5	T6	T7	T8
1	-	-	-	-	-	-	-	-	-
2	-	-	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-	-	-
4	-	-	-	-	-	-	-	-	-

**CHAIN    ADD    REMOVE    DUPL    PLAY**

A song consists of up to 64 slots, each referencing a set of 8 patterns to be played on the 8 tracks. Each slot is played for a number of bars/measures which duration is defined by the *Time Signature* on the [Project](#) page.

## Context Menu

Hold **SHIFT** + **PAGE** or double click **PAGE** (context menu will last for 2 seconds) to open the context menu and access the following functions:

Button	Function	Description
<b>F1</b>	Init	Initialize the song.

## Pattern Chaining

A quick way to create songs on the fly is pattern chaining. This function is specifically made for live performance to quickly create more interesting structures by chaining multiple patterns together.

To create a pattern chain, hold **F1** and press **S[1-16]** to select the pattern to be played for the newly created slot. If the same pattern is added multiple times by pressing **S[1-16]** again, the bar/measure count of the last added slot is incremented. For example, holding **F1** and pressing the sequence **S1**, **S1**, **S1**, **S2**, **S1**, **S1**, **S1**, **S3** will create the following slot list:

SONG									
#	N	T1	T2	T3	T4	T5	T6	T7	T8
1	3	P1							
2	1	P2							
3	3	P1							
4	1	P3							

**CHAIN    ADD    REMOVE    DUPL    PLAY**

To create a pattern chain from the *pattern* page, simply hold **S[1-16]** for the first pattern and press **S[1-16]** for the second pattern. Holding **S1** and pressing **S6** will create the following slot list:

SONG									
#	N	T1	T2	T3	T4	T5	T6	T7	T8
1	1	P1							
2	1	P6							
3	-	-	-	-	-	-	-	-	-
4	-	-	-	-	-	-	-	-	-

CHAIN | ADD | REMOVE | DUPL | PLAY

Note: When creating a pattern chain, the song is immediately activated for playback and the sequencer clock is started if not already running.

## Editing Slots

- Rotate the **ENCODER** or use **PREV** and **NEXT** to select a slot in the list.
- Press **F2** to add a slot at the end of the list.
- Press **SHIFT** + **F2** to insert a slot at the current cursor position.
- Press **F3** to remove the selected slot.
- Press **F4** to duplicate the selected slot.
- Hold **SHIFT** and press **PREV** or **NEXT** to move the selected slot backward and forward in the list.
- Hold **SHIFT** and rotate the **ENCODER** to adjust the number of bars/measures a slot is played for.
- Hold **SHIFT** and press **S[1-16]** to selected the number of bars/measures (1-16).
- Press **S[1-16]** to assign a pattern to all tracks of the selected slot.
- Hold any combination of **T[1-8]** and rotate the **ENCODER** to adjust the patterns of a group of tracks of the selected slot.
- Hold any combination of **T[1-8]** and press the **ENCODER** to toggle mutes of a group of tracks of the selected slot.
- Hold any combination of **T[1-8]** and press **S[1-16]** to assign a pattern to a group of tracks of the selected slot.

## Playback

Song playback can be started and stopped independently of the sequencer actually running. This allows to engage song playback while the sequencer is already running, or stop song playback without stopping the sequencer. When song playback is activated, the sequencer simply changes the playing patterns automatically and in sync.

Press **F5** to start playback of the song from the currently selected slot. This will also start the sequencer if it is not already running. Playback will be immediate, meaning that the currently playing pattern is switched instantaneously. To start playback on the next *Sync Measure*, use **SHIFT** + **F5**. A progress bar will appear at the top of the page, indicating the time until playback is started. To stop playback, simply press **F5** again. Playback can also be started by selecting a slot and pressing the **ENCODER**. This is also useful quickly switch to a different slot while playback is active. Again, to switch slot on the next *Sync Measure*, hold **SHIFT** and press the **ENCODER**.

According to the [user settings](#) if you press the sequencer **play** or the sequencer is in *slave* mode the song will automatically play.

During playback, the current slot is indicated with a small arrow and also shown on the left side together with a progress bar, indicating the duration for which the slot is played for. In the top left corner, the current bar and note is also displayed.

The global mute setting of a track is only affected during song playback if any slot of the track contains a mute. This allows to retain full control over mutes even if song playback is enabled, for example when just using the song mode to chain some patterns during a live performance.


SONG										
1.4	#	N	T1	T2	T3	T4	T5	T6	T7	T8
S1	1	B	P1							
	2	1	P2							
	3	B	P1							
	4	1	P3							

CHAIN    ADD    REMOVE    DUPL    STOP

Note: Song mode can also be used to toggle between different sets of patterns. Simply use slots to define the pattern sets and then select a slot and press **F5** twice to quickly start/stop song playback to switch to a new set of patterns.

## Tempo

The *Tempo* page is temporarily shown while holding **TEMP**.

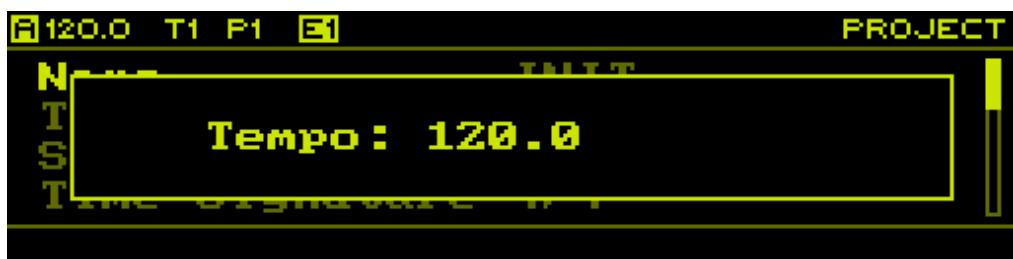


On this page the tempo of the master clock is adjusted. Simply rotate the **ENCODER** to adjust the tempo. Press and rotate the **ENCODER** to adjust the tempo in smaller steps. Hold **SHIFT** and rotate the **ENCODER** to adjust in larger steps.

### Tap Tempo

In addition to manually adjusting the tempo, it can also be set using tap tempo by pressing **PLAY** in a regular interval while holding **TEMP**.

### Nudging

To sync the master clock by ear to some other source, for example a turntable, tempo nudging is a useful feature. This allows the tempo to be temporarily increased/decreased within a 10% range. Nudging is activated by holding **TEMP** and holding **NEXT** or **PREV** to increase/decrease the tempo. The amount of tempo change due to nudging is visualized on the tempo page.

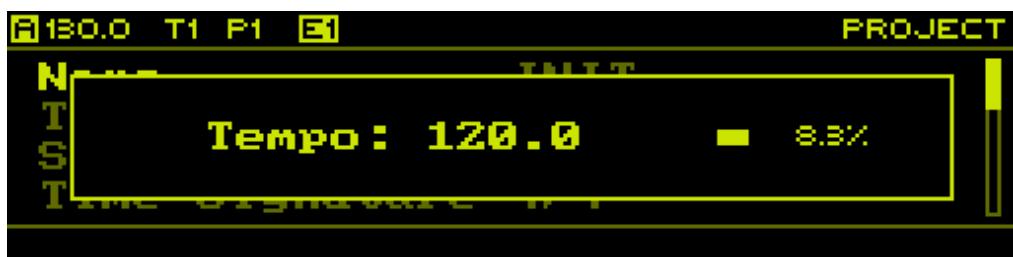


Note: The tempo is incrementally increased/decreased up to 10%, so one needs to hold both **TEMP** and **NEXT** or **PREV** for a small amount of time to get an effect.

## Swing


While on the *Tempo* page, hold **PERF** to edit swing by rotating the **ENCODER**.

## Pattern

The *Pattern* page can either be permanently entered using **PAGE** + **PATT** or just temporarily while holding **PATT**.

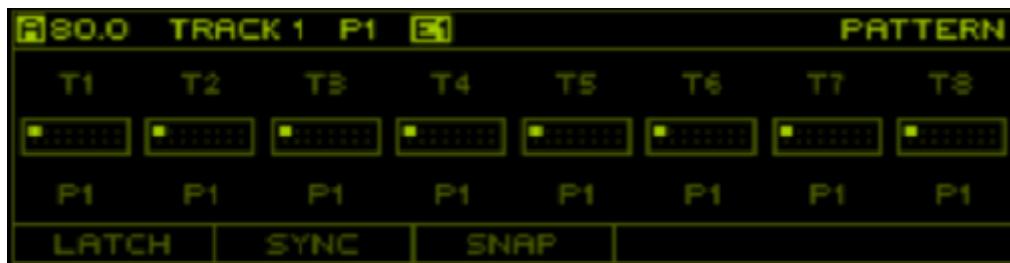

On this page you can handle pattern changes as well as selecting the currently edited pattern. Pattern changes can be scheduled by using *latching* or *syncing*. In addition, this page gives access to the snapshot system and allows for copy/pasting patterns. In [User Settings](#) there is an option to swap the default launch behaviour

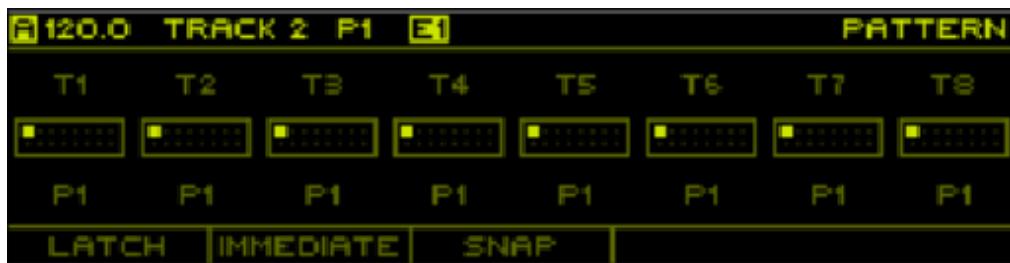

Note: The currently playing *Pattern* can be selected as a routing target on the [Routing](#) page.

## Editing Pattern

To change the pattern for editing which is indicated in the header as **E[1-16]** simple rotate the **ENCODER** or press **PREV** and **NEXT**. Alternatively you can use **SHIFT** + **S[1-16]** to select the editing pattern.

Note: The editing pattern indicated in the header is highlighted if the selected pattern for editing is the same as the currently playing pattern.

## Pattern Changes

To change to any of the 16 patterns press **S[1-16]**. This will switch all tracks to play the selected pattern immediately. To only switch patterns for certain tracks, hold any combination of **T[1-8]** and then select the pattern using **S[1-16]**.

## Latching Pattern Changes

To perform multiple pattern changes at the same time, hold **F1** while performing pattern changes. All changes are scheduled and executed together when **F1** is let go. While **F1** is held and some changes have been scheduled, you can press **F5** to cancel them.

Note: When using the temporary mode of the performer page by holding **PATT**, you can let go of **PATT** while holding **F1** and keep the page open.

## Synced Pattern Changes

To execute pattern changes on a musical beat, hold **F2** while performing pattern changes. A progress bar will appear at the top of the page, indicating the time until the changes are executed. Again, while holding **F2** you can press **F5** to cancel any scheduled changes.

Note: When using the temporary mode of the performer page by holding **PATT**, you can let go of **PATT** while holding **F2** and keep the page open.

Note: Synced actions are triggered on the beginning of a musical measure, configured on the [Project](#) page using the *Sync Measure* parameter.

## Snapshots

Snapshots are a useful tool to quickly make a temporary copy of all patterns currently playing and later take over the changes or throw them away.

Press **F3** create a snapshot of the patterns currently being played.

Note that the pattern indicators at the top-left of the screen change to **SNAP**, indicating that snapshot mode is active. While in snapshot mode, all functions of the sequencer remain working as expected, with the only exception that patterns cannot be changed on the [Pattern](#) page.

After editing the snapshot, press **F4** to commit the changes back to the original patterns. To commit the changes to a new set of patterns, press **S[1-16]** + **F4**. This will automatically change all tracks to play the selected pattern after the snapshot is committed.

Press **F3** to revert the edits done on the snapshot and go back to playing the set of patterns that have been playing before taking the snapshot. Press **S[1-16]** + **F3** to revert the snapshot but continue playing a new set of patterns.

## Performer

The *Performer* page can either be permanently entered using **PAGE** + **PERF** or just temporarily while holding **PERF**.



On this page you can handle mutes/solos as well as fills. Similar as with pattern changes you can also schedule mute, unmute or solo actions either by using *latching* or *syncing*.

The temporary mode is very handy to quickly trigger performance actions while working on another page.

The page visualizes the current mute state for every track. In addition, the currently playing step of a sequence is visualized right below. Finally, a percentage bar is used to visualize the current *Fill* state and the selected *Fill Amount*.

Note: *Mute*, *Fill* and *Fill Amount* can be selected as routing targets on the [Routing](#) page to be controlled from external sources or even internal sequences.

## Tempo

Turning the encoder will change the project tempo. Pressing the encoder will return to the last tempo value set in the *project* page.

## Mutes/Solos

Press **T[1-8]** to mute and unmute tracks or **SHIFT** + **T[1-8]** to toggle solo a track. Press **F3** to unmute all tracks at once.

### Latching Mutes/Solos

To perform multiple actions at the same time, hold **F1** while executing mute, unmute or solo actions. All actions are scheduled and executed together when **F1** is let go. While **F1** is held and some actions have been scheduled, you can press **F5** to cancel them.

Note: When using the temporary mode of the performer page by holding **PERF**, you can let go of **PERF** while holding **F1** and keep the page open.

### Synced Mutes/Solos

To execute actions on a musical beat, hold **F2** while executing mute, unmute or solo actions. A progress bar will appear at the top of the page, indicating the time until the actions are executed. Again, while holding **F2** you can press **F5** to cancel any scheduled action.

Note: When using the temporary mode of the performer page by holding **PERF**, you can let go of **PERF** while holding **F2** and keep the page open.

Note: Synced actions are triggered on the beginning of a musical measure, configured on the

[Project](#) page using the *Sync Measure* parameter.

## Fills

Hold **S[9-16]** to temporarily enable fills on individual tracks. Press **SHIFT** + **S[9-16]** to permanently enable fill on a track and disable fill by simply pressing **S[9-16]** again later on. Hold **F4** to temporarily fill all tracks at once. Press **SHIFT** + **F4** to permanently enable fill on all tracks.

To control the *Fill Amount* of a track, hold **S[1-8]** and rotate the **ENCODER**.

Note: There are different fill modes that can be configured per track on the [Track](#) page using the *Fill Mode* parameter.

## Routing

The *Routing* page is entered using **PAGE** + **ROUTING**.



There is a maximum of 16 routes that can be set up. Press **F1** and **F2** or hold **SHIFT** and rotate the **ENCODER** to select the route to edit.

To create a new route, select one of the empty routes that has *Target* value set to *None*. Then press the encoder to select a routing target by rotating the **ENCODER**.

Note: Most routable parameters can alternatively be set up from the page where the parameter is exposed ([Project](#) and [Track](#) pages) by using the context menu and selecting *Route*. This automatically switches to the *Routing* page and sets up the next available route for the chosen parameter, or selects the previously created route.

Once the routing target is selected, the following parameters are available for configuration:

Parameter	Range	Description
Target	<a href="#">Routing Target</a>	Target parameter to affect by this route.
Min	-	Value to set the target parameter to when source is at the minimum value.
Max	-	Value to set the target parameter to when source is at the maximum value.
Tracks	-	Target tracks to affect by this route. Only available if selected target parameter is a track parameter. Press <b>ENCODER</b> to edit

Parameter	Range	Description
		the value and press <b>T[1-8]</b> to select which tracks are affected.
Source	None, CV In 1-4, CV Out 1-8, MIDI	Source signal to use. <i>CV In 1-4</i> correspond to the physical CV inputs. <i>CV Out 1-8</i> correspond to the CV output signals generated by the sequencer. <i>MIDI</i> uses events from either MIDI or USB.
Range	1V - 5V Unipolar, 1V - 5V Bipolar	Voltage range to use for the CV source. Only available if source is set to a <i>CV In 1-4</i> or <i>CV Out 1-8</i> .
MIDI Source	MIDI, USB	MIDI port and channel used for the source. Only available when source is set to <i>MIDI</i> .
MIDI Event	CC Absolute, CC Relative, Pitch Bend, Note Momentary, Note Toggle, Note Velocity, Note Range	MIDI event to use as the source signal. Only available when source is set to <i>MIDI</i> .
CC Number	0 - 127	MIDI CC number to use as the source signal. Only available if MIDI Event is set to <i>CC Absolute</i> or <i>CC Relative</i> .
Note	C-1 - G9	MIDI note number to use as the source signal. Only available if MIDI Event is set to <i>Note Momentary</i> , <i>Note Toggle</i> or <i>Note Velocity</i> .



When changing the route parameters, they will not immediately be active. Press **F5** to commit the changes and make the new configuration active. An existing route can be reset to its default state by pressing **F3**. Again, the change has no effect before being committed using **F5**.

In order to simplify assigning MIDI controllers to target parameters, press **F4** to enter MIDI learn mode. Simply rotate an encoder or press a key/button on the connected MIDI controller to assign it to the target parameter. MIDI learn mode is active when the *Learn* button is highlighted. Press **F4** again to exit MIDI learn mode without assigning a MIDI controller.

Note: Routed parameters are marked with an arrow when displayed on other pages.

## Midi Output

The *Midi Output* page is entered using **PAGE** + **MIDIOUT**.



There is a maximum of 8 MIDI outputs that can be set up. Press **F1** and **F2** or hold **SHIFT** and rotate the **ENCODER** to select the MIDI output to edit.

Each of the MIDI outputs can be configured to either output note or control change messages derived from any of the 8 tracks of the sequencer.

To make things interesting, note data can be generated by using multiple sequencer tracks, e.g. different tracks can be used as the gate, note and velocity source. The generated note messages are still monophonic, but by combining multiple tracks of potentially different lengths, divisors and play modes, interesting MIDI sequences can be generated.

The following parameters are available for configuration:

Parameter	Range	Description
Target	MIDI, USB	MIDI port and channel used for sending MIDI data.
Event	None, Note, Control Change	MIDI event to generate. <i>None</i> generates no events, <i>Note</i> generates MIDI note on/off events and <i>Control Change</i> generates MIDI control change events.

When configured to *Note* event, the following additional parameters are available for configuration:

Parameter	Range	Description
Gate Source	Track 1-8	Sequencer track to use as the note gate source.
Note Source	Track 1-8, C-1 - G9	Sequencer track to use as the note source or a constant MIDI note.
Vel. Source	Track 1-8, 0-127	Sequencer track to use as the velocity source or a constant velocity value.

The *Gate Source* controls the generation of MIDI note on/off events. Notes span multiple steps (legato) if step length is set to maximum. The *Note Source* controls the MIDI note and is derived from a V/Oct CV signal with 0V being a C4. The *Vel. Source* controls the note velocity and is derived from a unipolar 5V signal which is mapped to 0-127. If the *Gate Source* contains a slide layer, slides are output as MIDI CC 65 events (portamento on/off). When the sequencer is reset, a MIDI CC 120 event (all notes off) is sent.

When configured to *Control Change* event, the following additional parameters are available for configuration:

Parameter	Range	Description
Control Number	0 - 127	Control number to use for the event.
Control Source	Track 1-8	Sequencer track to use as the control value source.

The *Control Source* controls the MIDI CC values and is derived from a unipolar 5V signal which is mapped to 0-127.

When changing the MIDI output parameters, they will not immediately be active. Press **F5** to commit the changes and make the new configuration active. An existing MIDI output configuration can be reset to its default state by pressing **F3**. Again, the change has no effect before being committed using **F5**.

## User Scale

The *User Scale* page is entered using **PAGE** + **U.SCALE**.



On this page you can edit the 4 user scales stored in the project. Switch between the 4 scales using **F1**, **F2**, **F3** and **F4**.

As with the preset scales, user scales can either be in *Chromatic* or *Voltage* mode. The former is used to create scales from the 12 semitones of the equal tempered chromatic scale. The latter can be used to make arbitrary scales.

The number of items in the scale is set with the *Size* parameter and can be up to 32 items.

When in *Chromatic* mode, each item can be assigned a semitone: **C**, **C#**, **D**, **D#**, **E**, **F**, **F#**, **G**, **G#**, **A**, **A#** or **B**.

When in *Voltage* mode, each item can be assigned a voltage between -5V and +5V with millivolts accuracy.

Note: The items defined in the user scale represent a single octave of the scale, which is equal to 12 semitones (1V) in *Chromatic* mode and the interval between the first and last item in *Voltage* mode. The other octaves are automatically inferred by repetition.

## Context Menu

Hold **SHIFT** + **PAGE** or double click **PAGE** (context menu will last for 2 seconds) to open the context menu and access the following functions:

Button	Function	Description
<b>F1</b>	Init	Initialize the selected user scale to the default state.
<b>F2</b>	Copy	Copy the selected user scale to the clipboard.
<b>F3</b>	Paste	Paste the clipboard to the selected user scale.
<b>F4</b>	Load	Load a user scale from the SD card into the selected user scale.
<b>F5</b>	Save	Save the selected user scale to the SD card.

## Overview

The *Overview* page is entered using **PAGE** + **PREV**.



On this page you can see an overall representation of all currently running sequences. In the left section, the currently playing pattern for each track is indicated. In the middle section, a dense representation of the sequence is shown (steps or curves). In the right section, the current state of the gate and CV outputs is visualized. You can enter gates in this view by selecting a track, then double clicking the desired **STEP[1-16]** button. If the track is a *Note* track, **STEP[1-16]** + **ENCODER** will change the step note. If the track is a *Stochastic* track, **STEP[1-16]** + **ENCODER** will change the note probability. It's also possible to activate per track follow mode hitting **PAGE** + **S16** and navigate the sequence with **NEXT** and **PREV** buttons. If the track is a *Curve* track, double clicking a step button (STEP[1-16]) will show the current gate configuration. Pressing the **ENCODER** will select cycling through shape, min, max, gate layers and then turning the encoder will change the selected layer value.

## Monitor

The *Monitor* page is entered using **PAGE** + **MONITOR**. This page has 4 tabs accessed using **F1**, **F2**, **F3** and **F4**.

### CV Inputs

The first tab shows the current voltages of the CV inputs.

A	120.0	T1	P1	E1	CV IN	MONITOR
CV IN						MONITOR
	CV1		CV2		CV3	CV4
	0.00V		0.00V		0.00V	0.00V
	CV IN	CV OUT	MIDI	STATS		

### CV Outputs

The second tab shows the current voltages of the CV outputs.

A	120.0	T1	P1	E1	CV OUT	MONITOR
CV OUT						MONITOR
	CV1		CV2		CV3	CV4
	0.00V		0.00V		0.00V	0.00V
	CV5		CV6		CV7	CV8
	0.00V		0.00V		0.00V	0.00V
	CV IN	CV OUT	MIDI	STATS		


### MIDI

The third tab shows incoming MIDI messages.



## Stats

The fourth tab shows general stats of the sequencer such as the total uptime and overflows of the MIDI message queues.

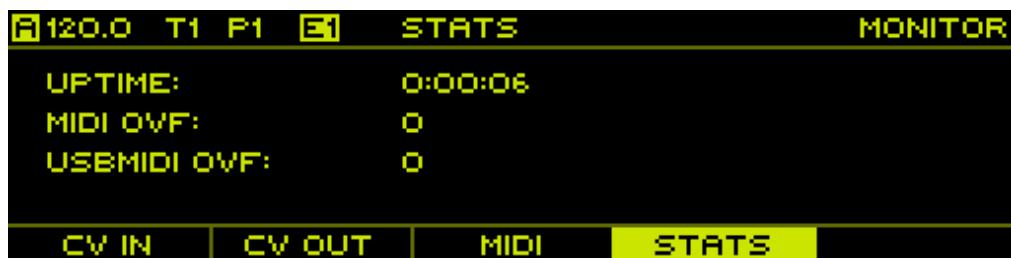

## Clock

The Clock page is entered using **PAGE** + **CLOCK**.



This page is used to setup the clock system of the sequencer using the following parameters:

Parameter	Range	Description
Mode	Auto, Master, Slave	Clock mode
Shift Mode	Restart, Pause	Action to perform when <b>SHIFT</b> + <b>PLAY</b> is pressed: In <i>Restart</i> mode, the master clock is restarted. In <i>Pause</i> mode, the master clock is stopped/resumed.
Input	Divisors	Musical note duration at which to interpret incoming clock pulses. The divisor is actually

Parameter	Range	Description
Divisor		used as a clock multiplier to generate the internal 192 PPQN clock resolution.
Input Mode	Reset, Run, Start/Stop	Mode in which to handle the incoming clock control signal. In <i>Reset</i> mode, the clock is kept in reset state while a high signal is read. In <i>Run</i> mode, the clock is only run when the signal is high. In <i>Start/Stop</i> mode, the clock is started when a high signal is read and stopped/paused when a low signal is read.
Output Divisor	Divisors	Musical note duration at which to generate outgoing clock pulses. The divisor is used to divide the internal 192 PPQN clock resolution to generate the outgoing clock pulses.
Output Swing	yes, no	Enable clock output with swing amount set on <a href="#">Project</a> page.
Output Pulse	1 - 20 ms	Duration of the outgoing clock pulses.
Output Mode	Reset, Run	Mode for generating the outgoing clock control signal. In <i>Reset</i> mode, the signal is high when the clock is stopped and in reset state. In <i>Run</i> mode, the signal is high when the clock is currently running.
MIDI RX	yes, no	Receive MIDI clock from MIDI.
MIDI TX	yes, no	Transmit MIDI clock to MIDI.
USB RX	yes, no	Receive MIDI clock from USB.
USB TX	yes, no	Transmit MIDI clock to USB.

Note: To set up a 24 PPQN input or output clock resolution, the divisor needs to be set to 2. This is because the divisor is applied to a 48 PPQN resolution instead of the internal 192 PPQN resolution.

## System

The System page is entered using **PAGE** + **SYSTEM** and needs confirmation to prevent accidental entering.



## Calibration


Press **F1** to show the calibration tab.



On this tab you can calibrate the 8 physical CV outputs of the sequencer to millivolts accuracy, given that you have access to a volt meter with high accuracy. Proper calibration is important to get accurate pitch signals (1V/Oct) to control the pitch of oscillators.

Each channel is calibrated using a list of calibration entries for all voltages from -5V to +5V at 1V increments. Each entry stores the decimal value that is sent to the digital-to-analog converter for the given voltage. By default, entries are set to *auto* which automatically determines the best guess for the calibration value. This value is either determined by a reference table or by interpolating other manually set calibration entries.

Press **T[1-8]** to select the channel for calibration. The voltage present at the CV outputs directly depends on the entry selected in the list. This allows to scroll through the list and adjust the calibration values until the CV output generates the correct voltage. To edit a calibration entry, simply press the **ENCODER**. Rotate the encoder to set the calibration value or press **F1** to revert back to the *auto* value.

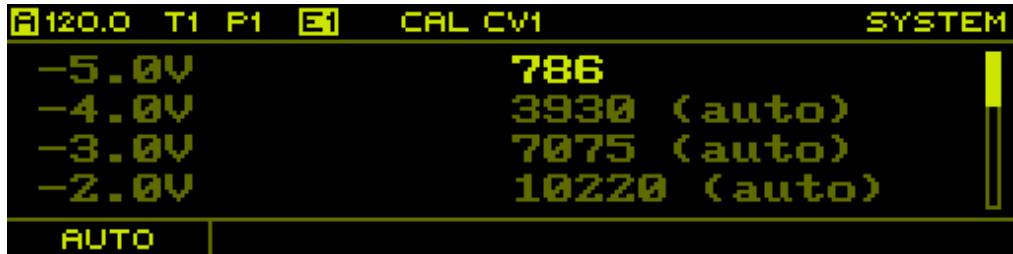

See [Calibration Procedure](#) for more information on how to efficiently calibrate the CV outputs.

## Context Menu

Hold **SHIFT** + **PAGE** or double click **PAGE** (context menu will last for 2 seconds) to open the context menu and access the following functions:

Button	Function	Description
<b>F1</b>	Init	Initialize the settings to the default state.
<b>F2</b>	Save	Save the settings to flash memory.
<b>F3</b>	Backup	Backup the settings to the SD card.
<b>F4</b>	Restore	Restore the settings from the SD card.

## Utilities

Press **F3** to show the utilities tab.



Currently there is only one utility to allow formatting the SD card.

## Update

Press **F4** to show the update tab.




This tab shows the current version of the firmware and allows to reset to the bootloader to easily initiate the firmware update procedure. See [Firmware Update](#) for more information.

## User Settings

Press **F5** to show the update tab.

On this you can select various user settings

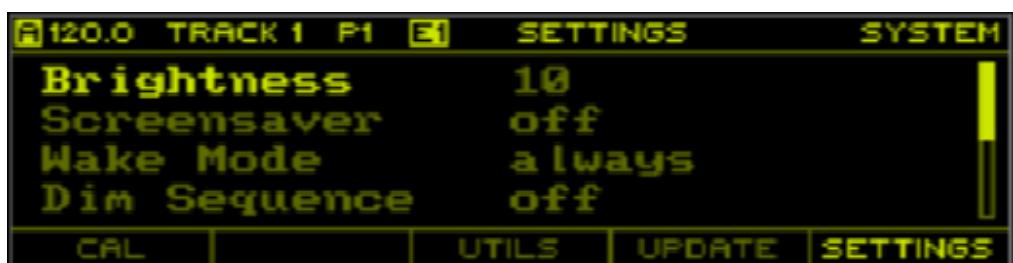

Setting	Range	Description
Brightness	0-10	Reduces the overall brightness of the display. Lower brightness will reduce noise.
Screensaver	off, 3s, 5s, 10s, 30s, 1m, 10m, 30m	Turns the screen off after the specified time, or "off" to disable. When the screen is off, the noise is completely gone. This is useful in a studio setting, when you'd like to record something completely noise-free.

Setting	Range	Description
Wake mode	always, required	Determines when the screen should "wake up" from the screensaver. "always" will wake the screen on any key press. "required" allows the screen to stay off when performing tasks that don't really require the screen, e.g. modifying a sequence (since the LEDs describe the current sequence). This is also a pseudo "screen-less" mode for the sequencer, which can be nice
Dim sequence	off, on	The sequence page is particularly noisy if a lot of steps are enabled from the steps currently displayed on-screen. With dim sequence on, the squares are slightly darker than normal, which reduces noise on the sequence page substantially.
LP style	classic, blue	Sets the launchpad color scheme
Pattern change	immediate, sync	sets the pattern change default action and swaps them in the function menu entry
LP note style	classic, circuit	sets the launchpad note editor

# Appendix

---

## Recording

Instead of entering note sequences one step at a time, an external MIDI keyboard can be used to speed up the process. There are two ways for recording sequences. First, sequences can be recorded live by just playing the keyboard while the sequencer is running. Secondly, step recording allows to quickly enter one note after the other using a keyboard, either when the sequencer is running or stopped. In step recording you can use shortcuts **SHIFT** + **NEXT** to move one step forward and **SHIFT** + **PREV** to move one step backwards. The recording mode is selected on the [Project](#) page. Recording is armed and disarmed using **PAGE** + **PLAY**.

### Live Recording

The first two record modes, *Overdub* and *Overwrite* enable live recording. While recording is armed and the sequencer is running, notes played on a keyboard are immediately written into the active sequence. In *Overdub* mode, steps are added to the existing sequence, potentially replacing existing steps. In *Overwrite* mode, existing steps are cleared as the play head moves through the sequence, adding new steps when the keyboard is played. The length of the sequence is not changed and has to be set in advance. While *Overdub* mode is intended to gradually build up or evolve a sequence, *Overwrite* mode can be used to quickly replace a sequence with a new one. Arming and disarming recording while playing the keyboard can be challenging. Therefore, recording can also be controlled via a route. This allows for example to use a foot pedal to punch in and out of recording while keeping the hands free for playing.

Note: Incoming notes from the keyboard have to be translated into the fixed grid of a sequence. Best results are obtained by playing in a way that maps well to a note sequence, e.g. monophonic and as quantized as possible.

### Step Recording

The *Step Record* mode is used to enter notes one step at a time. When recording is armed, playing notes on a keyboard simply sets one step after the other in the active note sequence. Slides can be recorded by moving the pitch bend control while holding a note. Ties can be recorded by moving the modulation control while holding a note. Recording starts at the first step and wraps around at the last step. Again, the length of the sequence has to be set in advance. While on the [Steps](#) page and the *Note* layer, **S[1-16]** can be used to select the current step to record from. The next step to be recorded into is marked with a circle.

## Divisors

Divisors are used to divide clock ticks with a resolution of 48 PPQN into periods corresponding to musical notes. The divisor is applied to a 48 PPQN resolution instead of the internal 192 PPQN resolution, as this results in a more meaningful musical range of musical notes. While any integer number between 1 and 192 can be used as a divisor, the following known divisor values are used to generate the commonly used musical notes:

Divisor	Note	Name
2	1/64T	Triplet sixty-fourth note
3	1/64	Sixty-fourth note
4	1/32T	Triplet thirty-second note
6	1/32	Thirty-second note
8	1/16T	Triplet sixteenth note

Divisor	Note	Name
9	1/32.	Dotted thirty-second note
12	1/16	Sixteenth note
16	1/8T	Triplet eighth note
18	1/16.	Dotted sixteenth note
24	1/8	Eighth note
32	1/4T	Triplet quarter note
36	1/8.	Dotted eighth note
48	1/4	Quarter note
64	1/2T	Triplet half note
72	1/4.	Dotted quarter note
96	1/2	Half note
128	1T	Triplet whole note
144	1/2.	Dotted half note
192	1	Whole note
256	2T	Triplet double note
288	1.	Dotted whole note
384	2	Double note
512	4T	Triplet quadruple note
576	2.	Dotted double note
768	4	Quadruple note

## Run Modes

Step sequences can be run in various run modes, which describe the order in which the steps of the sequence are played. To illustrate the different run modes, assume a sequence with **N = 8** steps, indexed from **1** to **8**:

```
1 2 3 4 5 6 7 8
```

### Forward

In *Forward* mode, the sequence is played from the first to the last step and then repeated. Each iteration is exactly **N** steps:

```
1 2 3 4 5 6 7 8 | 1 2 3 4 5 6 7 8 | 1 ...
```

### Backward

In *Backward* mode, the sequence is played from the last to the first step and then repeated. Each iteration is exactly **N** steps:

```
8 7 6 5 4 3 2 1 | 8 7 6 5 4 3 2 1 | 8 ...
```

## Pendulum

In *Pendulum* mode, the sequence is alternately played in forward and backward mode. Each iteration is exactly  $2 * N$  steps:

```
1 2 3 4 5 6 7 8 8 7 6 5 4 3 2 1 | 1 ...
```

## Ping Pong

In *Ping Pong* mode, the sequence is played similarly to the pendulum mode, but when changing direction, the first/last step is not played twice. This essentially shortens the iteration by two steps to  $2 * N - 2$  steps:

```
1 2 3 4 5 6 7 8 7 6 5 4 3 2 | 1 ...
```

## Random

In *Random* mode, the sequence starts with a random step and each time the sequence advances, a new random step is picked:

```
4 7 5 3 5 7 5 3 5 6 8 6 4 2 4 1 3 6 ...
```

## Random Walk

In *Random Walk* mode, the sequence starts with a random step and each time the sequence advances, a random coin toss is used to either pick the step to the left or to the right of the last played step. This also works across the boundary from the first to the last step of the sequence:

```
7 8 7 8 1 2 1 2 3 2 3 4 5 4 3 4 3 2 ...
```

## Play Modes

Step sequences can be played in two different modes. In *Aligned* mode, the default mode, the current step position is computed in a deterministic way, whereas in *Free* mode, the current step position is always determined based on the previous step position.

The following example illustrates the difference between the two modes: Let's assume a sequence with a length of 16 steps and the step length set to quarter notes, running in *Forward* mode. When the sequencer is reset and started, the sequence will be played the same in both *Aligned* and *Free* mode, advancing to the next step at each quarter note division. Let's assume that the step length is changed to half notes while the sequencer is running and the step sequence is currently at the 9th step. In *Free* mode, the sequence will continue from the 9th step, but advancing to the next step at each half note division. This means that the step position is not the same as if the sequencer would have been started with the step length set to half notes. This is exactly what *Aligned* mode does, it always computes the current position based on the time that has passed since the sequencer was last reset and started. So in this example, the sequence would jump to the 5th or 13th step instead and continue playing from there.

In summary, *Free* mode behaves more like an analog sequencer, which simply advances to the next step when the current step length has passed. This may lead to sequences being played in weird ways, depending on how parameters like *Divisor*, *First Step* and *Last Step* are changed while the sequencer is running. While these side effects may allow for some nice happy accidents, *Aligned* mode is generally the safer bet for most purposes.

## Rotation

Rotation enables to play back the sequence at different start points. A typical 8 step sequence in *Forward* mode is played back as follows:

```
1 2 3 4 5 6 7 8 1 2 3 4 5 6 7 8 ...
```

With a rotation of **+1** the sequence is rotated 1 step to the right and played back as follows:

```
2 3 4 5 6 7 8 1 2 3 4 5 6 7 8 1 ...
```

With a rotation of **-3** the sequence is rotated 3 steps to the left and played back as follows:

```
6 7 8 1 2 3 4 5 6 7 8 1 2 3 4 5 ...
```

## Step Conditions

Step conditions allow individual steps to only be played if a certain condition is met. In addition to the various probabilistic variations of a step, this allows for even more dynamic sequences. The following conditions are available:

Condition	Description
Fill	Step is only played if <i>Fill</i> is enabled (and the track has <i>Fill Mode</i> set to <i>Condition</i> mode).
!Fill	Step is only played if <i>Fill</i> is disabled (and the track has <i>Fill Mode</i> set to <i>Condition</i> mode).
Pre	Step is only played if the most recently evaluated step condition was true.
!Pre	Step is only played if the most recently evaluated step condition was false.
First	Step is only played on the very first iteration of the playback.
!First	Step is played on every but the very first iteration of the playback.
N:M	Step is played on the Nth iteration every M iterations. So for example, 2:4 plays the step on iteration 2, 6, 10 etc.
!N:M	Step is not played on the Nth iteration every M iterations. So for example, !2:4 plays the step on iteration 1, 3, 4, 5, 7, 8, 9, 11 etc.

Note: Step conditions are only evaluated if the step is actually triggered. That means that if a step is not triggered due to *Gate Probability* the assigned step condition will not be evaluated and has no effect.

## Metropolix Mode

The sequence uses a Metropolis-like sequencing with steps repeats and few different gate modes.

This feature works only in *Free* track mode, so make sure track Play Mode is set to *Free* under Track page.

In the Note Sequencer layout under the *Retrigger* layer The following options are available:



- **REPEAT** sets which repeats current step N times
- **REPEAT MODE** determines how to send gates

Mode	Description
EACH	sends a gate for each step
FIRST	sends first gate and waits for N - 1 pulses
MIDDLE	wait for N-1/2 pulses, send gate and wait again for N-1/2 pulses
LAST	wait for N - 1 pulses and send last gate
ODD	sends gate for each odd step (1, 3, 5)
EVEN	sends gate for each even step (2,4,6)
TRIPLET	sends gate for each third step, (1, 4, 7) creating triplet feel.
RANDOM	choose between all modes every time the gate is triggered

Shortcuts to gain quick access to repeat and repeat:

**SHIFT** + **RETRIG** enables REPEAT layer

**SHIFT** + **LENGTH** enables gate mode layer

## Scales

### Semitones

Index	1	2	3	4	5	6	7	8
Volts	0.000	0.083	0.167	0.250	0.333	0.417	0.500	0.583

Index	9	10	11	12
Volts	0.667	0.750	0.833	0.917

### Major

Index	1	2	3	4	5	6	7
Volts	0.000	0.167	0.333	0.417	0.583	0.750	0.917

### Minor

Index	1	2	3	4	5	6	7
Volts	0.000	0.167	0.250	0.417	0.583	0.667	0.833

### Major Blues

Index	1	2	3	4	5	6
Volts	0.000	0.250	0.333	0.583	0.750	0.833

### Minor Blues

Index	1	2	3	4	5	6
Volts	0.000	0.250	0.417	0.500	0.583	0.833

### Major Pent.

Index	1	2	3	4	5
Volts	0.000	0.167	0.333	0.583	0.750

### Minor Pent.

Index	1	2	3	4	5
Volts	0.000	0.250	0.417	0.583	0.833

### Folk

Index	1	2	3	4	5	6	7	8
Volts	0.000	0.083	0.250	0.333	0.417	0.583	0.667	0.833

### Japanese

Index	1	2	3	4	5
Volts	0.000	0.083	0.417	0.583	0.667

## Gamelan

Index	1	2	3	4	5
Volts	0.000	0.083	0.250	0.583	0.667

## Gypsy

Index	1	2	3	4	5	6	7
Volts	0.000	0.167	0.250	0.500	0.583	0.667	0.917

## Arabian

Index	1	2	3	4	5	6	7
Volts	0.000	0.083	0.333	0.417	0.583	0.667	0.917

## Flamenco

Index	1	2	3	4	5	6	7
Volts	0.000	0.083	0.333	0.417	0.583	0.667	0.833

## Whole Tone

Index	1	2	3	4	5	6
Volts	0.000	0.167	0.333	0.500	0.667	0.833

## 5-tet

Index	1	2	3	4	5
Volts	0.000	0.200	0.400	0.600	0.800

## 7-tet

Index	1	2	3	4	5	6	7
Volts	0.000	0.143	0.286	0.428	0.572	0.714	0.857

## 19-tet

Index	1	2	3	4	5	6	7	8
Volts	0.000	0.053	0.105	0.158	0.210	0.263	0.316	0.368

Index	9	10	11	12	13	14	15	16
Volts	0.421	0.474	0.526	0.579	0.632	0.684	0.737	0.790

<b>Index</b>	<b>17</b>	<b>18</b>	<b>19</b>
Volts	0.842	0.895	0.947

## 22-tet

<b>Index</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>
Volts	0.000	0.046	0.091	0.136	0.182	0.227	0.273	0.318

<b>Index</b>	<b>9</b>	<b>10</b>	<b>11</b>	<b>12</b>	<b>13</b>	<b>14</b>	<b>15</b>	<b>16</b>
Volts	0.364	0.409	0.454	0.500	0.546	0.591	0.636	0.682

<b>Index</b>	<b>17</b>	<b>18</b>	<b>19</b>	<b>20</b>	<b>21</b>	<b>22</b>
Volts	0.727	0.773	0.818	0.864	0.909	0.954

## 24-tet

<b>Index</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>
Volts	0.000	0.042	0.083	0.125	0.167	0.208	0.250	0.292

<b>Index</b>	<b>9</b>	<b>10</b>	<b>11</b>	<b>12</b>	<b>13</b>	<b>14</b>	<b>15</b>	<b>16</b>
Volts	0.333	0.375	0.417	0.458	0.500	0.542	0.583	0.625

<b>Index</b>	<b>17</b>	<b>18</b>	<b>19</b>	<b>20</b>	<b>21</b>	<b>22</b>	<b>23</b>	<b>24</b>
Volts	0.667	0.708	0.750	0.792	0.833	0.875	0.917	0.958

## Voltage

<b>Index</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>
Volts	0.000	0.100	0.200	0.300	0.400	0.500	0.600	0.700

<b>Index</b>	<b>9</b>	<b>10</b>
Volts	0.800	0.900

## Shapes

Index	1	2	3	4	5	6	7	8
Shapes								

Index	9	10	11	12	13	14	15	16
Shapes								

Index	17	18	19	20	21	22	23	24
Shapes								

Index	25	26	27	28	29	30	31	32
Shapes								

Index	33	34	35	36	37	38
Shapes						

## Arpeggiator Modes

The following arpeggiator modes are available. The example note order is based on a chord with 5 notes:

Mode	Sequence
Play Order	Played back in the order the notes were entered.
Up	1 2 3 4 5   1 2 3 4 5   ...
Down	5 4 3 2 1   5 4 3 2 1   ...
Up Down	1 2 3 4 5 4 3 2   1 2 3 4 5 4 3 2   ...
Down Up	5 4 3 2 1 2 3 4   5 4 3 2 1 2 3 4   ...
Up & Down	1 2 3 4 5 5 4 3 2 1   1 2 3 4 5 5 4 3 2 1   ...
Down & Up	5 4 3 2 1 1 2 3 4 5   5 4 3 2 1 1 2 3 4 5   ...
Converge	1 5 2 4 3   1 5 2 4 3   ...
Diverge	3 2 4 1 5   3 2 4 1 5   ...
Random	Played back in random order.

## Routing Targets

The following routing targets are available.

Target	Scope	Notes
Play	Global	
Play Toggle	Global	Toggle playing. Allows simultaneous use of the <b>PLAY</b> button.
Record	Global	
Record Toggle	Global	Toggle recording. Allows simultaneous use of the <b>SHIFT</b> + <b>PLAY</b> button combination.
Tap Tempo	Global	
Tempo	Global	
Swing	Global	
Mute	Track	
Fill	Track	
Fill Amount	Track	
Pattern	Track	
Slide Time	Track	
Octave	Track	
Transpose	Track	
Offset	Track	
Rotate	Track	

Target	Scope	Notes
Gate P. Bias	Track	
Retrig P. Bias	Track	
Length Bias	Track	
Note P. Bias	Track	
Shape P. Bias	Track	
First Step	Sequence	
Last Step	Sequence	
Run Mode	Sequence	
Divisor	Sequence	
Scale	Sequence	
Root Note	Sequence	
Rec step	Sequence	in step recording mode controls the current recording step. responds to gate (5ms). useful to insert rests
Reseed	Stochastic Sequence	
Rest Prob 2	Stochastic Sequence	
Rest Prob 4	Stochastic Sequence	
Rest Poob 8	Stochastic Sequence	
Seq First Step	Stochastic Sequence	
Seq Last Step	Stochastic Sequence	
L Oct. Range	Stochastic Sequence	
H Oct. Range	Stochastic Sequence	
Length Mod	Stochastic Sequence	

## MIDI Program Change

The performer can now send and receive program change messages.

Program change messages must be enabled in the project settings. Program change messages are only sent when changing all patterns to the same pattern (changing patterns individually will not trigger program change messages). Program change messages are currently always sent on channel 0. Program change messages are sent slightly before the end of the sequence in sync mode (this allows the receiving hardware some time to acknowledge the program change request).

## Launchpad

The Novation Launchpad can be used as an advanced control surface for the sequencer, allowing for editing sequences and launching patterns via the 8x8 button matrix. When a Launchpad is connected to the USB port, the sequencer automatically detects the device and immediately starts using it as a control surface.

The following Launchpad controllers have been tested and are working:

- Launchpad Mini MK1/MK2/MK3
- Launchpad S
- Launchpad Mk2
- Launchpad Pro
- Launchpad X

Note: Support for the very first version of Launchpad will never happen, as it is not a USB MIDI class compliant device.

Launchpad controllers are exclusively used as control surfaces and cannot be used as a standard MIDI device for the routing system or live recording.

When using a Launchpad Mini or Launchpad S, it should preferably be configured to operate in the *Low Power* mode. This is important in order to not draw too much current which can lead to the Launchpad spuriously disconnect. In addition, make sure that the Launchpad is configured to use ID 1, otherwise it will be detected as a general MIDI controller by the sequencer. The procedure to switch between *Low Power* and *Full Power* mode and setting the ID can be looked up [here](#).

## Global Functions

The **8** button acts as a *shift* button and can be pressed in combination with other buttons to access secondary functions. The following functions are always available:

Buttons	Description
<b>8</b> + <b>7</b>	Start and stop the sequencer
<b>8</b> + <b>1</b>	Switch to sequence mode
<b>8</b> + <b>2</b>	Switch to pattern mode
<b>8</b> + <b>3</b>	Switch to performance mode

Because the 8x8 grid of the Launchpad can only represent part of the data to be edited, the grid only acts as a window into a larger virtual 64x64 grid. Hold **1** to enter navigation mode, where the position of the window can be selected:

Buttons	Description
<b>1</b> + <b>2</b>	Move window left
<b>1</b> + <b>3</b>	Move window right
<b>1</b> + <b>4</b>	Move window up

Buttons	Description
<b>1</b> + <b>5</b>	Move window down
<b>1</b> + <b>GRID</b>	Move window to specific position

Note: Navigation is available in both sequence and pattern mode.

Both modes also allow controlling track mutes and fills:

Buttons	Description
<b>7</b> + <b>GRID</b>	toggle selected note to 5V
<b>7</b> + <b>A</b> - <b>H</b>	Fill track
<b>8</b> + <b>A</b> - <b>H</b>	Mute/unmute track
<b>6</b> + <b>A</b> - <b>H</b>	Solo/unsolo track

## Sequence Mode

Sequence mode allows for comprehensive editing of the patterns on all tracks. The grid allows for editing individual step values on the active track and layer. The following functions are available:

Buttons	Description
<b>A</b> - <b>H</b>	Select active track
<b>2</b> + <b>GRID</b>	Select active layer
<b>3</b> + <b>GRID</b>	Select first step
<b>4</b> + <b>GRID</b>	Select last step
<b>5</b> + <b>GRID</b>	Select run mode
<b>6</b> + <b>GRID</b>	select follow mode for the selected track or in Stochastic mode set rest probabilities

The visualization on the grid depends on the selected layer. Binary layers (e.g. *Gate* and *Slide*) can be visualized directly on the 8x8 grid without the need for navigation. This is useful for programming drum sequences for example. Other layers use navigation to various degree in order to allow programming the steps. When editing the *Note* layer, the base note (first note per octave) is visualized to help orientation. When editing a note sequence, double pressing a button can be used to toggle the step gate no matter what layer is edited (other than *Gate* or *Slide* layer).

## Pattern Mode

Pattern mode allows selecting the currently playing pattern on all the tracks. Each column on the **GRID** represents one track, allowing to launch individual patterns per track. The **A** - **H** buttons represent scenes, allowing to launch the same pattern number on all the tracks simultaneously. This is very similar to how Ableton Live allows launching clips and scenes on a Launchpad. Active patterns are shown as bright green, non-empty patterns are shown in dim colors, yellow for note tracks, red for curve tracks.

In addition, holding **2** while selecting patterns and scenes, allows to use latching mode. This means that the patterns are switched at the moment when **2** is released. Holding **3** while selecting patterns and scenes allows to launch them

synchronized to the global Sync Measure.

Requested patterns due to latching or syncing are shown in dim green.

## Performance Mode

Performance mode allow user to perform some quick live edits. There are two modes available accessible by holding **2 + GRID[1|2]**:

- **GRID 1** - Sequence Length: Holding a step and then pressing another one will set first step and last step of the sequence resulting in looping the current slice of the sequence until you will release the grid buttons.
- **GRID 2** - Overview Page: each row represents the track from 1-8 and allows to enter gates quickly. **6 + ROW3+COL1** enables follow mode globally, or you can select per track follow mode. for the overview page. All others functions are still available for the selected track.

## Circuit note editor

The visualization on the grid follows this schema:

- First 2 rows represent the gates from **S[1-16]**
- row 4 represents the semitones of a chromatic scale, selected note is highlighted, available notes in the scale are highlighted
- row 5 represents the tones of a chromatic scale, selected note is highlighted, available notes in the scale are highlighted
- row 7 represents the octave switcher from -4 to 3 octave, selected octave is highlighted
- raw 8 is a quick page change shortcut

## Stochastic Circuit note editor

- First 2 rows represent the probability of the selected note
- row 4 represents the semitones of a chromatic scale, selected note is highlighted, available notes in the scale are highlighted
- row 5 represents the tones of a chromatic scale, selected note is highlighted, available notes in the scale are highlighted
- row 7 is a quick shortcut for stochastic options: Engage loop, Clear Loop, Reseed
- if you press a button in the gates representation you will toggle the gate
- if you hold an available key (**GRID[4|5|, [0-7]**) and press a gate you will enter a gate with the selected note value plus the selected octave. if the gate is already present you will set the selected note plus the selected octave of the selected gate

## USB MIDI Devices

The following is a list of USB MIDI devices known to be compatible with the **PERFORMER** sequencer:

Manufacturer	Device
AKAI	<a href="#">APC Mini</a>
Arturia	<a href="#">MiniBrute</a> , <a href="#">MiniLab MK2</a> , <a href="#">Keystep</a>
CME	<a href="#">XKEY37</a>
Keith McMillen	<a href="#">QuNexus</a>
Korg	<a href="#">microKey 2, R3</a>

Manufacturer	Device
Moog	Minitaur
Novation	Launchkey Mini
Novation	Launchpad Mini MK1/MK2/MK3, Launchpad S, Launchpad Pro, Launchpad X
Yamaha	Modx7

The following is a list of USB MIDI devices known **not** to be compatible:

Manufacturer	Device
AKAI	MPK Mini
Novation	Launchpad
Synthstrom	Deluge

## Calibration Procedure

The following method allows you to quickly calibrate the 8 CV outputs of the sequencer to millivolts accuracy. In order to achieve good results you have to use a volt meter capable of measuring within millivolts accuracy.

**The calibration will only be as good as the volt meter to measure the voltages!**

Enter the **System** page using **PAGE** + **SYSTEM**.

For each of the 8 channels, perform the following steps:

- Select the channel by pressing **T[1-8]**.
- Connect the volt meter to the given CV output.
- Select the -5.0V entry and adjust the calibration value such that the volt meter measures as close to -5.000V as possible.
- Repeat the previous step for the +5.0V entry then for the +0.0V entry.
- At this point, calibration should be good enough with all other entries set to *auto*.
- Check each entry in-between the calibrated ones and adjust them if the measured voltage deviates too much from the expected value. In general it is a good idea to do this recursively by always selecting the voltage in the middle of two calibrated entries. For example, with +0.0V and +5.0V calibrated, continue with either +2.0V or +3.0V.

With all channels calibrated you should save the data to flash memory by holding **SHIFT** + **PAGE** and pressing **F2**. You can also save the calibration data as a backup to the SD card by holding **SHIFT** + **PAGE** and pressing **F3**.

## Firmware Update

Use the following steps to upgrade the sequencer:

- Download the latest **UPDATE.DAT** file from <https://github.com/westlicht/performer/releases>.
- Copy the **UPDATE.DAT** file to the root directory of the SD card.
- Insert the SD card into the sequencer's SD card slot.

The update procedure is performed by the bootloader on the sequencer. There are two possible ways to enter the bootloader:

1. Power up the sequencer while pressing down the **ENCODER**.
2. Enter the **System** page and go to the update tab, then press and hold the **ENCODER** which will initiate a reset and jump to the bootloader.

The bootloader will verify the integrity of the **UPDATE.DAT** file using an MD5 hash. Once verified, a confirmation is requested to actually initiate the update process. Simply rotate the **ENCODER** to change to **YES** and press the **ENCODER** to start the update.

After the firmware is written to the flash memory, it is verified again to ensure it was written properly. In case the verification fails, the firmware is erased from flash memory. At this point the sequencer will always enter the bootloader when powering up, allowing to load a different firmware.