# SERIAL-KM-EMULATOR / PAPER CASE

A4 landscape, 1:1 net for 0.3 mm cardstock.
Print at 100% / 'Actual size'. Do not use 'fit to page'.
Printed side = inside. Solid = cut, black dashed = valley fold.

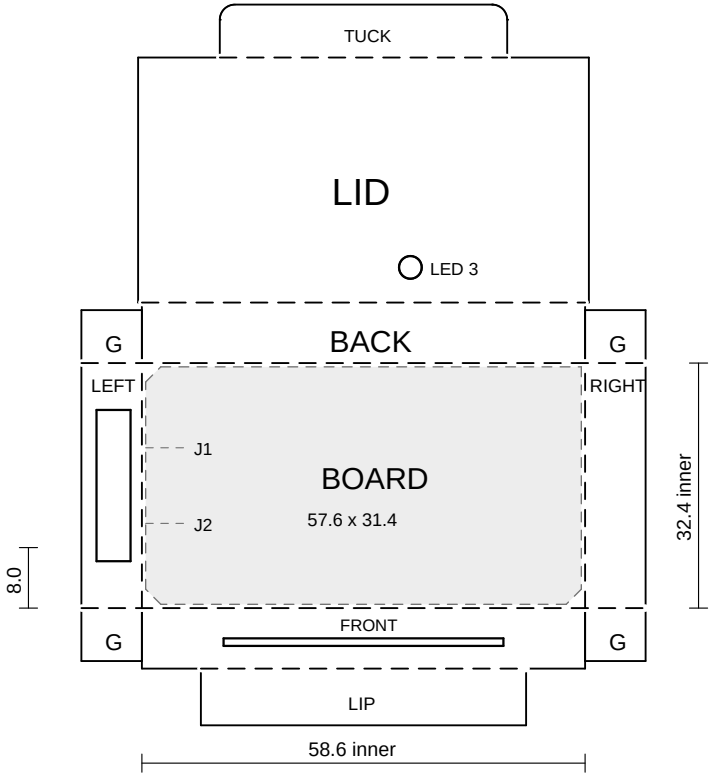


100 mm scale check (mm)

Generated by scripts/gen_paper_box.py from serial-km-emulator.kicad_pcb

## ASSEMBLY

1. Print on A4 at 100% / 'Actual size' (check the 100 mm bar).
2. Printed side = inside. Solid = cut, black dashed = valley fold.
3. Cut the USB-C slot, the 3 mm LED hole and the 37 x 1 mm tuck slot in the front wall.
4. Fold up the walls and fold the inner lip (LIP) down inside the front wall. Glue the tabs (G) to the front and back walls.
5. Fold the lid over and push the 38 mm tongue (7 mm deep) through the slot. The lip behind the slot catches it.
6. To open, lift the front edge of the lid; the tongue slides out.
7. Put the board on the floor against the LEFT wall. J1/J2 go through the slot, LED under the 3 mm hole.
8. No screws. Use tape or a foam pad if the board rattles.
9. Chamfer the USB-C slot outside if a plug overmould catches.

## DIMENSIONS (mm)

| | |
|---|---|
| inner | 58.6 x 32.4 x 8.0 |
| board | 57.6 x 31.4 x 1.6 |
| wall | 0.3 cardstock (recommended) |
| USB-C slot | 20.0 x 4.5, 1.5 above floor |
| LED hole | 3.0 dia, 35.5 / 4.7 from hinge |
| glue tab | 7 mm, four corners |
| tuck tongue | 38 x 7.0 mm, rounded tip |
| tuck slot | 37 x 1.0, 3.5 below rim |
| inner lip | 43 x 7.5, behind the slot |

## LINE TYPES

——— cut

– – – – fold (valley)

grey dashed = board outline (reference)

The QR code on the board back is hidden while the board is in the box. Take the board out to scan it.