SERIAL-KM-EMULATOR / PAPER CASE

A4 landscape, 1:1 net for 0.3 mm cardstock.
Print at 100% / 'Actual size'. Do not use 'fit to page'.
Printed side = inside. Solid = cut, black dashed = valley fold.

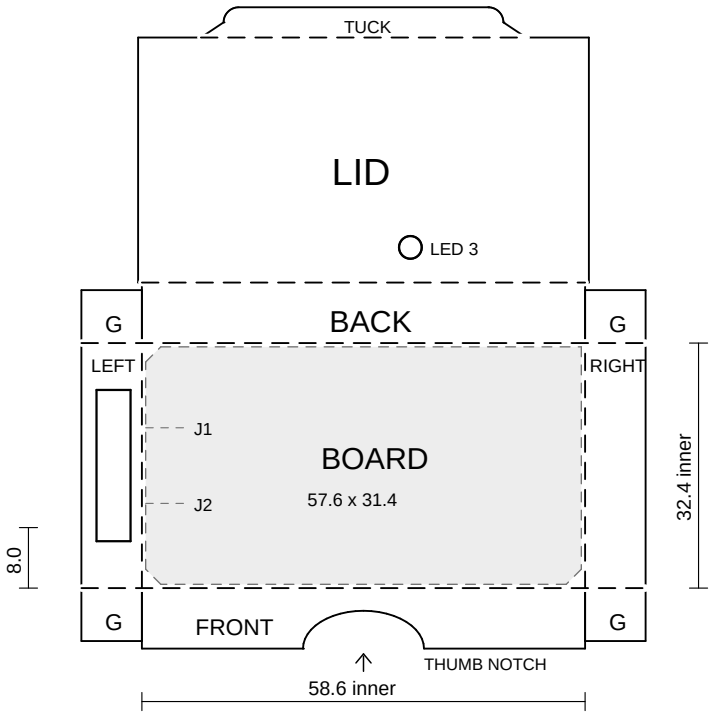

100 mm scale check (mm)



Generated by scripts/gen_paper_box.py from serial-km-emulator.kicad_pcb

ASSEMBLY

1. Print on A4 at 100% / 'Actual size'. Check the 100 mm bar at the bottom of this page.
2. The printed side becomes the inside of the box. Solid lines = cut. Black dashed lines = score and valley fold (fold toward the printed side).
3. Cut the outside, the 20 x 4.5 mm USB-C slot, the 3 mm LED hole and the 16 mm thumb notch.
4. Fold up the four walls. Put glue on the inside of the front and back walls, then press the tabs (G).
5. Fold the lid over and tuck the 43 mm flap (4 mm deep) inside the front wall.
6. To open, put a finger into the thumb notch and hook it under the flap. The tapered tip slides out.
7. Put the board on the floor, against the LEFT wall. J1/J2 go through the slot, LED under the 3 mm hole.
8. No screws. Use tape or a foam pad if the board rattles. A spacer up to 0.5 mm is OK.
9. Chamfer the outside of the slot lightly if a plug overmould catches on the paper.

DIMENSIONS (mm)

inner	58.6 x 32.4 x 8.0
board	57.6 x 31.4 x 1.6
wall	0.3 cardstock (recommended)
USB-C slot	20.0 x 4.5, 1.5 above floor
LED hole	3.0 dia, 35.5 / 4.7 from hinge
glue tab	7 mm, four corners
tuck flap	43 x 4.0 mm, tip 37
thumb notch	16 x 5 mm, front wall

LINE TYPES

——— cut

– – – – fold (valley)

grey dashed = board outline (reference)

The QR code on the board back is hidden while the board is in the box. Take the board out to scan it.