



UNIVERSITEIT VAN PRETORIA
UNIVERSITY OF PRETORIA
YUNIBESITHI YA PRETORIA
Faculty of Engineering, Built Environment and
Information Technology

EBB 320

CONTROL SYSTEMS

PRACTICAL 1: HARDWARE IMPLEMENTATION AND SYSTEM IDENTIFICATION

Name and Surname	Student Number	Signature	% Contribution
S. Tudent	12345678		20
Cornelis Claasen	24704611		33
S.T.U. Dent	34567890		45

By signing this assignment we confirm that we have read and are aware of the University of Pretoria's policy on academic dishonesty and plagiarism and we declare that the work submitted in this assignment is our own as delimited by the mentioned policies. We explicitly declare that no parts of this assignment have been copied from current or previous students' work or any other sources (including the internet), whether copyrighted or not. We understand that we will be subjected to disciplinary actions should it be found that the work we submit here does not comply with the said policies.

August 9, 2026

Contents

1	Theoretical Background	2
2	Software and Hardware Design Implementation	3
2.1	MCU Code	3
2.2	Matlab Code	5
3	Results	7
4	Discussion	8
5	Code	9
5.1	Matlab Code	9
5.2	MCU Code	22

1 Theoretical Background

2 Software and Hardware Design Implementation

2.1 MCU Code

In order to allow for easier future interaction, a command system was introduced. The MCU receives commands over UART as a string with the format:

"<command>, <value>"

These commands are interpreted by the MCU, changing the appropriate values.

Command	Value Changed
0	Change P
1	Change I
2	Change D
3	Change Setpoint
4	Change Disturbance Value
5	Change Duty Cycle
6	Change PWM Output
7	Change Start Flag

If the start variable is set, then the sampling process begins. First a timer is started, the PWM output flags variable is then checked to see which PWM signals must be set, and finally the samples are taken.

The samples are converted to temperatures using the temperature calibration equation. A running average of 200 samples is used to filter high frequency noise. The timer started at the beginning of the sampling process is then checked to see if the sampling period has passed, and if not, it waits for the remaining time. The processed samples are again sent over UART as a string with the format:

"<Temp1>, <Temp2>, <PWM1>, <PWM2>, <Time>, <Message>"

The <Message> parameter is used to signal error data. Currently the only error message implemented is for if the sampling process takes longer than the set sampling period. (Currently 200 Hz)

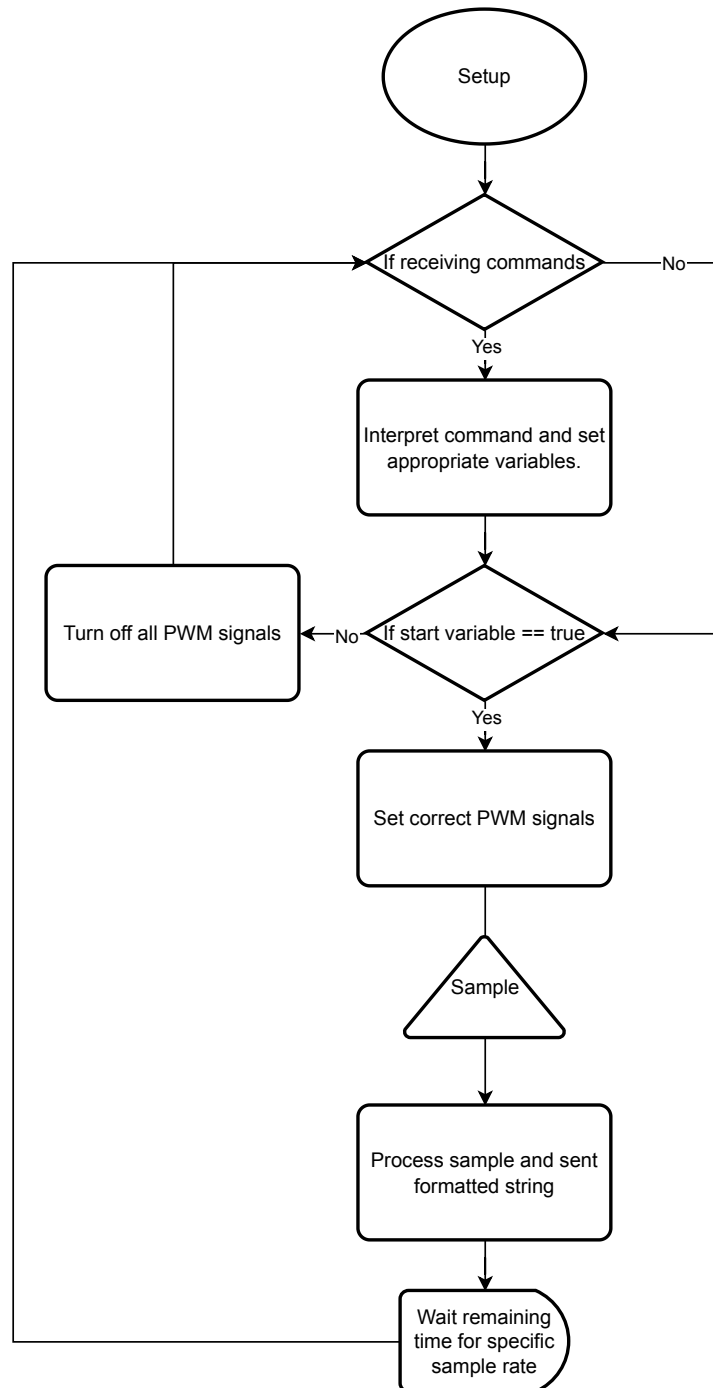


Figure 1: Flow Diagram of MCU Code.

2.2 Matlab Code

The Matlab code was written into a Matlab app to make it easier to operate the system. The app waits for the start button to be pressed, after which it sends the commands to the MCU to update all of the parameters set.

It then sets up the plotting variables and a variable called "capturing", which is used to continue the plotting process in a while loop, until the stop button is pressed. The loop continually checks if it has received data, and if it has, it interprets the formatted string send by the MCU. It plots the received data, checks the error messages received, and displays information based on the received message.

Before the loop starts a .csv file is accessed (or created if it did not exist beforehand), and the formatted string received from the MCU is saved directly to it.

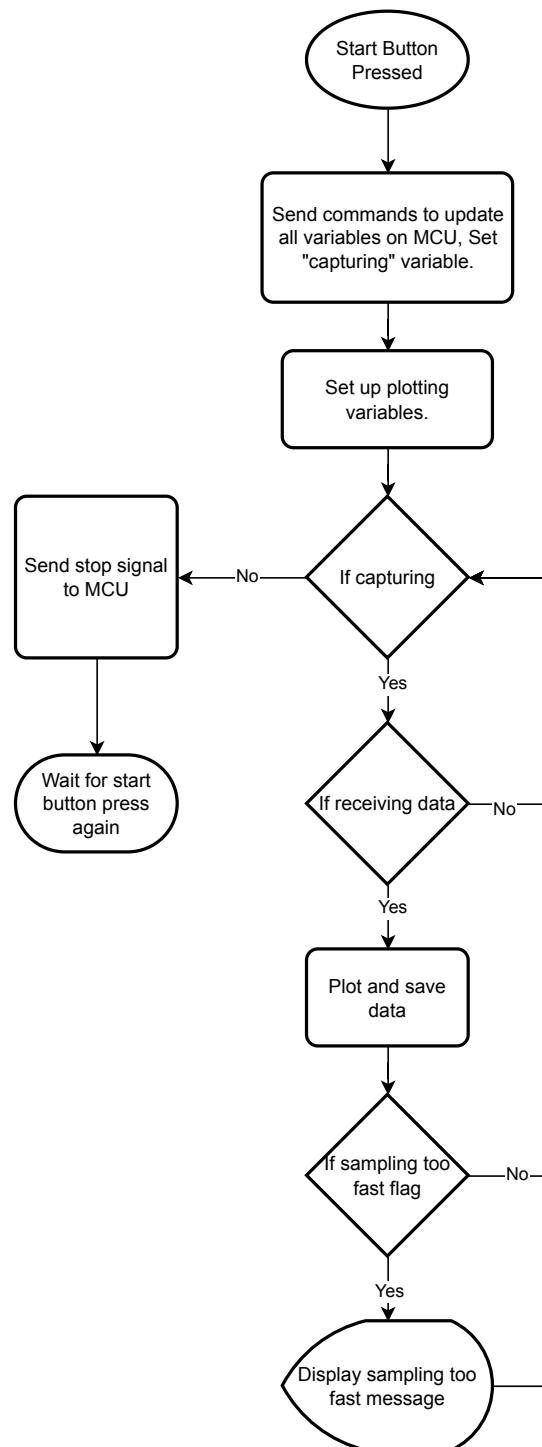


Figure 2: Flow Diagram of Matlab Code.

3 Results

4 Discussion

5 Code

5.1 Matlab Code

Listing 1: App Code For Sampling

```
classdef EBBPrac < matlab.apps.AppBase

    % Properties that correspond to app components
    properties (Access = public)
        UIFigure                matlab.ui.Figure
        GridLayout              matlab.ui.container.
            GridLayout
        LeftPanel                matlab.ui.container.
            Panel
        TabGroup                 matlab.ui.container.
            TabGroup
        Tab                      matlab.ui.container.
            Tab
        DataSaveEditField       matlab.ui.control.
            EditField
        DataSaveEditFieldLabel  matlab.ui.control.
            Label
        SamplingtoofastLabel    matlab.ui.control.
            Label
        UpdateChannelsButton    matlab.ui.control.
            Button
        StartButton              matlab.ui.control.
            StateButton
        StopButton               matlab.ui.control.
            StateButton
        OutputDropDown           matlab.ui.control.
            DropDown
        OutputDropDownLabel     matlab.ui.control.
            Label
        DutyCycleEditField      matlab.ui.control.
            NumericEditField
        DutyCycleEditFieldLabel matlab.ui.control.
            Label
        DisturbanceEditField     matlab.ui.control.
            NumericEditField
        DisturbanceEditFieldLabel matlab.ui.control.
            Label
        SetpointEditField       matlab.ui.control.
            NumericEditField
        SetpointEditFieldLabel  matlab.ui.control.
            Label
        DEditField               matlab.ui.control.
            NumericEditField
    end
end
```

```

DEditFieldLabel          matlab.ui.control.
    Label
IEditField               matlab.ui.control.
    NumericEditField
IEditFieldLabel          matlab.ui.control.
    Label
PEditField               matlab.ui.control.
    NumericEditField
PEditFieldLabel          matlab.ui.control.
    Label
Tab2                      matlab.ui.container.
    Tab
BaudRateEditField        matlab.ui.control.
    NumericEditField
BaudRateEditFieldLabel  matlab.ui.control.
    Label
COMPortEditField         matlab.ui.control.
    EditField
COMPortEditFieldLabel   matlab.ui.control.
    Label
RightPanel               matlab.ui.container.
    Panel
UIAxes_2                 matlab.ui.control.
    UIAxes
UIAxes                   matlab.ui.control.
    UIAxes
end

% Properties that correspond to apps with auto-reflow
properties (Access = private)
    onePanelWidth = 576;
end

properties (Access = private)
    %Live lines 1 and 2 are for the temperature
    %measurements.
    liveLine1
    liveLine2
    %Live lines 3 and 4 are for the PWM signals.
    liveLine3
    liveLine4
    P
    I
    D
    setpoint
    disturbance
    duty_cycle

```

```

output
capturing
COM_port
baud_rate
window_size
esp32
data_save_name % Description
end

% Callbacks that handle component events
methods (Access = private)

    % Value changed function: PEditField
    function PEditFieldValueChanged(app, event)
        app.P = app.PEditField.Value;
    end

    % Value changed function: IEditField
    function IEditFieldValueChanged(app, event)
        app.I = app.IEditField.Value;
    end

    % Value changed function: DEditField
    function DEditFieldValueChanged(app, event)
        app.D = app.DEditField.Value;
    end

    % Value changed function: SetpointEditField
    function SetpointEditFieldValueChanged(app, event
        )
        app.setpoint = app.SetpointEditField.Value;
    end

    % Value changed function: DisturbanceEditField
    function DisturbanceEditFieldValueChanged(app,
        event)
        app.disturbance = app.DisturbanceEditField.
            Value;
    end

    % Value changed function: DutyCycleEditField
    function DutyCycleEditFieldValueChanged(app,
        event)
        app.duty_cycle = app.DutyCycleEditField.Value
        ;
    end
end

```

```

% Value changed function: OutputDropDown
function OutputDropDownValueChanged(app, event)
    app.output = str2double(app.OutputDropDown.
        Value);
end

% Value changed function: StartButton
function StartButtonValueChanged(app, event)
    app.StartButton.Visible = "off";
    app.StopButton.Visible = "on";
    app.UpdateChannelsButton.Visible = "on";
    app.capturing = true;

    %Call all of the other functions to make sure
        their values are
    %captured.
    app.PEditFieldValueChanged();
    app.IEditFieldValueChanged();
    app.DEditFieldValueChanged();
    app.SetpointEditFieldValueChanged();
    app.DisturbanceEditFieldValueChanged();
    app.DutyCycleEditFieldValueChanged();
    app.OutputDropDownValueChanged();
    app.BaudRateEditFieldValueChanged();
    app.COMPortEditFieldValueChanged();
    app.DataSaveEditFieldValueChanged();

    if isempty(app.esp32)
        app.esp32 = serialport(app.COM_port, app.
            baud_rate);
        configureTerminator(app.esp32, "LF");
    end
    flush(app.esp32);

    pause(1);

    %Make sure all info is read into esp.
    writeline(app.esp32, sprintf("%d, %.2f", 0,
        app.P)); %
    writeline(app.esp32, sprintf("%d, %.2f", 1,
        app.I)); %
    writeline(app.esp32, sprintf("%d, %.2f", 2,
        app.D)); %
    writeline(app.esp32, sprintf("%d, %.2f", 3,
        app.setpoint)); %
    writeline(app.esp32, sprintf("%d, %.2f", 4,
        app.disturbance)); %
    writeline(app.esp32, sprintf("%d, %d", 5, app

```

```

        .duty_cycle)); %
writeline(app.esp32, sprintf("%d, %.2f", 6,
    app.output)); %
writeline(app.esp32, sprintf("%d, %.2f", 7,
    app.capturing)); %

%Clear axes.
cla(app.UIAxes);
cla(app.UIAxes_2);

%Plotting axes for the temperature
measurements.
app.liveLine1 = animatedline(app.UIAxes, '
    Color', 'r');
app.liveLine2 = animatedline(app.UIAxes, '
    Color', 'b');

%Plotting axes for the PWM signals.
app.liveLine3 = animatedline(app.UIAxes_2, '
    Color', 'r');
app.liveLine4 = animatedline(app.UIAxes_2, '
    Color', 'b');

app.window_size = 30; %seconds

%Define data csv that we will save to.
fid = fopen(app.data_save_name + ".csv", 'wt'
    );

while(app.capturing)
    if app.esp32.NumBytesAvailable > 0
        rawData = readline(app.esp32);
        data = str2double(split(rawData, ','))
            );
        data(5) = data(5)/1000;

        if ~isnan(data(1)) && (length(data)
            == 6)
            %Plot temperature data.
            addpoints(app.liveLine1, data(5),
                data(1));
            addpoints(app.liveLine2, data(5),
                data(2));
            xlim(app.UIAxes, [data(5) - app.
                window_size, data(5)]);

            %Plot PWM signals.
            addpoints(app.liveLine3, data(5),

```

```

        data(3));
        addpoints(app.liveLine4, data(5),
            data(4));
        xlim(app.UIAxes_2, [data(5) - app
            .window_size, data(5)]);

        %Write data to file.
        fprintf(fid, rawData);

        if data(end) == 0
            app.SamplingtoofastLabel.
                Visible = "on";
        else
            app.SamplingtoofastLabel.
                Visible = "off";
        end
    end
end

        drawnow limitrate
    end
end

%Close file we are saving to.
fclose(fid);

%Send stop signal.
writeline(app.esp32, sprintf("%d, %.2f", 7,
    app.capturing));

clear app.esp32;
end

% Value changed function: COMPortEditField
function COMPortEditFieldValueChanged(app, event)
    app.COM_port = app.COMPortEditField.Value;
end

% Value changed function: BaudRateEditField
function BaudRateEditFieldValueChanged(app, event
    )
    app.baud_rate = app.BaudRateEditField.Value;
end

% Value changed function: StopButton
function StopButtonValueChanged(app, event)
    app.capturing = false;
    app.StopButton.Visible = "off";
    app.UpdateChannelsButton.Visible = "off";
end

```

```

        app.StartButton.Visible = "on";

    end

    % Button pushed function: UpdateChannelsButton
    function UpdateChannelsButtonPushed(app, event)
        app.DutyCycleEditFieldValueChanged();
        app.OutputDropDownValueChanged();
        writeline(app.esp32, sprintf("%d, %.2f", 5,
            app.duty_cycle));
        writeline(app.esp32, sprintf("%d, %.2f", 6,
            app.output));
    end

    % Value changed function: DataSaveEditField
    function DataSaveEditFieldValueChanged(app, event
        )
        app.data_save_name = app.DataSaveEditField.
            Value;
    end

    % Changes arrangement of the app based on
    UIFigure width
    function updateAppLayout(app, event)
        currentFigureWidth = app.UIFigure.Position(3)
            ;
        if(currentFigureWidth <= app.onePanelWidth)
            % Change to a 2x1 grid
            app.GridLayout.RowHeight = {449, 449};
            app.GridLayout.ColumnWidth = {'1x'};
            app.RightPanel.Layout.Row = 2;
            app.RightPanel.Layout.Column = 1;
        else
            % Change to a 1x2 grid
            app.GridLayout.RowHeight = {'1x'};
            app.GridLayout.ColumnWidth = {204, '1x'};
            app.RightPanel.Layout.Row = 1;
            app.RightPanel.Layout.Column = 2;
        end
    end
end

% Component initialization
methods (Access = private)

    % Create UIFigure and components
    function createComponents(app)

```



```

% Create UIFigure and hide until all
    components are created
app.UIFigure = uifigure('Visible', 'off');
app.UIFigure.AutoResizeChildren = 'off';
app.UIFigure.Position = [100 100 702 449];
app.UIFigure.Name = 'MATLAB App';
app.UIFigure.SizeChangedFcn =
    createCallbackFcn(app, @updateAppLayout,
        true);

% Create GridLayout
app.GridLayout = uigridlayout(app.UIFigure);
app.GridLayout.ColumnWidth = {204, '1x'};
app.GridLayout.RowHeight = {'1x'};
app.GridLayout.ColumnSpacing = 0;
app.GridLayout.RowSpacing = 0;
app.GridLayout.Padding = [0 0 0 0];
app.GridLayout.Scrollable = 'on';

% Create LeftPanel
app.LeftPanel = uipanel(app.GridLayout);
app.LeftPanel.Layout.Row = 1;
app.LeftPanel.Layout.Column = 1;

% Create TabGroup
app.TabGroup = uitabgroup(app.LeftPanel);
app.TabGroup.Position = [3 3 197 442];

% Create Tab
app.Tab = uitab(app.TabGroup);
app.Tab.Title = 'Tab';

% Create PEditFieldLabel
app.PEditFieldLabel = uilabel(app.Tab);
app.PEditFieldLabel.HorizontalAlignment = '
    right';
app.PEditFieldLabel.Position = [46 385 25
    22];
app.PEditFieldLabel.Text = 'P';

% Create PEditField
app.PEditField = uieditfield(app.Tab, '
    numeric');
app.PEditField.ValueChangedFcn =
    createCallbackFcn(app, @
        PEditFieldValueChanged, true);
app.PEditField.Position = [85 385 100 22];

```

```

% Create IEditFieldLabel
app.IEditFieldLabel = uilabel(app.Tab);
app.IEditFieldLabel.HorizontalAlignment = '
    right';
app.IEditFieldLabel.Position = [46 355 25
    22];
app.IEditFieldLabel.Text = 'I';

% Create IEditField
app.IEditField = uieditfield(app.Tab, '
    numeric');
app.IEditField.ValueChangedFcn =
    createCallbackFcn(app, @
        IEditFieldValueChanged, true);
app.IEditField.Position = [85 355 100 22];

% Create DEditFieldLabel
app.DEditFieldLabel = uilabel(app.Tab);
app.DEditFieldLabel.HorizontalAlignment = '
    right';
app.DEditFieldLabel.Position = [46 326 25
    22];
app.DEditFieldLabel.Text = 'D';

% Create DEditField
app.DEditField = uieditfield(app.Tab, '
    numeric');
app.DEditField.ValueChangedFcn =
    createCallbackFcn(app, @
        DEditFieldValueChanged, true);
app.DEditField.Position = [85 326 100 22];

% Create SetpointEditFieldLabel
app.SetpointEditFieldLabel = uilabel(app.Tab)
    ;
app.SetpointEditFieldLabel.
    HorizontalAlignment = 'right';
app.SetpointEditFieldLabel.Position = [21 296
    49 22];
app.SetpointEditFieldLabel.Text = 'Setpoint';

% Create SetpointEditField
app.SetpointEditField = uieditfield(app.Tab,
    'numeric');
app.SetpointEditField.ValueChangedFcn =
    createCallbackFcn(app, @
        SetpointEditFieldValueChanged, true);

```

```

app.SetpointEditField.Position = [85 296 100
    22];

% Create DisturbanceEditFieldLabel
app.DisturbanceEditFieldLabel = uilabel(app.
    Tab);
app.DisturbanceEditFieldLabel.
    HorizontalAlignment = 'right';
app.DisturbanceEditFieldLabel.Position = [1
    265 69 22];
app.DisturbanceEditFieldLabel.Text = '
    Disturbance';

% Create DisturbanceEditField
app.DisturbanceEditField = uieditfield(app.
    Tab, 'numeric');
app.DisturbanceEditField.ValueChangedFcn =
    createCallbackFcn(app, @
        DisturbanceEditFieldValueChanged, true);
app.DisturbanceEditField.Position = [85 265
    100 22];

% Create DutyCycleEditFieldLabel
app.DutyCycleEditFieldLabel = uilabel(app.Tab
    );
app.DutyCycleEditFieldLabel.
    HorizontalAlignment = 'right';
app.DutyCycleEditFieldLabel.Position = [9 235
    63 22];
app.DutyCycleEditFieldLabel.Text = 'Duty
    Cycle';

% Create DutyCycleEditField
app.DutyCycleEditField = uieditfield(app.Tab,
    'numeric');
app.DutyCycleEditField.ValueChangedFcn =
    createCallbackFcn(app, @
        DutyCycleEditFieldValueChanged, true);
app.DutyCycleEditField.Position = [86 235 100
    22];
app.DutyCycleEditField.Value = 100;

% Create OutputDropDownLabel
app.OutputDropDownLabel = uilabel(app.Tab);
app.OutputDropDownLabel.HorizontalAlignment =
    'right';
app.OutputDropDownLabel.Position = [30 199 41
    22];

```

```

app.OutputDropDownLabel.Text = 'Output';

% Create OutputDropDown
app.OutputDropDown = uidropdown(app.Tab);
app.OutputDropDown.Items = {'None', 'Channel1', 'Channel2', 'Both'};
app.OutputDropDown.ItemsData = {'3', '0', '1', '2'};
app.OutputDropDown.ValueChangedFcn =
    createCallbackFcn(app, @
        OutputDropDownValueChanged, true);
app.OutputDropDown.Position = [85 199 100
    22];
app.OutputDropDown.Value = '3';

% Create StopButton
app.StopButton = uibutton(app.Tab, 'state');
app.StopButton.ValueChangedFcn =
    createCallbackFcn(app, @
        StopButtonValueChanged, true);
app.StopButton.Visible = 'off';
app.StopButton.Text = 'Stop';
app.StopButton.Position = [85 168 100 23];

% Create StartButton
app.StartButton = uibutton(app.Tab, 'state');
app.StartButton.ValueChangedFcn =
    createCallbackFcn(app, @
        StartButtonValueChanged, true);
app.StartButton.Text = 'Start';
app.StartButton.Position = [86 168 100 23];

% Create UpdateChannelsButton
app.UpdateChannelsButton = uibutton(app.Tab,
    'push');
app.UpdateChannelsButton.ButtonPushedFcn =
    createCallbackFcn(app, @
        UpdateChannelsButtonPushed, true);
app.UpdateChannelsButton.Visible = 'off';
app.UpdateChannelsButton.Position = [81 136
    108 23];
app.UpdateChannelsButton.Text = 'Update
    Channels';

% Create SamplingtoofastLabel
app.SamplingtoofastLabel = uilabel(app.Tab);
app.SamplingtoofastLabel.Visible = 'off';
app.SamplingtoofastLabel.Position = [90 12

```

```

101 22];
app.SamplingtoofastLabel.Text = 'Sampling too
    fast!';

% Create DataSaveEditFieldLabel
app.DataSaveEditFieldLabel = uilabel(app.Tab)
;
app.DataSaveEditFieldLabel.
    HorizontalAlignment = 'right';
app.DataSaveEditFieldLabel.Position = [10 96
    61 22];
app.DataSaveEditFieldLabel.Text = 'Data Save'
;

% Create DataSaveEditField
app.DataSaveEditField = uieditfield(app.Tab,
    'text');
app.DataSaveEditField.ValueChangedFcn =
    createCallbackFcn(app, @
        DataSaveEditFieldValueChanged, true);
app.DataSaveEditField.Position = [86 96 100
    22];
app.DataSaveEditField.Value = 'PWM1StepV0';

% Create Tab2
app.Tab2 = uitab(app.TabGroup);
app.Tab2.Title = 'Tab2';

% Create COMPortEditFieldLabel
app.COMPortEditFieldLabel = uilabel(app.Tab2)
;
app.COMPortEditFieldLabel.HorizontalAlignment
    = 'right';
app.COMPortEditFieldLabel.Position = [13 385
    58 22];
app.COMPortEditFieldLabel.Text = 'COM Port';

% Create COMPortEditField
app.COMPortEditField = uieditfield(app.Tab2,
    'text');
app.COMPortEditField.ValueChangedFcn =
    createCallbackFcn(app, @
        COMPortEditFieldValueChanged, true);
app.COMPortEditField.Position = [85 385 100
    22];
app.COMPortEditField.Value = '/dev/ttyUSB0';

% Create BaudRateEditFieldLabel

```

```

app.BaudRateEditFieldLabel = uilabel(app.Tab2
    );
app.BaudRateEditFieldLabel.
    HorizontalAlignment = 'right';
app.BaudRateEditFieldLabel.Position = [9 355
    62 22];
app.BaudRateEditFieldLabel.Text = 'Baud Rate'
    ;

% Create BaudRateEditField
app.BaudRateEditField = uieditfield(app.Tab2,
    'numeric');
app.BaudRateEditField.ValueChangedFcn =
    createCallbackFcn(app, @
    BaudRateEditFieldValueChanged, true);
app.BaudRateEditField.Position = [85 355 100
    22];
app.BaudRateEditField.Value = 115200;

% Create RightPanel
app.RightPanel = uipanel(app.GridLayout);
app.RightPanel.Layout.Row = 1;
app.RightPanel.Layout.Column = 2;

% Create UIAxes
app.UIAxes = uiaxes(app.RightPanel);
title(app.UIAxes, 'Title')
xlabel(app.UIAxes, 'X')
ylabel(app.UIAxes, 'Y')
zlabel(app.UIAxes, 'Z')
app.UIAxes.Position = [7 213 489 235];

% Create UIAxes_2
app.UIAxes_2 = uiaxes(app.RightPanel);
title(app.UIAxes_2, 'Title')
xlabel(app.UIAxes_2, 'X')
ylabel(app.UIAxes_2, 'Y')
zlabel(app.UIAxes_2, 'Z')
app.UIAxes_2.Position = [8 7 488 207];

% Show the figure after all components are
    created
app.UIFigure.Visible = 'on';
end
end

% App creation and deletion
methods (Access = public)

```

```

% Construct app
function app = EBBPrac

    % Create UIFigure and components
    createComponents(app)

    % Register the app with App Designer
    registerApp(app, app UIFigure)

    if nargout == 0
        clear app
    end
end

% Code that executes before app deletion
function delete(app)

    % Delete UIFigure when app is deleted
    delete(app UIFigure)
end
end
end

```

5.2 MCU Code

```

#include <fmt/core.h>
#include <Arduino.h>
#include <iostream>
#include <sstream>
#include <vector>
#include <string>
#include <queue>

double P = 0;
double I = 0;
double D = 0;
double setpoint = 0;
double disturbance = 0;
double duty = 128; //50% duty cycle by default.
int control_outputs = 0; //By default only pwm1 is on.
bool start = 0; //Start off.
int message = 100; //Flags for certain messages.
int start_time = 0;

double temp1 = 0;
double temp2 = 0;
int N_samples = 200;
std::queue<double> samples1;

```

```

std::queue<double> samples2;

hw_timer_t *timer = NULL;
const int PWM_Out_1 = GPIO_NUM_32;
const int PWM_Out_2 = GPIO_NUM_25;
const int PWM_Meas_1 = GPIO_NUM_33;
const int PWM_Meas_2 = GPIO_NUM_26;

const int Temp_Meas1 = GPIO_NUM_27;
const int Temp_Meas2 = GPIO_NUM_35;

const double A = (3.3/4095.0);
const int PWM_freq = 10;
const int PWM_res = 8;

const int BaudRate = 1152000;
const int sampling_period = 5000; //In microseconds.

void setup() {
    //Start the USB-C serial/UART port.
    Serial.begin(BaudRate);

    //Setup I/O pins.
    pinMode(Temp_Meas1, INPUT);
    pinMode(Temp_Meas2, INPUT);
    pinMode(PWM_Meas_1, INPUT);
    pinMode(PWM_Meas_2, INPUT);

    ledcChangeFrequency(0, PWM_freq, PWM_res);
    ledcChangeFrequency(1, PWM_freq, PWM_res);
    ledcAttachPin(PWM_Out_1, 0);
    ledcAttachPin(PWM_Out_2, 1);

    timer = timerBegin(0, 80, true);

    samples1.push(0);
    samples2.push(0);
}

void loop() {

    //If receiving communication from computer, update values.
    if(Serial.available() > 0)
    {
        String received = Serial.readStringUntil('\n');
        received.trim();

        std::istringstream stream(received.c_str());
    }
}

```



```

std::string command;
std::string value_str;
double value;

std::getline(stream, command, ',');
std::getline(stream, value_str, ',');
value = std::stod(value_str);

if(command == "0")
{
    P = value;
}
else if(command == "1")
{
    I = value;
}
else if(command == "2")
{
    D = value;
}
else if(command == "3")
{
    setpoint = value;
}
else if(command == "4")
{
    disturbance = value;
}
else if(command == "5")
{
    duty = value;
    duty = (pow(2, PWM_res) - 1)*(duty/100.0); //Convert
        to percentage.
}
else if(command == "6")
{
    control_outputs = value;
    //Serial.print("Igot");
    //Serial.println(control_outputs);
}
else if(command == "7")
{
    start = value;

    //Check if start is true, then start timer.
    if(start)
    {
        start_time = millis();
    }
}

```

```

    }
  }
}

//If start flag is true, start measuring inputs/start
  controlling aswell.
if(start)
{
  //Check when we started in order to see how long we were
    busy.
  timerRestart(timer);

  //Turn on the appropriate PWM signals.
  switch(control_outputs)
  {
    case 0:
      ledcWrite(0, duty);
      ledcWrite(1, 0);
      break;

    case 1:
      ledcWrite(1, duty);
      ledcWrite(0, 0);
      break;

    case 2:
      ledcWrite(0, duty);
      ledcWrite(1, duty);
      break;

    default :
      ledcWrite(0, 0);
      ledcWrite(1, 0);
  }

  //Interpret sensor data.
  double temp1_raw = (analogReadMilliVolts(Temp_Meas1)
    /1000.0 - 0.5)/0.01;
  double temp2_raw = (analogReadMilliVolts(Temp_Meas2)
    /1000.0 - 0.5)/0.01;

  if(samples1.size() > N_samples)
  {
    temp1 -= samples1.front();
    temp2 -= samples2.front();

    samples1.pop();
    samples2.pop();
  }
}

```

```

    }

    temp1 += temp1_raw/N_samples;
    temp2 += temp2_raw/N_samples;

    samples1.push(temp1_raw/N_samples);
    samples2.push(temp2_raw/N_samples);

    //Send sensor input data as a comma seperated list.
    std::string sending = fmt::format("{0},{1},{2},{3},{4},{5}",
        temp1, temp2, analogRead(PWM_Meas_1)*A, analogRead(
            PWM_Meas_2)*A, millis() - start_time, message);

    Serial.println(String(sending.c_str()));
    Serial.flush();

    //Check how long everything took in microseconds.
    int elapsed = timerReadMicros(timer);

    if(elapsed <= sampling_period)
    {
        delayMicroseconds(sampling_period - elapsed);
        message = 100; //Reset message flag to show nothing.
    }
    else
    {
        delayMicroseconds(sampling_period);
        message = 0; //Set message flag for sampling too fast.
    }
}
//Otherwise deactivate PWM outputs.
else
{
    ledcWrite(0, 0);
    ledcWrite(1, 0);
}
}

```

List of Tables

List of Figures

1	Flow Diagram of MCU Code.	4
2	Flow Diagram of Matlab Code.	6