

UNIVERSITEIT VAN PRETORIA
UNIVERSITY OF PRETORIA
YUNIBESITHI YA PRETORIA
Faculty of Engineering, Built Environment and Information Technology

EBB 320

Control Systems

Practical 3: PID Controller Design

Name and Surname	Student Number	Signature	% Contribution
Hanré Coetzer	21507334		33
Cornelis Claasen	24704611		33
B.J. Mncube	23700816		33

By signing this assignment we confirm that we have read and are aware of the University of Pretoria's policy on academic dishonesty and plagiarism and we declare that the work submitted in this assignment is our own as delimited by the mentioned policies. We explicitly declare that no parts of this assignment have been copied from current or previous students' work or any other sources (including the internet), whether copyrighted or not. We understand that we will be subjected to disciplinary actions should it be found that the work we submit here does not comply with the said policies.

October 22, 2026

Contents

1 Theoretical Background **2**

2 Design and Simulation **3**
2.1 Root Locus Technique for G11 3
2.2 Root Locus Technique for G22 4

3 Implementation **5**

4 Results **6**

5 Discussion **7**

A Code **9**
A.1 Matlab Code 9
A.2 Model Fit Code 23
A.3 Prac 2 — Controller Design (P and PI) 26
A.4 Prac 2 — Report Figure Generation (P and PI) 26
A.5 MCU Code 26

1 Theoretical Background

$$G_c(s) = K_p + \frac{K_i}{s} + K_d s = \frac{K_c(s+z_1)(s+z_2)}{s} \tag{1}$$

Therefore:

$$K_p = K_c(z_1 + z_2) \tag{2}$$
$$K_i = K_c(z_1 z_2) \tag{3}$$
$$K_d = K_c \tag{4}$$

$$\zeta = \frac{-\ln(\%\mathrm{OS}/100)}{\sqrt{\pi^2 + \ln^2(\%\mathrm{OS}/100)}} \tag{5}$$

$$\begin{aligned} \omega_n T_r &= 1.76\zeta^3 - 0.417\zeta^2 + 1.039\zeta + 1 \\ \omega_n &= (1.76\zeta^3 - 0.417\zeta^2 + 1.039\zeta + 1)/T_r \end{aligned} \tag{6}$$

$$\sigma_d = \zeta\omega_n \tag{7}$$
$$\omega_d = \omega_n\sqrt{1-\zeta^2} \tag{8}$$

2 Design and Simulation

2.1 Root Locus Technique for G11

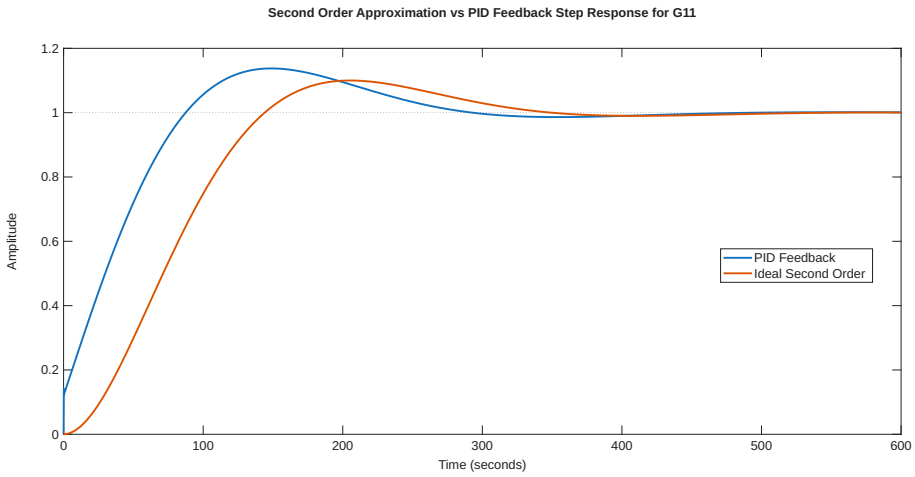


Figure 1: Time domain comparison of found PID controller against design point.

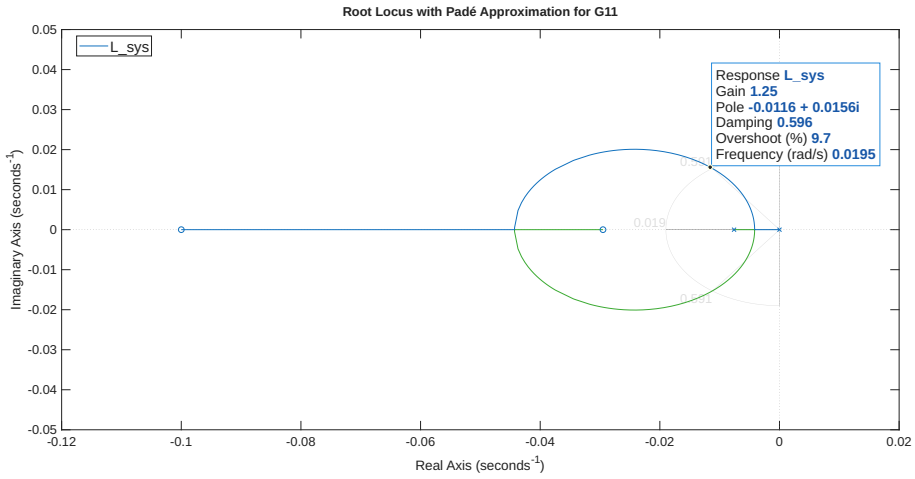


Figure 2: Root Locus plot of G11 with PID controller showing the intersection with the design point.

2.2 Root Locus Technique for G22

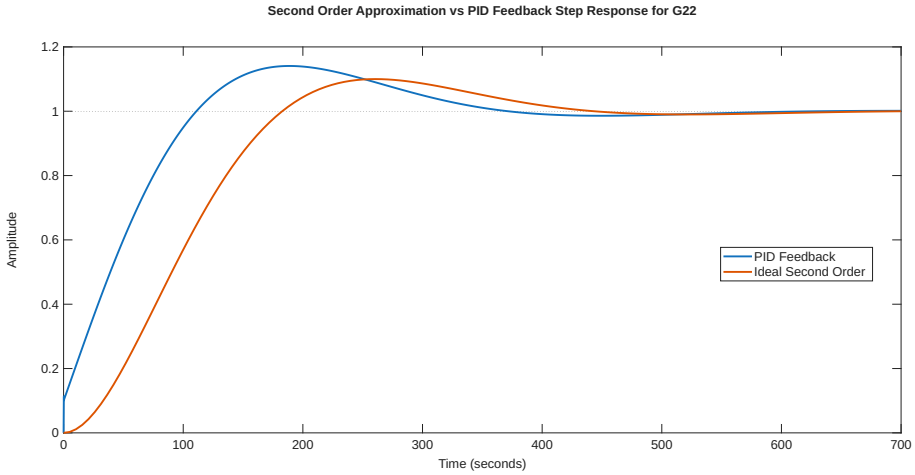


Figure 3: Time domain comparison of found PID controller against design point.

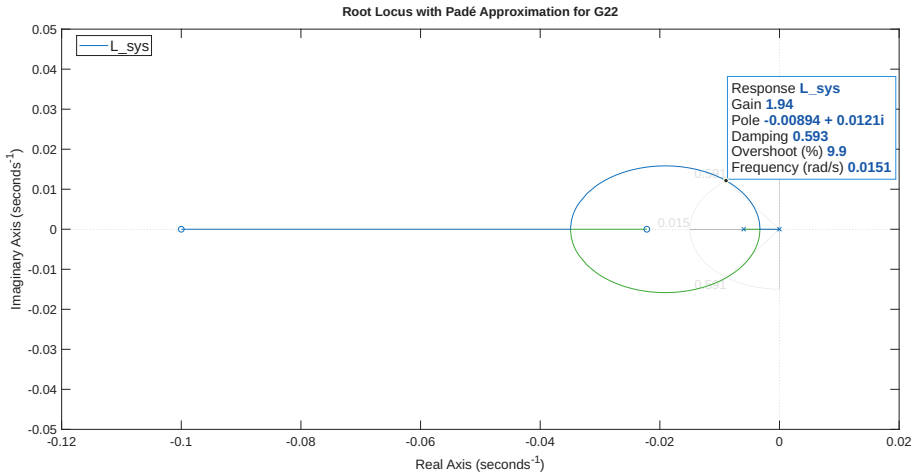


Figure 4: Root Locus plot of G22 with PID controller showing the intersection with the design point.

3 Implementation

4 Results

5 Discussion

List of Tables

List of Figures

1 Time domain comparison of found PID controller against design point. 3
2 Root Locus plot of G11 with PID controller showing the intersection with the design point. 3
3 Time domain comparison of found PID controller against design point. 4
4 Root Locus plot of G22 with PID controller showing the intersection with the design point. 4

A Code

A.1 Matlab Code

Listing 1: App Code For Sampling

```
%
    %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

%%%%%%%%%%%%%% Auto Generated Code Start
    %%%%%%%%%%%%%%%%%
%
    %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%


classdef EBBPrac < matlab.apps.AppBase

    % Properties that correspond to app components
    properties (Access = public)
        UIFigure                    matlab.ui.Figure
        GridLayout                  matlab.ui.container.
           GridLayout
        LeftPanel                   matlab.ui.container.
           Panel
        TabGroup                    matlab.ui.container.
           TabGroup
        Tab                         matlab.ui.container.
           Tab
        DataSaveEditField           matlab.ui.control.
           EditField
        DataSaveEditFieldLabel      matlab.ui.control.
           Label
        SamplingtoofastLabel        matlab.ui.control.
           Label
        UpdateChannelsButton        matlab.ui.control.
           Button
        StartButton                 matlab.ui.control.
           StateButton
        StopButton                  matlab.ui.control.
           StateButton
        OutputDropDown              matlab.ui.control.
           DropDown
        OutputDropDownLabel         matlab.ui.control.
           Label
        DutyCycleEditField          matlab.ui.control.
           NumericEditField
        DutyCycleEditFieldLabel     matlab.ui.control.
           Label
        DisturbanceEditField        matlab.ui.control.
```

```
        NumericEditField
    DisturbanceEditFieldLabel  matlab.ui.control.
        Label
    SetpointEditField          matlab.ui.control.
        NumericEditField
    SetpointEditFieldLabel     matlab.ui.control.
        Label
    DEditField                 matlab.ui.control.
        NumericEditField
    DEditFieldLabel            matlab.ui.control.
        Label
    IEditField                 matlab.ui.control.
        NumericEditField
    IEditFieldLabel            matlab.ui.control.
        Label
    PEditField                 matlab.ui.control.
        NumericEditField
    PEditFieldLabel            matlab.ui.control.
        Label
    Tab2                       matlab.ui.container.
        Tab
    BaudRateEditField          matlab.ui.control.
        NumericEditField
    BaudRateEditFieldLabel     matlab.ui.control.
        Label
    COMPortEditField           matlab.ui.control.
        EditField
    COMPortEditFieldLabel      matlab.ui.control.
        Label
    RightPanel                 matlab.ui.container.
        Panel
    UIAxes_2                   matlab.ui.control.
        UIAxes
    UIAxes                     matlab.ui.control.
        UIAxes
end

% Properties that correspond to apps with auto-reflow
properties (Access = private)
    onePanelWidth = 576;
end
%
   %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

%%%%%%%%%%%%% Auto Generated Code End
   %%%%%%%%%%%%%%%
%
   %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
```

```
properties (Access = private)
    %Live lines 1 and 2 are for the temperature
       measurements.
    liveLine1
    liveLine2
    %Live lines 3 and 4 are for the PWM signals.
    liveLine3
    liveLine4
    P
    I
    D
    setpoint
    disturbance
    duty_cycle
    output
    capturing
    COM_port
    baud_rate
    window_size
    esp32
    data_save_name % Description
end


% Callbacks that handle component events
methods (Access = private)

    % Value changed function: PEditField
    function PEditFieldValueChanged(app, event)
        app.P = app.PEditField.Value;
    end

    % Value changed function: IEditField
    function IEditFieldValueChanged(app, event)
        app.I = app.IEditField.Value;
    end

    % Value changed function: DEditField
    function DEditFieldValueChanged(app, event)
        app.D = app.DEditField.Value;
    end

    % Value changed function: SetpointEditField
    function SetpointEditFieldValueChanged(app, event
       )
        app.setpoint = app.SetpointEditField.Value;
```

```
end

% Value changed function: DisturbanceEditField
function DisturbanceEditFieldValueChanged(app,
    event)
    app.disturbance = app.DisturbanceEditField.
        Value;
end

% Value changed function: DutyCycleEditField
function DutyCycleEditFieldValueChanged(app,
    event)
    app.duty_cycle = app.DutyCycleEditField.Value
        ;
end

% Value changed function: OutputDropDown
function OutputDropDownValueChanged(app, event)
    app.output = str2double(app.OutputDropDown.
        Value);
end

% Value changed function: StartButton
function StartButtonValueChanged(app, event)
    app.StartButton.Visible = "off";
    app.StopButton.Visible = "on";
    app.UpdateChannelsButton.Visible = "on";
    app.capturing = true;

    %Call all of the other functions to make sure
        their values are
    %captured.
    app.PEditFieldValueChanged();
    app.IEditFieldValueChanged();
    app.DEditFieldValueChanged();
    app.SetpointEditFieldValueChanged();
    app.DisturbanceEditFieldValueChanged();
    app.DutyCycleEditFieldValueChanged();
    app.OutputDropDownValueChanged();
    app.BaudRateEditFieldValueChanged();
    app.COMPortEditFieldValueChanged();
    app.DataSaveEditFieldValueChanged();

    if isempty(app.esp32)
        app.esp32 = serialport(app.COM_port, app.
            baud_rate);
        configureTerminator(app.esp32, "LF");
    end
```

```
flush(app.esp32);

pause(1);

%Make sure all info is read into esp.
writeline(app.esp32, sprintf("%d, %.2f", 0,
   app.P)); %
writeline(app.esp32, sprintf("%d, %.2f", 1,
   app.I)); %
writeline(app.esp32, sprintf("%d, %.2f", 2,
   app.D)); %
writeline(app.esp32, sprintf("%d, %.2f", 3,
   app.setpoint)); %
writeline(app.esp32, sprintf("%d, %.2f", 4,
   app.disturbance)); %
writeline(app.esp32, sprintf("%d, %d", 5, app
   .duty_cycle)); %
writeline(app.esp32, sprintf("%d, %.2f", 6,
   app.output)); %
writeline(app.esp32, sprintf("%d, %.2f", 7,
   app.capturing)); %

%Clear axes.
cla(app.UIAxes);
cla(app.UIAxes_2);

%Plotting axes for the temperature
   measurements.
app.liveLine1 = animatedline(app.UIAxes, '
   Color', 'r');
app.liveLine2 = animatedline(app.UIAxes, '
   Color', 'b');

%Plotting axes for the PWM signals.
app.liveLine3 = animatedline(app.UIAxes_2, '
   Color', 'r');
app.liveLine4 = animatedline(app.UIAxes_2, '
   Color', 'b');

app.window_size = 30; %seconds

%Define data csv that we will safe to.
fid = fopen(app.data_save_name + ".csv", 'wt'
   );

while(app.capturing)
    if app.esp32.NumBytesAvailable > 0
        rawData = readline(app.esp32);
```

```
                data = str2double(split(rawData, ',')
                    );
                data(5) = data(5)/1000;

                if ~isnan(data(1)) && (length(data)
                    == 6)
                    %Plot temperature data.
                    addpoints(app.liveLine1, data(5),
                        data(1));
                    addpoints(app.liveLine2, data(5),
                        data(2));
                    xlim(app.UIAxes, [data(5) - app.
                        window_size, data(5)]);

                    %Plot PWM signals.
                    addpoints(app.liveLine3, data(5),
                        data(3));
                    addpoints(app.liveLine4, data(5),
                        data(4));
                    xlim(app.UIAxes_2, [data(5) - app
                        .window_size, data(5)]);

                    %Write data to file.
                    fprintf(fid, rawData);

                    if data(end) == 0
                        app.SamplingtoofastLabel.
                            Visible = "on";
                    else
                        app.SamplingtoofastLabel.
                            Visible = "off";
                    end
                end

                drawnow limitrate
            end
        end

        %Close file we are saving to.
        fclose(fid);

        %Send stop signal.
        writeline(app.esp32, sprintf("%d, %.2f", 7,
            app.capturing));

        clear app.esp32;
    end
```

```
% Value changed function: COMPortEditField
function COMPortEditFieldValueChanged(app, event)
    app.COM_port = app.COMPortEditField.Value;
end

% Value changed function: BaudRateEditField
function BaudRateEditFieldValueChanged(app, event
    )
    app.baud_rate = app.BaudRateEditField.Value;
end

% Value changed function: StopButton
function StopButtonValueChanged(app, event)
    app.capturing = false;
    app.StopButton.Visible = "off";
    app.UpdateChannelsButton.Visible = "off";
    app.StartButton.Visible = "on";

end

% Button pushed function: UpdateChannelsButton
function UpdateChannelsButtonPushed(app, event)
    app.DutyCycleEditFieldValueChanged();
    app.OutputDropDownValueChanged();
    writeline(app.esp32, sprintf("%d, %.2f", 5,
        app.duty_cycle));
    writeline(app.esp32, sprintf("%d, %.2f", 6,
        app.output));
end

% Value changed function: DataSaveEditField
function DataSaveEditFieldValueChanged(app, event
    )
    app.data_save_name = app.DataSaveEditField.
        Value;

end

% Changes arrangement of the app based on
    UIFigure width
function updateAppLayout(app, event)
    currentFigureWidth = app.UIFigure.Position(3)
        ;
    if(currentFigureWidth <= app.onePanelWidth)
        % Change to a 2x1 grid
        app.GridLayout.RowHeight = {449, 449};
        app.GridLayout.ColumnWidth = {'1x'};
        app.RightPanel.Layout.Row = 2;
```

```
            app.RightPanel.Layout.Column = 1;
        else
            % Change to a 1x2 grid
            app.GridLayout.RowHeight = {'1x'};
            app.GridLayout.ColumnWidth = {204, '1x'};
            app.RightPanel.Layout.Row = 1;
            app.RightPanel.Layout.Column = 2;
        end
    end
end

%
    %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

%%%%%%%%%%%%%% Auto Generated Code Start
    %%%%%%%%%%%%%
%
    %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%


% Component initialization
methods (Access = private)

    % Create UIFigure and components
    function createComponents(app)

        % Create UIFigure and hide until all
           components are created
        app.UIFigure = uifigure('Visible', 'off');
        app.UIFigure.AutoResizeChildren = 'off';
        app.UIFigure.Position = [100 100 702 449];
        app.UIFigure.Name = 'MATLAB App';
        app.UIFigure.SizeChangedFcn =
           createCallbackFcn(app, @updateAppLayout,
           true);

        % Create GridLayout
        app.GridLayout = uigridlayout(app.UIFigure);
        app.GridLayout.ColumnWidth = {204, '1x'};
        app.GridLayout.RowHeight = {'1x'};
        app.GridLayout.ColumnSpacing = 0;
        app.GridLayout.RowSpacing = 0;
        app.GridLayout.Padding = [0 0 0 0];
        app.GridLayout.Scrollable = 'on';

        % Create LeftPanel
        app.LeftPanel = uipanel(app.GridLayout);
        app.LeftPanel.Layout.Row = 1;
```

```
app.LeftPanel.Layout.Column = 1;

% Create TabGroup
app.TabGroup = uitabgroup(app.LeftPanel);
app.TabGroup.Position = [3 3 197 442];

% Create Tab
app.Tab = uitab(app.TabGroup);
app.Tab.Title = 'Tab';

% Create PEditFieldLabel
app.PEditFieldLabel = uilabel(app.Tab);
app.PEditFieldLabel.HorizontalAlignment = '
   right';
app.PEditFieldLabel.Position = [46 385 25
   22];
app.PEditFieldLabel.Text = 'P';

% Create PEditField
app.PEditField = uieditfield(app.Tab, '
   numeric');
app.PEditField.ValueChangedFcn =
   createCallbackFcn(app, @
   PEditFieldValueChanged, true);
app.PEditField.Position = [85 385 100 22];

% Create IEditFieldLabel
app.IEditFieldLabel = uilabel(app.Tab);
app.IEditFieldLabel.HorizontalAlignment = '
   right';
app.IEditFieldLabel.Position = [46 355 25
   22];
app.IEditFieldLabel.Text = 'I';

% Create IEditField
app.IEditField = uieditfield(app.Tab, '
   numeric');
app.IEditField.ValueChangedFcn =
   createCallbackFcn(app, @
   IEditFieldValueChanged, true);
app.IEditField.Position = [85 355 100 22];

% Create DEditFieldLabel
app.DEditFieldLabel = uilabel(app.Tab);
app.DEditFieldLabel.HorizontalAlignment = '
   right';
app.DEditFieldLabel.Position = [46 326 25
   22];
```

```
app.DEditFieldLabel.Text = 'D';

% Create DEditField
app.DEditField = uieditfield(app.Tab, '
   numeric');
app.DEditField.ValueChangedFcn =
   createCallbackFcn(app, @
   DEditFieldValueChanged, true);
app.DEditField.Position = [85 326 100 22];

% Create SetpointEditFieldLabel
app.SetpointEditFieldLabel = uilabel(app.Tab)
   ;
app.SetpointEditFieldLabel.
   HorizontalAlignment = 'right';
app.SetpointEditFieldLabel.Position = [21 296
    49 22];
app.SetpointEditFieldLabel.Text = 'Setpoint';

% Create SetpointEditField
app.SetpointEditField = uieditfield(app.Tab,
   'numeric');
app.SetpointEditField.ValueChangedFcn =
   createCallbackFcn(app, @
   SetpointEditFieldValueChanged, true);
app.SetpointEditField.Position = [85 296 100
   22];

% Create DisturbanceEditFieldLabel
app.DisturbanceEditFieldLabel = uilabel(app.
   Tab);
app.DisturbanceEditFieldLabel.
   HorizontalAlignment = 'right';
app.DisturbanceEditFieldLabel.Position = [1
   265 69 22];
app.DisturbanceEditFieldLabel.Text = '
   Disturbance';

% Create DisturbanceEditField
app.DisturbanceEditField = uieditfield(app.
   Tab, 'numeric');
app.DisturbanceEditField.ValueChangedFcn =
   createCallbackFcn(app, @
   DisturbanceEditFieldValueChanged, true);
app.DisturbanceEditField.Position = [85 265
   100 22];

% Create DutyCycleEditFieldLabel
```

```
app.DutyCycleEditFieldLabel = uilabel(app.Tab
    );
app.DutyCycleEditFieldLabel.
    HorizontalAlignment = 'right';
app.DutyCycleEditFieldLabel.Position = [9 235
     63 22];
app.DutyCycleEditFieldLabel.Text = 'Duty
    Cycle';

% Create DutyCycleEditField
app.DutyCycleEditField = uieditfield(app.Tab,
     'numeric');
app.DutyCycleEditField.ValueChangedFcn =
    createCallbackFcn(app, @
    DutyCycleEditFieldValueChanged, true);
app.DutyCycleEditField.Position = [86 235 100
     22];
app.DutyCycleEditField.Value = 100;

% Create OutputDropDownLabel
app.OutputDropDownLabel = uilabel(app.Tab);
app.OutputDropDownLabel.HorizontalAlignment =
     'right';
app.OutputDropDownLabel.Position = [30 199 41
     22];
app.OutputDropDownLabel.Text = 'Output';

% Create OutputDropDown
app.OutputDropDown = uidropdown(app.Tab);
app.OutputDropDown.Items = {'None', 'Channel1
    ', 'Channel2', 'Both'};
app.OutputDropDown.ItemsData = {'3', '0', '1'
    , '2'};
app.OutputDropDown.ValueChangedFcn =
    createCallbackFcn(app, @
    OutputDropDownValueChanged, true);
app.OutputDropDown.Position = [85 199 100
    22];
app.OutputDropDown.Value = '3';

% Create StopButton
app.StopButton = uibutton(app.Tab, 'state');
app.StopButton.ValueChangedFcn =
    createCallbackFcn(app, @
    StopButtonValueChanged, true);
app.StopButton.Visible = 'off';
app.StopButton.Text = 'Stop';
app.StopButton.Position = [85 168 100 23];
```

```
% Create StartButton
app.StartButton = uibutton(app.Tab, 'state');
app.StartButton.ValueChangedFcn =
   createCallbackFcn(app, @
   StartButtonValueChanged, true);
app.StartButton.Text = 'Start';
app.StartButton.Position = [86 168 100 23];

% Create UpdateChannelsButton
app.UpdateChannelsButton = uibutton(app.Tab,
   'push');
app.UpdateChannelsButton.ButtonPushedFcn =
   createCallbackFcn(app, @
   UpdateChannelsButtonPushed, true);
app.UpdateChannelsButton.Visible = 'off';
app.UpdateChannelsButton.Position = [81 136
   108 23];
app.UpdateChannelsButton.Text = 'Update
   Channels';

% Create SamplingtoofastLabel
app.SamplingtoofastLabel = uilabel(app.Tab);
app.SamplingtoofastLabel.Visible = 'off';
app.SamplingtoofastLabel.Position = [90 12
   101 22];
app.SamplingtoofastLabel.Text = 'Sampling too
    fast!';

% Create DataSaveEditFieldLabel
app.DataSaveEditFieldLabel = uilabel(app.Tab)
   ;
app.DataSaveEditFieldLabel.
   HorizontalAlignment = 'right';
app.DataSaveEditFieldLabel.Position = [10 96
   61 22];
app.DataSaveEditFieldLabel.Text = 'Data Save'
   ;

% Create DataSaveEditField
app.DataSaveEditField = uieditfield(app.Tab,
   'text');
app.DataSaveEditField.ValueChangedFcn =
   createCallbackFcn(app, @
   DataSaveEditFieldValueChanged, true);
app.DataSaveEditField.Position = [86 96 100
   22];
app.DataSaveEditField.Value = 'PWM1StepV0';
```

```
% Create Tab2
app.Tab2 = uitab(app.TabGroup);
app.Tab2.Title = 'Tab2';

% Create COMPortEditFieldLabel
app.COMPortEditFieldLabel = uilabel(app.Tab2)
    ;
app.COMPortEditFieldLabel.HorizontalAlignment
     = 'right';
app.COMPortEditFieldLabel.Position = [13 385
    58 22];
app.COMPortEditFieldLabel.Text = 'COM Port';

% Create COMPortEditField
app.COMPortEditField = uieditfield(app.Tab2,
    'text');
app.COMPortEditField.ValueChangedFcn =
    createCallbackFcn(app, @
    COMPortEditFieldValueChanged, true);
app.COMPortEditField.Position = [85 385 100
    22];
app.COMPortEditField.Value = '/dev/ttyUSB0';

% Create BaudRateEditFieldLabel
app.BaudRateEditFieldLabel = uilabel(app.Tab2
    );
app.BaudRateEditFieldLabel.
    HorizontalAlignment = 'right';
app.BaudRateEditFieldLabel.Position = [9 355
    62 22];
app.BaudRateEditFieldLabel.Text = 'Baud Rate'
    ;

% Create BaudRateEditField
app.BaudRateEditField = uieditfield(app.Tab2,
     'numeric');
app.BaudRateEditField.ValueChangedFcn =
    createCallbackFcn(app, @
    BaudRateEditFieldValueChanged, true);
app.BaudRateEditField.Position = [85 355 100
    22];
app.BaudRateEditField.Value = 115200;

% Create RightPanel
app.RightPanel = uipanel(app.GridLayout);
app.RightPanel.Layout.Row = 1;
app.RightPanel.Layout.Column = 2;
```

```
            % Create UIAxes
            app.UIAxes = uiaxes(app.RightPanel);
            title(app.UIAxes, 'Title')
            xlabel(app.UIAxes, 'X')
            ylabel(app.UIAxes, 'Y')
            zlabel(app.UIAxes, 'Z')
            app.UIAxes.Position = [7 213 489 235];

            % Create UIAxes_2
            app.UIAxes_2 = uiaxes(app.RightPanel);
            title(app.UIAxes_2, 'Title')
            xlabel(app.UIAxes_2, 'X')
            ylabel(app.UIAxes_2, 'Y')
            zlabel(app.UIAxes_2, 'Z')
            app.UIAxes_2.Position = [8 7 488 207];

            % Show the figure after all components are
               created
            app.UIFigure.Visible = 'on';
        end
    end

    % App creation and deletion
    methods (Access = public)

        % Construct app
        function app = EBBPrac

            % Create UIFigure and components
            createComponents(app)

            % Register the app with App Designer
            registerApp(app, app.UIFigure)

            if nargout == 0
                clear app
            end
        end

        % Code that executes before app deletion
        function delete(app)

            % Delete UIFigure when app is deleted
            delete(app.UIFigure)
        end
    end
end
```

```
%
    %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

%%%%%%%%%%%%%%%%%%%% Auto Generated Code end
    %%%%%%%%%%%%%
%
    %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
```

A.2 Model Fit Code

Listing 2: Model fitting and plotting code

```
% Obtaining the transfer function
% Package the input arrays of both transistors into one
    matrix (Needs to be columns)
PWM1StepV1Data = readmatrix('..\Data1\Step_PWM1_V0.csv');
PWM1StepV1 = PWM1StepV1Data(7920:end,1:5);
PWM2StepV0Data = readmatrix('..\Data1\Step_PWM2_V0.csv');
PWM2StepV0 = PWM2StepV0Data(6400:end,1:5);

PWM1TestDataFile = readmatrix('..\Data1\
    Step_PWM1_VtestData50.csv');
PWM1TestData = PWM1TestDataFile(6230:end,1:5);
PWM2TestDataFile = readmatrix('..\Data1\
    Step_PWM2_VtestData50.csv');
PWM2TestData = PWM2TestDataFile(6160:end,1:5);

% pwm1 data prep
V_PWM1 = [PWM1StepV1(:,3)];
Temp_PWM1 = [PWM1StepV1(:,1)-22.28, PWM1StepV1(:,2)
    -21.24];
time_step = 0.005;

% pwm2 data prep
V_PWM2 = [PWM2StepV0(:,4)];
Temp_PWM2 = [PWM2StepV0(:,1)-20.26, PWM2StepV0(:,2)
    -19.05];

% pwm1 test data prep
V_PWM1_Test = [PWM1TestData(:,3)];
Temp_PWM1_test = [PWM1TestData(:,1)-21.2, PWM1TestData
    (:,2)-20.2];

% pwm2 test data prep
V_PWM2_Test = [PWM2TestData(:,4)];
Temp_PWM2_test = [PWM2TestData(:,1)-21.1, PWM2TestData
    (:,2)-20.2] ;
```

```
% use iddata to set up the data for tfest
tfest_data1 = iddata(Temp_PWM1, V_PWM1, time_step);
tfest_data2 = iddata(Temp_PWM2, V_PWM2, time_step);
testData1 = iddata(Temp_PWM1_test, V_PWM1_Test, time_step
    );
testData2 = iddata(Temp_PWM2_test, V_PWM2_Test, time_step
    );

% estimate nr of poles and zeros
n_poles = 1;
n_zeros = 0;

% Estimate the transfer functions independently (SISO) to
     avoid idss error
% tfest_data(samples, output, input)
sys11 = tfest(tfest_data1(:, 1, 1), n_poles, n_zeros, NaN
    ); % PWM1 to T1
sys21 = tfest(tfest_data1(:, 2, 1), n_poles, n_zeros, NaN
    ); % PWM1 to T2

sys12 = tfest(tfest_data2(:, 1, 1), n_poles, n_zeros, NaN
    ); % PWM2 to T1
sys22 = tfest(tfest_data2(:, 2, 1), n_poles, n_zeros, NaN
    ); % PWM2 to T2

% Combine the individual SISO models back into SIMO
    systems
simo_transfer1 = [sys11; sys21];
simo_transfer2 = [sys12; sys22];

% set up graph details
tfest_data1.Name = 'Measured Data';
tfest_data2.Name = 'Measured Data';
testData1.Name = 'Measured Data';
testData2.Name = 'Measured Data';
simo_transfer2.Name = 'Simulated Model';
simo_transfer1.Name = 'Simulated Model';

figure(1)
compare(tfest_data1, simo_transfer1);
legend('Location', 'best');
ylabel('Change in Temperature (C)')

figure(2)
compare(tfest_data2, simo_transfer2);
legend('Location', 'best');
ylabel('Change in Temperature (C)')
```

```
figure(3)
compare(testData1, simo_transfer1);
legend('Location', 'best');
ylabel('Change in Temperature (C)')

figure(4)
compare(testData2, simo_transfer2);
legend('Location', 'best');
ylabel('Change in Temperature (C)')

lines = findobj(gcf, 'Type', 'Line');
set(lines, 'LineWidth', 1.5);

% display the transfer functions of PWM1
[num1, den1] = tfdata(simo_transfer1(1, 1), 'v');
delay1 = simo_transfer1(1, 1).IODelay; % Extract dead
   time
[num2, den2] = tfdata(simo_transfer1(2, 1), 'v');
delay2 = simo_transfer1(2, 1).IODelay;

disp('--- Transfer Function 1 (PWM1 to T1) ---');
disp('Numerator:'); disp(num1);
disp('Denominator:'); disp(den1);
disp(['Estimated Dead Time (s): ', num2str(delay1)]);

disp('--- Transfer Function 2 (PWM1 to T2) ---');
disp('Numerator:'); disp(num2);
disp('Denominator:'); disp(den2);
disp(['Estimated Dead Time (s): ', num2str(delay2)]);

% display transfer functions of PWM2
[num12, den12] = tfdata(simo_transfer2(1, 1), 'v');
delay12 = simo_transfer2(1, 1).IODelay;
[num22, den22] = tfdata(simo_transfer2(2, 1), 'v');
delay22 = simo_transfer2(2, 1).IODelay;

disp('--- Transfer Function 1 (PWM2 to T1) ---');
disp('Numerator:'); disp(num12);
disp('Denominator:'); disp(den12);
disp(['Estimated Dead Time (s): ', num2str(delay12)]);

disp('--- Transfer Function 2 (PWM2 to T2) ---');
disp('Numerator:'); disp(num22);
disp('Denominator:'); disp(den22);
disp(['Estimated Dead Time (s): ', num2str(delay22)]);
```

A.3 Prac 2 — Controller Design (P and PI)

A.4 Prac 2 — Report Figure Generation (P and PI)

A.5 MCU Code

```
#include <fmt/core.h>
#include <Arduino.h>
#include <iostream>
#include <sstream>
#include <vector>
#include <string>
#include <queue>
#include "ValuesPID.cpp"


double duty1 = 128; //50% duty cycle by default.
double duty2 = 128;
int control_outputs = 0; //By default only pwm1 is on.
bool start = 0; //Start off.
int message = 100; //Flags for certain messages.
int start_time = 0;
bool startControlling = 0; //See if we should start
    controlling, or continue just measuring.




//New PID structs for eventual use in the controllers.
ValuesPID controllerG11 = {0, 0, 0, 0, 0, 0, 0, 0};
ValuesPID controllerG22 = {0, 0, 0, 0, 0, 0, 0, 0};


double temp1 = 0; //Final temperature measurement that is
    sent to PC and used by controller/s.
double temp2 = 0; //Final temperature measurement that is
    sent to PC and used by controller/s.
int N_samples = 200; //Amount of samples being averaged.
std::queue<double> samples1; //Storage of samples for temp
    measurements for T1
std::queue<double> samples2; //Storage of samples for temp
    measurements for T2

hw_timer_t *timer = NULL; //Timer to ensure constant sample
    rate.
const int PWM_Out_1 = GPIO_NUM_32;
const int PWM_Out_2 = GPIO_NUM_25;
const int PWM_Meas_1 = GPIO_NUM_33;
const int PWM_Meas_2 = GPIO_NUM_26;
```

```
const int Temp_Meas1 = GPIO_NUM_27;
const int Temp_Meas2 = GPIO_NUM_35;

const double A = (3.3/4095.0); //Constant multiplier used to
    scale PWM outputs to voltages.
const int PWM_freq = 10;
const int PWM_res = 8;

const int BaudRate = 1152000;
const int sampling_period = 5000; //In microseconds.
const float dt = sampling_period/1000000.0; //t delta used
   in PWM calculations.
bool first_run = true; //Check if this is the very first run
   , used the prevent initial derivative kick. (Can be used
   for both controllers at once since they are controlling
   at the same time?)

float calculatePID(ValuesPID& controller){

      float duty = 0;
      float next_integral = controller.integral + controller
         .error * dt;

      controller.derivative = (controller.error - controller
         .prev_error)/dt;

      float pid_out = controller.P * controller.error +
         controller.I*next_integral + controller.D*
         controller.derivative;
      //anti-windup logic
      if  (pid_out >= 3.3 )
      {
        duty = 1;
        if ( controller.error < 0){
        controller.integral = next_integral;
        }

      }

      else if (pid_out <= 0.0 ) {
      duty = 0.0; // You cannot have a negative duty cycle
         for a simple heater/cooler
      if ( controller.error > 0){
        controller.integral = next_integral;
        }

      }
```

```
        else{
          duty = pid_out/3.3;
          controller.integral = next_integral;
        }
        duty = (pow(2, PWM_res) - 1)*(duty);

    return duty;
}

void setup() {
  //Start the USB-C serial/UART port.
  Serial.begin(BaudRate);

  //Setup I/O pins.
  pinMode(Temp_Meas1, INPUT);
  pinMode(Temp_Meas2, INPUT);
  pinMode(PWM_Meas_1, INPUT);
  pinMode(PWM_Meas_2, INPUT);

  ledcChangeFrequency(0, PWM_freq, PWM_res);
  ledcChangeFrequency(1, PWM_freq, PWM_res);
  ledcAttachPin (PWM_Out_1, 0);
  ledcAttachPin(PWM_Out_2, 1);

  timer = timerBegin(0, 80, true);

  samples1.push(0);
  samples2.push(0);
}

void loop() {

  //If receiving communication from computer, update values.
  if(Serial.available() > 0)
  {
    //Read the entire line, trim whitespace, and separate
       the comma separated line into the command value pair.
    String received = Serial.readStringUntil('\n');
    received.trim();

    std::istringstream stream(received.c_str());
    std::string command;
    std::string value_str;
    double value;

    std::getline(stream, command, ',');
    std::getline(stream, value_str, ',');
```

```
value = std::stod(value_str);

//Essentially a "switch case" to update the appropriate
    values for each command.
if(command == "0") // P value for PWM1
{
  controllerG11.P = value;
}
else if(command == "1") // I value for PWM1
{
  controllerG11.I = value;
}
else if(command == "2") // D value for PWM1
{
  controllerG11.D = value;
}
else if(command == "3") // Setpoint value for PWM1
{
  controllerG11.setpoint = value;
}

else if(command == "5") //Change from duty cycle set to
    the startControlling flag.
{
  startControlling = value;
}
else if(command == "7") //Flag to start process of
    taking measurements and sending them over UART.
{
  start = value;

  //Check if start is true, then start timer.
  if(start)
  {
    start_time = millis();
  }
}

else if(command == "8") // P value for PWM2
{
  controllerG22.P = value;
}
else if(command == "9") // I value for PWM2
{
  controllerG22.I = value;
}
else if(command == "10") // D value for PWM2
{
```

```
      controllerG22.D = value;
    }
    else if(command == "11") // Setpoint value for PWM2
    {
      controllerG22.setpoint = value;
    }
  }

  //If start flag is true, start measuring inputs/start
     controlling aswell.
  if(start)
  {
    //Check when we started in order to see how long we were
        busy.
    timerRestart(timer);

    if(startControlling)
    {
      //Turn on the appropriate PWM signals.
        ledcWrite(0, duty1);
        ledcWrite(1, duty2);
    }

    //Interpret sensor data.
    double temp1_raw = (analogReadMilliVolts(Temp_Meas1)
       /1000.0 - 0.5)/0.01;
    double temp2_raw = (analogReadMilliVolts(Temp_Meas2)
       /1000.0 - 0.5)/0.01;

    if(samples1.size() > N_samples)
    {
      temp1 -= samples1.front();
      temp2 -= samples2.front();

      samples1.pop();
      samples2.pop();
    }

    temp1 += temp1_raw/N_samples;
    temp2 += temp2_raw/N_samples;

    samples1.push(temp1_raw/N_samples);
    samples2.push(temp2_raw/N_samples);

    //Send sensor input data as a comma seperated list.
    std::string sending = fmt::format("{0},␣{1},␣{2},␣{3},␣
       {4},␣{5}",
    temp1, temp2, analogRead(PWM_Meas_1)*A, analogRead(
```

```
    PWM_Meas_2)*A, millis() - start_time, message);

Serial.println(String(sending.c_str()));
Serial.flush();


if (startControlling)
{
  //PID controller start
  controllerG11.prev_error = controllerG11.error;
  controllerG11.error = controllerG11.setpoint - temp1;

  controllerG22.prev_error =  controllerG22.error;
  controllerG22.error =  controllerG22.setpoint - temp2;

  // Prevent derivative kick on first run

  if (first_run) {
    controllerG11.prev_error = controllerG11.error;
    controllerG22.prev_error = controllerG22.error;

    first_run = false;
  }

  duty1 = calculatePID(controllerG11);
  duty2 =calculatePID(controllerG22);



  // std::string sending = fmt::format("{0}, {1}, {2},
     {3}, {4}", P, I, D, error, duty);
  // Serial.println(String(sending.c_str()));
  // Serial.flush();
}
//Otherwise turn off control signals.
else
{
  ledcWrite(0, 0);
  ledcWrite(1, 0);
}

//Check how long everything took in microseconds.
int elapsed = timerReadMicros(timer);

if(elapsed <= sampling_period)
{
  delayMicroseconds(sampling_period - elapsed);
  message = 100; //Reset message flag to show nothing.
```

```
      }
      else
      {
        delayMicroseconds(sampling_period);
        message = 0; //Set message flag for sampling too fast.
      }


    //Otherwise deactivate PWM outputs.
    }
    else
    {
      ledcWrite(0, 0);
      ledcWrite(1, 0);
    }
}
```