


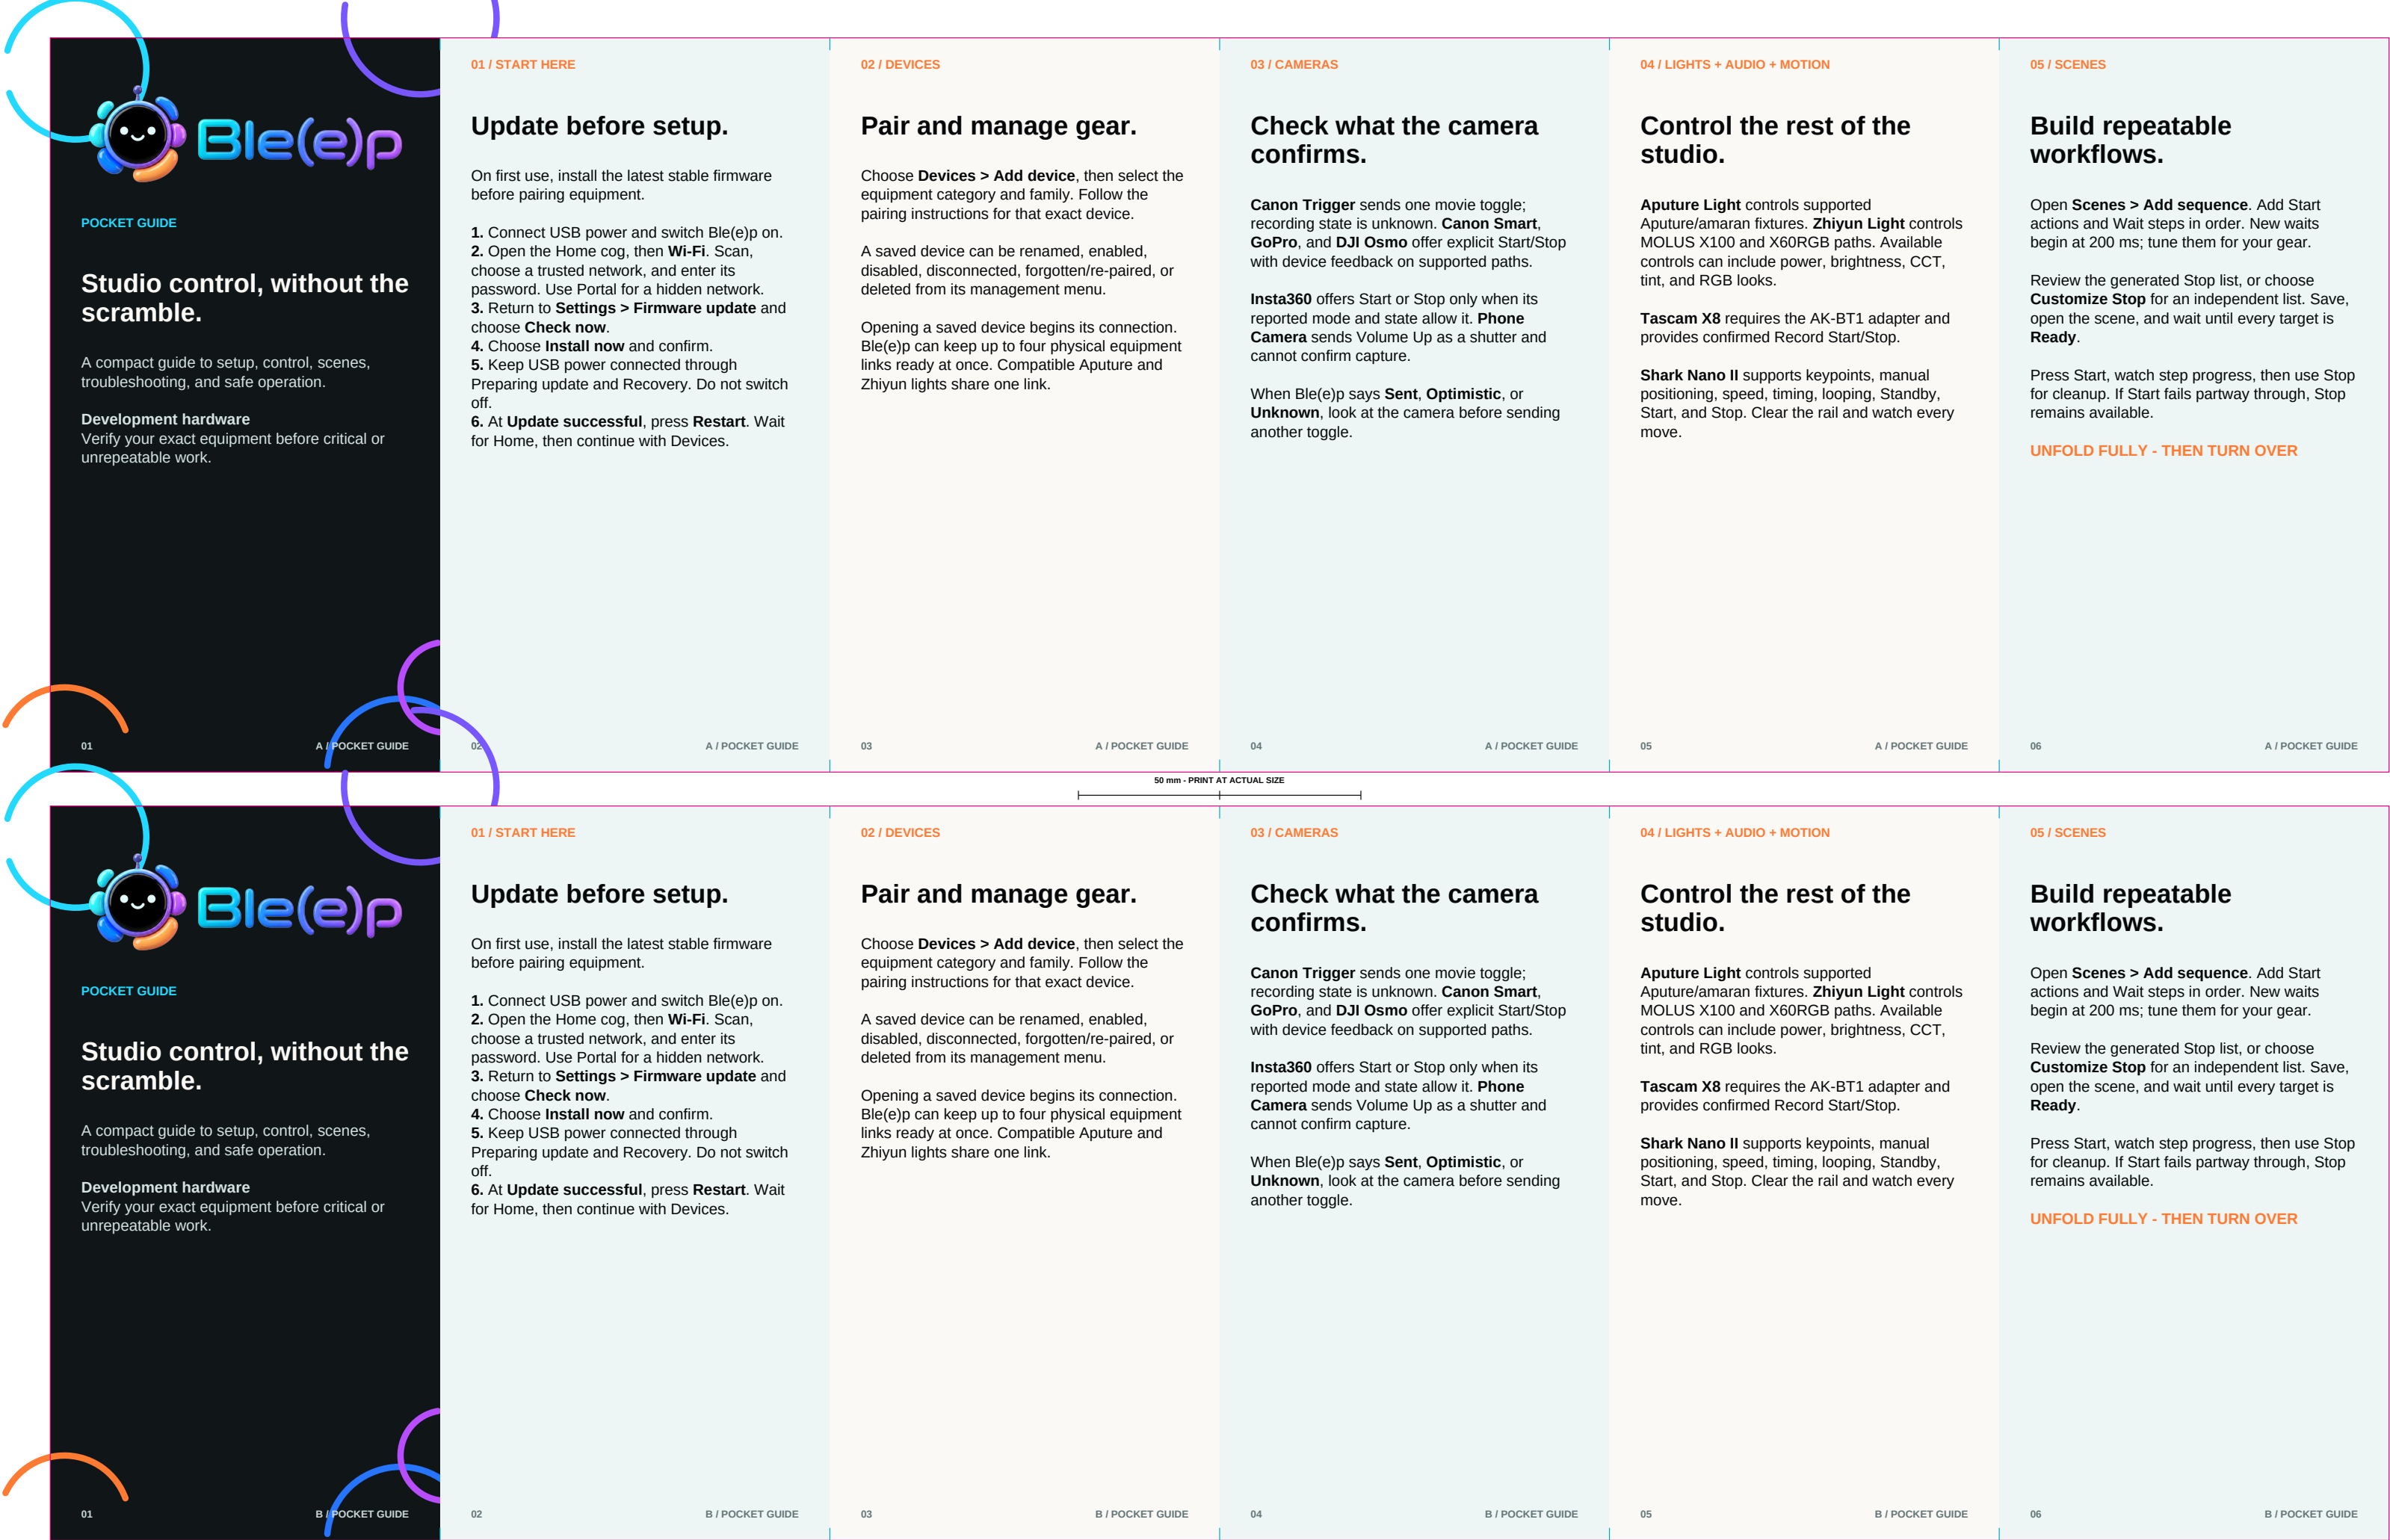

FULL OWNER'S GUIDE Details change. Scan before the shoot. Exact-model compatibility matters. A similar camera, light, recorder, phone, or motion device is not automatically supported. The complete guide includes current setup procedures, supported models, limitations, troubleshooting, safety, and developer information.  BLEEP.HML.TECH / OWNER'S GUIDE 12A / POCKET GUIDE	10 / SETTINGS + RESET Know what Factory Reset removes. Open the Home cog for version information, Wi-Fi, signed firmware updates, haptics, diagnostics, and Factory Reset. Factory Reset requires a three-second hold. It removes saved devices and pairings, scenes, Wi-Fi, Home Assistant links, light setup, and preferences, then restarts Ble(e)p. It does not remove the installed software. Use the full owner's guide for exact-model compatibility, pairing steps, limitations, assembly, and repair information.  11A / POCKET GUIDE	09 / WORK SAFELY Observe the real studio. Secure cameras, sliders, lights, cables, and recorders before sending commands. Keep people and loose objects clear of moving equipment. Watch for movement, recording, power, and light-output confirmation whenever state is optimistic or unknown. Do not charge, use, ship, or enclose a hot, damaged, or swollen battery. Power Ble(e)p off before packing it. Treat Wi-Fi details, tokens, pairing data, and device identities as private.  10A / POCKET GUIDE	08 / TROUBLESHOOT Recover methodically. Device missing: use the exact pairing menu, remove an old phone/remote registration if needed, and retry. Will not reconnect: wake the device, choose Manage > Disconnect, then reopen it. Free a physical link if four are active. Scene not Ready: open the failed target, confirm it is enabled, and resolve its connection first. Wi-Fi scan fails: return Home and retry near the access point. Use Portal to type a hidden network name. Portal missing: stay on the Portal screen and use the numeric address shown if bleep.local does not work.  09A / POCKET GUIDE	07 / READ THE STATUS Ready is not the same as done. Connecting / Preparing The link is being established. Ready A command can be sent; physical success is not promised. Pending Ble(e)p is waiting for an answer. Confirmed The device reported the displayed state. Sent / Optimistic / Unknown Check the real equipment. Unavailable / Failed Resolve the device and choose Retry.  08A / POCKET GUIDE	06 / PORTAL + HOME ASSISTANT Configure in a browser. Open Portal. Join the matching Bleep-Setup-XXXXX network or scan the panel QR, then use the address shown. Portal pauses normal device control and exists only while its screen is open. Use Finish & Exit when done. For Home Assistant, add trusted studio Wi-Fi, enter the local server URL and a long-lived token, then select up to four supported entities. The setup AP is open and Portal traffic is not encrypted.  07A / POCKET GUIDE
---	--	---	---	--	---

50 mm - PRINT AT ACTUAL SIZE

FULL OWNER'S GUIDE Details change. Scan before the shoot. Exact-model compatibility matters. A similar camera, light, recorder, phone, or motion device is not automatically supported. The complete guide includes current setup procedures, supported models, limitations, troubleshooting, safety, and developer information.  BLEEP.HML.TECH / OWNER'S GUIDE 12B / POCKET GUIDE	10 / SETTINGS + RESET Know what Factory Reset removes. Open the Home cog for version information, Wi-Fi, signed firmware updates, haptics, diagnostics, and Factory Reset. Factory Reset requires a three-second hold. It removes saved devices and pairings, scenes, Wi-Fi, Home Assistant links, light setup, and preferences, then restarts Ble(e)p. It does not remove the installed software. Use the full owner's guide for exact-model compatibility, pairing steps, limitations, assembly, and repair information.  11B / POCKET GUIDE	09 / WORK SAFELY Observe the real studio. Secure cameras, sliders, lights, cables, and recorders before sending commands. Keep people and loose objects clear of moving equipment. Watch for movement, recording, power, and light-output confirmation whenever state is optimistic or unknown. Do not charge, use, ship, or enclose a hot, damaged, or swollen battery. Power Ble(e)p off before packing it. Treat Wi-Fi details, tokens, pairing data, and device identities as private.  10B / POCKET GUIDE	08 / TROUBLESHOOT Recover methodically. Device missing: use the exact pairing menu, remove an old phone/remote registration if needed, and retry. Will not reconnect: wake the device, choose Manage > Disconnect, then reopen it. Free a physical link if four are active. Scene not Ready: open the failed target, confirm it is enabled, and resolve its connection first. Wi-Fi scan fails: return Home and retry near the access point. Use Portal to type a hidden network name. Portal missing: stay on the Portal screen and use the numeric address shown if bleep.local does not work.  09B / POCKET GUIDE	07 / READ THE STATUS Ready is not the same as done. Connecting / Preparing The link is being established. Ready A command can be sent; physical success is not promised. Pending Ble(e)p is waiting for an answer. Confirmed The device reported the displayed state. Sent / Optimistic / Unknown Check the real equipment. Unavailable / Failed Resolve the device and choose Retry.  08B / POCKET GUIDE	06 / PORTAL + HOME ASSISTANT Configure in a browser. Open Portal. Join the matching Bleep-Setup-XXXXX network or scan the panel QR, then use the address shown. Portal pauses normal device control and exists only while its screen is open. Use Finish & Exit when done. For Home Assistant, add trusted studio Wi-Fi, enter the local server URL and a long-lived token, then select up to four supported entities. The setup AP is open and Portal traffic is not encrypted.  07B / POCKET GUIDE
---	--	---	---	--	---