

Национальный исследовательский университет ИТМО  
(Университет ИТМО)

Нго Данг Хиен

# Адаптивное управление системами с переменными параметрами

Специальность 2.3.1.

Системный анализ, управление и обработка информации, статистика  
(технические науки)

Диссертация на соискание учёной степени  
кандидата технических наук

Научный руководитель:  
кандидат технических наук, доцент  
Герасимов Дмитрий Николаевич

Санкт-Петербург 2024

## Оглавление

Реферат . . . . .	7
Synopsis . . . . .	11
Введение . . . . .	15
Глава 1. Оформление различных элементов . . . . .	17
1.1. Ссылки . . . . .	17
1.2. Форматирование чисел и размерностей величин . . . . .	17
Глава 2. Вторая глава . . . . .	19
Глава 3. Третья глава . . . . .	20
Глава 4. Четвертая глава . . . . .	21
Заключение . . . . .	22
Словарь терминов . . . . .	23
Список рисунков . . . . .	24
Список таблиц . . . . .	25
Список литературы . . . . .	26
Благодарности . . . . .	27
Приложение А. Что-то очень важное . . . . .	28
Приложение Б. Texts of author's key publications . . . . .	29

## Реферат

Общая характеристика диссертации

Актуальность.

Цель исследования.

Научные задачи.

Методы исследования.

Основные положения, выносимые на защиту.

Научная новизна.



Рисунок 1—Knuth

**Теоретическая значимость.**

**Практическая значимость.**

**Достоверность.**

**Аппробация работы.** Основные результаты диссертации докладывались на следующих конференциях:

1. [The 22nd IFAC World Congress](#), Yokohama, Japan. July 9–14, 2023.
2. [The 63rd IEEE Conference on Decision and Control \(CDC-2024\)](#), Milan, Italy. December 16–19, 2024.
3. [XIV All-Russian Conference on Management Issues \(VSPU-2024\)](#), IPU RAS Moscow, Russia. June 17–20, 2024.

**Личный вклад автора.**

**Объём и структура работы.** Диссертация состоит из введения, 4 глав, заключения и 2 приложений. Полный объём диссертации составляет 31 страницу, включая 2 рисунка и 1 таблицу. Список литературы содержит 4 наименования.

## Основное содержание работы

В Главе 1...

## Публикации автора по теме диссертации

Основные результаты по теме диссертации изложены в 4 публикациях. Из них 2 опубликовано в изданиях, индексируемых в базе цитирования Scopus, из них 2 изданы в журналах, рекомендованных ВАК.

В международных изданиях, индексируемых в базе данных Scopus, Web of Science:

1. *Gerasimov D., Popov A., Hien N., Nikiforov V.* Adaptive control of LTV systems with uncertain periodic coefficients // IFAC-PapersOnLine. — 2023. — Т. 56, вып. 2, № 2. — С. 9185—9190. — URL: <https://doi.org/10.1016/j.ifacol.2023.10.160>.
2. *Gerasimov D. N., Ngo D. H., Nikiforov V. O.* Direct Adaptive Control of LTV Discrete-time Systems with Uncertain Periodic Coefficients // 2024 63rd IEEE Conference on Decision and Control (CDC). — IEEE, 2024. — x—y. — URL: <https://ieeexplore.ieee.org/document/>.

В изданиях из перечня ВАК РФ:

В иных изданиях:

1. *Нго Д., Герасимов Д.* Адаптивное управление дискретными системами с неопределёнными периодическими коэффициентами // XIV Всероссийское совещание по проблемам управления (ВСПУ-2024). Т. xx. — 2024. — x—y. — URL: <https://doi.org/>.

2. *Nguyen T. T., Ngo D. H., Nguyen Q. T., Tran D. T., Dang X. B.* Indoor Mobile Robot Positioning using Sensor Fusion // 2022 6th International Conference on Green Technology and Sustainable Development (GTSD). — IEEE, 07.2022. — C. 884—890. — URL: <https://ieeexplore.ieee.org/document/9989084/>.

## Synopsis

General thesis summary

Relevance of the chosen topic.

Goal.

Objectives.

Research methods.

Assertions that are presented for defense.

The novelty of research.

The scientific and technical objective.

The research object.

The research subject.

The theoretical significance.

The practical significance.

The accuracy of the obtained results.

Implementation of research results.

**Approbation of research results.** The main results of the thesis were presented at the following conferences:

1. [The 22nd IFAC World Congress](#), Yokohama, Japan. 9—14 июля 2023 г.
2. [The 63rd IEEE Conference on Decision and Control \(CDC-2024\)](#), Milan, Italy. 16–19 декабря 2024 г.
3. [XIV Всероссийское совещание по проблемам управления \(ВСПУ-2024\)](#), Россия, Москва, ИПУ РАН. 17–20 июня 2024 г.

**Personal contribution of the author.**

**Thesis structure and number of pages.** Thesis consists of the introduction, 4 chapters, conclusion and 2 appendixes. Thesis is 31 page long, including 2 figures and 1 table. Bibliography consists of 4 items.



## Main contents of the work

In Chapter 1...

### Publications.

Key results of research are described in 4 publications. Among them 2 is published in a journal indexed by Scopus.

Publications in international journals indexed by Scopus and Web of Science:

1. *Gerasimov D., Popov A., Hien N., Nikiforov V.* Adaptive control of LTV systems with uncertain periodic coefficients // IFAC-PapersOnLine. — 2023. — Т. 56, вып. 2, № 2. — С. 9185—9190. — URL: <https://doi.org/10.1016/j.ifacol.2023.10.160>.
2. *Gerasimov D. N., Ngo D. H., Nikiforov V. O.* Direct Adaptive Control of LTV Discrete-time Systems with Uncertain Periodic Coefficients // 2024 63nd IEEE Conference on Decision and Control (CDC). — IEEE, 2024. — x—y. — URL: <https://ieeexplore.ieee.org/document/>.

Publications indexed in Russian journal included in the List of the Higher Attestation Commission:

Publications in other journals:

1. *Нго Д., Герасимов Д.* Адаптивное управление дискретными системами с неопределёнными периодическими коэффициентами // XIV Всероссийское совещание по проблемам управления (ВСПУ-2024). Т. xx. — 2024. — x—y. — URL: <https://doi.org/>.

2. *Nguyen T. T., Ngo D. H., Nguyen Q. T., Tran D. T., Dang X. B.* Indoor Mobile Robot Positioning using Sensor Fusion // 2022 6th International Conference on Green Technology and Sustainable Development (GTSD). — IEEE, 07.2022. — C. 884—890. — URL: <https://ieeexplore.ieee.org/document/9989084/>.

## Введение

Актуальность темы.

Цель работы.

Задачи работы.

Научная новизна работы.

Теоретическая и практическая значимость работы.

Положения выносимые на защиту.

Апробация работы.

Достоверность научных достижений.

Внедрение результатов работы.

**Публикации.** Список всех публикаций автора по теме диссертации:

1. *Gerasimov D., Popov A., Hien N., Nikiforov V.* Adaptive control of LTV systems with uncertain periodic coefficients // IFAC-PapersOnLine. — 2023. — Т. 56, вып. 2, № 2. — С. 9185—9190. — URL: <https://doi.org/10.1016/j.ifacol.2023.10.160>.
2. *Gerasimov D. N., Ngo D. H., Nikiforov V. O.* Direct Adaptive Control of LTV Discrete-time Systems with Uncertain Periodic Coefficients // 2024 63rd IEEE Conference on Decision and Control (CDC). — IEEE, 2024. — x—y. — URL: <https://ieeexplore.ieee.org/document/>.



Рисунок 1—Knuth

3. *Нго Д., Герасимов Д.* Адаптивное управление дискретными системами с неопределёнными периодическими коэффициентами // XIV Всероссийское совещание по проблемам управления (ВСПУ-2024). Т. xx. — 2024. — x—y. — URL: <https://doi.org/>.
4. *Nguyen T. T., Ngo D. H., Nguyen Q. T., Tran D. T., Dang X. B.* Indoor Mobile Robot Positioning using Sensor Fusion // 2022 6th International Conference on Green Technology and Sustainable Development (GTSD). — IEEE, 07.2022. — С. 884—890. — URL: <https://ieeexplore.ieee.org/document/9989084/>.

**Структура и объем диссертации.** Диссертация состоит из введения, 4 глав, заключения и 2 приложений. Полный объём диссертации составляет 31 страницу, включая 2 рисунка и 1 таблицу. Список литературы содержит 4 наименования.

## Глава 1. Оформление различных элементов

### 1.1. Ссылки

[1—4]

### 1.2. Форматирование чисел и размерностей величин

Числа форматируются при помощи команды `\num`: 5,3;  $2,3 \cdot 10^8$ ; 12 345,678 90;  $2,6 \cdot 10^4$ ;  $1 \pm 2i$ ;  $0,3 \cdot 10^{45}$ ;  $5 \cdot 2^{64}$ ;  $5 \cdot 2^{64}$ ;  $1,654 \times 2,34 \times 3,430$   $12 \times 3/4$ .

Обратите внимание, что ГОСТ запрещает использование знака «-» для обозначения отрицательных чисел за исключением формул, таблиц и рисунков. Вместо него следует использовать слово «минус».



Рисунок 2—Knuth

Таблица 1—Основные величины СИ

Название	Команда	Символ
Ампер	<code>\ampere</code>	A
Кандела	<code>\candela</code>	cd
Кельвин	<code>\kelvin</code>	K
Килограмм	<code>\kilogram</code>	kg
Метр	<code>\metre</code>	m
Моль	<code>\mole</code>	mol
Секунда	<code>\second</code>	s

Размерности можно записывать при помощи команд `\si` и `\SI`:  $\text{F}^2 \cdot \text{lm} \cdot \text{cd}$ ;  $\text{J} \cdot \text{mol}^{-1} \cdot \text{K}^{-1}$ ;  $\text{J}/(\text{mol} \cdot \text{K})$ ;  $\text{m} \cdot \text{s}^{-2}$ ;  $(0,10 \pm 0,05) \text{ Np}$ ;  $(1,2 - 3\text{i}) \cdot 10^5 \text{ J} \cdot \text{mol}^{-1} \cdot \text{K}^{-1}$ ; 1; 2; 3; 4 T; 50—100 V.

## Глава 2. Вторая глава

### Глава 3. Третья глава

[4]



## Глава 4. Четвертая глава

## Заключение

## Словарь терминов

**TeX** : Система компьютерной вёрстки, разработанная американским профессором информатики Дональдом Кнутом

**панграмма** : Короткий текст, использующий все или почти все буквы алфавита

## Список рисунков

1	Knuth . . . . .	7
1	Knuth . . . . .	16
2	Knuth . . . . .	17

**Список таблиц**

1	Основные величины СИ . . . . .	18
---	--------------------------------	----

## Список литературы

1. *Krstić M., Kanellakopoulos I., Kokotović P.* Nonlinear and adaptive control design. — Wiley New York, 1995.
2. *Gerasimov D., Popov A., Hien N., Nikiforov V.* Adaptive control of LTV systems with uncertain periodic coefficients // IFAC-PapersOnLine. — 2023. — Т. 56, вып. 2, № 2. — С. 9185—9190. — URL: <https://doi.org/10.1016/j.ifacol.2023.10.160>.
3. *Gerasimov D., Suzdalev O., Pashenko A., Nikiforov V., Podoshkin D.* Transients Improvement in the Output-Feedback Adaptive Backstepping Control of Nonlinear Systems with Input Constraints // IFAC-PapersOnLine. — 2023. — ЯНВ. — Т. 56, вып. 2. — С. 6865—6870. — URL: <https://linkinghub.elsevier.com/retrieve/pii/S2405896323008480>.
4. *Nikiforov V., Gerasimov D.* Adaptive Regulation: Reference Tracking and Disturbance Rejection. Lecture Notes in Control and Information Sciences. — Springer Nature, 2022.

## Благодарности

## Приложение А

Что-то очень важное

$$\sin(x) \approx x$$



## Приложение Б

Texts of author's key publications



## Adaptive control of LTV systems with uncertain periodic coefficients <sup>\*</sup>

D. Gerasimov<sup>\*</sup> A. Popov<sup>\*</sup> N.D. Hien<sup>\*</sup> V. Nikiforov<sup>\*</sup>

<sup>\*</sup> ITMO University, Kronverkskiy av. 49, Saint Petersburg, 197101, Russia (corresponding author e-mail: [dngerasimov@itmo.ru](mailto:dngerasimov@itmo.ru)).

**Abstract:** The paper considers the control problem for a class of uncertain linear time-varying systems. The time-varying (TV) parameters are represented by multisinusoidal functions with a priori unknown amplitudes, phases, and frequencies of harmonics. The maximum numbers of the harmonics are known. To compensate the influence of the TV parameters on the closed-loop system, based on *internal model principle*, TV parameters observers are designed, and the plant model is represented in the parameterized form with constant unknown parameters. This form is used for design of adaptive backstepping controller with *modular identifiers* with improved parameters tuning.

Copyright © 2023 The Authors. This is an open access article under the CC BY-NC-ND license (<https://creativecommons.org/licenses/by-nc-nd/4.0/>)

**Keywords:** Adaptive control, systems with periodic coefficients, adaptive backstepping

### 1. INTRODUCTION

In this paper, we develop the control technique for a class of linear time-varying (LTV) continuous plants with uncertain multisinusoidal parameters and without disturbance.

As the literature survey shows, the most of the approaches of adaptive controllers design for systems with periodic coefficients assume that the period (frequency) of parameters variation is known (see Abidi (2014); Ahn (2004); Glower (1996); Narendra and Esfandiari (2018); Xu (2004); Yakubovich and Starzhinskiy (1975); Zhu and Sun (2020)). In Yu and Huang (2015), the period is assumed unknown, however its value can be factorized as product of some unknown integer and a known constant.

The contribution of the present paper is to relax the assumption about the knowledge of the period of parameters variations and propose a solution to the control problem for LTV plants with multisinusoidal parameters with unknown amplitudes, phases, and frequencies of harmonics.

To compensate the effect of multisinusoidal variations, the *Internal Model Principle* (IMP) (see Francis and Wonham (1975) or Chapter 1 in Nikiforov and Gerasimov (2022)) is applied. According to this principle, the TV parameters are modelled as the outputs of autonomous dynamic systems, refer to as *exosystems*, with constant coefficients. If the coefficients and the states of the exosystems are known, they can be invoked in the structure of the controller to ensure zero steady state control error. Since in the problem considered the TV plant parameters are uncertain, the exosystems states are not accessible for measurement, and the exosystems coefficients are unknown. To estimate the states, special observers are applied, then the plant is represented in a special parameterized form. This form is used for design a robust adaptive backstepping controller with *modular identifiers* and improved parameters tuning (see

Gerasimov et al. (2020); Nikiforov et al. (2022)). To ensure the robustness properties, the standard modification of adaptation algorithm with leakage factor is proposed.

The remainder of the paper is organized as follows. In the second section, the problem of control is formulated. In the third section, the TV parameters of the plant are represented in the forms of linear regressions. In the fourth section, a study case example is considered and discussed. In the fifth section, the plant is parameterized. In the sixth section, the adaptive controller is designed using a backstepping procedure. In the seventh section, an adaptation algorithm is derived, in the eighth section, simulation results are demonstrated and discussed.

**Notations:**  $I_i$  is the  $i \times i$  identity matrix;  $O_{i \times j}$  and  $O_i$  are the  $i \times j$  zero matrix and  $i$ -th dimensional vector, respectively;  $\mathcal{L}_\infty$  is the space of bounded functions;  $\|f(t)\|_\infty$ ,  $\|W(s)\|_\infty$  is the infinity-norm of a function  $f(t)$  and a transfer function  $W(s)$ , respectively;  $|\cdot|$  is the Euclidean norm;  $s = d/dt$  is the time derivative operator.

### 2. PROBLEM STATEMENT

Consider the plant

$$\begin{cases} \dot{x} = A(t)x + bu, & x(0), \\ y = c^\top x, \end{cases} \quad (1)$$

where  $x = [x_1, x_2, \dots, x_n]^\top \in \mathbb{R}^n$  is the state vector,  $u \in \mathbb{R}$  is the control signal,  $y \in \mathbb{R}$  is the output variable,

$$A(t) = \begin{bmatrix} \psi_1(t) & 1 & 0 & \cdots & 0 \\ 0 & \psi_2(t) & 1 & \ddots & 0 \\ \vdots & \ddots & \ddots & \ddots & \vdots \\ 0 & 0 & 0 & \ddots & 1 \\ 0 & 0 & 0 & \cdots & \psi_n(t) \end{bmatrix}, b = \begin{bmatrix} 0 \\ \vdots \\ 0 \\ 1 \end{bmatrix}, c = \begin{bmatrix} 1 \\ 0 \\ \vdots \\ 0 \end{bmatrix}.$$

For the plant, we accept the following assumptions.

**Assumption 1.** The plant model (1) is such that:

<sup>\*</sup> This work was supported by the Ministry of Science and Higher Education of Russian Federation (Project Goszadanie, 2019-0898).

1.1 the parameters  $\psi_i(t)$  are representable in the form

$$\psi_i(t) = \sum_{j=1}^{r_i} a_{i,j} \sin(\omega_{i,j}t + \phi_{i,j}) \quad i = 1, 2, \dots, n \quad (2)$$

with unknown  $a_{i,j}$ ,  $\phi_{i,j}$ , and  $\omega_{i,j}$ . The maximum numbers of harmonics  $r_i$  are known;

1.2 the plant is controllable;

1.3 the state  $x$  is accessible for measurement. ■

Assumption 1.1, is necessary for complete compensation of uncertain TV parameters by involving the IMP. Assumptions 1.2 and 1.3 are typical for problems of control.

The model (1) can describe oscillatory systems (Blekhman and Sorokin (2010); Yakubovich and Starzhinskiy (1975)), resonance systems (Fossen and Nijmeijer (2012)), electric circuits (Richard (1983)), models in vibration mechanics (Camino and Santos (2019); Hartono and Van Der Burgh (2004); Rand (2012); Tehrani and Kalkowski (2015)), of the models designed via approximations of process with some periodic excitation (e.g. Wang et al. (2006)), etc.

The objective is to design a control law that ensures the boundedness of all closed-loop signals in the system and:

- if  $|x_i(t)| \leq x_{0i}$ , for at least one  $i$  from 1 to  $n$ , for all  $t \geq t_0 \geq 0$ , where  $x_{0i} > 0$  are some predefined constants, then it provides the inequality

$$|\varepsilon(t)| \leq \varepsilon_0 \quad \forall t \geq T_0, \quad (3)$$

where  $\varepsilon = y_m - y$  is the tracking error,  $y_m(t)$  is a continuous bounded function with bounded and measurable high-order time derivatives (HOTD)  $y_m^{(i)}(i = 1, 2, \dots, n)$ ,  $\varepsilon_0 > 0$  is the maximum value of the steady-state error,  $T_0 > 0$  is the settling time. It is assumed that  $\varepsilon_0$  and  $T_0$  can be tightened by the control law parameters;

- otherwise it provides the limiting equality

$$\lim_{t \rightarrow \infty} |\varepsilon(t)| = 0. \quad (4)$$

*Remark 1.* It is seen from the structure of the plant that when at least one of the states  $x_i(t)$  approaches or crosses zero, the parameters in  $A(t)$  and their variations are no longer to be “observable” and the corresponding TV parameters observers are no longer to provide precise information about the parameters variations. As a result, an observer based controller does not compensate completely the effect of these variations. ■

Using Assumption 1.1 and according to the IMP (see Francis and Wonham (1975) or Chapter 2 in Nikiforov and Gerasimov (2022)), the functions  $\psi_i(t)$  ( $i = 1, 2, \dots, n$ ) can be represented as the outputs of autonomous systems

$$\begin{cases} \dot{z}_i = \Gamma_i z_i, \\ \psi_i = h_i^\top z_i, \end{cases} \quad (5)$$

where  $z_i \in \mathbb{R}^{m_i}$  are the inaccessible for measurement states with unknown initial conditions but known dimensions  $m_i$  (due to Assumption 1.1),  $\Gamma_i \in \mathbb{R}^{m_i \times m_i}$ ,  $h_i \in \mathbb{R}^{m_i}$  are constant unknown matrices and vectors, respectively.

### 3. PARAMETERIZATION OF THE FUNCTIONS $\psi(t)$

To cope with uncertain TV parameters, we represent the latter in the forms of linear regressions (see Lemma 2.2 in Nikiforov and Gerasimov (2022)).

*Lemma 1.* Under Assumption 1.1, the functions  $\psi_i(t)$  can be represented in the forms of linear regressors

$$\psi_i = \theta_i^\top \xi_i, \quad (6)$$

in which  $\theta_i \in \mathbb{R}^{m_i}$  are vectors of unknown constant parameters,  $\xi_i \in \mathbb{R}^{m_i}$  are the states of the filters

$$\dot{\xi}_i = G_i \xi_i + l_i \psi_i \quad (7)$$

with certain initial conditions  $\xi_i(0)$ , arbitrary Hurwitz matrices  $G_i \in \mathbb{R}^{m_i \times m_i}$ , and vectors  $l_i \in \mathbb{R}^{m_i}$  selected so that the pairs  $(G_i, l_i)$  are controllable. ■

Replacing (6) in (7), we obtain the autonomous models

$$\dot{\xi}_i = \bar{G}_i \xi_i, \quad (8)$$

where  $\bar{G}_i = G_i + l_i \theta_i^\top$ .

*Remark 2.* Note that since  $\psi_i$  are uncertain, the states  $\xi_i$  of the filters (7) (and, hence, the model (8)) are not measurable. To overcome this problem and design a linear regression model for  $\psi$  with a measurable regressor, we will propose a special TV parameters observer. ■

Now, for the sake of simplicity of paper presentation, we will start from an example of adaptive control for a scalar plant. Then extend the idea to the general case.

### 4. STUDY CASE

Let the plant be given by

$$\dot{y} = \psi(t)y + u, \quad (9)$$

where  $y$  is the scalar output,  $\psi(t) = \sum_{j=1}^r a_j \sin(\omega_j t + \phi_j)$  is the unknown parameter with uncertain  $a_j$ ,  $\omega_j$ , and  $\phi_j$ .

The problem is to design a control ensuring the control objective (3), (4) for the plant (9).

By Lemma 1,  $\psi(t)$  is representable in the form

$$\psi = \theta^\top \xi, \quad (10)$$

$$\dot{\xi} = G\xi + l\psi, \quad \xi(0) \quad (11)$$

with unmeasurable regressor  $\xi$  (see Remark 2), the vector of unknown constant parameters  $\theta \in \mathbb{R}^m$ . To recover the vector  $\xi$ , we propose the following nonlinear observer.

*Lemma 2.* The observer

$$\dot{\hat{\xi}} = \zeta + N(y, \sigma), \quad (12)$$

$$\dot{\zeta} = G\zeta + GN(y, \sigma) - \frac{\partial N(y, \sigma)}{\partial y} u, \quad \zeta(0), \quad (13)$$

where

$$N(y, \sigma) = \frac{1}{2} l \ln(y^2 + \sigma^2),$$

$\sigma(t)$  is the state of the filter

$$\dot{\sigma}(t) = -r\sigma(t) + \bar{\sigma}(t), \quad \sigma(0) > 0, \quad (14)$$

$$\bar{\sigma}(t) = \begin{cases} 0 & \text{if } |y(t)| \geq x_{01}, \\ \sigma_0 & \text{otherwise} \end{cases} \quad (15)$$

with some design parameters  $x_{01}, r, \sigma_0 > 0$ , generates the estimate  $\hat{\xi}$  of  $\xi$  satisfying the equality

$$\begin{aligned} \epsilon(t) \triangleq \xi(t) - \hat{\xi}(t) &= e^{Gt} \epsilon(0) \\ &+ (sI_m - G)^{-1} l \left[ \frac{\sigma^2(t)}{y^2(t) + \sigma^2(t)} \left( \psi(t) + r - \frac{\bar{\sigma}(t)}{\sigma(t)} \right) \right]. \end{aligned} \quad (16)$$

The norm  $\|\epsilon(t)\|_\infty$  is bounded and can be arbitrarily reduced by reduction of  $\sigma_0$  and/or  $x_{01}$ . ■

The lemma can be proved by evaluation of the time derivative  $\dot{\epsilon} = \dot{\xi} - \dot{\hat{\xi}}$  in view of (11)–(15) and (9).

Therefore, in view of (10) and Lemma 2, the plant model (9) can be rewritten in the following parameterized form suitable for certainty equivalent controller design:

$$\dot{y} = \theta^\top \hat{\xi} y + u + \bar{\epsilon} y, \quad (17)$$

where  $\bar{\epsilon} \triangleq \psi - \theta^\top \hat{\xi} = \theta^\top \epsilon$  is the signal considered as a bounded parametric disturbance.

Now, we calculate the time derivative of the tracking error  $\dot{\epsilon} = \dot{y}_m - \dot{y}$  and in view of (17) design the error equation

$$\dot{\epsilon} = -c_0 \epsilon + (\dot{y}_m + c_0 \epsilon - \hat{\theta}^\top \hat{\xi} y - u) - \hat{\theta}^\top \hat{\xi} y - \bar{\epsilon} y, \quad (18)$$

where  $c_0 > 0$  is a constant,  $\tilde{\theta} = \theta - \hat{\theta}$  is the vector of parametric errors.

Selecting the adjustable controller in the form

$$u = (c_0 + \mu_0 y^2) \epsilon - \hat{\theta}^\top \hat{\xi} y + \dot{y}_m, \quad (19)$$

where  $\mu_0 > 0$  is the damping term coefficient, and replacing it in (18), we obtain the tracking error model

$$\dot{\epsilon} = -(c_0 + \mu_0 y^2) \epsilon - \hat{\theta}^\top \hat{\xi} y - \bar{\epsilon} y. \quad (20)$$

The term  $\mu_0 y^2 \epsilon$  in (19) is included to provide the *input-to-state* (ISS) stability of the closed-loop system (20) with the input  $\tilde{\theta}$  affected by the *disturbance*  $\bar{\epsilon} y$  (see more general result of Lemma 5).

The model (20) can be used for design of the robust adaptation algorithm (see Ioannou and Sun (1996))

$$\dot{\hat{\theta}} = -\gamma \hat{\xi} y \epsilon - \gamma \gamma_0 \sigma_\theta (\hat{\theta}) \hat{\theta}, \quad (21)$$

where  $\gamma, \gamma_0 > 0$  are the gains,

$$\sigma_\theta(\hat{\theta}) = \begin{cases} 0 & \text{if } |\hat{\theta}| < \theta^*, \\ \frac{|\hat{\theta}|}{\theta^*} - 1 & \text{if } \theta^* \leq |\hat{\theta}| \leq 2\theta^*, \\ 1 & \text{if } |\hat{\theta}| > 2\theta^*, \end{cases} \quad (22)$$

is parametric feedback gain with a preselected large enough constant  $\theta^* > 0$ . The algorithm (21) referred to as  *$\sigma$ -modification* is applied to avoid unbounded parametric drift that may be caused by the *disturbance*  $\bar{\epsilon} y$  in (20). At the same time, the switching mechanism in (22) enables us to zero the tracking error  $\epsilon$  if this disturbance approaches zero (the case  $|y(t)| > x_{01}$ ).

Now, we are in position to formulate the following statement.

**Proposition 1.** Under Assumption 1.1, the control law (19) together with the observer (12)–(15) and the adaptation algorithm (21), (22) ensures the boundedness of all closed-loop signals and the objective (3), (4). The maximum steady-state error  $\epsilon_0$  can be decreased by decreasing of  $\gamma_0$  and  $\sigma_0$  and/or increasing of  $\mu_0$  and  $c_0$ .  $\square\square\square$

**Proof.** The boundness property and the objective (3) can be proved using the Lyapunov function  $V = \frac{1}{2} \epsilon^2 + \frac{1}{2\gamma} |\tilde{\theta}|^2$  and its time derivative calculated in view of (20), (21), and the identity  $\dot{\hat{\theta}} = -\dot{\theta}$ :

$$\begin{aligned} \dot{V} &= -c_0 \epsilon^2 - \mu_0 y^2 \epsilon^2 - \bar{\epsilon} y \epsilon + \gamma_0 \sigma_\theta \tilde{\theta}^\top \theta - \gamma_0 \sigma_\theta \tilde{\theta}^\top \tilde{\theta} \\ &= -\frac{c_0}{2} \epsilon^2 - \frac{\gamma_0 \sigma_\theta}{2} |\tilde{\theta}|^2 + \frac{\gamma_0 \sigma_\theta}{2} |\theta|^2 + \frac{\bar{\epsilon}^2}{4\mu_0} - \frac{\gamma_0 \sigma_\theta}{2} |\hat{\theta}|^2 \end{aligned}$$

$$\begin{aligned} &- \left( \sqrt{\mu_0} y \epsilon - \frac{\bar{\epsilon}}{2\sqrt{\mu_0}} \right)^2 \\ &\leq -\frac{c_0}{2} \epsilon^2 - \frac{\gamma_0 \sigma_\theta}{2} |\tilde{\theta}|^2 + \frac{\gamma_0 \sigma_\theta}{2} |\theta|^2 + \frac{\bar{\epsilon}^2}{4\mu_0}. \end{aligned}$$

In view of definition of  $\bar{\epsilon}$ , positive property of  $\sigma(t)$ , and the properties of norms, we have

$$\bar{\epsilon}^2(t) \leq (\theta^\top e^{Gt} \epsilon(0) + \|W(s)\|_\infty \|\psi(t) + r\|_\infty)^2,$$

where  $W(s) = \theta^\top (sI_m - G)^{-1} l$ . Hence,

$$\dot{V} \leq -\frac{c_0}{2} \epsilon^2 - \frac{\gamma_0 \sigma_\theta}{2} |\tilde{\theta}|^2 + \Delta \leq -\kappa_0 V + \Delta, \quad (23)$$

where  $\kappa_0 = \min\{c_0, \gamma_0 \sigma_\theta\}$ ,  $|\sigma_\theta| \leq 1$ ,

$$\Delta(t) = \frac{\gamma_0}{2} |\theta|^2 + \frac{1}{4\mu_0} (\theta^\top e^{Gt} \epsilon(0) + \|W(s)\|_\infty \|\psi(t) + r\|_\infty)^2.$$

It is seen from the latter that  $\Delta(t) \in \mathcal{L}_\infty$ . Therefore, it follows from (23) that  $\epsilon, \tilde{\theta} \in \mathcal{L}_\infty$ . Since  $\epsilon, \hat{\xi}, y_m, \dot{y}_m \in \mathcal{L}_\infty$ , then  $\dot{\hat{\theta}}, u \in \mathcal{L}_\infty$ . This completes the proof of the closed-loop signals boundness. The objective (3) is followed from the analysis of the term  $\Delta$ .

Now, prove the objective (4) (the case  $|y(t)| > x_{01}$ ). For this case,  $\sigma(t) \rightarrow 0$  as  $t \rightarrow \infty$  due to (14), (15) and, as a result,  $\epsilon(t), \bar{\epsilon}(t) = \theta \epsilon(t) \rightarrow 0$  exponentially fast according to (16). Hence, the disturbance  $\bar{\epsilon} y$  approaches zero exponentially fast, and due to the properties of the robust adaptation algorithm in absence of a disturbance (Ioannou and Sun, 1996, Section 8.4.1),  $\sigma_\theta(t) \equiv 0$ . Therefore,  $\Delta(t) \rightarrow 0$  exponentially fast, and it follows from (23) that  $\epsilon(t) \rightarrow 0$  as  $t \rightarrow \infty$ .  $\blacksquare$

Now, extend this particular solution for the plant of general order (1).

## 5. PLANT PARAMETERIZATION

To represent the plant (1) in the form suitable for design of a certainty equivalent controller, we extend Lemma 2 and design the TV parameters observers.

**Lemma 3.** The observers

$$\dot{\hat{\xi}}_i = \zeta_i + N_i(x_i, \sigma_i), \quad (24)$$

$$\dot{\zeta}_i = G_i \zeta_i + G_i N(x_i, \sigma_i) - \frac{\partial N_i}{\partial x_i} x_{i+1}, \quad \zeta_i(0), \quad (25)$$

$$\dot{\hat{\xi}}_n = \zeta_n + N_n(x_n, \sigma_n), \quad (26)$$

$$\dot{\zeta}_n = G_n \zeta_n + G_n N(x_n, \sigma_n) - \frac{\partial N_n(x_n, \sigma_n)}{\partial x_n} u, \quad \zeta_n(0), \quad (27)$$

where  $i = 1, 2, \dots, n-1$ ,

$$N_i(x_i, \sigma_i) = \frac{1}{2} l_i \ln(x_i^2 + \sigma_i^2), \quad (28)$$

$\sigma_i(t)$  are the states of the filters

$$\dot{\sigma}_i(t) = -r_i \sigma_i(t) + \bar{\sigma}_i(t), \quad \sigma_i(0) > 0, \quad (29)$$

$$\bar{\sigma}_i(t) = \begin{cases} 0 & \text{if } |x_i(t)| \geq x_{0i}, \\ \sigma_{0i} & \text{otherwise,} \end{cases} \quad (30)$$

$x_{0i}, \sigma_{0i} > 0$  are some constant parameters, generate the estimates  $\hat{\xi}_i$  of  $\xi_i$  satisfying the equality

$$\begin{aligned} \epsilon_i(t) &\triangleq \xi_i(t) - \hat{\xi}_i(t) = e^{G_i t} \epsilon_i(0) \\ &+ (sI_{m_i} - G_i)^{-1} l_i \left[ \frac{\sigma_i^2(t)}{x_i^2(t) + \sigma_i^2(t)} \left( \psi_i(t) + r_i - \frac{\bar{\sigma}_i(t)}{\sigma_i(t)} \right) \right]. \end{aligned}$$

The norms  $\|\epsilon_i(t)\|_\infty$  are bounded and can be reduced by reduction of the corresponding gains  $\sigma_{0i}$  and/or  $x_{0i}$ . ■

The lemma is proved calculating the time derivatives  $\dot{\epsilon}_i = \dot{\xi}_i - \dot{\hat{\xi}}_i$  in view of (7), (24)–(30), and (1).

For controller design, it will be needed to implement the HOTD of  $\hat{\xi}_i$ . To this end, we formulate the following corollary of Lemma 3 (see Appendix A in Nikiforov and Gerasimov (2022) or Gerasimov et al. (2020)).

*Corollary 1.* The estimates  $\hat{\xi}_i$  ( $i = 1, 2, \dots, n$ ) can be represented in the form

$$\hat{\xi}_i = T_i \hat{\xi}_{fi} + \epsilon_{Ti}, \quad (31)$$

where  $\epsilon_{Ti} = -T_i \frac{\kappa_0}{\kappa(s)}[\epsilon_i]$ ,

$$\hat{\xi}_{fi} = \frac{\kappa_0}{\kappa(s)}[\hat{\xi}_i] = \frac{\kappa_0}{s^{n-1} + \kappa_{n-2}s^{n-1} + \dots + \kappa_0}[\hat{\xi}_i], \quad (32)$$

$\kappa_j$  ( $j = 0, 1, \dots, n-2$ ) are the coefficients chosen so that the polynomial  $\kappa(s)$  is Hurwitz,  $T_i \in \mathbb{R}^{m_i \times m_i}$  are matrices given by

$$\kappa_0 T_i = \bar{G}_i^n + \kappa_{n-1} \bar{G}_i^{n-1} + \kappa_{n-2} \bar{G}_i^{n-2} + \dots + \kappa_0 I_{m_i},$$

$\bar{G}_i$  are the matrices defined in (8). ■

Applying the result of Lemma 3 and Corollary 1 and introducing new notations

$$\vartheta = [\theta_1^\top T_1, \theta_2^\top T_2, \dots, \theta_n^\top T_n]^\top,$$

$$\varpi_i = [O_{m_1}^\top, \dots, O_{m_{i-1}}^\top, \hat{\xi}_{fi}^\top, O_{m_{i+1}}^\top, \dots, O_{m_n}^\top]^\top \in \mathbb{R}^{\sum_{i=1}^n m_i}$$

we represent the TV plant parameters in the form

$$\varphi_i = \vartheta^\top \varpi_i + \bar{\epsilon}_i$$

with  $\bar{\epsilon}_i = \theta_i^\top (\epsilon_{Ti} + \epsilon_i)$ .

Hence, the plant (1) can be represented in the form

$$\begin{cases} \dot{x}_i = \vartheta^\top \varpi_i x_i + \bar{\epsilon}_i x_i + x_{i+1}, & i = 1, 2, \dots, n-1, \\ \dot{x}_n = \vartheta^\top \varpi_n x_n + \bar{\epsilon}_n x_n + u, \\ y = x_1, \end{cases} \quad (33)$$

It is seen from the form (33) that the uncertainty  $\vartheta$  is not matched with the control. This fact motivates application of adaptive backstepping for controller design.

## 6. ADAPTIVE CONTROLLER

For the parameterization (33), we use a slight modification of the algorithm of adaptive backstepping compensation with *modular identifiers* recently proposed in Gerasimov et al. (2020); Nikiforov et al. (2022):

$$\alpha_1 = (c_1 + s_1) z_1 - x_1 \varpi_1^\top \hat{\vartheta} + \dot{y}_m, \quad (34)$$

$$\alpha_i = z_{i-1} + (c_i + s_i) z_i + \sum_{j=1}^{i-1} \frac{\partial \alpha_{i-1}}{\partial x_j} x_{j+1} \quad (35)$$

$$\begin{aligned} & + \left( \sum_{j=1}^{i-1} \frac{\partial \alpha_{i-1}}{\partial x_j} x_j \varpi_j^\top - x_i \varpi_i^\top \right) \hat{\vartheta} + \sum_{j=0}^{i-2} \frac{\partial \alpha_{i-1}}{\partial \hat{\vartheta}^{(j)}} \hat{\vartheta}^{(j+1)} \\ & + \sum_{k=1}^{i-1} \sum_{j=0}^{i-1-k} \frac{\partial \alpha_{i-1}}{\partial \varpi_k^{(j)}} \varpi_k^{(j+1)} + \sum_{j=0}^{i-1} \frac{\partial \alpha_{i-1}}{\partial y_m^{(j)}} y_m^{(j+1)}, \end{aligned}$$

where  $i = 2, 3, \dots, n$ ;  $c_i, \mu_1, \mu_i > 0$  are constants;  $s_i$  are the damping terms given by

$$s_1 = \mu_1 x_1^2, \quad s_i = \mu_i \sum_{j=1}^{i-1} \left| \frac{\partial \alpha_{i-1}}{\partial x_j} x_j \right|^2 + \mu_i x_i^2; \quad (36)$$

$z_1 = y_m - y = \epsilon$ ,  $z_i = \alpha_{i-1} - x_i$  are the control errors.

The procedure is finished by design of the actual control

$$u = \alpha_n. \quad (37)$$

*Lemma 4.* The error model for the closed-loop system consisting of the plant (1), admitting the form (33), and the control law (34)–(37) can be represented as

$$\dot{z} = A_z z + B_z \tilde{\vartheta} + D_z \epsilon_z, \quad (38)$$

where  $\tilde{\vartheta} = \vartheta - \hat{\vartheta}$  is the  $\sum_{i=1}^n m_i$ -dimensional vector of parametric errors,  $\epsilon_z = [\bar{\epsilon}_1, \bar{\epsilon}_2, \dots, \bar{\epsilon}_n]^\top$ ,

$$A_z = \begin{bmatrix} -c_1 - s_1 & 1 & \dots & 0 & 0 \\ -1 & -c_1 - s_1 & \dots & 0 & 0 \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & \dots & 0 & 1 \\ 0 & 0 & \dots & -1 & -c_n - s_n \end{bmatrix},$$

$$D_z = \begin{bmatrix} -x_1 & 0 & \dots & 0 & 0 \\ \frac{\partial \alpha_1}{\partial x_1} x_1 & -x_2 & \dots & 0 & 0 \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ \frac{\partial \alpha_{n-1}}{\partial x_1} x_1 & \frac{\partial \alpha_{n-1}}{\partial x_2} x_2 & \dots & \frac{\partial \alpha_{n-1}}{\partial x_{n-1}} x_{n-1} & -x_n \end{bmatrix},$$

$$B_z = D_z W_z, \quad W_z = [\varpi_1; \varpi_2; \dots; \varpi_n]^\top. \quad \blacksquare$$

The lemma can be proved by evaluation of the time derivatives  $\dot{z}_1 = \dot{y}_m - \dot{y}$ ,  $\dot{z}_i = \dot{\alpha}_{i-1} - \dot{x}_i$  in view of (33)–(37).

As shown in Lemma 5.8 in Krstić et al. (1995), the damping terms (36) are involved in the control law to ensure the ISS stability of the model (38). Using this lemma, we formulate the following statement.

*Lemma 5.* If  $\hat{\vartheta}(t) \in \mathcal{L}_\infty$ , then  $z(t) \in \mathcal{L}_\infty$  for any  $t \geq 0$ . ■

*Proof.* Selecting the Lyapunov function  $V = \frac{1}{2} z^\top z$ , we calculate its time derivative in view of (38):

$$\begin{aligned} \dot{V} &= \frac{1}{2} z^\top (A_z^\top + A_z) z + z^\top B_z \tilde{\vartheta} + z^\top D_z \epsilon_z \\ &= - \sum_{i=1}^n (c_i + s_i) z_i^2 + z^\top D_z (W_z \tilde{\vartheta} + \epsilon_z) \leq -c_0 |z|^2 \\ &\quad - \sum_{i=1}^n \left( \sqrt{\mu_i} |D_{zi}^\top| |z| - \frac{1}{2\sqrt{\mu_i}} |W_z \tilde{\vartheta} + \epsilon_z| \right)^2 \\ &\quad + \frac{\mu_0}{4} (W_z \tilde{\vartheta} + \epsilon_z)^2 \\ &\leq -\frac{c_0}{2} V + \frac{\mu_0}{4} \|W_z\|_\infty^2 \|\tilde{\vartheta}\|_\infty^2 + \frac{\mu_0}{4} \|\epsilon_z\|_\infty^2, \end{aligned}$$

where  $c_0 = \min_i \{c_i\}$ ,  $D_{zi}^\top$  is the  $i$ -th row of  $D_z$ ,  $\mu_0 = \sum_{i=1}^n \frac{1}{\mu_i}$ .

It follows from the latter inequality that

$$|z(t)| \leq \frac{\mu_0}{2c_0} \left( \|W_z\|_\infty^2 \|\tilde{\vartheta}\|_\infty^2 + \|\epsilon_z\|_\infty^2 \right). \quad (39)$$

Since  $\varpi_i, \epsilon_i \in \mathcal{L}_\infty$  (due to the result of Lemma 3), then  $\|W_z\|_\infty, \|\epsilon_z\|_\infty \in \mathcal{L}_\infty$  are bounded. Therefore, taking into account (39), we complete the proof. ■

## 7. ADAPTATION ALGORITHM

In order to derive an adaptation algorithm that can guarantee the conditions of Lemma 5 and the objective (3), (4), we need to represent the model (38) in a static form. To this end, we formulate the swapping lemma.

*Lemma 6.* Let us introduce the filters

$$\dot{\zeta}_z = A_z \zeta_z + B_z \hat{\vartheta}, \quad (40)$$

$$\dot{Z} = A_z Z + B_z \quad (41)$$

and the *augmented error*

$$\bar{z} = z + \zeta_z. \quad (42)$$

Then the vector  $\bar{z}$  can be represented as the output of the static error model

$$\bar{z} = Z\vartheta + \bar{\epsilon}_z, \quad (43)$$

where  $\bar{\epsilon}_z$  is the vector function satisfying the equation

$$\dot{\bar{\epsilon}}_z = A_z \bar{\epsilon}_z + D_z \epsilon_z, \quad \bar{\epsilon}_z(0) = z(0) + \zeta_z(0) - Z(0)\vartheta. \quad \blacksquare$$

The lemma is proved by evaluation of the time derivative  $\dot{\bar{\epsilon}}_z = \dot{z} + \dot{\zeta}_z - \dot{Z}\vartheta$  in view of (38), (40), and (41).

*Remark 3.* Since the vectors  $\varpi_i$  are bounded by definition, due to the structures of the matrices  $A_z$  (with the damping terms  $s_i$ ) and  $B_z$  the matrix  $Z$  is bounded irrespectively of the boundedness of  $B_z$ . Therefore, the normalization of an adaptation algorithm based on (43) is unnecessary. ■

*Corollary 2.* If  $|x_i(t)| > x_{0i}$  for some  $t \geq t_0 \geq 0$ , then, starting from  $t_0$ ,  $\bar{\epsilon}_z(t) \rightarrow 0$  exponentially fast as  $t \rightarrow \infty$ . If  $|x_i(t)| \leq x_{0i}$ , then  $\bar{\epsilon}_z(t)$  is bounded for any  $t \geq 0$ . ■

The corollary is followed from the result of Lemmas 6, 4, definition of  $\bar{\epsilon}_i$  (see (33)), Corollary 1, and Lemma 3.

Now, using the representation (43), we design the robust adaptation algorithm with improved parametric convergence generating  $\hat{\vartheta}, \hat{\vartheta}, \dots, \hat{\vartheta}^{(n-1)}$ . To this end, we introduce a *positive* transfer function operator

$$L(s) = \frac{1}{d(s)} = \prod_{j=1}^q \frac{1}{s + d_j}$$

with  $q \geq n - 2$  and constant coefficients  $d_j > 0$  and get the extended regression<sup>1</sup>

$$\bar{z}_L = Z_L \vartheta + \epsilon_L, \quad (44)$$

where  $\bar{z}_L = L(s)[Z^\top \bar{z}]$  is the memory extended output,  $Z_L = L(s)[Z^\top Z]$  is the memory extended regressor positive semidefinite by definition,  $\epsilon_L = L(s)[Z^\top \bar{\epsilon}_z]$  is the bounded disturbance. Using the extended regression (44), we design the robust adaptation algorithm (see Section 7.3.3 in Nikiforov and Gerasimov (2022))

$$\dot{\hat{\vartheta}} = \gamma \left( \bar{z}_L - Z_L \hat{\vartheta} \right) - \gamma \gamma_0 \bar{\sigma}(t) \hat{\vartheta}, \quad (45)$$

where  $\gamma, \gamma_0 > 0$  are constants,

$$\bar{\sigma}(t) = L(s)[\sigma_\theta(\hat{\vartheta}(t))], \quad (46)$$

$$\sigma_\theta(\hat{\vartheta}) = \begin{cases} 0 & \text{if } |\hat{\vartheta}| < \vartheta^*, \\ \frac{|\hat{\vartheta}|}{\vartheta^*} - 1 & \text{if } \vartheta^* \leq |\hat{\vartheta}| \leq 2\vartheta^*, \\ 1 & \text{if } |\hat{\vartheta}| > 2\vartheta^*, \end{cases} \quad (47)$$

$\vartheta^* > 0$  is a large enough constant.

The HOTD  $\hat{\vartheta}, \dots, \hat{\vartheta}^{(n-1)}$  for (35) are calculated as follows:

$$\hat{\vartheta}^{(j)} = \gamma \left( \bar{z}_L^{(j-1)} - \left( Z_L \hat{\vartheta} + \gamma_0 \bar{\sigma}(t) \hat{\vartheta} \right)^{(j-1)} \right), \quad (48)$$

where  $j = 1, 2, \dots, n$ , and the derivatives are calculated as

$$\bar{z}_L^{(k)} = \frac{s^k}{d(s)} [Z^\top \bar{z}], \quad Z_L^{(k)} = \frac{s^k}{d(s)} [Z^\top Z], \quad \bar{\sigma}^{(k)} = \frac{s^k}{d(s)} [\sigma_\theta(\hat{\vartheta})].$$

Now, formulate the main result of the paper.

*Proposition 2.* Under Assumption 1, the adjustable controller (34)–(37) together with the TV parameters observers (24)–(30), filters (32), swapping filters (40), (41), augmented error (42), and the adaptation algorithm (45)–(48) when applied to the plant (1) the objective (3), (4) with all the closed-loop signals bounded. The maximum steady-state error  $\varepsilon_0$  can be decreased by decreasing of  $\gamma_0$  and  $\sigma_0$  and/or increasing of  $\mu_i$ , and  $c_i$ . □□□

*Sketch of proof.* Choose the Lyapunov function  $V = \frac{1}{2\gamma} \hat{\vartheta}^\top \hat{\vartheta}$  and evaluate its time derivative in view of (45) (for detail, see the proof of Proposition 3.4 in Nikiforov and Gerasimov (2022) extended to the adaptation algorithm with leakage factor  $\bar{\sigma}$ ), we get

$$\dot{V} \leq -\hat{\vartheta}^\top Z_L \hat{\vartheta} - \frac{\gamma_0 \bar{\sigma}}{2} |\hat{\vartheta}|^2 + |\bar{\epsilon}_z|^2 + \frac{\gamma_0 \bar{\sigma}}{2} |\vartheta|^2. \quad (49)$$

It follows from the latter that since  $\bar{\epsilon}_z \in \mathcal{L}_\infty$  (see Lemma 3), then  $\hat{\vartheta}(t) \in \mathcal{L}_\infty$ . Therefore, following the results of Lemma 5, we prove that  $z(t) \in \mathcal{L}_\infty$ .

If  $\sigma_0$  is decreased, the maximum steady-state value of  $\bar{\epsilon}_z$  is decreased. By decreasing  $\gamma_0$  the term  $\frac{\gamma_0 \bar{\sigma}}{2} |\vartheta|^2$  is decreased. Hence, analyzing (49) and (39) it can be shown that the norm  $|z|$  can be decreased by decreasing  $\gamma_0$  and  $\sigma_0$  and/or increasing of  $\mu_i$  and  $c_i$ . Following the result of Corollary 2 and the properties of the robust adaptation algorithm (45) it can be shown that if  $|x_i(t)| > x_{0i}$  for all  $t \geq t_0 \geq 0$ , the limiting equality (4) holds. ■

Let us make the concluding remarks regarding the tuning of controller design parameters.

- D1 if  $|x_i(t)| \leq x_{0i}$  for all  $t \geq t_0 \geq 0$  and for at least one of  $i$  ( $i = 1, 2, \dots, n$ ), only a nonzero steady-state control error can be guaranteed. This error can be reduced by reduction of  $\gamma_0$  and  $\sigma_0$ . or by increase of  $\mu_i$  and  $c_i$ . If  $|x_i(t)| > x_{0i}$  for all  $t \geq t_0 \geq 0$  and  $i$ , the solution proposed ensures the asymptotic zeroing of the control error;
- D2 to maximize the efficiency of adaptation process it is recommended to increase the threshold  $\vartheta^*$ ;
- D3 as it shown in Chapter 3 of Nikiforov and Gerasimov (2022), if the minimum eigenvalue of  $Z_L(t)$  is not integrally bounded, the rate of parametric convergence of the adaptation algorithm (45) can be increased by increasing the gain  $\gamma$ .

<sup>1</sup> In Ortega et al. (2020), this procedure is referred as to *memory regressor extension* due to the memory effect of the filter  $L(s)$  enabling us to collect past weighted values of the regressor  $Z$  and design an adaptation algorithm with accelerated parameters tuning.

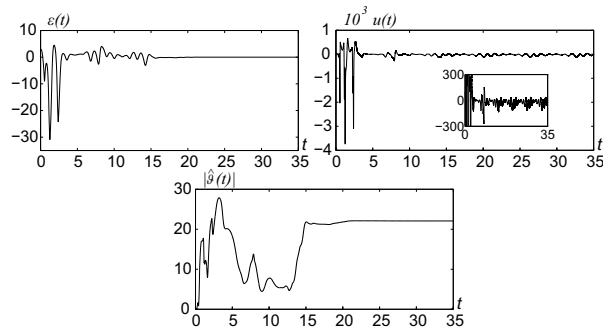


Fig. 1. Transients in the system closed by the robust adaptive backstepping controller

## 8. SIMULATION

Consider the second order unstable plant of the form (1) with zero initial conditions and TV parameters  $\psi_1(t) = -2 \cos(6t + 1) + 4$ ,  $\psi_2(t) = \sin 3t - 2$  with a priori unknown amplitudes, phases, frequencies and the biases.

Problem is to design a control that will drive the plant output to the reference  $y_m(t) = 2 \sin t + 3$ . To design the observer, according to the type of TV parameters we select the orders  $m_1 = m_2 = 3$ , matrices

$$G_1 = G_2 = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -6 & -11 & -6 \end{bmatrix}, \quad l_1 = l_2 = \begin{bmatrix} 0 \\ 0 \\ 6 \end{bmatrix},$$

thresholds  $x_{01} = x_{02} = 0.05$ , the parameters  $r_1 = r_2 = 20$ , the initial conditions of the filters (29)  $\sigma_1(0) = \sigma_2(0) = 1$ , and the switching parameters  $\sigma_{01} = \sigma_{02} = 0.05$ .

For the backstepping procedure implemented in two steps, we choose  $c_1 = c_2 = 5$ ,  $\mu_1 = \mu_2 = 0.001$ . The parameter of the filters (32) is given by  $\kappa_0 = 2$ .

For design of adaptation algorithm, we use the first order filter  $L(s) = \frac{1}{s + d_0}$ , zero initial conditions and the following set of parameters:  $d_0 = 1$ ,  $\gamma = 50$ ,  $\gamma_0 = 1$ ,  $\vartheta^* = 1000$ .

Initial conditions for the observer equations (24)–(27), filters (32), (40), and (41) are set to zero.

It is shown by the simulation results presented in Fig.1 that the tracking error approaches zero, signal  $u$  is bounded, while the parameters  $\hat{\vartheta}$  are tuned to constants. Due to the lack of space, we do not show the plots of  $x_1(t)$ ,  $x_2(t)$ , in which we observe several zero-crossings that do not influence the closed-loop system stability.

## REFERENCES

- Abidi, K. (2014). Spatial periodic adaptive control approach for rotary systems in sampled time. *Int. J. on Robust and Nonlinear Control*, 24, 1177–1188.
- Ahn, H.S. Chen, Y. (2004). Time periodical adaptive friction compensation. *2004 IEEE Int. Conf. on Robotics and Biomimetics*, 362–367.
- Blekhman, I. and Sorokin, V. (2010). On the separation of fast and slow motions in mechanical systems with high-frequency modulation of the dissipation coefficient. *J. of Sound and Vibration*, 239, 4936–4949.
- Camino, J.F. and Santos, I.F. (2019). A periodic linear-quadratic controller for suppressing rotor-blade vibration. *J. Vibration and Control*, 25(17). doi: 10.1177/1077546319853358.
- Fossen, T. and Nijmeijer, H.(eds.). (2012). *Parametric Resonance in Dynamical Systems*. Springer. doi: 10.1007/978-1-4614-1043-0.
- Francis, B. and Wonham, W. (1975). The internal model principle for linear multivariable regulators. *Applied Mathematics and Optimization*, 2, 170–194.
- Gerasimov, D., Pashenko, A., and Nikiforov, V. (2020). Improved adaptive compensation of unmatched multi-sinusoidal disturbances in uncertain nonlinear plants. *Proc. American Control Conf. ACC*, 626–632.
- Glaser, J. (1996). Mrac for systems with sinusoidal parameters. *Int. J. on Adaptive Control and Signal Processing*, 10, 85–92.
- Hartono and Van Der Burgh, A. (2004). A linear differential equation with a time-periodic damping coefficient: stability diagram and an application. *J. of Engineering Mathematics*, 49, 99–112.
- Ioannou, P. and Sun, J. (1996). *Robust Adaptive Control*. Prentice-Hall, Englewood Cliffs, NJ.
- Krstić, M., Kanellakopoulos, I., and Kokotović, P. (1995). *Nonlinear and Adaptive Control Design*. John Wiley & Sons, Inc., NY.
- Narendra, K. and Esfandiari, K. (2018). Adaptive control of linear periodic systems using multiple models. *Conf. on Decision and Control, CDC'18*, 589–594.
- Nikiforov, V. and Gerasimov, D. (2022). *Adaptive Regulation: Reference Tracking and Disturbance Rejection*. Springer Nature. doi:10.1007/978-3-030-96091-9.
- Nikiforov, V., Gerasimov, D., and Pashenko, A. (2022). Modular adaptive backstepping design with a high-order tuner. *IEEE Trans. Automatic Control*, 67(5), 2663–2668. doi:10.1109/TAC.2021.3091442.
- Ortega, R., Nikiforov, V., and Gerasimov, D. (2020). On modified parameter estimators for identification and adaptive control: a unified framework and some new schemes. *Annual Reviews in Control*, 50, 278–293.
- Rand, R. (2012). Lecture notes on nonlinear vibrations.
- Richard, J. (1983). *Analysis of Periodically Time-Varying Systems*. Springer-Verlag Berlin Heidelberg, New York.
- Tehrani, M. and Kalkowski, M. (2015). Active control of parametrically excited systems. *J. of Intelligent Material Systems and Structures*, 1–13.
- Wang, Z., Polycarpou, M., Uber, J., and Shang, F. (2006). Adaptive control of water quality in water distribution networks. *IEEE Trans. Control Systems Technology*, 14(1), 149–156.
- Xu, J.X. (2004). A new periodic adaptive control approach for time-varying parameters with known periodicity. *IEEE Trans. Automatic Control*, 49(4), 579–583.
- Yakubovich, V. and Starzhinskiy, V. (1975). *Linear Differential Equations with Periodic Coefficients*. John Wiley & Sons, NY.
- Yu, M. and Huang, D. (2015). A switching periodic adaptive control approach for time-varying parameters with unknown periodicity. *Int. J. on Adaptive Control and Signal Processing*, 29, 1526–1538.
- Zhu, S. and Sun, M. (2020). Robust adaptive repetitive control for a class of nonlinear periodically time-varying systems. *Int. J. of Control*. doi: 10.1080/00207179.2020.1786767.