


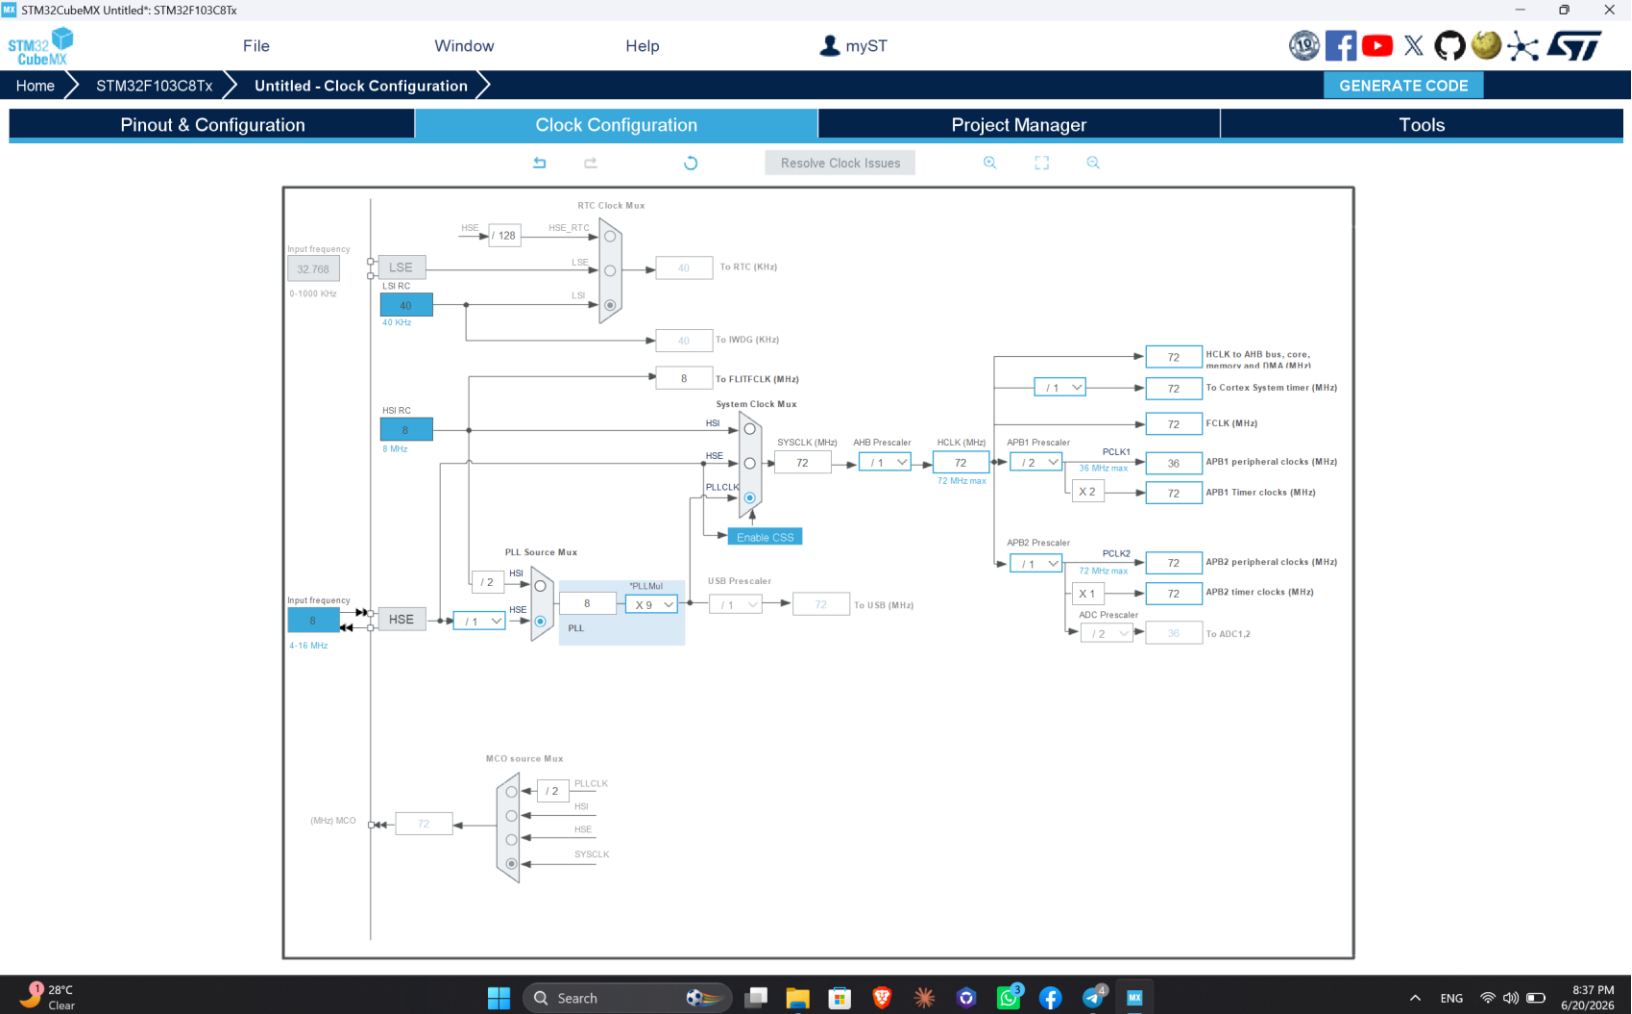

STM32CubeMX Untitled*: STM32F103C8Tx

File Window Help myST

Home > STM32F103C8Tx > Untitled - Pinout & Configuration

GENERATE CODE

Pinout & Configuration Clock Configuration Project Manager Tools

Software Packs Pinout

Pinout view System view

I2C2 Mode and Configuration

Mode

I2C2 I2C

Configuration

Reset Configuration

NVIC Settings DMA Settings GPIO Settings

Parameter Settings User Constants

Configure the below parameters:

Search (Ctrl+F)

Master Features

I2C Speed Mode Standard Mode

I2C Clock Speed (Hz) 100000

Slave Features

Clock No Stretch Mode Disabled

Primary Address Length selection 7-bit

Dual Address Acknowledged Disabled

Primary slave address 0

General Call address detection Disabled

RCC_OSC_IN

RCC_OSC_OUT

VBAT

PC13...

PC14...

PC15...

PD0...

PD1...

NRST

VSSA

VDDA

PA0...

PA1

PA2

PA3

PA4

PA5

PA6

PA7

PB0

PB1

PB2

PB10

PB11

VSS

VDD

STM32F103C8Tx LQFP48

I2C2_SCL

I2C2_SDA

27°C Clear

Search

8:46 PM 6/20/2026

STM32CubeMX

FileWindowHelpmyST

19fX

STM32CubeMXUntitled*: STM32F103C8Tx

HomeSTM32F103C8TxUntitled - Pinout & Configuration

GENERATE CODE

Pinout & Configuration

Clock Configuration

Project Manager

Tools

CategoriesA-Z

System Core

DMA

GPIO

IWDG

NVIC

RCC

SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

TIM3

TIM4

Connectivity

Computing

Middleware and Software Packs

GPIO Mode and Configuration

Configuration

Group By Peripherals

GPIOI2CRCC

Search Signals

Search (Ctrl+F)

Show only Modified Pins

Pin Name	Signal on Pin	GPIO outp...	GPIO mode	GPIO Pull...	Maximum ...	User Label	Modified
PA0-WKUP	n/a	Low	Output Pu...	No pull-up ...	Low		☒
PA1	n/a	n/a	Input mode	Pull-up	n/a		☒
PA2	n/a	n/a	Input mode	Pull-up	n/a		☒
PA3	n/a	n/a	Input mode	Pull-up	n/a		☒

PA3 Configuration :

GPIO mode

Input mode

GPIO Pull-up/Pull-down

Pull-up

User Label

Pinout view

System view

VDD

VSS

PB9

PB8

BOOT

PB7

PB6

PB5

PB4

PB3

PA15

PA14

VDD

PC13...

PC14...

PC15...

PD0...

PD1...

NRST

VSSA

VDDA

GPIO_Output

PA0...

GPIO_Input

PA1

GPIO_Input

PA2

PA3

PA4

PA5

PA6

PA7

PB0

PB1

PB2

PB10

PB11

VSS

VDD

GPIO_Input

PA3

PA4

PA5

PA6

PA7

PB0

PB1

PB2

PB10

PB11

VSS

VDD

I2C1_SCL

I2C1_SDA

STM32F103C8Tx

LQFP48

RCC_OSC_IN

RCC_OSC_OUT

Hot days ahead

27°C

Search

8:55 PM

6/20/2026