1. Description

1.1. Project

Project Name	L433CCTx-mini-sys
Board Name	L433CCTx-mini-sys
Generated with:	STM32CubeMX 4.19.0
Date	02/16/2017

1.2. MCU

MCU Series	STM32L4
MCU Line	STM32L4x3
MCU name	STM32L433CCTx
MCU Package	LQFP48
MCU Pin number	48

2. Pinout Configuration

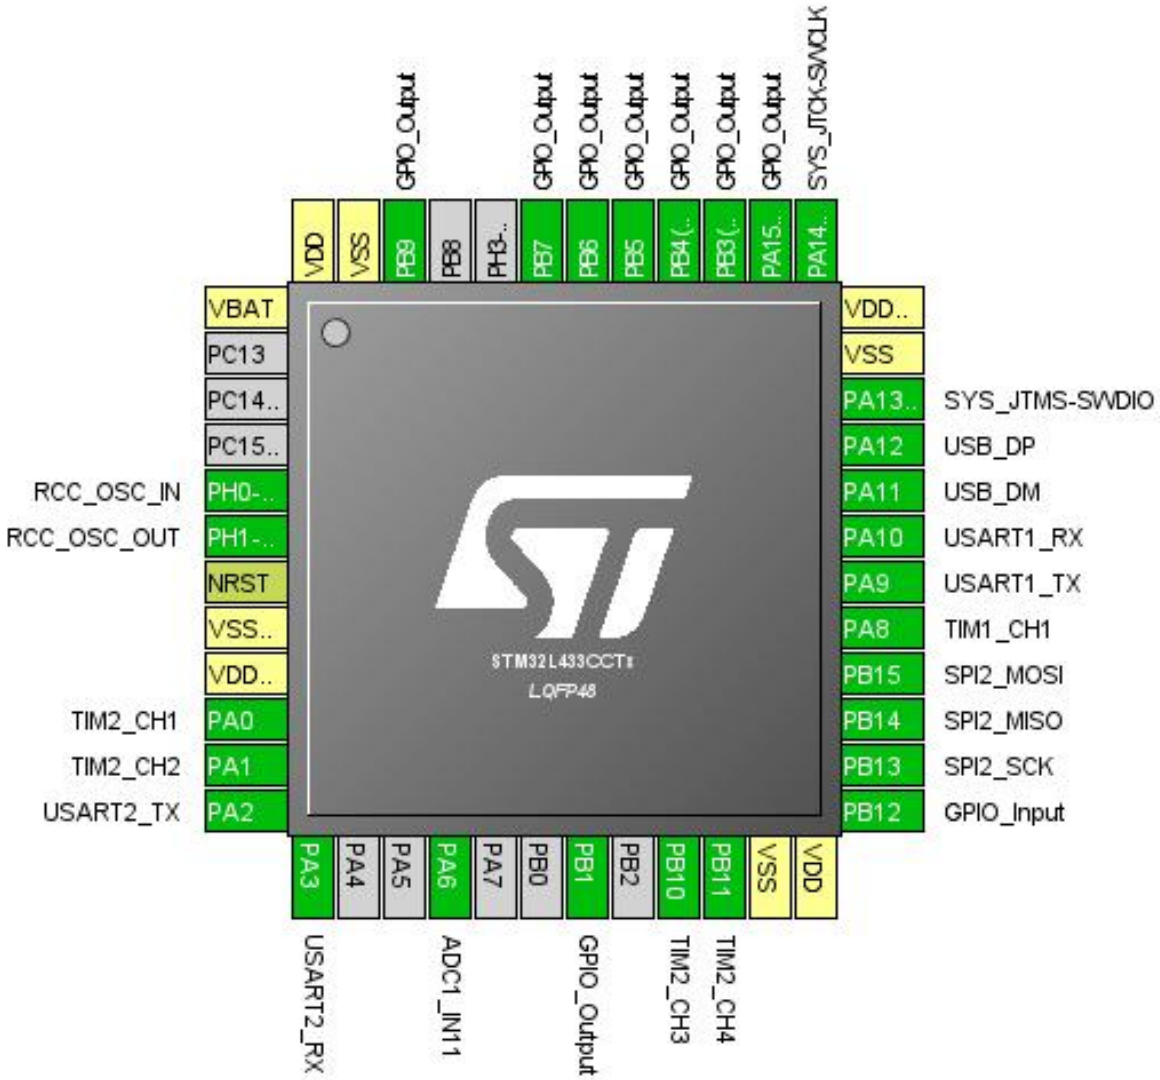

3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PH0-OSC_IN (PH0)	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT (PH1)	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA/VREF-	Power		
9	VDDA/VREF+	Power		
10	PA0	I/O	TIM2_CH1	
11	PA1	I/O	TIM2_CH2	
12	PA2	I/O	USART2_TX	
13	PA3	I/O	USART2_RX	
16	PA6	I/O	ADC1_IN11	
19	PB1 *	I/O	GPIO_Output	
21	PB10	I/O	TIM2_CH3	
22	PB11	I/O	TIM2_CH4	
23	VSS	Power		
24	VDD	Power		
25	PB12 *	I/O	GPIO_Input	
26	PB13	I/O	SPI2_SCK	
27	PB14	I/O	SPI2_MISO	
28	PB15	I/O	SPI2_MOSI	
29	PA8	I/O	TIM1_CH1	
30	PA9	I/O	USART1_TX	
31	PA10	I/O	USART1_RX	
32	PA11	I/O	USB_DM	
33	PA12	I/O	USB_DP	
34	PA13 (JTMS-SWDIO)	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDDUSB	Power		
37	PA14 (JTCK-SWCLK)	I/O	SYS_JTCK-SWCLK	
38	PA15 (JTDI) *	I/O	GPIO_Output	
39	PB3 (JTDO-TRACESWO) *	I/O	GPIO_Output	
40	PB4 (NJTRST) *	I/O	GPIO_Output	
41	PB5 *	I/O	GPIO_Output	
42	PB6 *	I/O	GPIO_Output	
43	PB7 *	I/O	GPIO_Output	
46	PB9 *	I/O	GPIO_Output	

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

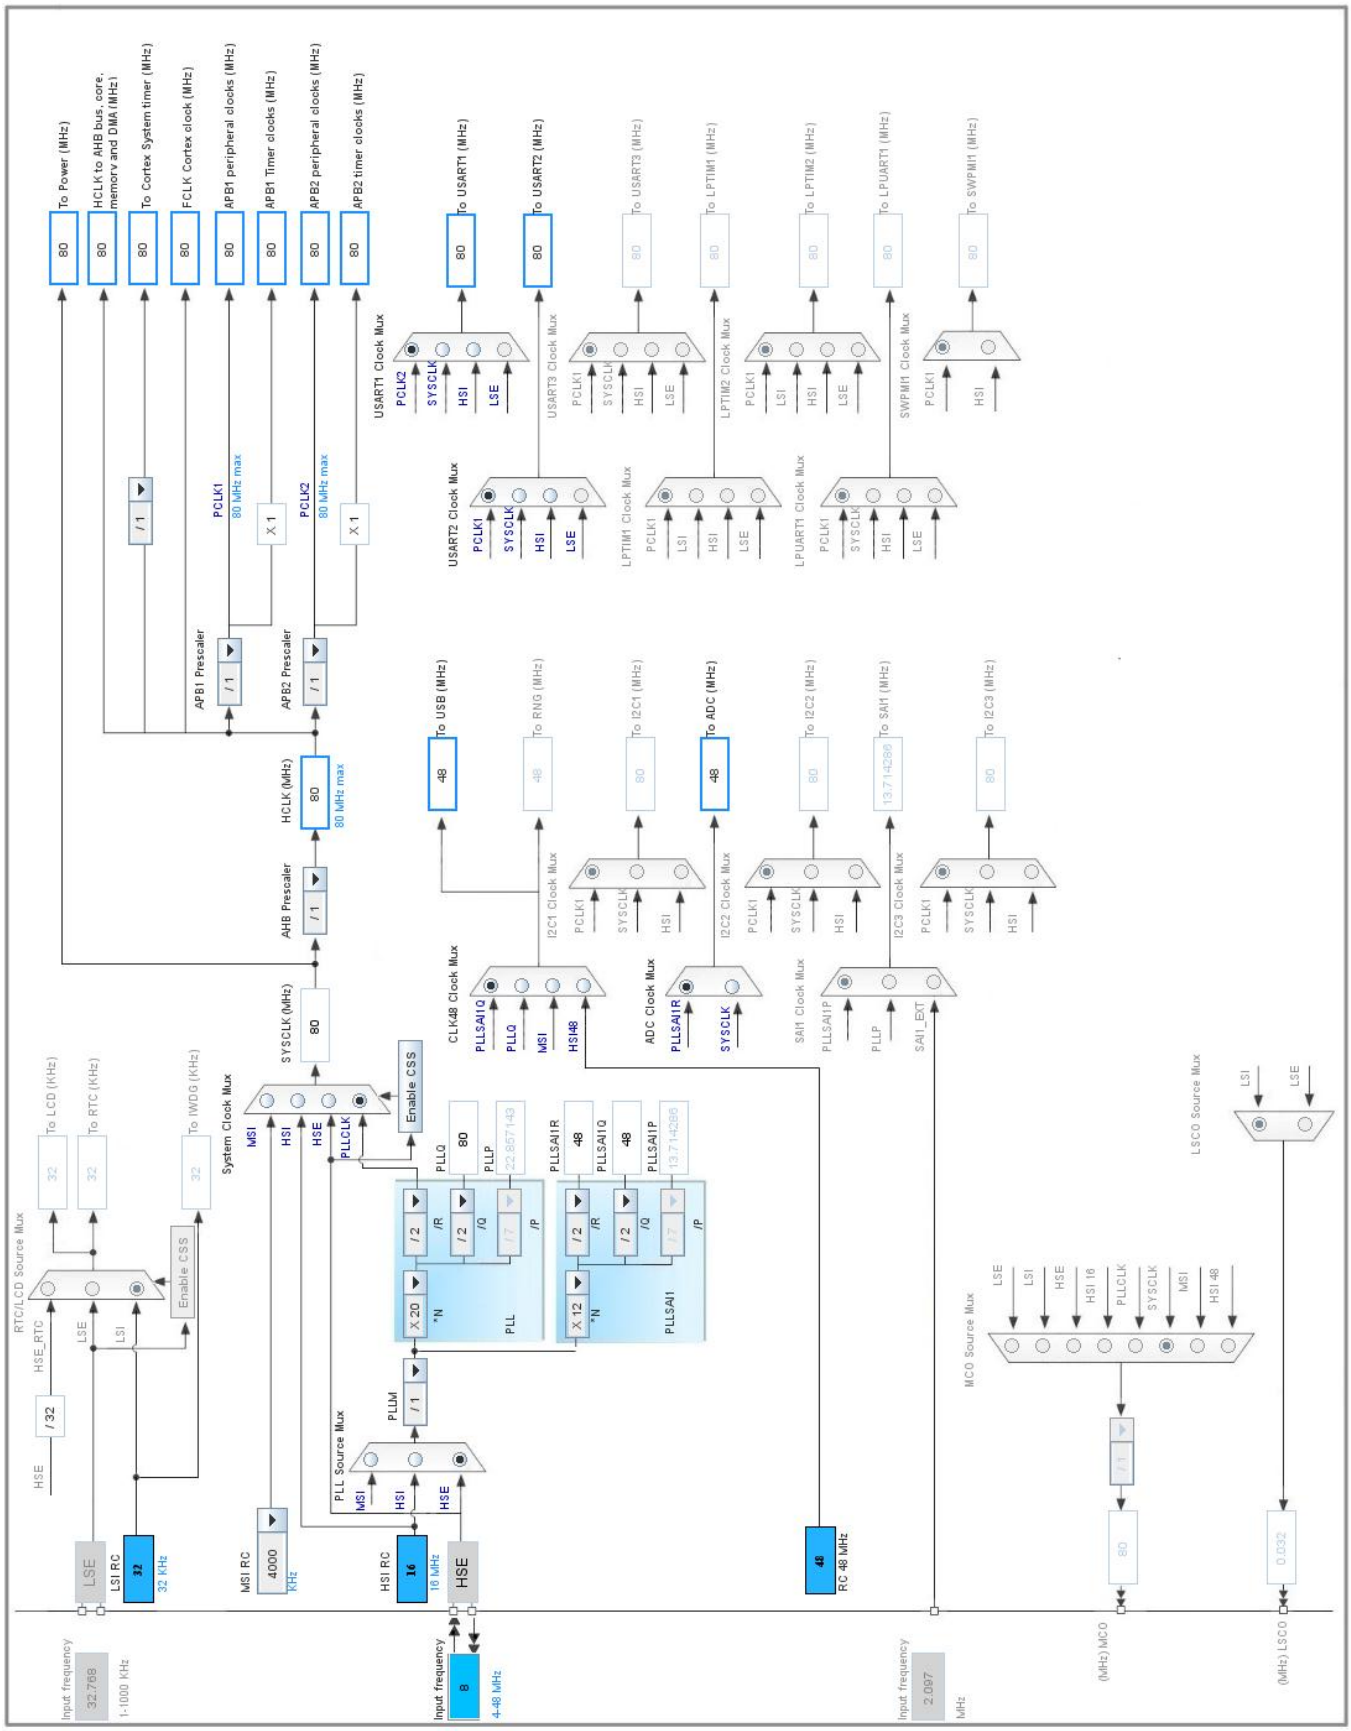

5. IPs and Middleware Configuration

5.1. ADC1

IN11: IN11 Single-ended

5.1.1. Parameter Settings:

ADC_Settings:

Clock Prescaler	Asynchronous clock mode divided by 1
Resolution	ADC 12-bit resolution
Data Alignment	Right alignment
Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	End of single conversion
Overrun behaviour	Overrun data preserved
Low Power Auto Wait	Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions	Enable
Enable Regular Oversampling	Disable
Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
Rank	1
Channel	Channel 11
Sampling Time	2.5 Cycles
Offset Number	No offset

ADC_Injected_ConversionMode:

Enable Injected Conversions	Disable

Analog Watchdog 1:

Enable Analog WatchDog1 Mode	false

Analog Watchdog 2:

Enable Analog WatchDog2 Mode	false

Analog Watchdog 3:

Enable Analog WatchDog3 Mode	false

5.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Disabled
Data Cache	Enabled
Flash Latency(WS)	4 WS (5 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
MSI Calibration Value	0
MSI Auto Calibration	Disabled
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

5.3. SPI2

Mode: Full-Duplex Master

5.3.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	**8 Bits ***
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	**8 ***
Baud Rate	**10.0 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled

NSSP Mode	**Disabled ***
NSS Signal Type	Software

5.4. SYS

Debug: Serial Wire

Timebase Source: SysTick

5.5. TIM1

Channel1: PWM Generation CH1

5.5.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	**99 ***
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)
Trigger Event Selection TRGO2	Reset (UG bit from TIMx_EGR)

Break And Dead Time management - BRK Configuration:

BRK State	Disable
BRK Polarity	High
BRK Filter (4 bits value)	0
BRK Sources Configuration	
- Digital Input	Disable
- COMP1	Disable
- COMP2	Disable

Break And Dead Time management - BRK2 Configuration:

BRK2 State	Disable
BRK2 Polarity	High
BRK2 Filter (4 bits value)	0
BRK2 Sources Configuration	
- Digital Input	Disable
- COMP1	Disable
- COMP2	Disable

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable
Lock Configuration	Off

Clear Input:

Clear Input Source	Disable

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

5.6. TIM2

Channel1: PWM Generation CH1
Channel2: PWM Generation CH2
Channel3: PWM Generation CH3
Channel4: PWM Generation CH4

5.6.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**19 ***
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value)	**19999 ***
Internal Clock Division (CKD)	No Division

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)

Clear Input:

Clear Input Source	Disable

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (32 bits value)	0
Fast Mode	Disable
CH Polarity	High

PWM Generation Channel 2:

Mode	PWM mode 1
Pulse (32 bits value)	0
Fast Mode	Disable
CH Polarity	High

PWM Generation Channel 3:

Mode	PWM mode 1
Pulse (32 bits value)	0
Fast Mode	Disable
CH Polarity	High

PWM Generation Channel 4:

Mode	PWM mode 1
Pulse (32 bits value)	0
Fast Mode	Disable
CH Polarity	High

5.7. USART1

Mode: Asynchronous

5.7.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	**8 Bits (including Parity) ***
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	**Receive Only ***
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

5.8. USART2

Mode: Asynchronous

5.8.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	7 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

5.9. USB

mode: Device (FS)

5.9.1. Parameter Settings:

Basic Parameters:

Speed	Full Speed 12MBit/s
Endpoint 0 Max Packet size	64 Bytes
Physical interface	Internal Phy
Sof Enable	Disabled

Power Parameters:

Low Power	Disabled

Link Power Management	Disabled
Battery Charging	Disabled

5.10. FATFS

mode: User-defined

5.10.1. Set Defines:

Version:

FATFS version	R0.11

Function Parameters:

FS_TINY (Tiny mode)	Disabled
FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FORWARD (Forward function)	Disabled
USE_LABEL (Volume label functions)	Disabled
USE_FASTSEEK (Fast seek function)	Enabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Latin 1 (Windows)
USE_LFN (Use Long Filename)	Disabled
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled
USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_NORTC (Timestamp feature)	Dynamic timestamp
NORTC_YEAR (Year for timestamp)	2015
NORTC_MON (Month for timestamp)	6
NORTC_MDAY (Day for timestamp)	4

WORD_ACCESS (Platform dependent access option)	Byte access
FS_REENTRANT (Re-Entrancy)	Disabled
FS_TIMEOUT (Timeout ticks)	1000
SYNC_t (O/S sync object)	osSemaphoreId
FS_LOCK (Number of files opened simultaneously)	2

5.11. USB_DEVICE

Class For FS IP: Communication Device Class (Virtual Port Com)

5.11.1. Parameter Settings:

Basic Parameters:

VirtualMode	Cdc
USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SUPPORT_USER_STRING (Enable user string descriptor)	Disabled
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message
USBD_LPM_ENABLED (Link Power Management)	**0: Link Power Management not supported ***

Class Parameters:

USBD_CDC_INTERVAL (Number of micro-frames interval)	1000

5.11.2. Device Descriptor:

Device Descriptor:

VID (Vendor IDentifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

Device Descriptor FS:

PID (Product IDentifier)	22336
PRODUCT_STRING (Product Identifier)	STM32 Virtual ComPort
SERIALNUMBER_STRING (Serial number)	00000000001A
CONFIGURATION_STRING (Configuration Identifier)	CDC Config
INTERFACE_STRING (Interface Identifier)	CDC Interface

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA6	ADC1_IN11	Analog mode for ADC conversion	No pull-up and no pull-down	n/a	
RCC	PH0-OSC_IN (PH0)	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT (PH1)	RCC_OSC_OUT	n/a	n/a	n/a	
SPI2	PB13	SPI2_SCK	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PB14	SPI2_MISO	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PB15	SPI2_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
SYS	PA13 (JTMS-SWDIO)	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14 (JTCK-SWCLK)	SYS_JTCK-SWCLK	n/a	n/a	n/a	
TIM1	PA8	TIM1_CH1	**Alternate Function Open Drain ***	No pull-up and no pull-down	**High ***	
TIM2	PA0	TIM2_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PA1	TIM2_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB10	TIM2_CH3	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB11	TIM2_CH4	Alternate Function Push Pull	No pull-up and no pull-down	Low	
USART1	PA9	USART1_TX	Alternate Function Push Pull	Pull-up	**Very High ***	
	PA10	USART1_RX	Alternate Function Push Pull	Pull-up	**Very High ***	
USART2	PA2	USART2_TX	Alternate Function Push Pull	Pull-up	**Very High ***	
	PA3	USART2_RX	Alternate Function Push Pull	Pull-up	**Very High ***	
USB	PA11	USB_DM	n/a	n/a	n/a	

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
	PA12	USB_DP	n/a	n/a	n/a	
GPIO	PB1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	**High ***	
	PB12	GPIO_Input	Input mode	**Pull-up ***	**n/a**	
	PA15 (JTDI)	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PB3 (JTDO-TRACESWO)	GPIO_Output	Output Push Pull	No pull-up and no pull-down	**High ***	
	PB4 (NJTRST)	GPIO_Output	Output Push Pull	No pull-up and no pull-down	**High ***	
	PB5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	**High ***	
	PB6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	**High ***	
	PB7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	**High ***	
	PB9	GPIO_Output	Output Push Pull	No pull-up and no pull-down	**High ***	

6.2. DMA configuration

DMA request	Stream	Direction	Priority
USART2_TX	DMA1_Channel7	Memory To Peripheral	**Medium ***
TIM1_CH1	DMA1_Channel2	Memory To Peripheral	**High ***

USART2_TX: DMA1_Channel7 DMA request Settings:

Mode:	**Circular ***
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

TIM1_CH1: DMA1_Channel2 DMA request Settings:

Mode:	**Circular ***
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	**Word ***
Memory Data Width:	**Byte ***

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
DMA1 channel2 global interrupt	true	0	0
DMA1 channel7 global interrupt	true	0	0
TIM2 global interrupt	true	0	0
USART1 global interrupt	true	0	0
USB event interrupt through EXTI line 17	true	0	0
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/35/36/37/38	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 global interrupt	unused		
TIM1 break interrupt and TIM15 global interrupt	unused		
TIM1 update interrupt and TIM16 global interrupt	unused		
TIM1 trigger and commutation interrupts	unused		
TIM1 capture compare interrupt	unused		
SPI2 global interrupt	unused		
USART2 global interrupt	unused		
FPU global interrupt	unused		

*** User modified value**

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32L4
Line	STM32L4x3
MCU	STM32L433CCTx
Datasheet	028794_Rev1

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Project

8.1. Project Settings

Name	Value
Project Name	L433CCTx-mini-sys
Project Folder	/array_data01/STM32L433CCTx-mini-sys-01/L433CCTx-mini-sys
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_L4 V1.6.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No