
BENCH CONFIGURATION ONLY

Existing LOGIC_SEL = 5 V (continuity checked). Uno R3 uses 5 V logic.

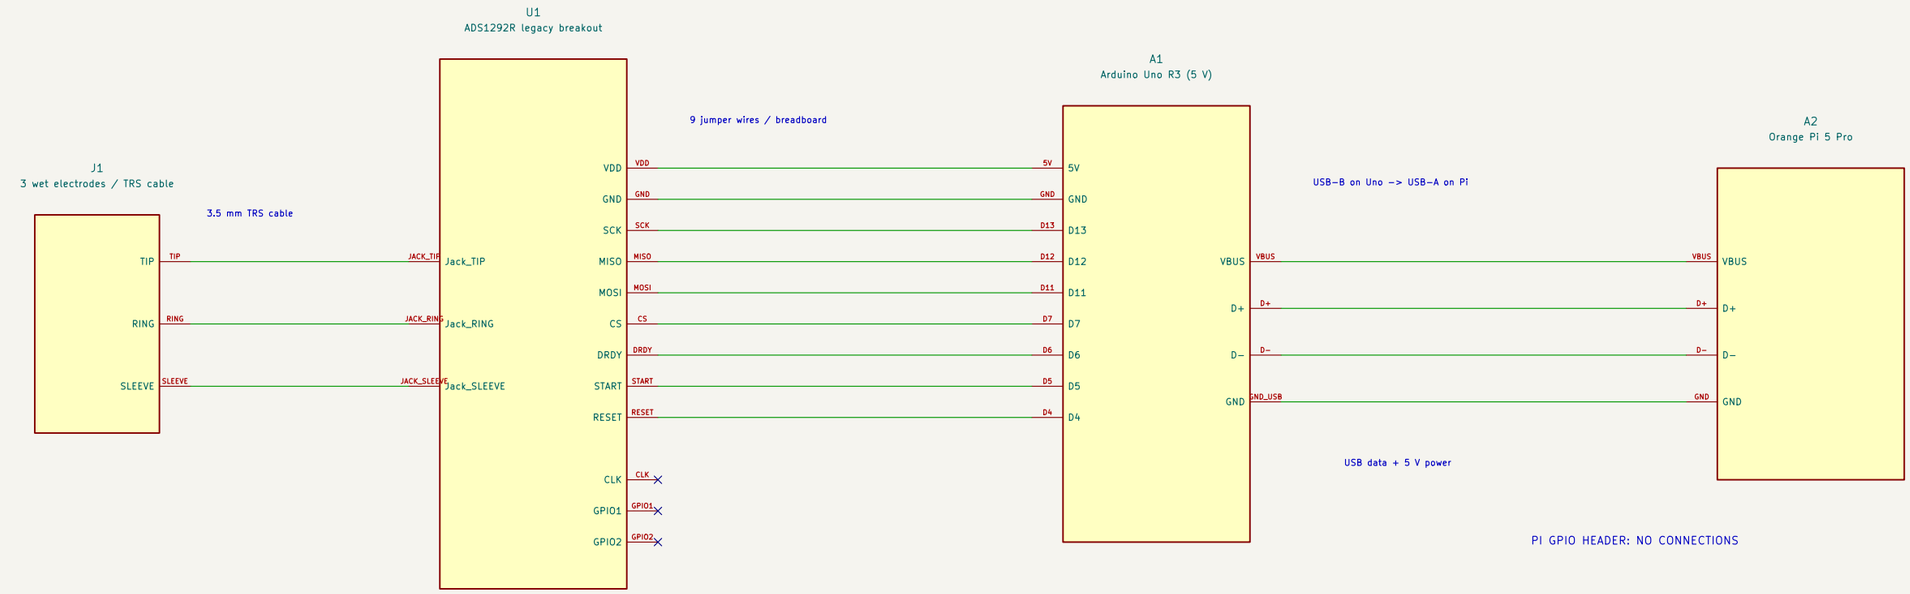

JP3 board side: TIP -> R20 (0R) -> ADS IN2N

RING -> R22 (0R) -> IN2P

SLEEVE -> R24 (100k) -> R23 (0R) -> RLDOUT / bias

ELECTRODES: LEAVE DISCONNECTED during USB/mains bench tests.

Board-side jack mapping sourced from official v3 schematic. Cable colors / placement UNVERIFIED.

The ADS1292R board is sold for ECG/respiration; EEG suitability is not yet validated.

Before body use: power isolation, peripheral connections and electrode setup still need review.

Do not treat a battery-powered Pi connected to mains USB/HDMI peripherals as isolated.

No extra Uno barrel-jack / VIN supply in this USB-powered bench configuration.

CHECK BEFORE POWER: each header pin has its own breadboard strip; no adjacent-pin shorts.

Firmware: CS=D7, DRDY=D6, START=D5, RESET=D4. Keep Uno D10 configured as OUTPUT for SPI master.

PENDING: battery-only laptop move, body-use power review, electrode placement, EEG validation.

No robot arm or heart-rate hardware in this MVP. Quest/WebXR receives the network intensity stream.

Source: Protocentral/ADS1292rShield_Breakout, hardware/breakout/pc_ads1292r_brk_v3.sch (JP3 / R20 / R22 / R23 / R24).

OPTION: replace A2 with battery-only laptop; same USB cable.

Never both hosts. Physical move / power review still PENDING.

Laptop charger, docks, displays and powered peripherals unplugged.

Module wiring reference; not a medical device or body-use approval

MOLTEN hackathon prototype

Sheet: /

File: adaptive-horror.kicad_sch

Title: Adaptive Horror | Biosignal Bench Wiring

Size: A3	Date: 2026-10-17	**Rev: B**
KiCad E.D.A. 10.0.6		Id: 1/1