
SmartBoard Session Report

Course: cpe14 - DSP
Session: Quantization
Date: 2026-10-24
Status: draft

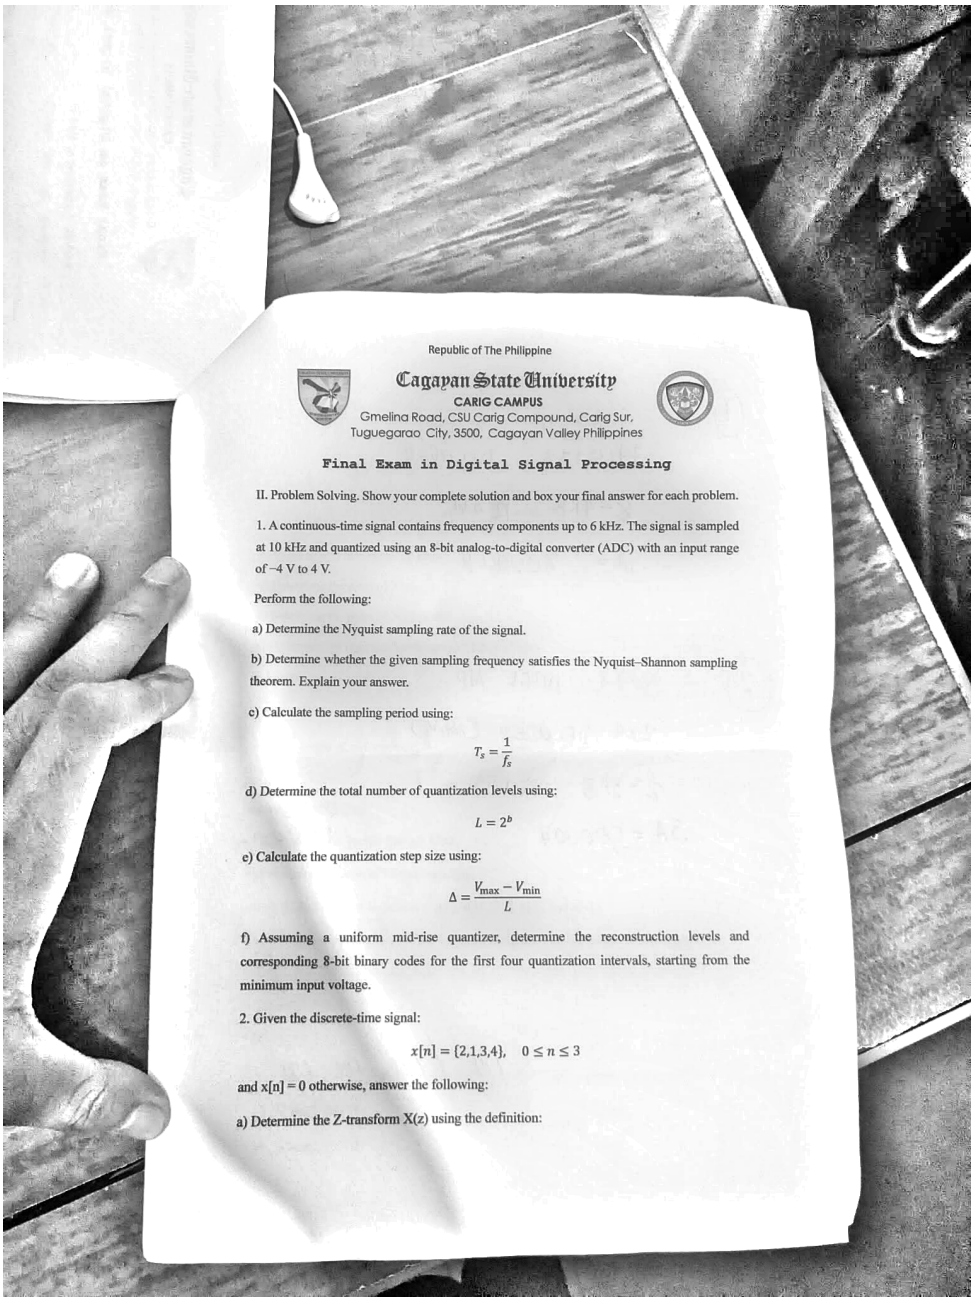

Republic of The Philippine

Cagayan State University
CARIG CAMPUS
Gmelina Road, CSU Carig Compound, Carig Sur,
Tuguegarao City, 3500, Cagayan Valley Philippines

Final Exam in Digital Signal Processing

II. Problem Solving. Show your complete solution and box your final answer for each problem.

1. A continuous-time signal contains frequency components up to 6 kHz. The signal is sampled at 10 kHz and quantized using an 8-bit analog-to-digital converter (ADC) with an input range of −4 V to 4 V.

Perform the following:

a) Determine the Nyquist sampling rate of the signal.

b) Determine whether the given sampling frequency satisfies the Nyquist–Shannon sampling theorem. Explain your answer.

c) Calculate the sampling period using:

$$T_s = \frac{1}{f_s}$$

d) Determine the total number of quantization levels using:

$$L = 2^b$$

e) Calculate the quantization step size using:

$$\Delta = \frac{V_{max} - V_{min}}{L}$$

f) Assuming a uniform mid-rise quantizer, determine the reconstruction levels and corresponding 8-bit binary codes for the first four quantization intervals, starting from the minimum input voltage.

2. Given the discrete-time signal:

$$x[n] = \{2,1,3,4\}, \quad 0 \le n \le 3$$

and x[n] = 0 otherwise, answer the following:

a) Determine the Z-transform X(z) using the definition:

Cleaned image (gentle)

vote pele OE gig tr gh grt Pi WR na A MR gtr oem ee Ay yet a
: es ag te ore Set ON ¥ iy: ee ras ee! oa aon ‘F asin

Se ca er ee eee © an rg fad re
SYNE le es Set. tT i Te RAMA ONE Par dpe 1 ea So
er re a ed pe GO Legh fog iets cis nar t fee, (at aes
- ee ge a gee ge Oe Se ade ea
ae e . ad ” a ain RE, © oe a Petr te
’ te Ee caren ee ee footy aM Ae ee? ;
vee ” 0 ett ge ce a TE A ee Wb SEE net ew A Se . 3 F
_ vote Ly - a et ae vat co Eas aE BESS SL gah r
nce a en ae ots EUR PED Nae TO
oe ; aint ete : a ake MO ge ite OE AE ey L ly
TREE fae LS Sa OE De NN oe SE
Republic of The Philippine a 2 ag ree
CO Freak ‘id
pare] ’ A _- vf “ Wea sage #
Cagapan State University Soom Ket bsah ao ASR
teen fy ‘ tps " a awe =
———— CARIG CAMPUS cS) \ aes 8 anon =<
Pe, Lot net # Gmelina Road, CSU Carig Compound, CarigSur, =§ BR ‘ eae lg tet ays
ee Tuguegarao City, 3500, Cagayan Valley Philippines . Bae fect?
ye a - Final Exam in Digital Signal Processing i vin Eee eh 5
eae Te, Il. Problem Solving. Show your complete solution and box your final answer for each problem. ae ee ee ih = tS
mate tT sane 1, Acontinuous-time signal contains frequency components up to 6 kHz. The signal is sampled oe...) : i ‘a aoe
eS Be at at 10 kHz and quantized using an 8-bit analog-to-digital converter (ADC) with an input range rH ak ‘ita
oe a a a of -4 V to4 V. nese ernie
(ii.% ” a a gal Soa
a 4 Perform the following: seen ae, ‘t L.
: ie : cet a) Determine the Nyquist sampling rate of the signal. . “t a - “rh
ey m, b) Determine whether the given sampling frequency satisfies the Nyquist-Shannon sampling cape SA
wey ete oes theorem. Explai i < tte '
Pe m . Explain your answer. Pe aN
Oiler ¢) Calculate the sampling period using: Ss:
eB . fBy . . eld oo J ~~
roar h arn a sia 1 Bw Le te
i? ard T= > PO EE Oe
eo firs, d) Determine the total number of quantization levels using: ey oa
Relay le . €) Calculate the quantization step size using: ee a gee
: a - “ve ebict i ‘ A= Vinay — Vin = Vrnin Paes os zl “le .
= a ye i _ Te UN eT fe
re p Va me TS L 73 aye Mae
oe Ra ee oe fs ‘ ay we
x* f egg . : ‘ the . ¢ . paee Nong
=a P “ye tie yee f) Assuming a uniform mid-rise quantizer, determine the reconstruction levels and PN ete Es
ey a pei corresponding 8-bit binary codes for the first four quantization intervals, starting from the eee AME rept
—— : ee My minimum input voltage. Mus ke * a a
2:8) Wve te 2. Given the discrete-time signal: : sa oh

, ee bm mT ae itll innit iii tt init SO ETS 5 ere a! eprint pais WaT ot we / ane wo Se rave stale Bele
i ae aie ee area ee ne: See PSs wie Suir gi, 3 ae Ag awh SE oy cata Sar