
# SmartBoard Session Report

Course: cpe14 - DSP
Session: Quantization
Date: 2026-10-24
Status: draft

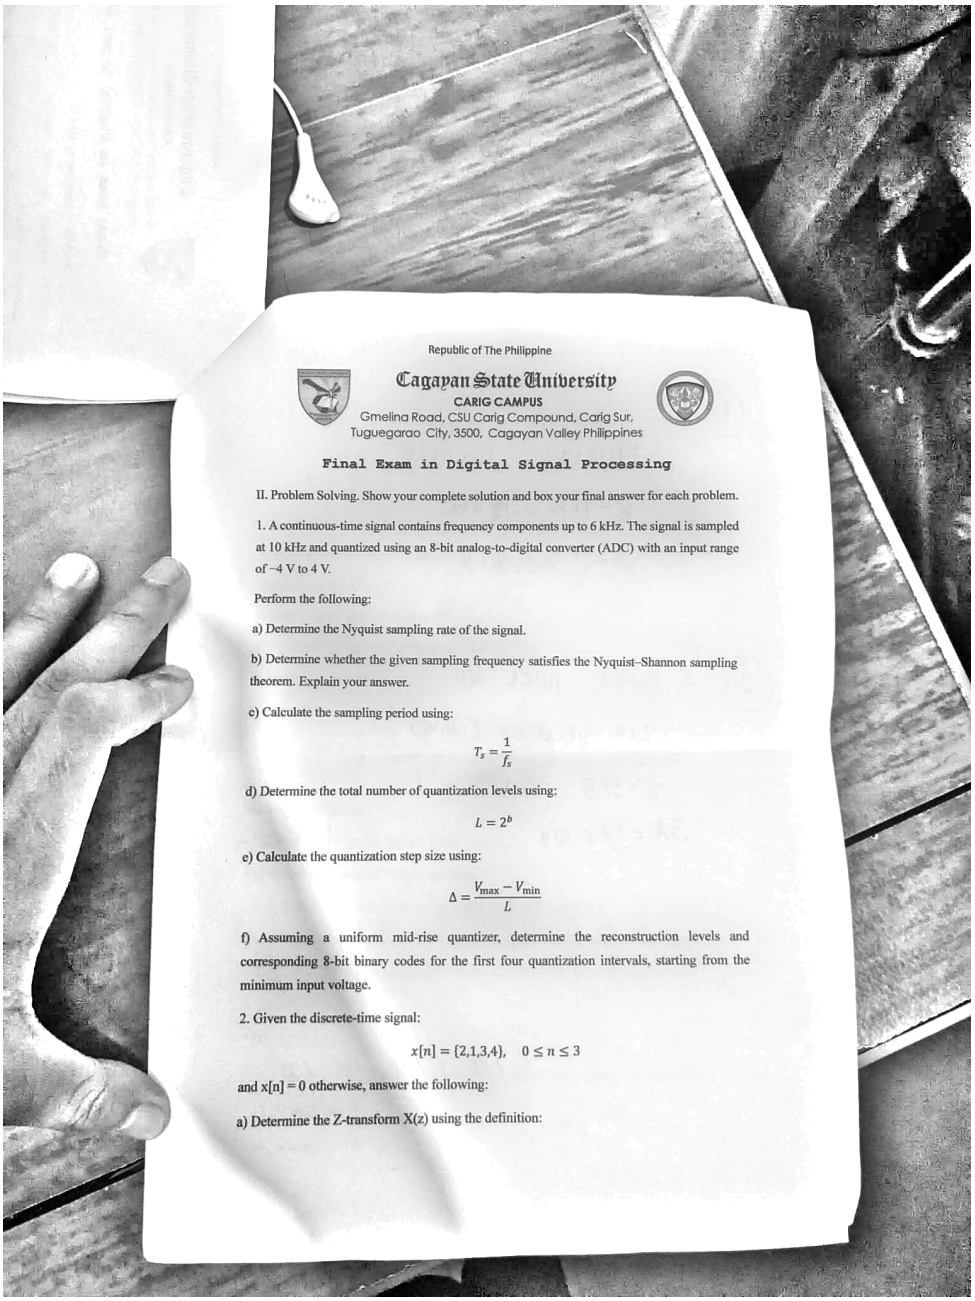

Republic of The Philippine

Cagayan State University
CARIG CAMPUS
Gmelina Road, CSU Carig Compound, Carig Sur,
Tuguegarao City, 3500, Cagayan Valley Philippines

**Final Exam in Digital Signal Processing**

II. Problem Solving. Show your complete solution and box your final answer for each problem.

1. A continuous-time signal contains frequency components up to 6 kHz. The signal is sampled at 10 kHz and quantized using an 8-bit analog-to-digital converter (ADC) with an input range of −4 V to 4 V.

Perform the following:

a) Determine the Nyquist sampling rate of the signal.

b) Determine whether the given sampling frequency satisfies the Nyquist–Shannon sampling theorem. Explain your answer.

c) Calculate the sampling period using:

$$T_s = \frac{1}{f_s}$$

d) Determine the total number of quantization levels using:

$$L = 2^b$$

e) Calculate the quantization step size using:

$$\Delta = \frac{V_{max} - V_{min}}{L}$$

f) Assuming a uniform mid-rise quantizer, determine the reconstruction levels and corresponding 8-bit binary codes for the first four quantization intervals, starting from the minimum input voltage.

2. Given the discrete-time signal:

$$x[n] = \{2,1,3,4\}, \quad 0 \le n \le 3$$

and x[n] = 0 otherwise, answer the following:

a) Determine the Z-transform X(z) using the definition:

*Cleaned image (gentle)*

Republic of The Philippine a 2 ag ree
CO Freak ‘id

Cagapan State University Soom Ket bsah ao ASR
———— CARIG CAMPUS cS) \ aes 8 anon =<
Pe, Lot net # Gmelina Road, CSU Carig Compound, CarigSur, =§ BR ‘ eae lg tet ays
ee Tuguegarao City, 3500, Cagayan Valley Philippines . Bae fect?
ye a - Final Exam in Digital Signal Processing i vin Eee eh 5
eae Te, Il. Problem Solving. Show your complete solution and box your final answer for each problem. ae ee ee ih = tS
mate tT sane 1, Acontinuous-time signal contains frequency components up to 6 kHz. The signal is sampled oe...) : i ‘a aoe
eS Be at at 10 kHz and quantized using an 8-bit analog-to-digital converter (ADC) with an input range rH ak ‘ita
a 4 Perform the following: seen ae, ‘t L.
: ie : cet a) Determine the Nyquist sampling rate of the signal. . “t a - “rh
ey m, b) Determine whether the given sampling frequency satisfies the Nyquist-Shannon sampling cape SA
Pe m . Explain your answer. Pe aN
Oiler ¢) Calculate the sampling period using: Ss:
eo firs, d) Determine the total number of quantization levels using: ey oa
Relay le . €) Calculate the quantization step size using: ee a gee
re p Va me TS L 73 aye Mae
=a P “ye tie yee f) Assuming a uniform mid-rise quantizer, determine the reconstruction levels and PN ete Es
ey a pei corresponding 8-bit binary codes for the first four quantization intervals, starting from the eee AME rept
2:8) Wye te 2. Given the discrete-time signal: : sa oh
on is yey ™ and x[n] = 0 otherwise, answer the following: Lon phe
ia, rh Sle. a) Determine the Z-transform X(z) using the definition: vo eg ee