
SmartBoard Session Report

Course: cpe14 - DSP
Session: Quantization
Date: 2026-10-24
Status: draft

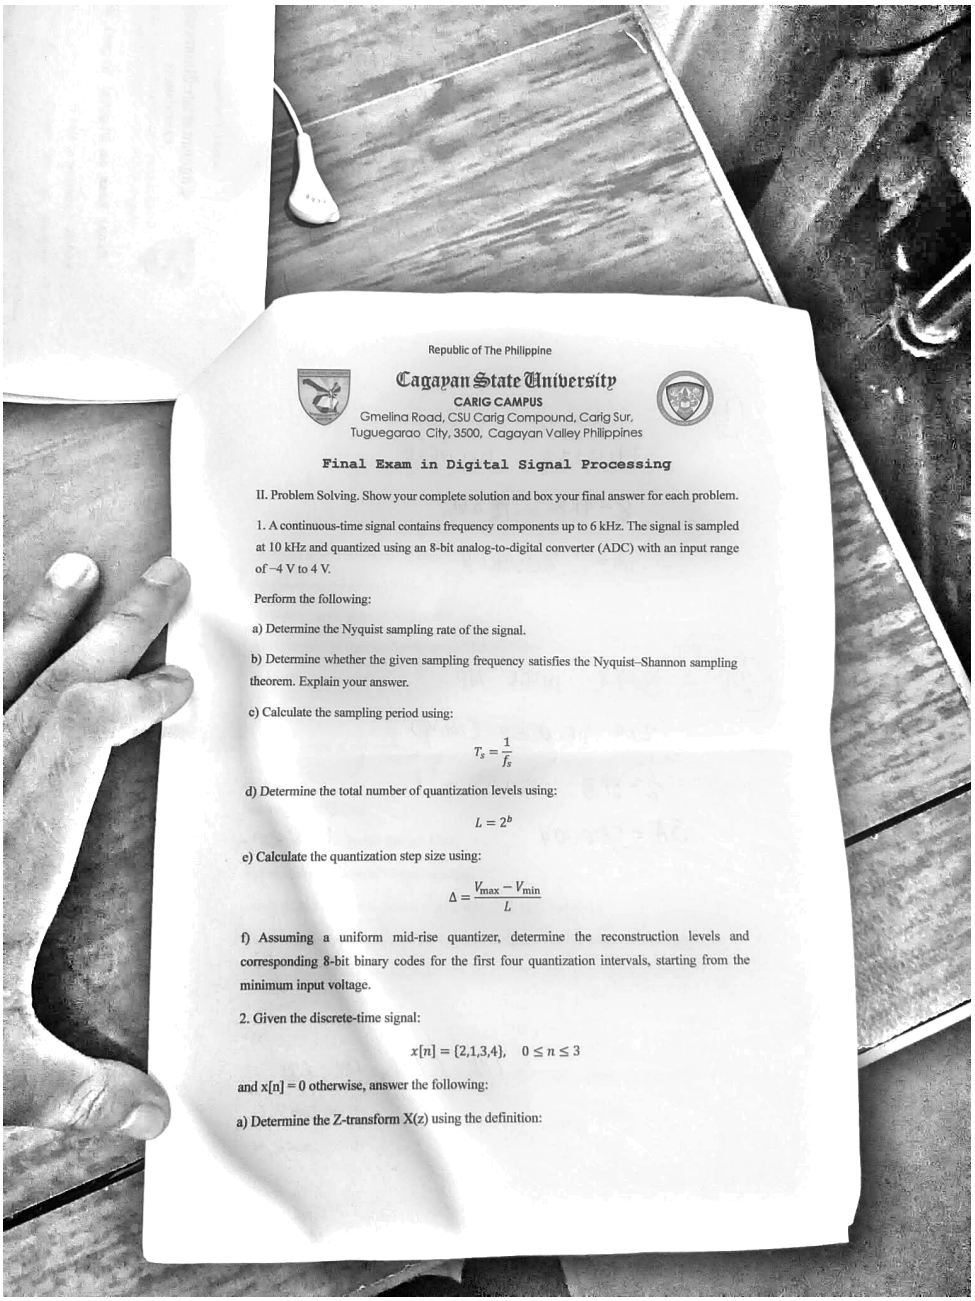

Republic of The Philippine

Cagayan State University
CARIG CAMPUS
Gmelina Road, CSU Carig Compound, Carig Sur,
Tuguegarao City, 3500, Cagayan Valley Philippines

Final Exam in Digital Signal Processing

II. Problem Solving. Show your complete solution and box your final answer for each problem.

1. A continuous-time signal contains frequency components up to 6 kHz. The signal is sampled at 10 kHz and quantized using an 8-bit analog-to-digital converter (ADC) with an input range of −4 V to 4 V.

Perform the following:

a) Determine the Nyquist sampling rate of the signal.

b) Determine whether the given sampling frequency satisfies the Nyquist–Shannon sampling theorem. Explain your answer.

c) Calculate the sampling period using:

$$T_s = \frac{1}{f_s}$$

d) Determine the total number of quantization levels using:

$$L = 2^b$$

e) Calculate the quantization step size using:

$$\Delta = \frac{V_{max} - V_{min}}{L}$$

f) Assuming a uniform mid-rise quantizer, determine the reconstruction levels and corresponding 8-bit binary codes for the first four quantization intervals, starting from the minimum input voltage.

2. Given the discrete-time signal:

$$x[n] = \{2,1,3,4\}, \quad 0 \le n \le 3$$

and x[n] = 0 otherwise, answer the following:

a) Determine the Z-transform X(z) using the definition:

Cleaned image (gentle)

rn oS a 2 ag OR Rs US ee ne ee Vn Pw
: ga ea rs eae an oT ee a

oe Fee eh us ogee SAAB Ate OWE Pe red Fy atl So
eae eee AN See our
wo a S J ae z Ly eet te RRA ee a aT on &
ee are ae ea ail aR eget Sate See tan 2
a ere il ee ae es Rae wr eee anon eed A al ss ahi
we eke tae Tee WA Pe eee
cya OT a eee TORT. ere er ae aah ee
: ee as ae a anes ar rt er a are
reo pee CO pre NE gt UE BN NE Teoh SU 2
° 8 Tees ae
Republic of The Philippine se ee ie
Wer vic: Salta: Aldor,
eat A 5 _ el DR ee
Cagapan State University fam : rey wR
= CARIG CAMPUS eS) ea ally re
a : wet Gmelina Road, CSU Carig Compound, CarigSur, = SZ oe eRe eater =
ae me . Tuguegarao City, 3500, Cagayan Valley Philippines . c pie tenes
art - ; so ; Final Exam in Digital Signal Processing Sane
a nT : IL Problem Solving. Show your complete solution and box your final answer for each problem. mp Goo
Boe 1, Acontinuous-time signal contains frequency components up to 6 KHz. The signal is sampled ee ape ' sR
Oe eee aaeerd at 10 kHz and quantized using an 8-bit analog-to-digital converter (ADC) with an input range Pana’ fone
7 cay Z a of -4Vto4 V. a eae.
evens Sacee é Perform the following: Poles NY bs
- 3 , . a) Determine the Nyquist sampling rate of the signal. ara ae
= : ay Ue hes
ek Lt my b) Determine whether the given sampling frequency satisfies the Nyquist-Shannon sampling eee ret *
y Rabies °) theorem. Explain your answer. ee 8 on
ral yo wget ¢) Calculate the sampling period using: ~—, Lees ‘
cs iad = s pe at a -
SP ake Bo “ ee
oe, foi-., d) Determine the total number of quantization levels using: es ee
Bel Ss Bae 2 ee
fat Dt” net i . e) Calculate the quantization step size using: nen * Pr eanee
ay Creeks 4g — Ymax Vinin press MEE
a vay eg reed ne ae fe
an Wy ae ote L Reith Sane ce
ry Se q f) Assuming a uniform mid-rise quantizer, determine the reconstruction levels and { Perec at
an i Sa iv corresponding 8-bit binary codes for the first four quantization intervals, starting from the 3 ae her
oe he ae so) minimum input voltage. Woe ee tw 2 oe
ne 4 Msg Frye , re a anh a fe
ft te Meee 2. Given the discrete-time signal: Pete /
ane bE TS Re “
BEA iy. x[n] = {2,134}, Osns3 - oS
ee a ip _ and x{n] = 0 otherwise, answer the following: Togs
ae RS e + Pe ok ed