

# Robust Performance Guarantees for System Level Synthesis

Nikolai Matni

Department of Electrical and Systems Engineering, University of Pennsylvania

September 12, 2019

## Abstract

We generalize the system level synthesis framework to systems defined by bounded causal linear operators, and use this parameterization to make connections between robust system level synthesis and classical results from the robust control literature. In particular, by leveraging results from  $\mathcal{L}_1$  robust control, we show that necessary and sufficient conditions for robust performance with respect to causal bounded linear uncertainty in the system dynamics can be translated into convex constraints on the system responses. We exploit this connection to show that these conditions naturally allow for the incorporation of delay, sparsity, and locality constraints on the system responses and resulting controller implementation, allowing these methods to be applied to large-scale distributed control problems – to the best of our knowledge, these are the first such robust performance guarantees for distributed control systems.

## 1 Introduction

Robust control seeks to explicitly account for the unavoidable mismatch between a mathematical model of a system, and the behavior of the system itself. In the context of linear control systems, robust control techniques [2, 6, 20] have proven invaluable in applications ranging from process control to aerospace engineering. A theme in robust control is the tradeoff between how easily necessary and sufficient conditions for robust stability and performance can be obtained, and how detailed (conversely conservative) the description of model uncertainty is. Indeed, many of the celebrated tools from robust control, such as the structured singular value (see [12]), structured small gain theorems (see Ch 7.2 of [2]), and integral quadratic constraints (see [11]), seek to optimally navigate this tradeoff. However, as of yet, few of these results have been extended in a convincing manner to the large-scale distributed setting.

Although there is a rich and increasingly mature body of work tackling distributed optimal control problems exists (see [8, 13, 18, 19], and references therein), some of which have robust control interpretations with respect to unstructured bounded perturbations (e.g., [7, 9, 14]), to the best of our knowledge no tight conditions for robust performance of large-scale distributed controllers that extend beyond these simple extensions exist. In this paper, we extend the System Level Synthesis (SLS) parameterization [1, 18] of internally stabilizing controllers to a class of systems described by causal bounded linear operators, and show how this parameterization can be used to make connections to classical robust synthesis techniques [2, 6]. We then exploit this connection to show that these necessary and sufficient conditions are equally applicable when additional delay, sparsity, and locality constraints are imposed on the system responses and controller implementation. To the

best of our knowledge, these are the first such necessary and sufficient conditions that are applicable to large-scale uncertain systems and distributed controllers. In particular, our contributions are:


- A generalization of the SLS parameterization of stabilizing state-feedback controllers for finite-dimensional LTI systems [18] to systems with dynamics described by bounded and causal linear operators, showing that affine constraints on certain system response design variables are necessary and sufficient for them to be achievable by a causal linear controller;
- A generalization of the robustness result of [10] showing that the generalized SLS parameterization is stable with respect to perturbations away from the aforementioned achievability subspace, as well as an explicit characterization of the effects of these perturbations on the actual closed loop behavior achieved by the correspondingly perturbed controller implementation;
- The formulation and solution of robust performance problem in terms of system response variables for a linear-time-invariant dynamical system subject to bounded and causal linear uncertainty that naturally allows for delay, sparsity, and locality structure to be imposed on the system response and corresponding controller implementation;

The rest of the paper is structured as follows: in Section 2, we introduce notation and basic definitions of stability and well-posedness. In Section 3, we review the SLS parameterization for finite-dimensional LTI systems, and generalize it to a richer class of systems with dynamics described by bounded linear operators. In Section 4, we consider a robust version of the generalized SLS parameterization derived in Section 3, and provide necessary and sufficient conditions for robust performance terms of *convex* constraints on the system responses. In Section 4.1, we highlight how these convex constraints can naturally be integrated with structural constraints on the system responses, such as delay, sparsity, and locality constraints, while still preserving the necessity and sufficiency of the identified conditions. We end with conclusions and discussions of future work in Section 5.

## 2 Notation and Preliminaries

We slightly adapt the notation used in [6]. We use Latin letters to denote vectors and matrices, e.g.,  $Ax = b$ , and bold-face Latin letters to denote signals and operators, e.g.,  $\mathbf{x} = (x_t)_{t=0}^\infty$ , and  $\mathbf{y} = \mathbf{G}\mathbf{u}$ . We let  $\ell_\infty$  denote the space of all bounded sequences of real numbers, i.e.,  $\mathbf{x} = (x_t)_{t=0}^\infty$  if and only if  $\sup_t |x_t| < \infty$ , in which case we define  $\|\mathbf{x}\|_{\ell_\infty} = \sup_t |x_t|$ . Similarly, we let  $\ell_\infty^q$  denote the space of all  $q$ -tuples of elements of  $\ell_\infty$ : if  $\mathbf{x} = (\mathbf{x}^1, \dots, \mathbf{x}^q) \in \ell_\infty^q$ , then  $\|\mathbf{x}\|_{\ell_\infty} = \max_{i=1, \dots, q} \|\mathbf{x}^i\|_{\ell_\infty}$ . We also define the extended space  $\ell_{\infty, e}^q$  which is equal to the space of all  $q$ -tuples of sequences of real numbers. We let  $\mathbf{S}_+$  denote the right shift operator such that if  $\mathbf{x} = (x_t)_{t=0}^\infty$ , then  $\mathbf{S}_+\mathbf{x} = (0, x_0, x_1, \dots)$ . Similarly, we let  $\mathbf{S}_-$  denote the left shift operator such that  $\mathbf{S}_-\mathbf{x} = (x_1, x_2, \dots)$ . Hence  $\mathbf{S}_-\mathbf{S}_+ = I$ , but in general  $\mathbf{S}_+\mathbf{S}_- \neq I$ .

We let  $\mathcal{L}_{TV}^{p,q}$  be the space of all bounded linear causal operators mapping  $\ell_\infty^q \rightarrow \ell_\infty^p$ , and broadly refer to all such operators as  $\ell_\infty$ -stable. If  $\mathbf{R} \in \mathcal{L}_{TV}^{p,q}$ , then  $\|\mathbf{R}\|_{\ell_\infty \rightarrow \ell_\infty} := \sup_{\|\mathbf{x}\|_{\ell_\infty} \leq 1} \|\mathbf{R}\mathbf{x}\|_{\ell_\infty}$ , which is the induced operator norm. Note that each  $\mathbf{R} \in \mathcal{L}_{TV}^{p,q}$  can be completely characterized by its block lower-triangular pulse response matrix. We denote by  $\mathcal{L}_{TI}^{p,q}$  the subspace of  $\mathcal{L}_{TV}^{p,q}$  consisting of time-invariant operators, and further denote by  $\mathcal{RH}_\infty^{p,q}$  the subspace of  $\mathcal{L}_{TI}^{p,q}$  consisting of all

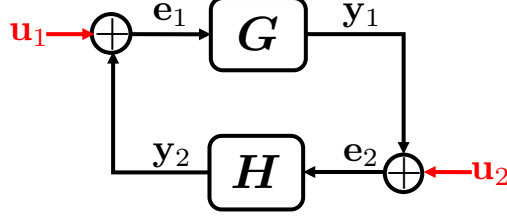

**Figure 1:** A feedback interconnection between systems  $\mathbf{G}$  and  $\mathbf{H}$ .

stable finite-dimensional systems. When the dimensions can be inferred from context, they will be omitted. We use  $z$  to denote the discrete-time  $z$ -transform variable: it follows that the restriction of  $\mathbf{S}_+$  to  $\mathcal{RH}_\infty$  is given by  $\frac{1}{z}$ , and similarly the restriction of  $\mathbf{S}_-$  to  $\mathcal{RH}_\infty$  is given by  $z$ . Finally, we recall that an operator  $\mathbf{G} \in \mathcal{L}_{\text{TI}}^{p,q}$  is uniquely characterized by its  $z$ -transform  $\mathbf{G}(z) = \sum_{i=0}^{\infty} z^{-i} G_i$  – when there is no confusion, we will use  $\mathbf{G}$  to denote both the operator and its  $z$ -transform.

The feedback interconnection as in Fig. 1, where  $\mathcal{G} : \ell_{\infty,e}^p \rightarrow \ell_{\infty,e}^q$  and  $\mathcal{H} : \ell_{\infty,e}^q \rightarrow \ell_{\infty,e}^p$ , is *well-posed* if  $(I - \mathbf{GH})^{-1}$  exists as a map from  $\ell_{\infty,e}^q \rightarrow \ell_{\infty,e}^q$ , and it is  $\ell_\infty$ -stable if it is (i) well posed, (ii) the map  $(\mathbf{u}_1, \mathbf{u}_2) \rightarrow (\mathbf{e}_1, \mathbf{e}_2, \mathbf{y}_1, \mathbf{y}_2)$  takes  $\ell_\infty^p \times \ell_\infty^q$  into  $\ell_\infty^p \times \ell_\infty^q \times \ell_\infty^p \times \ell_\infty^q$ , and (iii) there exist constants  $\alpha_1$  and  $\alpha_2$ , independent of  $\mathbf{u}_1$  and  $\mathbf{u}_2$ , such that  $\max \{ \|\mathbf{e}_1\|_{\ell_\infty}, \|\mathbf{e}_2\|_{\ell_\infty}, \|\mathbf{y}_1\|_{\ell_\infty}, \|\mathbf{y}_2\|_{\ell_\infty} \} \leq \alpha_1 \|\mathbf{u}_1\|_{\ell_\infty} + \alpha_2 \|\mathbf{u}_2\|_{\ell_\infty}$ . Similarly, a map  $\mathbf{G} : \ell_{\infty,e}^q \rightarrow \ell_{\infty,e}^p$  is  $\ell_\infty$ -stable if it is causal, takes  $\ell_\infty^q$  into  $\ell_\infty^p$ , and is bounded, i.e.,  $\|\mathbf{G}\|_{\ell_\infty \rightarrow \ell_\infty} < \infty$  or equivalently,  $\mathbf{G} \in \mathcal{L}_{\text{TV}}^{p,q}$ . Necessary and sufficient conditions for the interconnection in Fig. 1 to be  $\ell_\infty$ -stable are then that  $\mathbf{G}$  and  $\mathbf{H}$  are  $\ell_\infty$ -stable, that the interconnection is well-posed, and that  $(I - \mathbf{GH})^{-1}$  is  $\ell_\infty$ -stable. We note that it is sufficient to verify that only  $(I - \mathbf{GH})^{-1}$  is  $\ell_\infty$ -stable as it is easily shown that this is true if and only if  $(I - \mathbf{HG})^{-1}$  is  $\ell_\infty$ -stable (see Proposition 1, [6]). Finally we note that in the case of finite dimensional linear-time-invariant (LTI) systems, the interconnection in Fig. 1 is  $\ell_\infty$ -stable if and only if it is *internally stable*, and as such, we simply use  $\ell_\infty$ -stability in what follows.

### 3 Operator System Level Parameterization

Let  $\mathbf{A} \in \mathcal{L}_{\text{TV}}^{n,n}$  and  $\mathbf{B} \in \mathcal{L}_{\text{TV}}^{n,p}$ , and consider the dynamical system mapping  $\ell_{\infty,e}^n \times \ell_{\infty,e}^p \rightarrow \ell_{\infty,e}^n$  defined by


$$\mathbf{x} = \mathbf{S}_+ \mathbf{A} \mathbf{x} + \mathbf{S}_+ \mathbf{B} \mathbf{u} + \mathbf{S}_+ \mathbf{w}, \quad \mathbf{x}_0 = 0. \quad (3.1)$$

As  $\mathbf{S}_+ \mathbf{A}$  is strictly causal, the feedback interconnection defined by the dynamics (3.1) is well posed in the sense that  $(I - \mathbf{S}_+ \mathbf{A})^{-1}$  exists as an operator from  $\ell_{\infty,e}^n \times \ell_{\infty,e}^p \rightarrow \ell_{\infty,e}^n$  [2]. We emphasize that although we impose that  $\mathbf{A}$  be  $\ell_\infty$ -stable, this does not imply that the dynamics (3.1) are themselves open-loop stable. Rather, open-loop stability of the system is determined by the  $\ell_\infty$  stability of the operator  $(I - \mathbf{S}_+ \mathbf{A})^{-1}$ .

Note that if  $\mathbf{A}$  and  $\mathbf{B}$  are memoryless and time invariant, i.e., if their matrix representations are block-diagonal  $\mathbf{A} = \text{blkdiag}(A, A, \dots)$ ,  $\mathbf{B} = \text{blkdiag}(B, B, \dots)$ , then the system (3.1) reduce to the familiar finite-dimensional LTI system

$$x_{t+1} = Ax_t + Bu_t + w_t, \quad x_0 = 0, \quad (3.2)$$

where once again stability of the closed loop system is determined by the stability of the operator  $(zI - A)^{-1}$  as opposed to the boundedness of the matrix  $A$ .

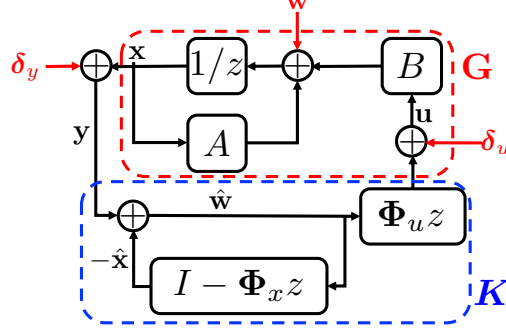

**Figure 2:** The proposed  $\ell_\infty$ -stabilizing (equivalently internally stabilizing) state-feedback controller structure defined by equations (3.5).

For LTI systems (3.2), the System Level Synthesis (SLS) framework [1, 18] provides an appealing parameterization of all closed loop responses from  $\mathbf{w} \rightarrow (\mathbf{x}, \mathbf{u})$  achievable by a causal state-feedback  $\ell_\infty$ -stabilizing (equivalently internally stabilizing) LTI control law  $\mathbf{K}$  such that  $\mathbf{u} = \mathbf{K}\mathbf{x}$ , as summarized in the following theorem. We remind the reader that a controller  $\mathbf{K}$  is  $\ell_\infty$ -stabilizing (equivalently internally stabilizing) if its interconnection with the system dynamics, as illustrated in Fig. 2, defines an  $\ell_\infty$ -stable map from  $(\mathbf{w}, \delta_y, \delta_u) \rightarrow (\mathbf{x}, \mathbf{u}, \hat{\mathbf{w}})$  (see III.A of [18]).

**Theorem 3.1** (Theorem 1, [18]). *For the LTI system (3.2) with causal state-feedback LTI control law  $\mathbf{u} = \mathbf{K}\mathbf{x}$ , the following are true:*

1. *The affine subspace defined by*

$$\begin{bmatrix} zI - A & -B \end{bmatrix} \begin{bmatrix} \Phi_x \\ \Phi_u \end{bmatrix} = I \quad \Phi_x, \Phi_u \in \frac{1}{z} \mathcal{RH}_\infty \quad (3.3)$$

*parameterizes all system responses*

$$\begin{bmatrix} \mathbf{x} \\ \mathbf{u} \end{bmatrix} = \begin{bmatrix} \Phi_x \\ \Phi_u \end{bmatrix} \mathbf{w} \quad (3.4)$$

*achievable by an internally stabilizing state-feedback controller  $\mathbf{K}$ .*

2. *For any transfer matrices  $\{\Phi_x, \Phi_u\}$  satisfying the constraints (3.3), the control signal computed via<sup>1</sup>*

$$\begin{aligned} \mathbf{u} &= z\Phi_u \hat{\mathbf{w}} \\ \hat{\mathbf{w}} &= \mathbf{x} - \hat{\mathbf{x}} \\ \hat{\mathbf{x}} &= (z\Phi_x - I)\hat{\mathbf{w}} \end{aligned} \quad (3.5)$$

*defines the control law  $\mathbf{u} = \Phi_u \Phi_x^{-1} \mathbf{x}$ , is internally stabilizing, and achieves the desired response (3.4).*

Thus, in the case of LTI systems (3.2), the search for an optimal controller  $\mathbf{K}$  can be converted to a search over system responses  $\{\Phi_x, \Phi_u\}$  constrained to lie in the affine space defined by equation

<sup>1</sup>We note that due to the affine constraints (3.3),  $z\Phi_x - I$  is strictly causal, and thus feedback loop between  $\hat{\mathbf{x}}$  and  $\hat{\mathbf{w}}$  is well posed.

(3.3). This fact, combined with the transparent mapping between the system responses and the corresponding controller implementation (3.5), has been successfully exploited for the synthesis of distributed optimal controllers for large-scale systems by imposing additional convex structural constraints, such as delay, sparsity, and locality subspace constraints, on the system responses and corresponding controller implementation (3.5) – we refer the reader to [15–17] for more details.

Another favorable feature of the parameterization defined in Theorem 3.1 is that it is provably stable under deviations from the subspace (3.3), as summarized in the following theorem from [10].

**Theorem 3.2** (Theorem 2, [10]). *Let  $(\hat{\Phi}_x, \hat{\Phi}_u, \Delta)$  be a solution to*

$$\begin{bmatrix} zI - A & -B \end{bmatrix} \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix} = I - \Delta, \quad \hat{\Phi}_x, \hat{\Phi}_u \in \frac{1}{z} \mathcal{RH}_\infty. \quad (3.6)$$

*If  $(I - \Delta)^{-1}$  exists as an operator from  $\ell_{\infty,e}^n \rightarrow \ell_{\infty,e}^n$ , then the controller implementation (3.5) defined in terms of the transfer matrices  $\{\hat{\Phi}_x, \hat{\Phi}_u\}$  achieves the closed loop responses*

$$\begin{bmatrix} x \\ u \end{bmatrix} = \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix} (I - \Delta)^{-1} w, \quad (3.7)$$

*on the LTI system (3.2), and is internally stabilizing if and only if  $(I - \Delta)^{-1} \in \mathcal{RH}_\infty$ .*

This parameterization has proved crucial in providing tractable approximations to non-convex distributed control problems [10], and in providing sub-optimality bounds for robust controllers as applied to learned systems [3, 5]. However, in these past works, very crude approximations based solely on small gain bounds and triangle inequalities were used to control the effects of the uncertain map  $(I - \Delta)^{-1}$  on system stability and performance. In this work we show that Theorems 3.1 and 3.2 can be extended to a more general setting that allows connections to well developed tools from the robust control literature [2, 6]. Although we focus on  $\mathcal{L}_1$  optimal control in this paper due to its favorable separability structure (cf. §4.1), we expect these results to carry over naturally to the  $\mathcal{H}_\infty$  setting.


### 3.1 Necessary Conditions

Here we characterize a set of affine constraints that the closed loop system responses of system (3.1) must satisfy if they are induced by a linear, causal, and  $\ell_\infty$ -stabilizing controller  $K : \ell_{\infty,e}^n \rightarrow \ell_{\infty,e}^p$  via the control law  $u = Kx$ . In particular, a controller  $K$  is  $\ell_\infty$ -stabilizing if the interconnection illustrated in Fig. 3 is  $\ell_\infty$ -stable as a map from  $(w, \delta_y, \delta_u) \rightarrow (x, u, \beta)$ , where  $\beta$  is any signal internal to the controller  $K$ .

**Proposition 3.3.** *Let  $K : \ell_{\infty,e}^n \rightarrow \ell_{\infty,e}^p$  be a linear, causal, and  $\ell_\infty$ -stabilizing controller. Then all maps taking  $w \rightarrow (x, u)$  achievable by such a  $K$  satisfy the constraints*

$$\begin{bmatrix} I - S_+ A & -S_+ B \end{bmatrix} \begin{bmatrix} \Phi_x \\ \Phi_u \end{bmatrix} = S_+, \quad \Phi_x, \Phi_u \text{ strictly causal, linear, and } \ell_\infty\text{-stable}. \quad (3.8)$$

*Proof.* Basic algebra shows that the map from  $w \rightarrow x$  is given by  $(I - S_+(A + BK))^{-1} S_+$ , and that the map from  $w \rightarrow u$  is given by  $K(I - S_+(A + BK))^{-1} S_+$ . By assumption, both of these maps

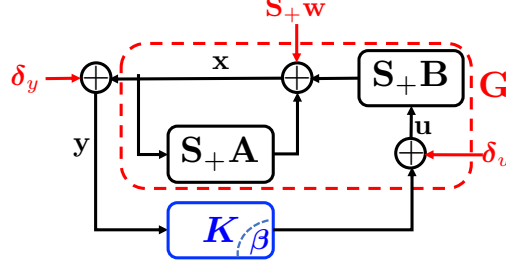

**Figure 3:** A controller  $K$  is said to be  $\ell_\infty$  stabilizing with respect to dynamics (3.1) if the illustrated interconnection is  $\ell_\infty$ -stable as a map from  $(w, \delta_y, \delta_u) \rightarrow (x, u, \beta)$ , where  $\beta$  is any signal internal to the controller  $K$ .

are  $\ell_\infty$ -stable,<sup>2</sup> as  $K$  is an  $\ell_\infty$ -stabilizing controller. By assumption, both  $(I - S_+(A + BK))^{-1}$  and  $K(I - S_+(A + BK))^{-1}$  are  $\ell_\infty$ -stable. Defining

$$\begin{bmatrix} \Phi_x \\ \Phi_u \end{bmatrix} = \begin{bmatrix} I \\ K \end{bmatrix} (I - S_+(A + BK))^{-1} S_+,$$

it is easily verified that  $\{\Phi_x, \Phi_u\}$  satisfy constraint (3.8).  $\square$

**Remark 1.** If  $A$  and  $B$  are LTI, and  $K$  is LTI, then so are  $\{\Phi_x, \Phi_u\}$ , and all are uniquely characterized by their  $z$ -transforms. Further the right shift operator  $S_+$ , when restricted to  $\mathcal{L}_{\text{TI}}$ , can be written as  $S_+ = 1/z$ . In this case, constraint (3.8) simplifies to

$$\begin{bmatrix} I - \frac{1}{z}A & -\frac{1}{z}B \end{bmatrix} \begin{bmatrix} \Phi_x \\ \Phi_u \end{bmatrix} = \frac{1}{z}I \quad \Phi_x, \Phi_u \in \frac{1}{z}\mathcal{RH}_\infty, \quad (3.9)$$

which can be viewed as a generalization of constraint (3.3) to LTI dynamics defined by dynamic operators  $A(z)$  and  $B(z)$ . Similarly, if  $A$  and  $B$  are memoryless and LTI, and  $K$  is LTI, then  $\{\Phi_x, \Phi_u\}$  are LTI, and constraint (3.8) simplifies to

$$\begin{bmatrix} I - \frac{1}{z}A & -\frac{1}{z}B \end{bmatrix} \begin{bmatrix} \Phi_x \\ \Phi_u \end{bmatrix} = \frac{1}{z}I \quad \Phi_x, \Phi_u \in \frac{1}{z}\mathcal{RH}_\infty, \quad (3.10)$$

which is clearly equivalent to (3.3).


### 3.2 Controller Implementation

We now show how to construct an internally stabilizing controller from any strictly causal, linear, and  $\ell_\infty$ -stable operators  $\{\Phi_x, \Phi_u\}$  satisfying constraint (3.8) that achieves the desired response from  $w \rightarrow (x, u)$ .

**Proposition 3.4.** Let  $\{\Phi_x, \Phi_u\}$  satisfy constraint (3.8). Then the controller implementation shown in Fig. 4, described by the equations

$$\begin{aligned} u &= \Phi_x S_- \hat{w} \\ \hat{w} &= x - \hat{x}, \quad \hat{w}_0 = 0, \\ \hat{x} &= (\Phi_x S_- - I) \hat{w}, \end{aligned} \quad (3.11)$$

<sup>2</sup>That they are well posed is immediate as  $S_+(A + BK)$  is strictly causal.

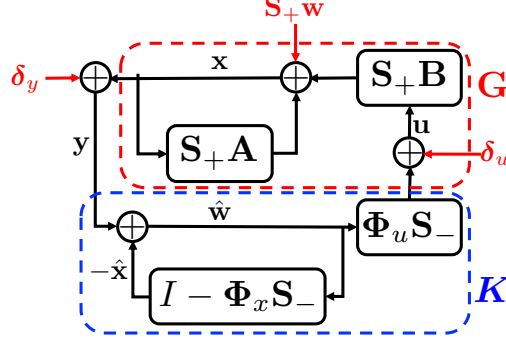

**Figure 4:** The proposed state-feedback controller structure defined by equations (3.11).

is  $\ell_\infty$ -stabilizing. In particular, the resulting map from  $(w, \delta_y, \delta_u) \rightarrow (x, u, \hat{w})$  is  $\ell_\infty$ -stable, and achieves the desired closed loop response

$$\begin{bmatrix} x \\ u \end{bmatrix} = \begin{bmatrix} \Phi_x \\ \Phi_u \end{bmatrix} w. \quad (3.12)$$

*Proof.* From equations (3.1) and (3.11) (alternatively, from Fig. 4), we have that

$$\begin{aligned} x &= S_+Ax + S_+Bu + S_+w, \quad x_0 = 0 \\ u &= \Phi_u S_- \hat{w} + \delta_u \\ \hat{w} &= x + \delta_y + (I - \Phi_x S_-) \hat{w}, \quad \hat{w}_0 = 0, \end{aligned} \quad (3.13)$$

where we emphasize that  $\hat{w}_0 = 0$  such that  $\hat{w}$  is a strictly causal signal. We first observe that the restriction of  $(I - \Phi_x S_-)$  to strictly causal signals is itself strictly causal, as the constraint (3.8) enforces that the block lower triangular matrix representation of  $\Phi_x$  has identify matrices along its first block sub-diagonal, i.e., for  $\Phi_x = (\Phi_x(i, j))_{i,j=0}^\infty$  the block lower triangular matrix representation of  $\Phi_x$ , we have that  $\Phi_x(i, i-1) = I$  for all  $i \geq 1$ . It therefore follows that the feedback loop between  $\hat{x}$  and  $\hat{w}$  is well posed. By rote calculation, it follows from equation (3.13) that the closed loop maps from  $(w, \delta_y, \delta_u) \rightarrow (x, u, \hat{w})$  are given by

$$\begin{bmatrix} x \\ u \\ \hat{w} \end{bmatrix} = \begin{bmatrix} \Phi_x & \Phi_x(S_- - A) & \Phi_x B \\ \Phi_u & \Phi_u(S_- - A) & I + \Phi_u B \\ S_+ & I - S_+ A & S_+ B \end{bmatrix} \begin{bmatrix} w \\ \delta_y \\ \delta_u \end{bmatrix}. \quad (3.14)$$

By assumption,  $\Phi_x$ ,  $\Phi_u$ ,  $A$ , and  $B$  are all  $\ell_\infty$ -stable, and hence the interconnection illustrated in Fig. 4, and described by equations (3.1) and (3.13) is  $\ell_\infty$ -stable.  $\square$

**Remark 2.** If  $A$  and  $B$  are memoryless and LTI, and  $K$  is LTI, then so are the system responses  $\{\Phi_x, \Phi_u\}$ , and consequently the right and left shift operators  $S_+$  and  $S_-$  become  $\frac{1}{z}$  and  $z$ , respectively, recovering the controller implementation (3.5).

### 3.3 Robust Operator System Level Synthesis

Thus Propositions 3.3 and 3.4 show that the parameterization of Theorem 3.1 can be extended to a class of dynamics described by bounded and causal linear operators in feedback with a causal linear controller. We now show that this extension enjoys similar stability properties with respect to perturbations from the subspace (3.8).

**Theorem 3.5.** Let  $\mathbf{A} \in \mathcal{L}_{TV}^{n,n}$  and  $\mathbf{B} \in \mathcal{L}_{TV}^{n,p}$ , and suppose that  $\{\hat{\Phi}_x, \hat{\Phi}_u\}$  satisfy

$$\begin{bmatrix} I - \mathbf{S}_+ \mathbf{A} & -\mathbf{S}_+ \mathbf{B} \end{bmatrix} \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix} = \mathbf{S}_+ (I - \Delta), \quad \Phi_x, \Phi_u \text{ strictly causal, linear, and } \ell_\infty\text{-stable,} \quad (3.15)$$

for  $\Delta$  a strictly causal linear operator from  $\ell_{\infty,e}^n \rightarrow \ell_{\infty,e}^n$ . Then the controller implementation (3.11) defined in terms of the operators  $\{\hat{\Phi}_x, \hat{\Phi}_u\}$  is well posed and achieves the following response

$$\begin{bmatrix} \mathbf{x} \\ \mathbf{u} \end{bmatrix} = \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix} (I - \Delta)^{-1} \mathbf{w}. \quad (3.16)$$

Further, this interconnection is  $\ell_\infty$ -stable if and only if  $(I - \Delta)^{-1}$  is  $\ell_\infty$ -stable.

*Proof.* As  $\Delta$  is strictly causal by assumption,  $I_\Delta := (I - \Delta)^{-1}$  exists as a map from  $\ell_{\infty,e}^n \rightarrow \ell_{\infty,e}^n$ . Going through a similar argument as that in the proof of Proposition 3.4, we observe that

$$\begin{bmatrix} \mathbf{x} \\ \mathbf{u} \\ \hat{\mathbf{w}} \end{bmatrix} = \begin{bmatrix} \Phi_x I_\Delta & \Phi_x I_\Delta (\mathbf{S}_- - \mathbf{A}) & \Phi_x I_\Delta \mathbf{B} \\ \Phi_u I_\Delta & \Phi_u I_\Delta (\mathbf{S}_- - \mathbf{A}) & I + \Phi_u I_\Delta \mathbf{B} \\ \mathbf{S}_+ I_\Delta & I_\Delta (I - \mathbf{S}_+ \mathbf{A}) & I_\Delta \mathbf{S}_+ \mathbf{B} \end{bmatrix} \begin{bmatrix} \mathbf{w} \\ \delta_y \\ \delta_u \end{bmatrix}. \quad (3.17)$$

Thus we see that the desired map (3.16) from  $\mathbf{w} \rightarrow (\mathbf{x}, \mathbf{u})$  is achieved. Further, as  $\Phi_x, \Phi_u, \mathbf{A}, \mathbf{B}$  are all  $\ell_\infty$ -stable by assumption, it follows that the  $\ell_\infty$ -stability of the map from  $(\mathbf{w}, \delta_y, \delta_u) \rightarrow (\mathbf{x}, \mathbf{u}, \hat{\mathbf{w}})$  is determined by the  $\ell_\infty$ -stability of  $I_\Delta$ , from which the result follows.  $\square$

## 4 Robust Performance under Model Uncertainty

We now use the tools developed in the previous section to identify necessary and sufficient conditions for the robust stability and robust performance of a system (3.1) subject to bounded perturbations in its  $\mathbf{A}$  and  $\mathbf{B}$  operators. In particular consider the system

$$\mathbf{x} = \mathbf{S}_+ (\mathbf{A}_0 + \Delta_A) \mathbf{x} + \mathbf{S}_+ (\mathbf{B}_0 + \Delta_B) \mathbf{u} + \mathbf{S}_+ \mathbf{w}, \quad (4.1)$$

where  $\mathbf{A}_0 = \text{blkdiag}(\hat{A}, \hat{A}, \dots)$  and  $\mathbf{B}_0 = \text{blkdiag}(\hat{B}, \hat{B}, \dots)$  are memoryless LTI operators defining a nominal LTI system  $x_{t+1} = \hat{A}x_t + \hat{B}u_t + w_t$ , and  $\Delta_A$  and  $\Delta_B$  are  $\ell_\infty$ -stable and satisfy

$$\|[\Delta_A, \Delta_B]\|_{\ell_\infty \rightarrow \ell_\infty} \leq \varepsilon. \quad (4.2)$$

We first identify SLS based necessary and sufficient conditions for robust stability, and then build upon those to formulate a robust performance problem.

We consider the following robust control problem: find a LTI controller  $\mathbf{K} : \ell_{\infty,e}^n \rightarrow \ell_{\infty,e}^p$ , using only the nominal dynamics  $(\hat{A}, \hat{B})$  and uncertainty bound  $\varepsilon$ , such that the dynamics (4.1) in closed loop with the control law  $\mathbf{u} = \mathbf{K}\mathbf{x}$  is  $\ell_\infty$ -stable for all admissible uncertainty realizations  $(\Delta_A, \Delta_B)$  satisfying (4.2). To do so, we recognize that for any LTI  $\{\hat{\Phi}_x, \hat{\Phi}_u\}$  satisfying the LTI achievability



constraints (3.3), we then have that

$$\begin{aligned}
& [I - S_+ A_0 - S_+ \Delta_A \quad -S_+ B_0 - S_+ \Delta_B] \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix} \\
&= [I - S_+ A_0 \quad -S_+ B_0] \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix} - [S_+ \Delta_A \quad S_+ \Delta_B] \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix} \\
&= S_+ \left( I - S_+ [\Delta_A \quad \Delta_B] \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix} \right) \quad (4.3)
\end{aligned}$$

where the final inequality follows from the assumption that  $\{\hat{\Phi}_x, \hat{\Phi}_u\}$  satisfy the LTI achievability constraints (3.3), or equivalently (3.8), defined in terms of the dynamics  $(\hat{A}, \hat{B})$ . Noting that

$$\hat{\Delta} := S_+ [\Delta_A \quad \Delta_B] \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix}, \quad (4.4)$$

is a strictly causal  $\ell_\infty$ -stable operator, we conclude by Theorem 3.5 that the controller implementation (3.11) defined in terms of the LTI operators  $\{\hat{\Phi}_x, \hat{\Phi}_u\}$  achieves the following closed loop behavior when applied to the uncertain dynamics (4.1):

$$\begin{bmatrix} x \\ u \end{bmatrix} = \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix} (I + \hat{\Delta})^{-1}. \quad (4.5)$$

Further this control law is internally stabilizing if and only if  $(I + \hat{\Delta})^{-1}$  is  $\ell_\infty$ -stable.

Defining the controlled output signal as

$$z = Cx + Du, \quad (4.6)$$

for  $C = \text{blkdiag}(C, C, \dots)$  and  $D = \text{blkdiag}(D, D, \dots)$ , user specified cost matrices,<sup>3</sup> and consider the goal of minimizing the  $\ell_\infty \rightarrow \ell_\infty$  induced gain from  $w \rightarrow z$  of the uncertain system (4.1). We can then pose the robust performance problem for a specified performance level  $\gamma \geq 0$  as finding LTI operators  $\{\hat{\Phi}_x, \hat{\Phi}_u\}$  that satisfy

$$\begin{aligned}
& \left\| [C \quad D] \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix} \left( I - S_+ [\Delta_A \quad \Delta_B] \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix} \right)^{-1} \right\|_{\ell_\infty \rightarrow \ell_\infty} \leq \gamma \\
& [zI - \hat{A} - \hat{B}] \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix} = I, \quad \hat{\Phi}_x, \hat{\Phi}_u \in \frac{1}{z} \mathcal{RH}_\infty, \\
& \left( I - S_+ [\Delta_A \quad \Delta_B] \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix} \right)^{-1} \text{ is } \ell_\infty\text{-stable}
\end{aligned} \quad (4.7)$$

for all  $(\Delta_A, \Delta_B)$  satisfying bound (4.2), where we have combined equations (4.6) and (4.5) to derive the robust performance bound condition.

To lighten notation going forward, we let

$$Q = [C \quad D], \quad \hat{\Phi} = \begin{bmatrix} \hat{\Phi}_x \\ \hat{\Phi}_u \end{bmatrix}, \quad \Delta = \frac{1}{\varepsilon} S_+ [\Delta_A \quad \Delta_B], \quad Z_{AB} = [zI - \hat{A} \quad -\hat{B}]. \quad (4.8)$$

---

<sup>3</sup>For simplicity, we assume  $C$  and  $D$  to be memoryless and LTI, however our results are equally applicable when the controlled output is defined in terms frequency weighted filters  $C(z)$  and  $D(z)$ .

With this notation, the robust performance problem (4.7) is equivalent to finding an LTI operator  $\hat{\Phi}$  satisfying

$$\left\| \frac{1}{\gamma} Q \hat{\Phi} + \frac{1}{\gamma} Q \hat{\Phi} \Delta (I - (\varepsilon \hat{\Phi}) \Delta)^{-1} (\varepsilon \hat{\Phi}) \right\|_{\ell_\infty \rightarrow \ell_\infty} \leq 1 \quad (4.9)$$

$$Z_{AB} \hat{\Phi} = I, \quad \hat{\Phi} \in \frac{1}{z} \mathcal{RH}_\infty, \quad (I - \hat{\Phi} \Delta)^{-1} \text{ is } \ell_\infty\text{-stable}$$

for all  $\Delta$  satisfying  $\|\Delta\|_{\ell_\infty \rightarrow \ell_\infty} \leq 1$ , where we have used that  $(I - \Delta \hat{\Phi})^{-1} = I + \Delta(I - \hat{\Phi} \Delta)^{-1} \hat{\Phi}$  and that  $(I - GH)^{-1}$  is  $\ell_\infty$ -stable if and only if  $(I - HG)^{-1}$  is  $\ell_\infty$ -stable (see Proposition 1, [6]) to recast the expression (4.7) in a form that matches the linear-fractional-transform (LFT) structure studied in [2, 6].

We can therefore leverage the equivalence between robust stability and performance (see Theorem 5.1, [6]) to conclude that  $\hat{\Phi}$  satisfies the robust performance conditions (4.9) for all  $\|\Delta\|_{\ell_\infty \rightarrow \ell_\infty} \leq 1$  if and only if the augmented LTI system

$$M = \begin{bmatrix} \frac{1}{\gamma} Q \hat{\Phi} & \frac{1}{\gamma} Q \hat{\Phi} \\ \varepsilon \hat{\Phi} & \varepsilon \hat{\Phi} \end{bmatrix} \quad (4.10)$$

is robustly stable for all structured perturbations  $\tilde{\Delta}$  satisfying

$$\tilde{\Delta} = \text{blkdiag}(\Delta_1, \Delta_2), \quad \Delta_1, \Delta_2 \in \mathcal{L}_{\text{TV}}, \quad \|\Delta_1\|_{\ell_\infty \rightarrow \ell_\infty} \leq 1, \|\Delta_2\|_{\ell_\infty \rightarrow \ell_\infty} \leq 1. \quad (4.11)$$

The necessary and sufficient conditions for robust stability of the resulting two-block problem can be derived as a special case of Theorem 6.3 of [6]. The particular case of an augmented LTI system  $M$  satisfying  $M_{11} = M_{12}$  and  $M_{21} = M_{22}$ , as is the case for our problem (4.10), is addressed in Ch 8.3 of [6]. The necessary and sufficient conditions specified in Theorem 6.3 of [6] reduce to the following *convex* constraints on the system response  $\hat{\Phi}$

$$Z_{AB} \hat{\Phi} = I, \quad \hat{\Phi} \in \frac{1}{z} \mathcal{RH}_\infty, \quad (4.12)$$

$$\left\| Q \hat{\Phi} \right\|_{\ell_\infty \rightarrow \ell_\infty} + \gamma \left\| \varepsilon \hat{\Phi} \right\|_{\ell_\infty \rightarrow \ell_\infty} < \gamma.$$

Finally, we remark that although the constraints (4.12) are in general infinite-dimensional due to the transfer matrix  $\hat{\Phi}$ , principled finite-dimensional approximations, some of which enjoy provable sub-optimality guarantees, are available [1, 3, 4, 10]. Further, for the  $\mathcal{L}_1$  problem considered here, the resulting optimization problem can be posed as a linear program, thus enjoying favorable computational complexity properties. It then follows that by bisecting on  $\gamma$ , e.g., by using golden search, we can find a performance level  $\gamma$ , and corresponding system responses and controller, satisfying  $\gamma \leq \gamma_\star + \epsilon$  in  $O \log_2(1/\epsilon)$  iterations, for  $\gamma_\star$  the smallest  $\gamma$  such that the set defined by (4.12) is non-empty.

#### 4.1 Robust Performance Guarantees for Large-Scale Distributed Control

In previous work [15–17], it was shown that for LTI dynamical systems (3.2) defined by structured (i.e., sparse) matrices  $(A, B)$ , imposing *locality constraints* on the system responses  $\{\Phi_x, \Phi_u\}$ , i.e., imposing that  $\{\Phi_x, \Phi_u\} \in \mathcal{S}$ , for  $\mathcal{S}$  a suitably defined structure inducing subspace constraint, led to distributed controllers that enjoyed scalable synthesis and implementation complexity. Although

formally defining these concepts is beyond the scope of this paper, we note that such conditions can be easily enforced on the solution of the robust performance conditions (4.12) by additionally imposing that  $\{\hat{\Phi}_x, \hat{\Phi}_u\} \in \mathcal{S}$ . Under suitable assumptions on the structure of the cost matrices  $(C, D)$  (e.g., that  $(C, D)$  are block-diagonal), the resulting problem satisfies a notion of *partial separability*, c.f. §IV of [17], which allows for the problem to be solved at scale using distributed optimization techniques.

We emphasize that the conditions identified in (4.12) remain necessary and sufficient when additional structure is imposed on the system responses  $\{\hat{\Phi}_x, \hat{\Phi}_u\}$  so long as the dynamic perturbations  $(\Delta_A, \Delta_B)$  remain unstructured. To the best of our knowledge, our results are the first such necessary and sufficient conditions for robust performance that is applicable to large-scale distributed systems. An exciting direction for future work will be to explore the consequences of locality in the system responses  $\{\hat{\Phi}_x, \hat{\Phi}_u\}$  on necessary and sufficient conditions for robust performance when the perturbations  $(\Delta_A, \Delta_B)$  are further constrained to respect the topology of the nominal system, as defined by the support of  $(\hat{A}, \hat{B})$ .

## References

- [1] J. Anderson, J. C. Doyle, S. H. Low, and N. Matni. System level synthesis. *Annual Reviews in Control*, 2019.
- [2] M. A. Dahleh and I. J. Diaz-Bobillo. *Control of uncertain systems: a linear programming approach*. Prentice-Hall, Inc., 1994.
- [3] S. Dean, H. Mania, N. Matni, B. Recht, and S. Tu. On the sample complexity of the linear quadratic regulator. *arXiv preprint arXiv:1710.01688*, 2017.
- [4] S. Dean, H. Mania, N. Matni, B. Recht, and S. Tu. Regret bounds for robust adaptive control of the linear quadratic regulator. In *Advances in Neural Information Processing Systems*, pages 4188–4197, 2018.
- [5] S. Dean, S. Tu, N. Matni, and B. Recht. Safely learning to control the constrained linear quadratic regulator. In *2019 American Control Conference (ACC)*, pages 5582–5588. IEEE, 2019.
- [6] M. H. Khammash. *Stability and performance robustness of discrete-time systems with structured uncertainty*. PhD thesis, Rice University, 1990.
- [7] L. Lessard. State-space solution to a minimum-entropy  $h_\infty$ -optimal control problem with a nested information constraint. In *53rd IEEE Conference on Decision and Control*, pages 4026–4031. IEEE, 2014.
- [8] A. Mahajan, N. Martins, M. Rotkowitz, and S. Yuksel. Information structures in optimal decentralized control. In *Decision and Control (CDC), 2012 IEEE 51st Annual Conference on*, pages 1291–1306, 2012. doi: 10.1109/CDC.2012.6425819.
- [9] N. Matni. Distributed control subject to delays satisfying an  $h_\infty$  norm bound. In *53rd IEEE Conference on Decision and Control*, pages 4006–4013. IEEE, 2014.
- [10] N. Matni, Y.-S. Wang, and J. Anderson. Scalable system level synthesis for virtually localizable systems. In *2017 IEEE 56th Annual Conference on Decision and Control (CDC)*, pages 3473–3480. IEEE, 2017.
- [11] A. Megretski and A. Rantzer. System analysis via integral quadratic constraints. *IEEE Transactions on Automatic Control*, 42(6):819–830, 1997.

- [12] A. Packard and J. Doyle. The complex structured singular value. *Automatica*, 29(1):71–109, 1993.
- [13] M. Rotkowitz and S. Lall. A characterization of convex problems in decentralized control. *Automatic Control, IEEE Transactions on*, 51(2):274–286, 2006.
- [14] C. A. Rösinger and C. W. Scherer. Structured controller design with applications to networked systems. In *2017 IEEE 56th Annual Conference on Decision and Control (CDC)*, pages 4771–4776, Dec 2017. doi: 10.1109/CDC.2017.8264365.
- [15] Y.-S. Wang and N. Matni. Localized lqg optimal control for large-scale systems. In *2016 American Control Conference (ACC)*, pages 1954–1961. IEEE, 2016.
- [16] Y.-S. Wang, N. Matni, and J. C. Doyle. Localized lqr optimal control. In *53rd IEEE Conference on Decision and Control*, pages 1661–1668. IEEE, 2014.
- [17] Y.-S. Wang, N. Matni, and J. C. Doyle. Separable and localized system-level synthesis for large-scale systems. *IEEE Transactions on Automatic Control*, 63(12):4234–4249, 2018.
- [18] Y.-S. Wang, N. Matni, and J. C. Doyle. A system level approach to controller synthesis. *IEEE Transactions on Automatic Control*, 2019.
- [19] Y. Zheng, L. Furieri, A. Papachristodoulou, N. Li, and M. Kamgarpour. On the equivalence of youla, system-level and input-output parameterizations. *arXiv preprint arXiv:1907.06256*, 2019.
- [20] K. Zhou, J. C. Doyle, and K. Glover. *Robust and optimal control*. Prentice Hall New Jersey, 1996.