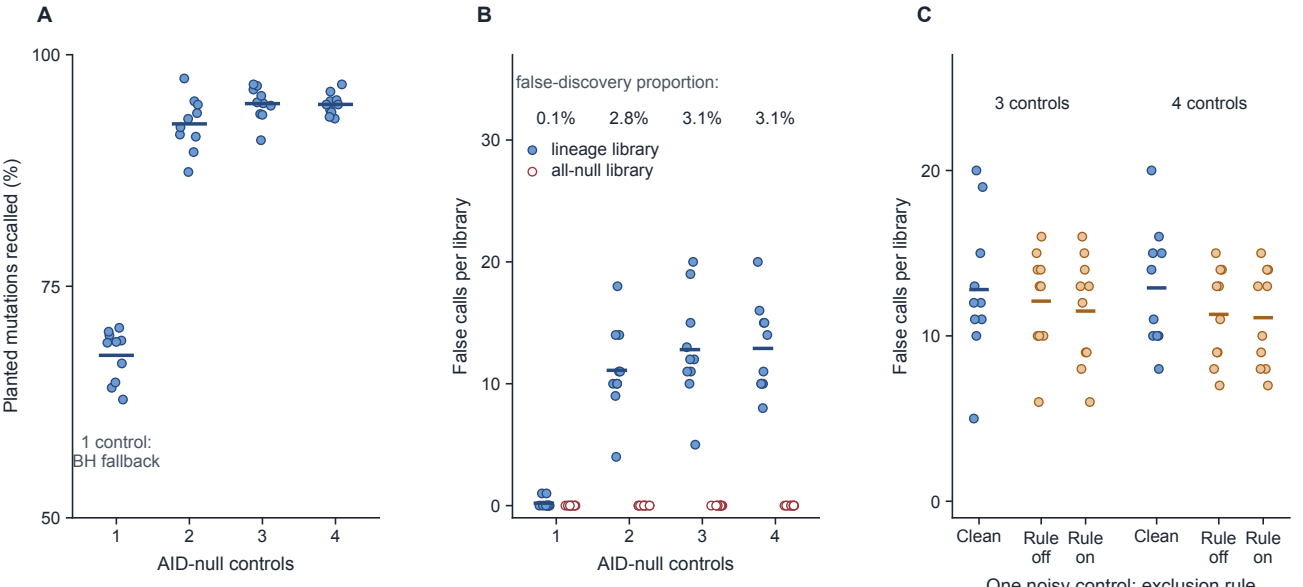

One-control designs use a BH fallback; two or more controls support empirical decoy calibration.