```
========================================================================
```
Control Commands for NEC Projector (Basic) Rev 07.02.13a

Copyright (C) NEC Display Solutions, Ltd. 2002-2013
```
--------------------------------------------------------------------
```
Updated on July 2, 2013
```
--------------------------------------------------------------------
```
This file contains information about NEC projector control commands.

Model Name	
GT60	GT5000/GT6000 Series
GT50	GT1150/GT2150 Series
HT	HT1000/HT1100 Series
HT10	HT410/HT510 Series
LT180	LT180
LT30	LT25/LT30/LT35 Series
LT	LT220/LT240/LT240K/LT260/LT260K/LT245/LT265 Series
LT80	LT280/LT380 Series
MT70	MT860/MT1060/MT1065/MT1075 Series
NP60	NP40/NP50/NP60 Series
NP62	NP41/NP61/NP62 Series
NP1000	NP1000/NP2000 Series
NP3150	NP1150/NP2150/NP3150/NP3151W Series
NP4000	NP4000/NP4001 Series
NP905	NP905/NP901W/VT800 Series
NP600	NP300/NP400/NP500/NP500W/NP500WS/NP600/NP600S Series
VT	VT770 Series
VT70	VT37/VT47/VT480/VT57/VT570/VT575/VT670/VT676 Series
VT80	VT48/VT480/VT580 Series
VT90	VT49/VT490/VT590/VT595/VT695 Series
VT700	VT700
WT	WT600/WT610/WT615 Series
NP4100	NP4100/NP4100W Series
NP3250	NP1250/NP2250/NP3250/NP3250W Series
NP610	NP310/NP410/NP410W/NP510/NP510W/NP510WS/NP610/NP610S Series
NP2200	NP1200/NP2200 Series
NP216	NP110/NP115/NP215/NP216 Series
NP64	NP43/NP64 Series
M300	M260X/M260W/M300X/M300W Series
M361	M271X/M311X/M311W/M361X Series
P420	P350X/P350W/P420X Series
P501	P401W/P451X/P451W/P501X Series
UM330	UM330X/UM330W Series
U300	U300X/U310W Series
V300	V260/V260X/V300X/V300W Series
VE281	VE281/VE281X/VE282B/VE282XB
PA600	PA600X/PA550W/PA500U/PA500X Series
PX750U	PX700W/PX750U/PX800X Series
PH1000U	PH1000U Series
PH1400U	PH1400U Series

```
========================================================================
```

Contents

===
 1. Projector Control

NEC projectors make use of control commands that control the functions of the projector via connection with a personal computer or another device.

===
 2. Connection Method

The following 3 kinds of connection methods are available for sending and receiving control commands.

1. Serial connection using the serial port on the projector
   A serial cable is required.
2. USB connection using the USB port on the projector
   A USB cable is required.
3. LAN connection
           3-1. LAN connection using a wired LAN card
                 A wired LAN card and LAN cable are required.
           3-2. LAN connection using a wireless LAN card
                 A wireless LAN card is required.
           3-3.LAN connection using the LAN port on the projector
                 A LAN cable is required.
           3-4. LAN connection using a wireless LAN unit
                 A wireless LAN unit is required
Status of supported connection

	(1)	(2)	(3-1)	(3-2)	(3-3)	(3-4)
	Serial Port	USB Port	Wired LAN Card	Wireless LAN Card	Wired LAN Port	Wireless LAN Port
GT5000/GT6000	Yes	Yes	Yes	Yes	Yes	No
GT1150/GT2150	Yes	No	Yes	Yes	Yes	No
HT410/HT510	Yes	No	No	No	No	No
HT1000/HT1100	Yes	No	No	No	No	No
LT180	Yes	No	No	No	No	No
LT25/LT30/LT35	Yes	No	No	No	No	No
LT220/LT240/LT260	Yes	No	Yes	Yes	No	No
LT240K/LT260K	Yes	Yes	Yes	Yes	No	No
LT245/LT265/LT280/LT380	Yes	No	No	Yes	Yes	No
MT860/MT1060/MT1065/MT1075	Yes	Yes	Yes	Yes	No	No
NP40/NP50/NP60	Yes	No	No	No	No	No
NP41/NP61/NP62	Yes	No	No	No	No	No
NP43/NP64	Yes	No	No	No	No	No
NP1000/NP2000	Yes	No	No	Yes	Yes	No
NP1150/NP2150/NP3150/NP3151W	Yes	No	No	No	Yes	Yes
NP4000/NP4001	Yes	No	No	No	Yes	No
NP905/NP901W	Yes	No	No	No	Yes	Yes
NP300/NP400/NP500/NP500W/NP500WS/NP600/NP600S	Yes	No	No	No	Yes	No
VT770	Yes	No	No	No	No	No
VT37/VT47/VT470/VT57/VT570/VT575VT/670/VT676	Yes	No	No	No	No	No
VT48/VT480/VT580	Yes	No	No	No	No	No
VT49/VT490/VT590/VT595/VT695/VT700	Yes	No	No	No	No	No
VT700	Yes	No	No	No	No	No
VT800	Yes	No	No	No	Yes	No
WT600WT/610/WT615	Yes	Yes	Yes	Yes	No	No
NP4000/NP4001	Yes	No	No	No	Yes	No
NP1250/NP2250/NP3250/NP3250W	Yes	No	No	No	Yes	Yes
NP310/NP410/NP410W/NP510/NP510W/NP510WS/NP610/NP610S	Yes	No	No	No	Yes	No
NP1200/NP2200	Yes	No	No	No	Yes	No
NP4100/NP4100W	Yes	No	No	No	Yes	No
NP110/NP115/NP215/NP216	Yes	No	No	No	Yes	No
M260X/M260W/M300X/M300W	Yes	No	No	No	Yes	Yes
M271X/M311X/M311W/M361X	Yes	No	No	No	Yes	Yes
P350X/P350W/P420X	Yes	No	No	No	Yes	Yes
P401W/P451X/P451W/P501X	Yes	No	No	No	Yes	Yes
UM330X/UM330W	Yes	No	No	No	Yes	Yes
U300X/U310W	Yes	No	No	No	Yes	No
V260X/V300X/V300W	Yes	No	No	No	Yes	No
VE281/VE281X/VE282B/VE282XB	Yes	No	No	No	No	No
PA500X/PA550W/PA500U/PA600X	Yes	No	No	No	Yes	Yes
PX700W/PX750U/PX800X	Yes	No	No	No	Yes	Yes
PH1000U	Yes	No	No	No	Yes	Yes
PH1400U	Yes	No	No	No	Yes	Yes

Yes: Supported
No: Not Supported

* A USB cable is supplied as standard with the MT860/1060/1065/1075.
* The GT5000/6000 does not come with a USB cable.
* Note that a connection method using the supplied USB cable is not supported for the LT220/240/260.
* The serial cable, LAN card and LAN cable are separately sold.
* The WT610 replaced the WT610 and uses the same command set.

(CAUTION)
Before making connections, be sure to invalidate the standby mode of the projector and set the "idle mode". The projector cannot use the control commands in the standby mode.
Setting method: Under projector [Projector Options] --> [Setup], enter a check for [Idle Mode] on Page 4.

(CAUTION) (!1)
Before making connections, be sure to select [NORMAL] for [STANDBY MODE].
Setting method : From the projector's menu, select [SETUP] --> [OPTIONS(2)] -->[STANDBY MODE]--> [NORMAL].

(CAUTION) (!2)
The projector accept the "POWER ON" command during [POWER-SAVING] mode for[STANDBY MODE].

Supplement:
(!1) Only the NP600/NP610/NP3200 series is compatible.
(!2) Only the M300 series is compatible.

[P350X/P350W/P420X Series]

STANDBY MODE: "POWER-SAVING"

Control Command	Serial port	Wired LAN port	Wireless LAN unit
POWER ON	Yes	No	No

Yes:　Supported
No: Not supported

[PA600X/PA550W/PA500U/PA500X Series]
[PX700W/PX750U/PX800X Series]
[PH1000U Series]

STANDBY MODE: "POWER-SAVING"

Control Command	Serial port	Wired LAN port	Wireless LAN unit
POWER ON	Yes	No	No

STANDBY MODE: "NETWORK STANDBY"

Control Command	Serial port	Wired LAN port	Wireless LAN unit
POWER ON	Yes	Yes	Yes

Yes:　Supported
No: Not supported

==
 3. Interface Conditions

Serial connection

The communications method conforms to the RS-232C standard.

* A USB cable is supplied as standard with the MT860/1060/1065/1075.
* The GT5000/6000 does not come with a USB cable.
* Note that a connection method using the supplied USB cable is not supported for the LT220/240/260.
* The serial cable, LAN card and LAN cable are separately sold.

(CAUTION)
Before making connections, set the standby mode of the projector to "NORMAL" or "Idol mode".
The projector cannot use the control commands in the power-saving condition, but the following model can use some control commands.

Baud rate:	38400 bps
	(NP600 series, NP610 Series, VT60/VT70/VT80/VT90 series, VT700: 19200bps)
Data length:	8 bits
Parity bit:	No parity
Stop bits:	1 bit
Communications mode:	Full duplex

The control connector is described below.

[HT/LT/NP40/VT70/VT80/VT90/WT]

The PC CONTROL connector is a mini DIN 8-pin connector.

    1 To TxD of PC
    2
    3
    4 To GND of PC
    5
    6
    7 To RxD of PC
    8

    * 2, 3, 5, 6, and 8 are used inside the projector.

[GT/LT80/MT/NP1000/VT (except
VT70/VT80/VT90)/NP3150/NP905/NP600/NP4000/NP3250/NP610/NP2200/NP216/M300/P420/U300/V300]

The PC CONTROL connector is a D-SUB 9-pin connector.

    1
    2 To TxD of PC
    3 To RxD of PC
    4
    5 To GND of PC
    6
    7 To CTS of PC
    8 To RTS of PC
    9

==
4. Communication Frame

On the LT/MT/SX/GT series projectors communication is done in a frame
composed of header, data, and checksum.
The frame sent from the controller to the projector is referred to as
a command, and the one sent from the projector to the command as an
reply is referred to as a response.
The response has two types; Acknowledge (hereafter referred to as ACK)
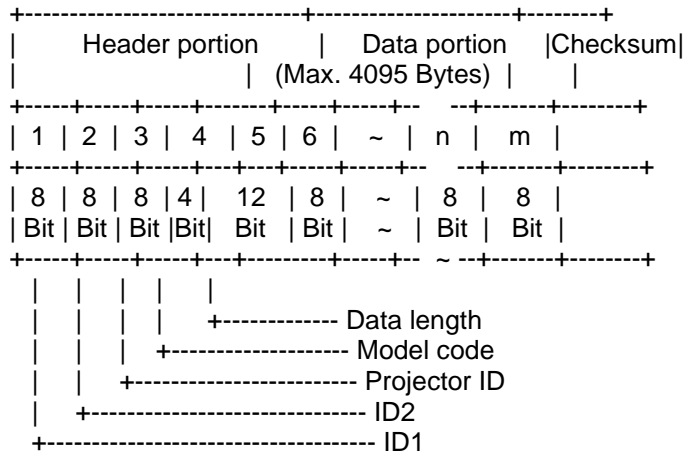that recognizes a command and Negative Acknowledge (hereafter referred

to as NAK) that fails to recognize a command.

```
+--------------+   Command   +--------------+
|              |------------>|              |
| Controller   |             | Projector    |
|              |<------------|              |
+--------------+   Response  +--------------+
          (ACK or NAK)
```
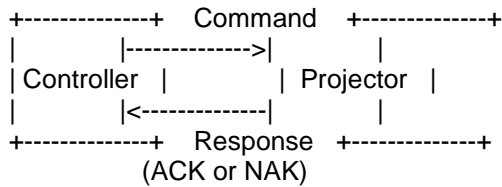
4-1. Frame Format
****

One frame comprises a header, a data portion, and a checksum.

```
 Frame Format:
+------------------------------+----------------------+--------+
|      Header portion          |    Data portion      |Checksum|
|                       |      | (Max. 4095 Bytes)  |        |
+-----+-----+-----+-------+-----+-----+--  --+-------+--------+
| 1   | 2   | 3   |  4  | 5   | 6   |  ~  |  n  |  m  |
+-----+-----+-----+---+---+-----+-----+--  --+-------+--------+
| 8   | 8   | 8   | 4 |  12   | 8   |  ~  |  8  |  8  |
| Bit | Bit | Bit |Bit|  Bit  | Bit |  ~  | Bit | Bit |
+-----+-----+-----+---+---------+-----+--  ~ --+-------+--------+
   |     |    |   |     |
   |     |    |   |     +------------- Data length
   |     |    |   +-------------------- Model code
   |     |    +------------------------ Projector ID
   |     +---------------------------- ID2
   +---------------------------------- ID1
```

* ID1: (8 Bit)
This is an identification data assigned to each command.

 Command :
 This sets an identification data assigned to each command to send it.
 (See each command description.)

 Response :
 This returns the 6th bit of received ID1 as HIGH.
 For ACK it sends the 8th bit back as LOW (recognized); for NAK it
 sends the 8th bit back as HIGH (not recognized).

* ID2: (8 Bit)
This is an identification data assigned to each command.

 Command :
 This sets an identification data assigned to each command to send it.
 (See each command description.)

 Response :
 This returns the value of received ID2 as is.

* Projector ID : (8 Bit)
This is a projector ID for the projector that sends and receives

frames.

Command :
This specifies a projector ID for the projector that sends and
receives commands. (individual notification)
Entering 00H or FFH becomes a common command for all the projectors.
(broadcast notification)
This is convenient for controlling multiple projectors at the same
time.

* When the controller is connected with the projector on a one-to-one
  basis Broadcast notification is recommended.
* When the controller is connected with multiple projectors
  To control a certain projector, use "individual notification".
  For all others "broadcast notification" is recommended.

Response :
This returns the projector ID for a projector received regardless of
individual notification or broadcast notification.

CAUTION :
To notify individually, specifying a model code from the following
model codes is required.

* Model code: (4 Bit)
This is a model code for the projector that sends and receives frames.

Command :
This specifies a model code for the projector that sends commands.
(individual notification)
Entering 0000B or 1111B becomes a common command for all the
projectors. (broadcast notification)
This is convenient for controlling multiple projectors at the same
time.

* When the controller is connected with the projector on a one-to-one
  basis Broadcast notification is recommended.
* When the controller is connected with multiple projectors
  To control a certain projector, use "individual notification".
  For all others "broadcast notification" is recommended.

Response :
This returns the model code for a projector received regardless of
individual notification or broadcast notification.

 Table of Model codes

  0000B : (broadcast notification)
  0001B : MT Series
  0010B : LT Series
  0011B : SX Series
  0101B : GT Series
  1111B : (broadcast notification)

CAUTION :
* When the model code is set to "broadcast notification", the command
  becomes broadcast notification command, regardless of values of the
  projector ID.
* Model code is specified using upper ranking 4 bits of data length.
  The lower ranking 4 bits becomes the upper bits of data length.

* Data length : (12 Bit)
This is data length of data portion (unit:: byte).

 Command :
 This sets data length of data added to a command to send it.
 (See each command description.)

 Response :
 This sets data length of data added to a response to send it.
 (See each command description.)

 CAUTION :
 Data length is specified using total of 12 bits (0 - 4095) of 4 bits
 of the 4th byte and 8 bits of the 5th byte.* The upper ranking 4 bits
 of the 4th byte is model code.

* Data portion
This becomes data of data length specified in the data length portion.

 Command :
 This sets data added to a command to send it.
 (See each command description.)

 Response :
 This sets data added to a response to send it.
 (See each command description.)

* Checksum
This is lower ranking 8 bits of the sum total of the header and data
portions of one transmit and receive data frame.

 4-2. Data portion of response
 ****

For ACK

This returns ACK without adding data portion to the command that does
not request data.
This returns ACK with adding data to the data portion for the command
that requests data.

For NAK

This adds a cause of not accepting the command to data portion to
return it.

(Example) Power On

 Command:
 02H 00H FFH F0H 00H CKS

 NAK:
 A2H 00H 01H 20H 02H DATA01 DATA02 CKS

  Data   Contents

DATA01 Error types
        00H : Not supported
        01H : Parameter error
        02H : Operation mode error
        03H : Gain-related error
        04H : Logo transfer error
DATA02 Error description
        * When not supported
        00H : Unknown command
        01H : The current model does not support this function.
        02H : This model is not compatible with the Switcher.
        03H : This model is not compatible with the PC Viewer.
        * When a parameter error occurs
        00H : Unvalid values specified.
        01H : Specified terminal is unavailable or cannot be selected
        02H : Selected language is not available.
        * When an operation mode error occurs
        00H : Available memory reservation error
        01H : External control working
        02H : Operating memory
        03H : Standby
        04H : On Forced on-screen mute mode
        05H : Link mode working
        06H : Displaying a signal other than PC Viewer
        07H : -No signal-
        08H : Displaying a test pattern or PC Card Files screen.
        09H : No PC card is inserted-
        0AH : Memory operation failed
        0BH : Switcher mode working
        0CH : Displaying the Entry List
        * When a gain adjustment error occurs
        00H : Group number / sub category number is not correct.
        01H : Selected gain is not available.
        02H : Adjustment failed
        * When a logo transfer error occurs
        00H : Start is not requested
        01H : Cannot process due to storing
        02H : Exceeds the total number of blocks required
             at the time of start
        03H : The block number of transferred data is not consecutive.

USB connection

This conforms to the USB1.1 standard.

   Transfer speed: All speeds (supported)
   Endpoint: Control transfer Endpoint 0
   Device class: HID class (Ver1.1)

   USB1.1 Standard: Universal Serial Bus Specification Revision 1.1
   HID : Human Interface Device

Connector Specifications

   1 VBUS (Power supply)
   2 D-   (- Signal)
   3 D+   (+ Signal)
   4 GND (Ground)

* Depending on the USB host controller in the personal computer, the USB connection may fail to operate. When using a USB hub, please use a self-powered type, not a bus-powered type. When using a USB hub, connection to the first stage of the USB hub is recommended.

LAN connection

[Wired LAN port]

LAN interface
  Communication speed: Auto setting (10/100Mbps)
  Certified standard: IEEE802.3 (10BASE-T)
                   IEEE802.3u (100BASE-TX, Auto-Negotiation)

A LAN connector (8 male RJ-45 connector)
  1 TD+   Transmit data (+)
  2 TD-   Transmit data (-)
  3 RD+   Receive data (+)
  4   Not used
  5   Not used
  6 RD-   Receive data (-)
  7   Not used
  8   Not used

[Wired/wireless LAN card]

The LAN connections will differ depending on the commercial LAN card that is used.
- For information on supported LAN cards, visit:
  Global: http://www.nec-pj.com/

[Port Number]

The TCP port number used is "7142".

===
 4. List of Commands
----

 * Example for command

Command name   Example
----
 006. RUNNING SENSE   00H 81H 00H 00H 00H 81H
 007. COMMON DATA REQUEST   00H C0H 00H 00H 00H C0H
 009. ERROR STATUS REQUEST   00H 88H 00H 00H 00H 88H
 015. POWER ON   02H 00H 00H 00H 00H 02H
 016. POWER OFF   02H 01H 00H 00H 00H 03H
 018. INPUT SW CHANGE   02H 03H 00H 00H 02H <DATA> CKS
 020. PICTURE MUTE ON   02H 10H 00H 00H 00H 12H
 021. PICTURE MUTE OFF   02H 11H 00H 00H 00H 13H
 022. SOUND MUTE ON   02H 12H 00H 00H 00H 14H
 023. SOUND MUTE OFF   02H 13H 00H 00H 00H 15H
 024. ONSCREEN MUTE ON   02H 14H 00H 00H 00H 16H
 025. ONSCREEN MUTE OFF   02H 15H 00H 00H 00H 17H
 030. GAIN ADJUST   03H 10H 00H 00H 05H <DATA> CKS
 030-2. VOLUME ADJUST   03H 10H 00H 00H 05H 05H <DATA> CKS
 030-12. IMAGE MODE ADJUST   03H 10H 00H 00H 05H <DATA> CKS
 037. INFORMATION REQUEST   03H 8AH 00H 00H 00H 8DH
 037-1. LAMP INFORMATION REQUEST 03H 8CH 00H 00H 00H 8FH

```
037-2. LAMP INFORMATION REQUEST 2          03H 94H 00H 00H 00H 97H
037-4. LAMP INFORMATION REQUEST 3          03H 96H 00H 00H 02H <DATA> CKS
037-6: CARBON SAVINGS INFORMATION REQUEST  03H 9AH 00H 00H 01H <DATA> CKS
037-7. LAMP INFORMATION REQUEST 4          03H 9BH 00H 00H 03H <DATA> CKS
038. LAMP MODE REQUEST                     03H B0H 00H 00H 01H 07H BBH
039. LAMP MODE SET                         03H B1H 00H 00H 02H 07H 00H BDH
046. WXGA MODE SETTING REQUEST             03H B0H 00H 00H 01H DATA1 CKS
049. WXGA MODE SETTING SET                 03H B1H 00H 00H 02H DATA1 DATA2 CKS
050. REMOTE KEY CODE                       02H 0FH 00H 00H 02H 00H 00H 13H
053. LENS CONTROL                          02H 18H 00H 00H 02H <DATA> CKS
053-1. LENS CONTROL REQUEST                02H 1CH 00H 00H 02H <DATA> CKS
053-2. LENS CONTROL 2                      02H 1DH 00H 00H 04H <DATA> CKS
053-3. LENS MEMORY CUSTOM SET              02H 1EH 00H 00H 01H <DATA> CKS
053-4. LENS MEMORY REFERENCE SET           02H 1FH 00H 00H 01H <DATA> CKS
053-5. LENS MEMORY CONTROL REQUEST         02H 20H 00H 00H 01H <DATA> CKS
053-6. LENS MEMORY CONTROL                 02H 21H 00H 00H 02H <DATA> CKS
053-7. LENS INFORMATION REQUEST            02H 22H 00H 00H 01H <DATA> CKS
060. GAIN PARAMETER REQUEST 2              03H 04H 00H 00H 03H <DATA> CKS
077. MUTE CONTROL                          02H 1AH 00H 00H 02H <DATA> CKS
078-1. SETTING REQUEST                     00H 85H 00H 00H 01H 00H CKS
078-2. RUNNING STATUS REQUEST              00H 85H 00H 00H 01H 01H CKS
078-3. INPUT STATUS REQUEST                00H 85H 00H 00H 01H 02H CKS
078-4. MUTE STATUS REQUEST                 00H 85H 00H 00H 01H 03H CKS
078-5. MODEL NAME REQUEST                  00H 85H 00H 00H 01H 04H CKS
078-6. MIRROR COVER STATUS REQUEST         00H 85H 00H 00H 01H 05H CKS
079. FREEZE CONROL                         01H 98H 00H 00H 01H DATA01 CKS
097-198. PIP/SIDE BY SIDE REQUEST          03H B0H 00H 00H 02H C5H DATA CKS
098-196. WXGA MODE SETTING SET             03H B1H 00H 00H 02H DATA1 DATA2 CKS
098-198. PIP/SIDE BY SIDE SET              03H B1H 00H 00H 03H C5H <DATA> CKS
110. AUTO FUNCTIONS EXECUTE                03H B6H 00H 00H 01H <DATA> CKS
111. AUTO ADJUST EXECUTE2                  03H BAH 00H 00H 01H <DATA> CKS
305-1. BASE MODEL TYPE REQUEST             00H BFH 00H 00H 01H <DATA> CKS
305-3. PROJECTOR INFORMATION REQUEST       00H BFH 00H 00H 01H <DATA> CKS
```

 * Availability by Model

 Model No.
----
 01 : LT240/LT260
 02 : MT1060/MT1065/MT1075
 03 : HT1000
 04 : LT220
 05 : MT860
 06 : WT600/WT610/WT615
 07 : GT5000
 08 : LT240K/LT260K
 09 : GT6000
 10 : HT1100
 11 : VT770
 12: HT410/HT510 (HT10 Series)
 13 : LT245/LT265
 14 : LT280/LT380
 15 : LT180
 16 : VT37/VT47/VT470/VT57/VT570/VT575/VT670/VT676 (VT70 series)
 17 : VT48/VT480/VT580 (VT80 Series)
 18 : NP1000/NP2000 (NP1000 Series)
 19 : NP1150/NP2150/NP3150/NP3151W (3150 Series)
 20 : LT25/LT30/LT35 (LT30 Series)
 21 : NP40/NP50/NP60 (NP60 Series)
 22 : VT49/VT490/VT590/VT595/VT695 (VT90 Series)
 23 : VT700

Availability by Model (CURRENT MODELS)														
Command Name	29	34	35	36	37	38	39	40	41	42	42	43	44	45
006. RUNNING SENSE	*	*	*	*	*	*	*	*	*	*	*	*	*	*
007. COMMON DATA REQUEST	*	*	*	*	*	*	*	*	*	*	*	*	*	*
009. ERROR STATUS REQUEST	*	*	*	*	*	*	*	*	*	*	*	*	*	*
015. POWER ON	*	*	*	*	*	*	*	*	*	*	*	*	*	*
016. POWER OFF	*	*	*	*	*	*	*	*	*	*	*	*	*	*
018. INPUT SW CHANGE	*	*	*	*	*	*	*	*	*	*	*	*	*	*
020. PICTURE MUTE ON	*	*	*	*	*	*	*	*	*	*	*	*	*	*
021. PICTURE MUTE OFF	*	*	*	*	*	*	*	*	*	*	*	*	*	*
022. SOUND MUTE ON	*	-	*	*	*	*	*	-	-	*	*	*	*	*
023. SOUND MUTE OFF	*	-	*	*	*	*	*	-	-	*	*	*	*	*
024. ONSCREEN MUTE ON	*	*	*	*	*	*	*	*	*	*	*	*	*	*
025. ONSCREEN MUTE OFF	*	*	*	*	*	*	*	*	*	*	-	*	*	*
030. GAIN ADJUST	-	-	*	*	*	*	*	-	-	*	*	*	*	*
030-2. VOLUME ADJUST														
Volume	*	*	*	*	*	*	*	-	-	*	*	*	*	*
Bass	-	-	-	-	-	-	-	-	-	*	-	-	-	-
Treble	-	-	-	-	-	-	-	-	-	*	-	-	-	-
Balance	-	-	-	-	-	-	-	-	-	*	-	-	-	-
030-12. IMAGE MODE ADJUST														
Aspect Ratio Input Signal	*	!	*	*	*	*	*	*	*	*	*	*	*	*
037. INFORMATION REQUEST	*	!	*	*	*	*	*	*	*	*	*	*	*	*
037-1. LAMP INFORMATION REQUEST	-	*	*	*	*	*	*	*	*	*	*	*	*	*
037-2. LAMP INFORMATION REQUEST 2	-	*	*	*	*	*	*	*	*	*	*	*	*	*
037-4. LAMP INFORMATION REQUEST 3	*	*	*	*	*	*	*	*	*	*	*	*	*	*
037.6 CARBON SAVINGS INFORMATION REQUEST	-	*	-	-	-	*	-	-	-	-	-	-	-	-
037-7. LAMP INFORMATION REQUEST 4	-	*	*	-	-	*	-	-	-	*	-	-	*	*
038. LAMP MODE REQUEST	*	*	*	*	*	*	*	*	*	*	*	-	*	*
039. LAMP MODE SET	*	*	*	*	*	*	*	*	*	*	*	-	*	*
046. WXGA MODE SETTING REQUEST	-	-	*	-	-	*	*	*	*	*	-	-	*	*
049. WXGA MODE SETTING SET	-	-	*	-	-	*	*	*	*	*	-	-	*	*
050. REMOTE KEY CODE	*	*	*	*	*	*	*	*	*	*	*	*	*	*
053. LENS CONTROL	-	-	-	-	-	-	-	*	*	-	-	-	-	-
053-1. LENS CONTROL REQUEST	-	-	-	-	-	-	-	*	*	-	-	-	-	-
053-2. LENS CONTROL 2	-	-	-	-	-	-	-	*	*	-	-	-	-	-
053-3. LENS MEMORY CUSTOM SET	-	-	-	-	-	-	-	*	*	-	-	-	-	-
053-4. LENS MEMORY REFERENCE SET	-	-	-	-	-	-	-	*	*	-	-	-	-	-
053-5. LENS MEMORY CONTROL REQUEST	-	-	-	-	-	-	-	*	*	-	-	-	-	-
053-6. LENS MEMORY CONTROL	-	-	-	-	-	-	-	*	*	-	-	-	-	-
053-7. LENS INFORMATION REQUEST	-	-	-	-	-	-	-	*	*	-	-	-	-	-
060. GAIN PARAMETER REQUEST 2	*	*	*	*	*	*	*	*	*	*	*	*	*	*
077. MUTE CONTROL	*	*	*	*	*	*	*	*	*	*	*	*	*	*
078-1. SETTING REQUEST	*	*	*	*	*	*	*	*	*	*	*	*	*	*
078-2. RUNNING STATUS REQUEST	*	*	*	*	*	*	*	*	*	*	*	*	*	*
078-3. INPUT STATUS REQUEST	*	*	*	*	*	*	*	*	*	*	*	*	*	*
078-4. MUTE STATUS REQUEST	*	*	*	*	*	*	*	*	*	*	*	*	*	*
078-5. MODEL NAME REQUEST	*	*	*	*	*	*	*	*	*	*	*	*	*	*
078-6. MIRROR COVER STATUS REQUEST	-	-	-	-	-	-	-	-	-	-	-	-	-	-
079. FREEZE CONTROL	*	*	*	-	*	*	*	*	*	*	-	-	*	*
110. AUTO FUNCTIONS EXECUTE	-	*	*	-	-	-	-	-	-	*	-	-	*	*
111. AUTO ADJUST EXECUTE2	-	-	*	-	-	*	*	*	*	*	-	-	*	*
097-198. PIP/SIDE BY SIDE REQUEST	-	-	*	-	-	-	*	*	*	-	-	-	*	*
098-196. WXGA MODE SETTING SET	-	*	*	-	-	*	*	*	*	-	-	-	*	*
098-198. PIP/SIDE BY SIDE SET	-	-	*	-	-	-	*	*	*	-	-	-	*	*
305.1. BASE MODEL TYPE REQUEST	*	*	*	*	*	*	*	*	*	*	*	*	*	*
305.3 PROJECTOR INFORMATION REQUEST	*	*	*	*	*	*	*	*	*	*	*	*	*	*

Command Name	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	30	31	32	33	35
006. RUNNING SENSE	*	*	*	*	*	*	*	*	*	*	*	-	*	*	-	-	-	*	*	-	-	-	*	*	*	*	*	*	*	*	*	*	*
007. COMMON DATA REQUEST	*	*	*	*	*	*	*	*	*	*	*	-	*	*	-	-	-	*	*	-	-	-	*	*	*	*	*	*	*	*	*	*	*
009. ERROR STATUS REQUEST	*	*	*	*	*	*	*	*	*	*	*	*	*	*	-	-	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
015. POWER ON	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
016. POWER OFF	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
018. INPUT SW CHANGE	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
020. PICTURE MUTE ON	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
021. PICTURE MUTE OFF	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
022. SOUND MUTE ON	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	-	*	*	*	*	*	-	*	*	*	*	*	*
023. SOUND MUTE OFF	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	-	*	*	*	*	*	-	*	*	*	*	*	*
024. ONSCREEN MUTE ON	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
025. ONSCREEN MUTE OFF	*	*	*	*	*	*	*	*	*	*	*	*	*	*	-	-	-	*	*	*	*	*	-	*	*	*	*	-	*	*	*	*	*
030. GAIN ADJUST	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	-	-	-	-	*	*	*	*	*	*	*	*	*	*
030-2. VOLUME ADJUST																																	
Volume	*	*	*	*	*	*	*	*	*	*	*	-	*	*	-	-	*	*	*	*	-	*	*	*	*	*	*	-	*	*	*	*	*
Bass	-	*	-	-	*	-	*	-	*	-	*	-	*	-	-	-	*	*	-	-	-	-	-	*	-	-	*	-	*	-	*	-	*
Treble	-	*	-	-	*	-	*	-	*	-	*	-	*	-	-	-	*	*	-	-	-	-	-	*	-	-	*	-	*	-	*	-	*
Balance	-	-	-	-	-	-	*	-	-	-	-	-	*	-	-	-	*	*	-	-	-	-	-	*	-	-	*	-	*	-	*	-	*
030-12. IMAGE MODE ADJUST																																	
Aspect Ratio Input Signal	*	*	*	*	*	*	*	*	*	*	*	*	*	-	-	-	*	*	*	-	*	*	*	!	*	*	!	*	*	*	*	*	*
037. INFORMATION REQUEST	*	*	*	*	*	*	*	*	*	*	*	*	-	-	-	*	*	*	*	*	*	*	!	*	*	!	*	*	*	*	*	*	*
037-1. LAMP INFORMATION REQUEST	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	-	*	*	*	*	*	*	*	*	*	*
037-2. LAMP INFORMATION REQUEST 2	*	*	*	*	*	*	*	*	*	*	*	-	*	*	*	*	*	*	*	-	-	*	-	*	*	*	*	-	*	*	*	*	*
037-4. LAMP INFORMATION REQUEST 3	!	!	!	!	!	!	*	*	*	*	*	*	*	*	*	*	*	*	*	-	*	*	*	*	*	*	*	*	*	*	*	*	*
037-6. CARBON SAVINGS INFORMATION REQUEST	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	*	-
037-7. LAMP INFORMATION REQUEST 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	*	*
038. LAMP MODE REQUEST	*	*	*	*	*	*	*	*	*	*	*	-	*	*	*	*	*	*	*	-	-	-	-	!	*	*	*	*	*	*	*	*	*
039. LAMP MODE SET	*	*	*	*	*	*	*	*	*	*	*	-	*	*	*	*	*	*	*	-	-	-	-	!	*	*	*	*	*	*	*	*	*
046. WXGA MODE SETTING REQUEST	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	*	*	-	*	*	*	*	*
049. WXGA MODE SETTING SET	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	*	*	-	*	*	*	*	*
050. REMOTE KEY CODE	*	*	*	*	*	*	*	*	*	*	*	*	*	*	-	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
053. LENS CONTROL	-	*	-	-	*	-	*	-	*	-	*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
053-1. LENS CONTROL REQUEST	-	-	-	-	-	-	*	-	*	-	*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
053-2. LENS CONTROL 2	-	-	-	-	-	-	*	-	*	-	*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
053-3. LENS MEMORY CUSTOM SET	-	-	-	-	-	-	*	-	*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
053-4. LENS MEMORY REFERENCE SET	-	-	-	-	-	-	*	-	*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
053-5. LENS MEMORY CONTROL REQUEST	-	-	-	-	-	-	*	-	*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
053-6. LENS MEMORY CONTROL	-	-	-	-	-	-	*	*	*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
053-7. LENS INFORMATION REQUEST	-	-	-	-	-	-	*	-	*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
060. GAIN PARAMETER REQUEST 2	*	*	*	*	*	*	*	*	*	*	*	-	*	*	-	-	*	*	*	-	-	-	*	*	*	*	*	*	*	*	*	*	*
077. MUTE CONTROL	*	*	*	*	*	*	*	*	*	*	*	*	*	*	-	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
078-1. SETTING REQUEST	*	*	*	*	*	*	*	*	*	*	*	-	*	*	-	-	*	*	*	-	-	*	*	*	*	*	*	*	*	*	*	*	*
078-2. RUNNING STATUS REQUEST	*	*	*	*	*	*	*	*	*	*	*	-	*	*	-	-	*	*	*	-	-	*	*	*	*	*	*	*	*	*	*	*	*
078-3. INPUT STATUS REQUEST	*	*	*	*	*	*	*	*	*	*	*	-	*	*	-	-	*	*	*	-	-	*	*	*	*	*	*	*	*	*	*	*	*
078-4. MUTE STATUS REQUEST	*	*	*	*	*	*	*	*	*	*	*	-	*	*	-	-	*	*	*	-	-	*	*	*	*	*	*	*	*	*	*	*	*
078-5. MODEL NAME REQUEST	*	*	*	*	*	*	*	*	*	*	*	-	*	*	-	-	*	*	*	-	-	*	*	*	*	*	*	-	*	*	*	*	*
078-6. MIRROR COVER STATUS REQUEST	-	-	-	-	-	*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
079. FREEZE CONTROL	*	*	*	*	*	*	*	*	*	*	*	*	-	!	-	-	-	-	*	-	-	-	-	*	*	*	*	*	*	*	*	*	*
110. AUTO FUNCTIONS EXECUTE	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	!	*	-	-	-	*	*	-	*	*	*	*	*	*	*
111. AUTO ADJUST EXECUTE2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	!	*	-	*	-	-	*	*	*	*	*	*	*	*
097-198. PIP/SIDE BY SIDE REQUEST	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	!	-	-	-	-	*	-	-	-	*	-	-	-	-	*	-
098-196. WXGA MODE SETTING SET	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	*	-	-	-	-	*	*
098-198. PIP/SIDE BY SIDE SET	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	!	-	-	-	-	*	-	-	-	*	-	-	-	-	*	-
305.1 BASE MODEL TYPE REQUEST	-	-	-	-	-	-	-	-	-	-	-	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	-	*	*	*	*	*
305.3 PROJECTOR INFORMATION REQUEST	-	-	-	-	-	-	-	-	-	-	-	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	-	*	*	*	*	*	*

(!)
LT30   :   firmware version 1.03 or later
NP4000:   firmware version 1.04 or later
NP4001:   firmware version 1.01 or later
NP62   :   firmware version 1.02 or later

==

5. Command Descriptions

Precautions with Inscriptions:

(*1) Projector ID
It is the value when forwarding a factory.
This reflects the "Projector ID" that has been set to the projector.

(*2) Model code: "xxH" inscription
This will differ depending on the projector.
  In case of MT/NP1000 series   10H
  In case of MT/NP3150 series   10H

In case of MT/NP3250 series	10H
In case of PA600 series	10H
In case of PX750 series	10H
In case of PH1000 series	10H
In case of LT/LT80 series	20H
In case of NP61, NP62 series	20H
In case of NP216 series	20H
In case of V300 series	20H
In case of VT series	40H
In case of NP600 series	40H
In case of NP610 series	40H
In case of NP2200 series	40H
In case of M300 series	40H
In case of M311 series	40H
In case of P420 series	40H
In case of P501 series	40H
In case of GT series	50H
In case of HT series	60H
In case of WT series	70H
In case of UM330 series	70H
In case of HT10 series	D0H
In case of LT180 series	D0H
In case of LT30 series	D0H
In case of NP60 series	D0H
In case of NP4000, 4100 series	80H
In case of U300 series	80H
In case of NP905/NP901W/VT800	90H

(*3) Checksum: "CKS" inscription
This is the value of the lower 8 bits of the results calculated in byte units from all of the data up to the immediately preceding data.
   Example:
   20H 81H 01H 60H 01H 00H 03H
   +   +   +   +   +   + = CKS

(*4) Response error number
This is the value of the error number at the time of an error.
See "NAK" of "6-2. Data portion of response".

(*5) Term "RGB" and "COMPUTER"
On the HT1100, VT770, LT245/ LT265/ LT280/ LT380, NP1000/NP2000, NP1150/NP2150/NP3150/NP3151W, NP1250/NP2250/NP3250/NP3250W, NP1200/NP2200, NP4000/NP4001, NP4100/NP4100W, NP905/NP901W/VT800, LT25/LT30/LT35, VT48/VT480/VT580, VT49/VT490/VT590/VT595/VT695/VT700, NP300/NP400/NP500/NP500W/NP500WS/NP600/NP600S, NP310/NP410/MP410W/NP510/NP510W/NP610WS/NP610/NP610S, NP40/NP50/NP60/NP41/NP61/NP62/NP43/NP64, P350X/350W/420X, PA500X/500U/550W/600X, PX700W/750U/800X and PH1000U the term "RGB connector" has been changed to "COMPUTER".

(*6) Term "DVI" and "COMPUTER"
On the LT380, NP1000/NP2000, NP1150/NP2150/NP3150/NP3151W, NP1250/NP2250/NP3250/NP3250W, NP1200/NP2200, NP4000/NP4001, NP4100/NP4100W, NP300/NP400/NP500/NP500W/NP500WS/NP600/NP600S, NP310/NP410/MP410W/NP510/NP510W/NP610WS/NP610/NP610S and VT595/VT695/VT700, the term "DVI connector" has been changed to "COMPUTER".

 006. RUNNING SENSE
****
Function:
This command acquires the operation mode of the projector.

Command:
  00H 81H 00H 00H 00H 81H

Response: At the time of a success
  20H 81H 01H xxH 01H DATA01 CKS
          (*1) (*2)   (*3)

  Data Portion Contents

  DATA01   Status of operation
          Bit 7: Power On/Off processing
              0 = No execution (Normal condition)
              1 = During execution

          Bit 6: Selecting signal processing
              0 = No execution (Normal condition)
              1 = During execution

          Bit 5: Cooling processing
              0 = No execution (Normal condition)
              1 = During execution

          Bit 4: External control mode
              0 = OFF
              1 = ON

          Bit 3: No Power-Off period
              0 = Power-Off Possible (Normal condition)
              1 = Power-Off Impossible

          Bit 2: Reserved

          Bit 1: Projector status
              0 = Idling
              1 = Power On
          Bit 0: Reserved
Response: At the time of a failure
  A0H 81H 01H xxH 02H DATA1H DATA02 CKS
          (*1) (*2)   (*4)   (*3)

 007. COMMON DATA REQUEST
****
Function:
This command acquires all of the detailed conditions of the projector.

Command:
  00H C0H 00H 00H 00H C0H

Response: At the time of a success
  20H C0H 01H xxH 80H DATA01 .. DATA128 CKS
          (*1) (*2)   (*3)

  Data Portion Contents

  DATA01   Projector type
          See DATA70..71
          08H : NP4000 Projector
          11H : NP62 Projector

DATA02   Projector ID

DATA02	
1 .. 64	NP4000
1 .. 254	NP62/NP64
1 .. 254	NP216

DATA03   Reserved

DATA04   Projector status
    00H: Idling
    01H: Power On

DATA05   Cooling processing
    00H: No execution (Normal condition)
    01H: During execution

DATA06   Indication signal number (Entry list number - 1)
    0 .. 199

DATA07   Type 1 of input terminal to be selected (!)
    01H : 1
    02H : 2
    03H : 3
    04H : 4
    05H : 5

DATA08   Type 2 of input terminal to be selected (!1) (!) (!!)
    01H : RGB (*5)
    02H : VIDEO
    03H : S-VIDEO
    04H : COMPONENT
    05H : Reserved
    06H : DIGITAL (*6)
    07H : VIEWER
    08H : SLOT1
    09H : SLOT2

DATA09   Indication signal type
    * Valid only when Type 2 of input terminal is 02H or 03H
    x0H : NTSC3.58
    x1H : NTSC4.43
    x2H : PAL
    x3H : PAL60
    x4H : SECAM
    x5H : B/W60
    x6H : B/W50
    x7H : PALNM
    x8H : NTSC3.58 LBX
    x9H : NTSC3.58 SQZ
    xDH : NTSC
    xEH : PAL-M
    xFH : PAL-N
    * x: undefined

DATA10 .. 12 Reserved (undefined)

DATA13 .. 20 Horizontal frequency of the indication signal(string)
    ("000.00" kHz + NULL(0)+ NULL(0))

DATA21 .. 28 Vertical frequency of the indication signal(string)
    ("000.00" Hz + NULL(0)+ NULL(0))

DATA29   Picture mute
        00H : OFF
        01H : ON

DATA30   Sound mute
        00H : OFF
        01H : ON

DATA31 .. Reserved

DATA32 Freeze Status (!2)
        00H : OFF
        01H : ON
        FFH : Not Supported

DATA33   Test pattern display 1
        00H : No display (Normal condition)
        00H Other : Displaying (Pattern ID)

Pattern ID	Pattern Name	MT	LT	LT180	LT80	HT	GT	WT	VT	NP1000	NP3150	NP905	NP4000	NP4100	NP62	NP64	NP3250	NP216	P420	V300	VE281	P501
02H	Cross Hatch	-	*	*	-	*	-	-	-	-	*	*	*	*	*	*	*	*	*	*	*	*
03H	Gray Bars	*	*	*	*	*	*	*	*	*	*	*	-	-	-	-	*	-	*	-	-	*
04H	Raster(0%)	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
05H	Raster(25%)	*	*	*	*	*	*	*	*	*	*	*	*	*	-	-	*	*	*	*	*	*
06H	Raster(50%)	*	*	*	*	*	*	*	*	*	*	*	*	*	-	-	*	*	*	*	*	*
07H	Raster(100%)	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
08H	Focus	*	*	*	*	*	*	*	*	*	-	-	-	-	-	-	-	-	-	-	-	-
09H	Raster Blue	*	-	-	*	-	*	-	*	*	*	*	*	*	*	*	*	*	*	*	*	*
0AH	Gray Raster 30	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
17H	Gray Raster 10	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
18H	RAMP WBRG	-	*	*	-	*	-	*	-	-	-	-	-	-	*	*	-	*	-	*	*	-
19H	Blue Raster 60	-	*	*	-	*	-	*	-	-	-	-	*	*	*	*	-	*	*	*	*	*
1DH	Cross Hatch 3	*	*1	*	*	-	*	*	*	*	-	-	-	-	-	-	-	-	-	-	-	-

* : Supported
- : Not supported
*1: Only LT240K/260K

Pattern ID	Pattern Name	PA600	PX750	PH1000
01H	Cross Hatch	*	*	*
02H	Gray Bars	*	*	*
03H	Raster(0%)	*	*	*
04H	Raster(25%)	*	*	*
05H	Raster(50%)	*	*	*
06H	Raster(100%)	*	*	*
07H	Color Bar	*	*	*

DATA34   Test pattern display 2
        FFH: No display (Normal condition)
        FFH Other: Displaying
        Bit 2: BLUE pattern
            0 = OFF
            1 = ON
        Bit 1: GREEN pattern
            0 = OFF
            1 = ON
        Bit 0: RED pattern
            0 = OFF
            1 = ON

DATA35 .. 50 Reserved

DATA51 .. 65 User registration name (14 characters + NULL)

DATA66   Forced On-screen mute

00H : OFF
        01H : ON

DATA67   On-screen display
        00H : No display
        01H : Displaying

DATA68   Selecting signal processing
        00H : No execution (Normal condition)
        01H : During execution

DATA69   Status of operation
        00H : Idling
        04H : Power On
        05H : Cooling
        06H : Idling (Error occurrence)
        Other than above: (nondisclosure)
        Internal use of code during a state transition period

DATA70 .. 71 Projector type

Data01	Data70	Data71	
01H	00H	03H	MT1060/MT1065
01H	01H	03H	MT860
01H	02H	03H	MT1075
01H	00H	06H	NP1000/NP2000
02H	00H	03H	LT240/LT260
02H	01H	03H	LT220
02H	02H	03H	LT240K/LT260K
02H	00H	05H	LT245/LT265
02H	00H	06H	LT380
02H	01H	06H	LT280
03H	00H	04H	VT770
03H	00H	06H	VT80 Series
03H	00H	07H	VT90 Series
04H	00H	01H	GT1150
04H	01H	01H	GT2150
04H	00H	03H	GT5000
04H	01H	03H	GT6000
05H	00H	03H	HT1000
05H	00H	04H	HT1100
06H	00H	03H	WT600
06H	00H	05H	WT610/WT615
08H	00H	07H	NP4000/NP4001
08H	00H	10H	NP4100
08H	01H	10H	NP4100W
10H	00H	08H	VT700
10H	00H	09H	NP600
10H	01H	09H	NP500
10H	02H	09H	NP500 W
10H	03H	09H	NP400
10H	04H	09H	NP300
10H	00H	10H	NP610
10H	01H	10H	NP510
10H	02H	10H	NP510W
10H	03H	10H	NP410
10H	05H	10H	NP310
10H	07H	10H	NP610S
10H	08H	10H	NP510WS
10H	09H	10H	NP410
10H	01H	11H	NP2200
10H	02H	11H	NP1200
11H	00H	00H	NP41/61
11H	01H	00H	NP62
11H	00H	11H	NP215
11H	02H	11H	NP115
11H	03H	11H	NP110
11H	04H	11H	NP216
11H	00H	12H	NP64
11H	03H	12H	NP43
12H	00H	08H	NP1150/NP2150/NP3150
12H	01H	08H	NP3151W
12H	00H	09H	NP905
12H	01H	09H	NP901W
12H	02H	09H	VT800
12H	00H	10H	NP1250/NP2250/NP3250
12H	01H	10H	NP3250W
13H	01H	10H	M300X
13H	02H	10H	M300W
13H	05H	10H	M260X
13H	06H	10H	M260W
13H	00H	11H	P420X
13H	01H	11H	P350X
13H	02H	11H	P350W
13H	00H	12H	UM330X
13H	01H	12H	UM330W
13H	00H	13H	M361X
13H	01H	13H	M311W
13H	02H	13H	M271X
13H	03H	13H	M311X
14H	02H	10H	U300X
14H	04H	10H	U310W
15H	00H	10H	PA600X
15H	01H	10H	PA500X
15H	02H	10H	PA550W
15H	03H	10H	PA500U
16H	00H	10H	V300X
16H	01H	10H	V260X
16H	03H	10H	V260
16H	01H	11H	VE281X/VE281XB
16H	04H	11H	VE281/VE281B
17H	00H	10H	PX750U
17H	01H	10H	PX700W
17H	02H	10H	PX800X
19H	00H	10H	PH1000U
20H	00H	10H	P501X
20H	01H	10H	P451X
20H	02H	10H	P451W
20H	03H	10H	P401W

DATA72　　　PC Card insertion
　　　　　00H : Not inserted
　　　　　01H : Inserted

DATA73　　　USB Mouse connection
　　　　　00H : Not connected
　　　　　01H : Connected

DATA74　　　Entry list type
　　　　　01H : Default
　　　　　02H : User

DATA75 .. 82 Reserved

DATA83　　　On-screen mute
　　　　　00H : OFF
　　　　　01H : ON

DATA84　　　Reserved

DATA85　　　Indicate Contents
　　　　　00H = Picture signal displaying
　　　　　01H = No signal
　　　　　02H = Viewer displaying
　　　　　03H = Test pattern displaying
　　　　　04H = LAN displaying

DATA86 .. 128 Reserved

Response: At the time of a failure
　A0H C0H 01H xxH 02H DATA01 DATA02 CKS
　　　　　　(*1)　(*2)　　　　　　(*4)　　　　(*3)
(!)

Selected input terminal	Data 07	Data08	
RGB or RGB1 (*5)	1 (01H)	RGB	(01H)
RGB2 (*5)	2 (02H)	RGB	(01H)
Video	1 (01H)	VIDEO	(02H)
S-Video	1 (01H)	S-VIDEO	(03H)
Component	2 (02H)	COMPONENT	(04H)
Component	3 (03H)	COMPONENT	(04H)
DVI or DVI(Digital) (*6)	1 (01H)	DIGITAL	(06H)
HDMI	1 (01H)	DIGITAL	(06H)
Viewer	1 (01H)	VIEWER	(07H)
LAN	2 (02H)	VIEWER	(07H)
Slot1-1	1 (01H)	SLOT1	(08H)
Slot1-2	2 (02H)	SLOT1	(08H)
Slot2-1	1 (01H)	SLOT2	(09H)
Slot2-2	2 (02H)	SLOT2	(09H)
RGB(Video)	2 (02H)	VIDEO	(02H)
RGB(S-Video)	2 (02H)	S-VIDEO	(03H)
USB Display	4 (04H)	VIEWER	(07H)

Supplement:
(!1) VT700/NP600 series
(!2) only the NP600 series is compatible.
(!!) On the U300 series, this parameter becomes F0H when non signal.

009. ERROR STATUS REQUEST
****
Function:
This command acquires the error information occurring with the projector.

Command:
  00H 88H 00H 00H 00H 88H

Response: At the time of a success
  20H 88H 01H xxH 0CH DATA01 .. DATA12 CKS
           (*1) (*2)   (*3)

  Data Portion Contents
  ----
  * The various bits are normal is "0" and error is "1".
  * "None" is "0" fixation.

  DATA01   Error Status (1)
           bit0 : Lamp cover error
           bit1 : Temperature error(Bimetal)
           bit2 : None
           bit3 : None
           bit4 : Fan error
           bit5 : Power error
           bit6 : Lamp(or Lamp1) error
           bit7 : Lamp(or Lamp1) has reached its end of life
  DATA02   Error Status (2)
           bit0 : Lamp(or Lamp1) has been used beyond its limit
           bit1 : Formatter error
           bit2 : Lamp2 error
           bit3 : None
           bit4 : None
           bit5 : None
           bit6 : None
           bit7 : None

  DATA03   Error Status (3)
           bit0 : None
           bit1 : FPGA error
           bit2 : Temperature error(Sensor)
           bit3 : Lamp(or Lamp1) housing error (!)
           bit4 : Lamp(or Lamp1) data error (!)
           bit5 : Mirror cover error
           bit6 : Lamp2 has reached its end of life
           bit7 : Lamp2 has been used beyond its limit

  DATA03   Error Status (4)
           bit0 : Lamp2 housing error
           bit1 : Lamp2 data error
           bit2 : High temperature due to dust pile-up
           bit3 : A foreign object sensor error
           bit4 : Pump error
           bit5 : None
           bit6 : None
           bit7 : None

  DATA05 .. 12 Reserved

Response: At the time of a failure
  A0H 88H 01H xxH 02H DATA01 DATA02 CKS
           (*1) (*2)   (*4)   (*3)

Supplement:
(!) LT/LT80/HT: "None"

015. POWER ON
****
Function:
This command switches on the main power of the projector.
Command:
  02H 00H 00H 00H 00H 02H

Response: At the time of a success
  22H 00H 01H xxH 00H CKS
          (*1) (*2)   (*3)

Response: At the time of a failure
  A2H 00H 01H xxH 02H DATA01 DATA02 CKS
          (*1) (*2)   (*4)   (*3)
Supplement:
The projector does not accept the other command during power on processing.

016. POWER OFF
****
Function:
This command switches off the main power of the projector.

Command:
  02H 01H 00H 00H 00H 03H

Response: At the time of a success
  22H 01H 01H xxH 00H CKS
          (*1) (*2)   (*3)

Response: At the time of a failure
  A2H 01H 01H xxH 02H DATA01 DATA02 CKS
          (*1) (*2)   (*4)   (*3)

Supplement:
The projector doesn't accept the other command during power off processing. (It contains a cooling period.)

018. INPUT SW CHANGE
****
Function:
This command switches the input terminal or the entry list.

Command:
  02H 03H 00H 00H 02H DATA01 DATA02 CKS
                                              (*3)

  Data Portion Contents

  DATA01   Switching object
          00H : Entry List
          01H : Input terminal

DATA02   Switching number

When the switching object is the "Signal list", the signal list number is specified. (0…99)

When the switching object is the "Input connector", the input connector number is specified.

Terminal Number	Terminal Name	CURRENT MODELS												
		NP4000/4100	M300	M361	P420	P501	PE401	U300	UM330	V300	VE281	PA600	PX750	PH1000
01H	RGB1(RGB)	*	*	*	*	*		*	*	*	*	*	*	*
02H	RGB2 (!1)	*	*	*	*	-		*	-	* (!4)	-	*	*	*
02H	DVI(ANALOG) (!2)	-	-	-	-	-		-	-	-	-	-	-	-
03H	RGB3 (*5)	-	-	-	-	-		-	-	-	-	*	*	*
06H	Video	*	*	*	*	*		*	*	*	*	*	*	*
0BH	S-Video	*	*	*	*	*		*	*	*	-	*	*	*
10H	Component	*	-	-	-	-		-	-	-	-	-	-	-
11H	Component	-	-	-	-	-		-	-	-	-	-	-	-
12H	Component	-	-	-	-	-		-	-	-	-	-	-	-
1AH	DVI (*6) (!2)	*	-	-	-	-		-	-	-	*	-	-	-
1AH	DVI(DIGITAL)(*6)	-	-	-	-	-		-	-	-	-	*	*	*
1AH	HDMI	-	*	*	*	*		*	*	* (!4)	* (!5)	*	*	*
1BH	DisplayPort	-	-	-	-	-		-	-	-	-	*	*	*
1BH	HDMI	-	-	-	-	*	*	-	*	-	-	-	-	-
1CH	SLOT	-	-	-	-	-		-	-	-	-	-	*	*
1FH	Viewer	-	*	*	*	*		-	*	-	-	*	*	*
20H	LAN / NETWORK	-	*	*	*	*		-	*	-	-	*	*	*
07H	RGB(Video)	-	-	-	-	-		-	-	-	-	-	-	-
0CH	RGB(S-Video)	-	-	-	-	-		-	-	-	-	-	-	-
22H	USB Display	-	*	*	*	*		-	*	-	-	-	-	-
24H	SLOT1-1	-	-	-	-	-		-	-	-	-	-	-	-
25H	SLOT1-2	-	-	-	-	-		-	-	-	-	-	-	-
29H	SLOT2-1	-	-	-	-	-		-	-	-	-	-	-	-
2AH	SLOT2-2	-	-	-	-	-		-	-	-	-	-	-	-

Terminal Number	Terminal Name	LEGACY MODELS												
		MT	LT	LT180	LT80	HT	GT	WT	VT	NP1000/3150	HT10	LT30	NP40	
01H	RGB1(RGB)	*	*	*	*	*	*	*	*	*	*	*	*	
02H	RGB2 (!1)	*	*	-	*	-	*	-	*	*	-	-	-	
02H	DVI(ANALOG) (!2)	-	-	-	-	-	-	*	-	-	-	-	-	
06H	Video	*	*	*	*	*	*	*	*	*	*	*	*	
0BH	S-Video	*	*	*	*	*	*	*	*	*	*	*	*	
10H	Component	-	-	*	*	*	-	-	-	*	-	-	-	(!!)
11H	Component	-	-	*	-	*	-	-	-	-	*	-	-	(!!!)
12H	Component	-	-	-	-	-	-	-	*	-	-	-	-	(!!!!)
1AH	DVI (*6) (!2)	*	-	*	-	*	-	-	*	-	-	-	-	(!)
1AH	DVI(DIGITAL)(*6)	-	-	-	*	-	*	*	-	*	-	-	-	(!)
1AH	HDMI	-	-	-	-	-	-	-	-	-	-	-	-	
1FH	Viewer	*	*	*	*	*	*	*	*	*	-	-	-	(!!!!)
20H	LAN / NETWORK	*	*	-	*	-	*	*	-	*	-	-	-	
07H	RGB(Video)	-	-	-	-	-	*	-	-	-	-	-	-	
0CH	RGB(S-Video)	-	-	-	-	-	*	-	-	-	-	-	-	
22H	USB Display	-	-	-	-	-	-	-	-	-	-	-	-	
24H	SLOT1-1	-	-	-	-	-	*	-	-	-	-	-	-	
25H	SLOT1-2	-	-	-	-	-	*	-	-	-	-	-	-	
29H	SLOT2-1	-	-	-	-	-	*	-	-	-	-	-	-	
2AH	SLOT2-2	-	-	-	-	-	*	-	-	-	-	-	-	

* : Supported

- : Not supported

(!): The MT860/LT280 does not support a DVI connector.

(!!) HT1000

(!!!) HT410/HT510/HT1100

(!!!!) VT770 support Component and Viewer

(!1) VT470/VT470JY/VT570/VT670/VT575/VT676/VT480/VT580

(!2) VT595/VT695/VT700/NP300/NP400/NP500/NP500W/NP600/NP500WS/NP600S

(!3) NP62/NP64 only (not available on NP41/NP43/NP61)

(!4) Except V260

Response: At the time of a success
  22H 03H 01H xxH 01H DATA01 CKS
        (*1)   (*2)   (*3)

  Data Portion Contents

  DATA01   Results
          00H : Normal
          FFH : Error

Response: At the time of a failure
  A2H 03H 01H xxH 02H DATA01 DATA02 CKS
        (*1)   (*2)   (*4)   (*3)
Command example:
* When switch to the Video connector
  02H 03H 00H 00H 02H 01H 06H 0EH

 020. PICTURE MUTE ON
****

Function:

This command blanks the picture.
Command:
  02H 10H 00H 00H 00H 12H
Response: At the time of a success
  22H 10H 01H xxH 00H CKS
      (*1) (*2)   (*3)

Response: At the time of a failure
  A2H 10H 01H xxH 02H DATA01 DATA02 CKS
          (*1) (*2)   (*4)   (*3)

Supplement:
* Picture mute is cancelled for the following:
  Input connector switching
  Video signal switching

 021. PICTURE MUTE OFF
****
Function:
This command cancels the blank picture condition.

Command:
  02H 11H 00H 00H 00H 13H

Response: At the time of a success
  22H 11H 01H xxH 00H CKS
        (*1)   (*2)   (*3)

Response: At the time of a failure
  A2H 11H 01H xxH 02H DATA01 DATA02 CKS
          (*1) (*2)   (*4)   (*3)

 022. SOUND MUTE ON
****
Function:
This command mutes the sound.

Command:
  02H 12H 00H 00H 00H 14H

Response: At the time of a success
  22H 12H 01H xxH 00H CKS
          (*1)   (*2)   (*3)

Response: At the time of a failure
  A2H 12H 01H xxH 02H DATA01 DATA02 CKS
            (*1) (*2)   (*4)   (*3)
Supplement:
* Sound mute is cancelled for the following:
  Input connector switching
  Video signal switching
  Volume adjustment

 023. SOUND MUTE OFF
****
Function:

This command cancels the sound muting.

Command:
  02H 13H 00H 00H 00H 15H

Response: At the time of a success
  22H 13H 01H xxH 00H CKS
          (*1) (*2)   (*3)

Response: At the time of a failure
  A2H 13H 01H xxH 02H DATA01 DATA02 CKS
          (*1) (*2)   (*4)   (*3)

 024. ONSCREEN MUTE ON
****
Function:
This command blanks the on-screen display.

Command:
  02H 14H 00H 00H 00H 16H

Response: At the time of a success
  22H 14H 01H xxH 00H CKS
          (*1) (*2)   (*3)

Response: At the time of a failure
  A2H 14H 01H xxH 02H DATA01 DATA02 CKS
          (*1) (*2)   (*4)   (*3)

Supplement:
* Onscreen mute is cancelled for the following:
  Input connector switching
  Video signal switching

 025. ONSCREEN MUTE OFF
****
Function:
This command cancels the blanking of the on-screen display.

Command:
  02H 15H 00H 00H 00H 17H

Response: At the time of a success
  22H 15H 01H xxH 00H CKS
          (*1) (*2)   (*3)

Response: At the time of a failure
  A2H 15H 01H xxH 02H DATA01 DATA02 CKS
          (*1) (*2)   (*4)   (*3)

[030. GAIN ADJUST]
****
*direct setting of volume

*volume increment/decrement
*direct setting of brightness
*brightness increment/decrement
*direct setting of color
*color increment/decrement
*direct setting of contrast
*contrast increment/decrement
*direct setting of sharpness
*sharpness increment/decrement
*direct setting of tint
*tint increment/decrement

   brightness
   contrast
   color
   tint<hue>
   sharpness
     Not supported "LT170","VT60 series","VT70 series","VT80 series", "VT90 series"
     Not supported "HT410/HT510","LT180/LT25/LT30/LT35"

   volume
     Not supported "LT170","VT60 series","VT70 series" (except "VT80 series, VT90 series")
     Not supported "HT410/HT510","LT180/LT25/LT30/LT35"

Command:
  03H 10H 00H 00H 05H DATA01 .. DATA05 CKS

     DATA01 : 00H (Brightness)
             01H (Contrast)
             02H (Color)
             03H (Tint<Hue>)
             04H (Sharpness)
             05H (Volume)

     DATA02 : FFH (except "Volume")
             00H ("Volume" only)

     DATA03 : 00H (direct settings)
             01H (increment/decrement)

     DATA04 : lower data (8bit)
     DATA05 : upper data (8bit)

   ex.1) volume direct setting (value = 20)

      DATA01 : 05H (Volume)
      DATA02 : 00H ("Volume" only)
      DATA03 : 00H (direct setting)
      DATA04 : 14H (lower data : 20 = 0014<Hex>)
      DATA05 : 00H (upper data : 20 = 0014<Hex>)

   ex.2) brightness increment (value = +1)

      DATA01 : 00H (Brightness)
      DATA02 : FFH (except "Volume")
      DATA03 : 01H (increment/decrement)
      DATA04 : 01H (lower data : +1 = 0001<Hex>)
      DATA05 : 00H (upper data : +1 = 0001<Hex>)

   ex.3) contrast decrement (value = -1)
      DATA01 : 01H (Contrast)
      DATA02 : FFH (except "Volume")

```
          DATA03 : 01H (increment/decrement)
          DATA04 : FFH (lower data : -1 = FFFF<Hex>)
          DATA05 : FFH (upper data : -1 = FFFF<Hex>)
```

030-2. VOLUME ADJUST
****
Function:
This command sets the volume.

Command:
```
  03H  10H  00H  00H  05H  DATA01 .. DATA05  CKS
                                              (*3)
```
  Data Portion Contents

  DATA01   05H fixed

  DATA02   Setting items
          00H : Volume
          01H : Bass
          02H : Treble
          03H : Balance

  DATA03   Setting mode
          00H : Absolute value specification
          01H : Relative value specification

  DATA04   Setting Value (Lower ranking 8 bits)
  DATA05   Setting Value (Upper ranking 8 bits)

Response: At the time of a success
```
  23H  10H  01H  xxH  02H  DATA01  DATA02  CKS
            (*1)  (*2)                      (*3)
```

  Data Portion Contents

  DATA01 .. 02 Results
          0000H : Normal
          0000H Other : Error

Response: At the time of a failure
```
  A3H  10H  01H  xxH  02H  DATA01  DATA02  CKS
            (*1)  (*2)          (*4)        (*3)
```

Command example:
* Setting Volume to "10"
```
  03H  10H  00H  00H  05H  05H  00H  00H  0AH  00H  27H
```

030-12. IMAGE MODE ADJUST
****
Function:
This command adjusts the Image Mode.

Command:
```
  03H  10H  00H  00H  05H  DATA01 .. DATA05  CKS
                                              (*3)
```
  Data Portion Contents

  DATA01 .. 02 Adjustment items

DATA01	DATA02	Adjustment items
18H	00H	Aspect Ratio Input (!)

DATA03   Adjustment mode
      00H : Absolute value specification
      01H : Relative value specification

DATA04   Adjustment value (Lower ranking 8 bits)
DATA05   Adjustment value (Upper ranking 8 bits)

Response: At the time of a success
  23H 10H 01H xxH 02H DATA01 DATA02 CKS
        (*1) (*2)   (*3)

Data Portion Contents

DATA01 .. 02 Results
      0000H : Normal
      0000H Other : Error

Response: At the time of a failure
  A3H 10H 01H xxH 02H DATA01 DATA02 CKS
        (*1) (*2)   (*4)   (*3)

Command example:
* Setting the Aspect Ratio to Letter Box (Wide Zoom)
  03H 10H 00H 00H 05H 18H 00H 00H 01H 00H 31H

(!) Method of Specifying the Absolute Value of Special Adjustment Values

	DATA04	DATA05
Aspect Ratio 4:3 (Window) (PH1000 Series)	00H	00H
Aspect Ratio Normal / Auto (NP600, NP610, NP2200, NP62, NP64, NP216, P420,P501, PA600, U300, V300, V281 Series)	00H	00H
Aspect Ratio 1.25:1(5:4)	00H	00H
Aspect Ratio Letter Box (PA600, PX750, PH1000 Series)	01H	00H
Aspect Ratio 1.33:1(4:3)	01H	00H
Aspect Ratio Wide Zoom (NP600, NP610, NP2200, NP62, NP64, NP216, P420, P501, V300, VE281 Series)	01H	00H
Aspect Ratio Wide Screen (PA600, PX750, PH1000 Series)	02H	00H
Aspect Ratio 1.78:1(16:9)	02H	00H
Aspect Ratio Cinema / 16:9 (NP600, NP610, NP2200, NP62, NP64, NP215, P420, P501, PA600, U300, V300, VE281 Series)	02H	00H
Aspect Ratio Crop	03H	00H
Aspect Ratio Wide Zoom (NP4000, NP4100, PA600, PX750, PH1000 Series)	03H	00H
Aspect Ratio Native (NP600, NP610, NP2200, NP62, NP64, NP216, P420, P501, U300, V300, VE281 Series)	03H	00H
Aspect Ratio 1.85:1	03H	00H
Aspect Ratio Zoom	03H	00H
Aspect Ratio 4:3 Fill (PA600, PX750, PH1000 Series)	04H	00H
Aspect Ratio 4:3 (NP600, P420, U300, V300, VE281 Series)	04H	00H
Aspect Ratio 2.35:1	04H	00H
Aspect Ratio Normal	05H	00H
Aspect Ratio Auto (NP4000, NP4100 Series)	05H	00H
Aspect Ratio 15:9 (NP600, NP610, NP2200, NP216, P420, P501, U300, V300, VE281 Series)	05H	00H
Aspect Ratio Full	06H	00H
Aspect Ratio 16:10 (NP600, NP610, NP2200, NP216, P420, P501, U300, V300, VE281 Series)	06H	00H
Aspect Ratio Zoom	07H	00H
Aspect Ratio Letter Box (NP600, NP610, NP2200, NP216, P420, P501 Series)	07H	00H
Aspect Ratio Cinema	08H	00H
Aspect Ratio V-Zoom	09H	00H
Aspect Ratio Stadium	0AH	00H
Aspect Ratio 5:4 (NP61, NP64, NP216, PA600, U300, V300, VE281 Series)	0BH	00H
Aspect Ratio 16:10 (PA600, PX750, PH1000 Series)	0CH	00H
Aspect Ratio 15:9 (PA600, PX750, PH1000 Series)	0DH	00H
Aspect Ratio Native (NP4000, NP4100, PA600 Series)	0EH	00H

037. INFORMATION REQUEST
****
Function:
This command acquires the projector information.

Command:
  03H 8AH 00H 00H 00H 8DH

Response: At the time of a success
  23H 8AH 01H xxH 62H DATA01 .. DATA98 CKS
          (*1) (*2)   (*3)

  Data Portion Contents

  DATA01 .. 49 : Projector name (NULL termination character string)
  DATA50 .. 82 : Reserved
  DATA83 .. 86 : Lamp Hour Meter (second) (!)
  DATA87 .. 90 : Filter Usage   (second)
  DATA91 .. 94 : Panel Usage   (second)
  DATA95 .. 98 : Projector Usage (second)

Response: At the time of a failure
  A3H 8AH 01H xxH 02H DATA01 DATA02 CKS
          (*1) (*2)   (*4)   (*3)

Supplement:
 (!) Lamp Hour Meter
 This is the timer for normal lamp mode conversion.
  Lamp Timer Acquisition Examples
  DATA83 DATA84 DATA85 DATA86 : Lamp Timer
    00H   00H   00H   00H : Total 0 seconds
    C0H   65H   52H   00H : Total 5400000 seconds/3600 = 1500 hours
    00H   E4H   57H   00H : Total 5760000 seconds/3600 = 1600 hours
  Calculator Procedure
  1) Set calculator to HEX
  2) Punch in DATA86 DATA85 DATA84 DATA83 (005265C0)
  3) Change from HEX to Decimal - value will change to 5400000 seconds

* The projector's hours of use is displayed in terms of Normal mode values.
It is also displayed with truncated a number after decimal point.

037-1. LAMP INFORMATION REQUEST
****
Function:
This command acquires the lamp information (in terms of Normal mode (values) of projector.

Command:
  03H 8CH 00H 00H 00H 8FH

Response: At the time of a success
  23H 8CH 01H xxH 10H DATA01 .. DATA16 CKS
          (*1) (*2)   (*3)

Data Portion Contents

DATA01 .. 04 : Lamp Hour Meter(Normal mode) (second)
DATA05 .. 08 : Reserved
DATA09 .. 12 : Lamp Use Warning Starting Time(Normal mode) (second)
DATA13 .. 16 : Lamp Use Prohibited Time(Normal mode) (second)

Response: At the time of a failure
  A3H 8CH 01H xxH 02H DATA01 DATA02 CKS
        (*1)   (*2)   (*4)   (*3)

Supplement:

  Example for acquiring remaining lamp time (in terms of Normal mode values)

 : Lamp Hour Meter (Normal mode)
  DATA01 DATA02 DATA03 DATA04
   30H   2AH   00H   00H :   10800 seconds

   Calculator Procedure
   1) Set calculator to HEX
   2) Punch in DATA04 DATA03 DATA02 DATA01 (00002A30)
   3) Change from HEX to Decimal - value will change to 10800 seconds

 : Starting time for lamp usage warning message (in terms of Normal mode values)
  DATA09 DATA10 DATA11 DATA12
   00H   DDH   6DH   00H : 7200000 second

   Calculator Procedure
   1) Set calculator to HEX
   2) Punch in DATA12 DATA11 DATA10 DATA09 (006DDD00)
   3) Change from HEX to Decimal - value will change to 7200000 seconds

   Lamp remaining time (in terms of Normal mode values)
   = (7200000 - 10800) / 3600 = 1997 hour

 037-2. LAMP INFORMATION REQUEST 2
****
Function:
This command acquires lamp remaining amount.

Command:
  03H 94H 00H 00H 00H 97H

Response: At the time of a success
  23H 94H 01H xxH 05H DATA01 .. DATA05 CKS
        (*1)   (*2)   (*3)

Data Portion Contents

DATA01 .. 04 Reserved
DATA05   lamp remaining amount (100% to -10%)

Response: At the time of a failure
  A3H 94H 01H xxH 02H DATA01 DATA02 CKS
        (*1)   (*2)   (*4)   (*3)

037-4. LAMP INFORMATION REQUEST 3
****
Function:
This command acquires the information on the projector lamp in Eco mode.

Command:
  03H 96H 00H 00H 02H DATA01 DATA02 CKS
                                                              (*3)

  Data Portion Contents

  DATA01   Target
        00H : Lamp1
        01H : Lamp2

  DATA02   item
          00H : Lamp Hour Meter (second) (!)
          01H : Lamp usage time (second) (!!)
          04H : lamp remaining amount until lamp warning message
              (100% to -10%)
          05H : Lamp counter (Normal mode) (second) (!!!)
          06H : Lamp counter (Eco mode) (second) (!!!)
          08H : Remaining time until lamp warning message starts
              to appear (in terms of specified values)
          09H : Remaining time until lamp warning message starts
              to appear (in terms of Normal mode values)
          0AH : Remaining time until lamp warning message starts
              to appear (in terms of Eco mode values)
          10H : Remaining time until inhibition of lamp usage
              (in terms of specified values)
          11H : Remaining time until inhibition of lamp usage
              (in terms of Normal mode values)
          12H : Remaining time until inhibition of lamp usage
              (in terms of Eco mode values)

Response: At the time of a success
  23H 96H 01H xxH 06H DATA01 .. DATA06 CKS
          (*1) (*2)   (*3)

  Data Portion Contents

  DATA01   same values as DATA01 of the command
  DATA02   same values as DATA02 of the command
  DATA03 .. 06 Acquired information

Response: At the time of a failure
  A3H 96H 01H xxH 02H DATA01 DATA02 CKS
          (*1)   (*2)   (*4)   (*3)

Supplement:
  * In case of acquiring lamp's use of hours
  03H 96H 00H 00H 02H 00H 01H 9CH

  Example of acquisition
  DATA03 DATA04 DATA05 DATA06: lamp's use of hours
    50H   46H   00H   00H: 18000 seconds

  Calculator Procedure
  1) Set calculator to HEX

2) Punch in DATA06 DATA05 DATA04 DATA03 (00004650)
3) Change from HEX to Decimal - value will change to 18000 seconds

Lamp's use of hours = 18000/3600 = 5 hours

   * In case of acquiring the remaining time until lamp warning message starts to appear (in terms of specified values)
   03H 96H 00H 00H 02H 00H 08H A3H

   Example of acquisition
   DATA03 DATA04 DATA05 DATA06: Remaining time
     40H   7EH   05H   00H: 360000 seconds

   Calculator Procedure
   1) Set calculator to HEX
   2) Punch in DATA06 DATA05 DATA04 DATA03 (00057E40)
   3) Change from HEX to Decimal - value will change to 360000 seconds

   Remaining time until lamp warning message starts to appear
   = 360000/ 3600= 100 hours
(!) Lamp Hour Meter
This is the timer for normal lamp mode conversion.
(!!) Lamp usage time
This is the lamp total usage. It is displayed in the projector's menu.
(!!!) NP4000/4001, NP4100/4100W : This function is not supported.

 037.6. CARBON SAVINGS INFORMATION REQUEST
****
Function:
This command acquires the Carbon Saving values on the projector.

Command:
  03H 9AH 00H 00H 01H DATA01 CKS
                     (*3)

  Data Portion   Contents

  DATA01   Acquirement items
       00H : Total Carbon Savings
       01H : Carbon Savings during operation

Response: At the time of a success
  23H 9AH 01H xxH 09H DATA01 to DATA09 CKS
      (*1) (*2)   (*3)

  Data Portion   Contents

  DATA01   Same as DATA01 of the transmit data
  DATA02 to 05   Carbon Savings (Kilogram Maximum: 99999[kg])
  DATA06 to 09   Carbon Savings (Milligram Maximum:999999[mg])

Response: At the time of a failure
  A3H 9AH 01H xxH 02H DATA01 DATA02 CKS
      (*1) (*2)   (*4)   (*3)

Supplement:
  Example for Total Carbon Savings
  DATA02 DATA03 DATA04 DATA05 : Kilogram
   9CH   09H   00H   00H : 2460 [kg]

DATA06 DATA07 DATA08 DATA09 : Milligram
  06H   F9H   00H   00H : 63750 [mg]

Total Carbon Savings
= (2460 * 1000) + (63750 / 1000) = 2460063.75 [g]
= 2460 + (63750 / 1000 / 1000)   = 2460.06375 [kg]

 037-7. LAMP INFORMATION REQUEST 4
****
Function:
This command acquires the information on the projector lamp.

Command:
  03H 9BH 00H 00H 03H DATA01 DATA02 DATA03 CKS
                                  (*3)
  Data Portion   Contents

  DATA01   Target
                00H : Lamp1
                01H : Lamp2
  DATA02   Unit(!4)
                00H : Second
                01H : Reserved
                02H : Hour
  DATA03   Item
                00H : Lamp Hour Meter (second)(!2)
                01H : Lamp usage time (second)(!3)
                04H : lamp remaining amount until lamp warning message
                   (100% to -X%(!1))
                05H : Lamp usage time (Normal mode)(second) (!5)
                06H : Lamp usage time (Eco mode)(second) (!5)
                08H : Remaining time until lamp warning message starts
                      to appear (in terms of specified values)
                09H : Remaining time until lamp warning message starts
                      to appear (in terms of Normal mode values)
                0AH : Remaining time until lamp warning message starts
                      to appear (in terms of Eco mode values)
                10H : Remaining time until inhibition of lamp usage
                      (in terms of specified values)
                11H : Remaining time until inhibition of lamp usage
                      (in terms of Normal mode values)
                12H : Remaining time until inhibition of lamp usage
                      (in terms of Eco mode values)

Response: At the time of a success
  23H 9BH 01H xxH 07H DATA01 to DATA07 CKS
      (*1) (*2)   (*3)

  Data Portion   Contents

  DATA01   same values as DATA01 of the command
  DATA02   same values as DATA02 of the command
  DATA03   same values as DATA03 of the command
  DATA04 to 07   Acquired information

Response: At the time of a failure
  A3H 9BH 01H xxH 02H DATA01 DATA02 CKS
      (*1) (*2)   (*4)   (*3)

Supplement:
  * In case of acquiring lamp's use of hours
  03H 9BH 00H 00H 03H 00H 00H 01H CKS

  Example of acquisition
  DATA04 DATA05 DATA06 DATA07 : lamp's use of hours
  50H   46H   00H   00H   : 18000 seconds

  Lamp Usage = 18000 / 3600 = 5 hour

(!1) X = 100 - ((Lamp Use Prohibited Time * 100) / Lamp Use Warning Starting Time)
     Example) The case of Lamp Use Prohibited Time 2100[H]• A
           Lamp Use Warning Starting Time 2000[H] Model.
     X = 100 - ((2100 * 100) / 2000) = -5[%]
(!2) Lamp Hour Meter
     This is the timer for normal lamp mode conversion.
(!3) Lamp usage time
     This is the lamp total usage. It is displayed in the projector's menu.
(!4) This setting is ignored, if the Item's unit is not time.
(!5) NP4000/4001, NP4100/4100W : This function is not supported.

 038. LAMP MODE REQUEST
****
Function:
This command acquires the setting of the lamp mode of projector.

Command:
  03H B0H 00H 00H 01H 07H BBH

Response: At the time of a success
  23H B0H 01H xxH 02H DATA01 DATA02 CKS
            (*1)   (*2)   (*3)

  Data Portion   Contents

  DATA01   07H fixed
  DATA02   Setting Value

Setting Value	(1)	(2)	(3)	(4)
00H	Normal	Off	Off	Off
01H	Eco	Auto	Auto	Auto Eco
02H	x	Eco1	Eco1	Normal
03H	x	x	Eco2	Eco

Response: At the time of a failure
  A3H B0H 01H xxH 02H DATA01 DATA02 CKS
            (*1)   (*2)   (*4)   (*3)

 039. LAMP MODE SET
****
Function:
This command sets the lamp mode of projector.

Command:
  03H B1H 00H 00H 02H DATA01 DATA02 CKS

(*3)

Data Portion   Contents

DATA01   07H fixed
DATA02   Setting Value

Setting Value	(1)	(2)	(3)	(4)
00H	Normal	Off	Off	Off
01H	Eco	Auto	Auto	Auto Eco
02H	x	Eco1	Eco1	Normal
03H	x	x	Eco2	Eco

Response: At the time of a success
  23H B1H 01H xxH 02H DATA01 DATA02 CKS
         (*1) (*2)   (*3)

Data Portion   Contents

DATA01   07H fixed
DATA02   Results
              00H : Normal
              01H : Error

Response: At the time of a failure
  A3H B1H 01H xxH 02H DATA01 DATA02 CKS
         (*1) (*2)   (*4)   (*3)

 046. WXGA MODE SETTING REQUEST
****
Function:
This command acquires the setting of the WXGA Mode of projector.

Command:
  03H B0H 00H 00H 01H C3H 77H

Response: At the time of a success
  23H B0H 01H xxH 02H DATA01 DATA02 CKS
         (*1) (*2)   (*3)

Data Portion   Contents

DATA01   C3H fixed
DATA02   Setting Value
              00H : OFF
              01H : ON

Response: At the time of a failure
  A3H B0H 01H xxH 02H DATA01 DATA02 CKS
         (*1) (*2)   (*4)   (*3)

 049. WXGA MODE SETTING SET
****
Function:
This command sets the WXGA Mode of projector.

Command:
    03H B1H 00H 00H 02H DATA01 DATA02 CKS
                                                    (*3)

    Data Portion   Contents

    DATA01   C3H fixed
    DATA02   Setting Value
                 00H : OFF
                 01H : ON

Response: At the time of a success
    23H B1H 01H xxH 02H DATA01 DATA02 CKS
            (*1) (*2)   (*3)

    Data Portion   Contents

    DATA01   C3H fixed
    DATA02   Results
                 00H : Normal
                 01H : Error

Response: At the time of a failure
    A3H B1H 01H xxH 02H DATA01 DATA02 CKS
            (*1) (*2)   (*4)   (*3)

===
 6. Response
 ----
* At the time of a success(ACK)

This returns ACK without adding data portion to the command that does
not request data.
This returns ACK with adding data to the data portion for the command
that requests data.

* At the time of a failure(NAK)

This adds a cause of not accepting the command to data portion to
return it.

(Example) Power On

 Command:
  02H 00H 00H 00H 00H CKS

Response:
  A2H 00H 01H 40H 02H DATA01 DATA02 CKS

===
 7. Table of Response Error Codes

DATA01	DATA2	
Error Types	Error description	Error contents
00H	00H	Unknown command.
00H	01H	This current model does not support this function.
01H	00H	Invalid values specified.
01H	01H	Specified terminal is unavailable or cannot be selected.
02H	03H	Setting not possible.
02H	0DH	Power Off inhibited.

050. REMOTE KEY CODE
****
Function:
This command sends remote control key codes of projector.

Command:
  02H 0FH 00H 00H 02H DATA01 DATA02 CKS
                                                        (*3)
  Data Portion Contents

  DATA01 .. 02 : Remote control key code (Word type)
          Key number DATA01 DATA02   Key name
          ----
              1   01H   00H   POWER
              2   02H   00H   POWER ON (!!)
              3   03H   00H   POWER OFF (!!)
              4   04H   00H   SOURCE (AUTO) (!!)
              5   05H   00H   AUTO (!) (!!)
              6   06H   00H   MENU (!!) (!!!)
              7   07H   00H   UP (!!) (!!!)
              8   08H   00H   DOWN (!!) (!!!)
              9   09H   00H   RIGHT (!!) (!!!)
             10   0AH   00H   LEFT (!!) (!!!)
             11   0BH   00H   ENTER (!!) (!!!)
             12   0CH   00H   CANCEL (!!) (!!!)
             13   0DH   00H   HELP (!!) (!!!)
             14   0EH   00H   POINTER
             15   0FH   00H   MAGNIFY UP
             16   10H   00H   MAGNIFY DOWN
             17   11H   00H   PICTURE MUTE
             18   12H   00H   SOUND MUTE
             19   13H   00H   MUTE (!!)
             20   14H   00H   FOCUS UP
             21   15H   00H   FOCUS DOWN
             22   16H   00H   ZOOM UP
             23   17H   00H   ZOOM DOWN
             30   1EH   00H   STORE
             31   1FH   00H   MUTE ALL OFF
             37   25H   00H   R
             38   26H   00H   G
             39   27H   00H   B
             40   28H   00H   OSD MUTE
             41   29H   00H   PICTURE
             42   2AH   00H   WHITE BAL
             43   2BH   00H   IMAGE
             44   2CH   00H   TEST

45	2DH	00H	UNDO
46	2EH	00H	1
47	2FH	00H	2
48	30H	00H	3
49	31H	00H	4
50	32H	00H	5
51	33H	00H	6
52	34H	00H	7
53	35H	00H	8
54	36H	00H	9
55	37H	00H	0
56	38H	00H	POSITION
57	39H	00H	INFO.
58	3AH	00H	PIXEL
59	3BH	00H	KEYSTONE
60	3CH	00H	AMPLITUDE
61	3DH	00H	INPUT LIST
71	47H	00H	PICMUTE ON (!!)
72	48H	00H	PICMUTE OFF (!!)
73	49H	00H	SNDMUTE ON (!!)
74	4AH	00H	SNDMUTE OFF (!!)
75	4BH	00H	RGB1(*5) (!!)
76	4CH	00H	RGB2(*5)
77	4DH	00H	RGB3
78	4EH	00H	YCBCR
79	4FH	00H	VIDEO1 (!!)
80	50H	00H	VIDEO2
81	51H	00H	S-VIDEO1 (!!)
82	52H	00H	S-VIDEO2
83	53H	00H	DIGITAL1
84	54H	00H	DIGITAL2
85	55H	00H	PC CARD
96	60H	00H	BS
132	84H	00H	VOLUME UP (!!)
133	85H	00H	VOLUME DOWN (!!)
134	86H	00H	KEYSTONE UP (!!)
135	87H	00H	KEYSTONE DOWN (!!)
136	88H	00H	SLIDE UP
137	89H	00H	SLIDE DOWN
138	8AH	00H	FREEZE (!!)
158	9EH	00H	FILE
159	9FH	00H	PAGE
163	A3H	00H	ASPECT (!!)
164	A4H	00H	VIDEO3
165	A5H	00H	VIDEO4
166	A6H	00H	S-VIDEO3
167	A7H	00H	S-VIDEO4
200	C8H	00H	ZOOM
201	C9H	00H	FOCUS
214	D6H	00H	3D REFORM
215	D7H	00H	SOURCE (!!)
216	D8H	00H	RGB(*5) Toggle (!!)
217	D9H	00H	VIDEO Toggle (!!)
218	DAH	00H	3D REFORM RESET
221	DDH	00H	AUTO (SHORT)
222	DEH	00H	AUTO (LONG)
223	DFH	00H	PICTURE MANAGEMENT (!!)
225	E1H	00H	COMPONENT (!!)
226	E2H	00H	ZOOM POS UP (HT)
227	E3H	00H	ZOOM POS DOWN (HT)
228	E4H	00H	DVI/DVI (DIGITAL) (*6) (!!)
229	E5H	00H	LAN

```
            232    E8H    00H    D ZOOM UP (WT)
            233    E9H    00H    D ZOOM DOWN (WT)
            237    EDH    00H     PSCODE(Passcode screen will be displayed at once)
            238    EEH    00H    LAMP MODE (!!!)


Response: At the time of a success
   22H  0FH  01H  xxH  01H  DATA01  CKS
            (*1)  (*2)                (*3)



Data Portion Contents

   ----------------------------------------------------------------
   DATA01      Results
           00H : Normal
           FFH : Error

Response: At the time of a failure
   A2H  0FH  01H  xxH  02H  DATA01  DATA02  CKS
            (*1)  (*2)            (*4)          (*3)

(!) About AUTO key
The MT series model with the built-in image sensor does not support the AUTO key. Use the AUTO (SHORT) key.

(!!)  HT10 series, LT180, LT30 series, NP40 series and NP4000 series
(!!!) VT60 series, VT70 series, VT80 series, and VT90 series


Command example:
 * Sending the AUTO key code
   02H  0FH  00H  00H  02H  05H  00H  18H

 * Sending the AUTO (SHORT) key code
   02H  0FH  00H  00H  02H  DDH  00H  F0H

   -----------------------------------------

 * cycle/toggle volume mute
 * cycle/toggle picture mute
 * cycle/toggle picture freeze

   02H  0FH  00H  00H  02H  DATA01  DATA02  CKS

   Data Portion   Contents
   ----------------------------------------------------------------
   DATA01/DATA02  12H/00H : Volume mute
   DATA01/DATA02  11H/00H : Picture mute
   DATA01/DATA02  8AH/00H : Picture freeze

   -------------------------------------------
 * cycle aspect ratio

   02H  0FH  00H  00H  02H  DATA01  DATA02  CKS

   Data Portion   Contents
   ----------------------------------------------------------------
   DATA01/DATA02  A3H/00H : Aspect Ratio

   -------------------------------------------
 * all menu functionality (digits 0-9, cursor movement, enter, select, return, back, clear, etc)

   02H  0FH  00H  00H  02H  DATA01  DATA02  CKS
```

053. LENS CONTROL
****

Function:
This command controls the lens. (Time specification)

Command:
```
02H  18H  00H  00H  02H  DATA01  DATA02  CKS
                               (*3)
```
Data Portion Contents
```
------------------------------------------------------------------
DATA01      Target
        00H : Zoom
        01H : Focus

DATA02      Contents
        00H : Stops
        01H : Drives for 1 second in the direction of plus
        02H : Drives for 0.5 second in the direction of plus
        03H : Drives for 0.25 second in the direction of plus
        7FH : Drives in the direction of plus
        81H : Drives in the direction of minus
        FDH : Drives for 0.25 second in the direction of minus
        FEH : Drives for 0.5 second in the direction of minus
        FFH : Drives for 1 second in the direction of minus
```

Response: At the time of a success
```
22H  18H  01H  xxH  01H  DATA01  CKS
    (*1) (*2)      (*3)
```

Data Portion Contents
```
-----------------------------------------------------------------
DATA01      Results
        00H : Normal
        01H : Error
```

Response: At the time of a failure
```
A2H  18H  01H  xxH  02H  DATA01  DATA02  CKS
    (*1) (*2)      (*4)      (*3)
```

Supplement:
While the lens is being driven, the same command can be issued for
control purposes without causing a stop.

053-1. LENS CONTROL REQUEST
****

Function:
This command acquires the information on the lens control.

Command:
```
02H  1CH  00H  00H  02H  DATA01  DATA02  CKS
                               (*3)
```

```
   Data Portion  Contents
   ----------------------------------------------------------------
   DATA01      Target
               00H : Zoom
               01H : Focus
               02H : Lens Shift (H)
               03H : Lens Shift (V)

   DATA02      00H fixed

Response: At the time of a success
   22H  1CH  01H  xxH  08H  DATA01 .. DATA08  CKS
        (*1) (*2)                  (*3)

   Data Portion  Contents
   ----------------------------------------------------------------
   DATA01    same values as DATA01 of the command
   DATA02    same values as DATA02 of the command
   DATA03    Maximum adjustable range (Lower ranking 8 bits)
   DATA04    Maximum adjustable range (Upper ranking 8 bits)
   DATA05    Minimum adjustable range (Lower ranking 8 bits)
   DATA06    Minimum adjustable range (Upper ranking 8 bits)
   DATA07    Current values (Lower ranking 8 bits)
   DATA08    Current values (Upper ranking 8 bits)

Response: At the time of a failure
   A2H  1CH  01H  xxH  02H  DATA01  DATA02  CKS
        (*1) (*2)        (*4)      (*3)
```

053-2. LENS CONTROL 2
****
Function:
This command controls the lens.

Command:
```
   02H  1DH  00H  00H  04H  DATA01 .. DATA04  CKS
                                (*3)

   Data Portion  Contents
   ----------------------------------------------------------------
   DATA01      Target
               00H : Zoom
               01H : Focus
               02H : Lens Shift (H)
               03H : Lens Shift (V)
               FFH : Stop (!)

   DATA02      Setting mode
               00H : Absolute value specification
               02H : Relative value specification

   DATA04      Adjustment value ( Lower ranking 8 bits )
   DATA05      Adjustment value ( Upper ranking 8 bits )

Response: At the time of a success
   22H  1DH  01H  xxH  02H  DATA01  DATA02  CKS
        (*1) (*2)            (*3)

   Data Portion  Contents
```

```
    ----------------------------------------------------------------
    DATA01    same values as DATA01 of the command
    DATA02    same values as DATA02 of the command

Response: At the time of a failure
   A2H  1DH  01H  xxH  02H  DATA01  DATA02  CKS
        (*1) (*2)          (*4)     (*3)

(!)
If specifying • gStop• h, Setting mode and adjustment values are not
referenced
```

 053-3. LENS MEMORY CUSTOM SET
```
***********************************************************************
```
Function:
This command executes the "Use Custom Point" or "Set Custom Point".

```
Command:
   02H  1EH  00H  00H  01H  DATA01 CKS
                        (*3)
   Data Portion  Contents
   ----------------------------------------------------------------
   DATA01      Target
           00H : Use Custom Point
           01H : Set Custom Point

Response: At the time of a success
   22H  1EH  01H  xxH  02H  DATA01  DATA02  CKS
        (*1) (*2)           (*3)

   Data Portion  Contents
   ----------------------------------------------------------------
   DATA01      same values as DATA01 of the command
   DATA02      Results
           00H : Normal
           01H : Error

Response: At the time of a failure
   A2H  1EH  01H  xxH  02H  DATA01  DATA02  CKS
        (*1) (*2)          (*4)     (*3)
```

 053-4. LENS MEMORY REFERENCE SET
```
***********************************************************************
```
Function:
This command executes the "Use Reference Point" or "Set Reference
Point".

```
Command:
   02H  1FH  00H  00H  01H  DATA01 CKS
                        (*3)
   Data Portion  Contents
   ----------------------------------------------------------------
   DATA01      Target
           00H : Use Reference Point
           01H : Set Reference Point
           02H : Return to Factory Default( Reset )
```

Response: At the time of a success
　22H　1FH　01H　xxH　02H　DATA01　DATA02　CKS
　　　　(*1) (*2)　　　　　　　(*3)

　Data Portion　Contents
　--
　DATA01　　　same values as DATA01 of the command
　DATA02　　　Results
　　　　　00H : Normal
　　　　　01H : Error

Response: At the time of a failure
　A2H　1FH　01H　xxH　02H　DATA01　DATA02　CKS
　　　　(*1) (*2)　　　(*4)　　(*3)

　053-5. LENS MEMORY CONTROL REQUEST
　***
Function:
This command acquires the information on the lens memory function.

Command:
　02H　20H　00H　00H　01H　DATA01 CKS
　　　　　　　　　　　(*3)
　Data Portion　Contents
　--
　DATA01　　　Target
　　　　　00H : Use Point on Signal Change
　　　　　01H : Picture mute during lens shift

Response: At the time of a success
　22H　20H　01H　xxH　02H　DATA01　DATA02　CKS
　　　　(*1) (*2)　　　　　　(*3)

　Data Portion　Contents
　--
　DATA01　　　same values as DATA01 of the command
　DATA02　　　Setting Value
　　　　　00H : Inactive
　　　　　01H : Active

Response: At the time of a failure
　A2H　20H　01H　xxH　02H　DATA01　DATA02　CKS
　　　　(*1) (*2)　　　(*4)　　(*3)

　053-6. LENS MEMORY CONTROL
　***
Function:
This command controls the lens memory function.

Command:
　02H　21H　00H　00H　02H　DATA01　DATA02　CKS
　　　　　　　　　　　　　(*3)
　Data Portion　Contents
　--
　DATA01　　　Target

```
              00H : Use Point on Signal Change
              01H : Picture mute during lens shift
   DATA02      Setting Value
              00H : Inactive
              01H : Active

Response: At the time of a success
   22H  21H  01H  xxH  02H  DATA01  DATA02  CKS
       (*1) (*2)              (*3)

   Data Portion  Contents
   ------------------------------------------------------------------
   DATA01      same values as DATA01 of the command
   DATA02      Results
           00H : Normal
           01H : Error

Response: At the time of a failure
   A2H  21H  01H  xxH  02H  DATA01  DATA02  CKS
       (*1) (*2)        (*4)      (*3)
```

 060. GAIN PARAMETER REQUEST 2
****
Function:
This command acquires the adjustment values.

```
Command:
   03H  04H  00H  00H  03H  DATA01 .. DATA03  CKS
                                              (*3)
   Data Portion    Contents
   ----------------------------------------------------------------
   DATA01 .. 02   Acquirement items (!)
   DATA03        00H fixed
Response: At the time of a success
   23H  04H  01H  xxH  0DH  DATA01 .. DATA13  CKS
          (*1)  (*2)                   (*3)

   Data Portion    Contents
   ----------------------------------------------------------------
   DATA01        Adjustment status
              00H : Displaying impossible
              01H : Adjustment impossible
              02H : Adjustment possible
              FFH : Selected gain is not available.
   DATA02        Maximum adjustment value (Lower ranking 8 bits)
   DATA03        Maximum adjustment value (Upper ranking 8 bits)
   DATA04        Minimum adjustment value (Lower ranking 8 bits)
   DATA05        Minimum adjustment value (Upper ranking 8 bits)
   DATA06        Default adjustment value (Lower ranking 8 bits)
   DATA07        Default adjustment value (Upper ranking 8 bits)
   DATA08        Current value (Lower ranking 8 bits)
   DATA09        Current value (Upper ranking 8 bits)
   DATA10 .. 13  Reserved


Response: At the time of a failure
   A3H  04H  01H  xxH  02H  DATA01  DATA02  CKS
            (*1)  (*2)            (*4)          (*3)
```

DATA01	DATA02	Acquirement name
00H	00H	Picture / Brightness
01H	00H	Picture / Contrast
02H	00H	Picture / Color
03H	00H	Picture / Hue
04H	00H	Picture / Sharpness
05H	00H	Volume
05H	01H	Sound / Bass
05H	02H	Sound / Treble
06H	00H	Blanking / Top
06H	01H	Blanking / Bottom
06H	02H	Blanking / Left
06H	03H	Blanking / Right
06H	04H	Blanking / On/Off
07H	00H	Image / Auto Adjust
08H	00H	Image / Position H
08H	01H	Image / Position V
09H	00H	Image / Pixel Adjust Clock
09H	01H	Image / Pixel Adjust Phase
0AH	00H	Image / Video Filter
0BH	00H	Image / Resolution
0CH	00H	Image / Amplitude H
0CH	01H	Image / Amplitude V
0DH	00H	Image / Input Signal Size H
0DH	01H	Image / Input Signal Size V
0EH	00H	Image / Output Signal Size H
0EH	01H	Image / Output Signal Size V
0FH	00H	Image / Output Position H
0FH	01H	Image / Output Position V
10H	00H	Image / Sync Protection Upper
10H	01H	Image / Sync Protection Lower
13H	00H	Color Temperature
14H	00H	White Balance / Brightness R
14H	01H	White Balance / Brightness G
14H	02H	White Balance / Brightness B
14H	03H	White Balance / Contrast R
14H	04H	White Balance / Contrast G
14H	05H	White Balance / Contrast B
15H	00H	Keystone H
15H	01H	Keystone V
16H	00H	Video Mode Gamma
18H	00H	Aspect Ratio / Input Signal
18H	01H	Aspect Ratio / Display Area
19H	00H	Motion Level
1AH	00H	Noise Reduction / Luminance
1BH	00H	Noise Reduction / Chrominance
1CH	00H	Select Color Matrix
1DH	00H	V-Aperture / Vertical Detail
21H	00H	W/B Compress White
21H	01H	W/B Compress Black / Black Expansion
22H	00H	Telecine
23H	00H	Y/C Delay
24H	00H	Dithering
25H	00H	VD Delay / Adjustment
25H	01H	VD Delay / Field Invert
25H	02H	VD Delay / Offset
26H	00H	Motion Select
27H	00H	Select Color Matrix Type
28H	00H	YTR Adjustment / Gain
28H	01H	YTR Adjustment / Tap
28H	02H	YTR Adjustment / Gain2
28H	03H	YTR Adjustment / Tap2
29H	00H	CTR Adjustment / Gain
29H	01H	CTR Adjustment / Tap
29H	02H	CTR Adjustment / Gain2
29H	03H	CTR Adjustment / Tap2
2AH	00H	Sharpness Tap
2BH	00H	White Correct / Position
2BH	01H	White Correct / Gain
2CH	00H	Black Correct / Position
2CH	01H	Black Correct / Gain
2CH	02H	Black Correct / Inv Gain
2DH	00H	Lamp Output
2EH	00H	Signal Level / Auto Control
2FH	00H	Signal Level / R/G/B Gain R
2FH	01H	Signal Level / R/G/B Gain G
2FH	02H	Signal Level / R/G/B Gain B
30H	00H	Signal Level / Y/Cb/Cr Gain Y
30H	01H	Signal Level / Y/Cb/Cr Gain Cb
30H	02H	Signal Level / Y/Cb/Cr Gain Cr
31H	00H	Signal Level / Y/Pb/Pr Gain Y
31H	01H	Signal Level / Y/Pb/Pr Gain Pb
31H	02H	Signal Level / Y/Pb/Pr Gain Pr
33H	00H	Clamp Timing
33H	01H	Clamp Timing / Adjust
34H	00H	Convergence / Red H
34H	01H	Convergence / Red V
34H	02H	Convergence / Green H
34H	03H	Convergence / Green V
34H	04H	Convergence / Blue H
34H	05H	Convergence / Blue V
35H	00H	Switcher Gain / R
35H	01H	Switcher Gain / G
35H	02H	Switcher Gain / B
36H	00H	Switcher Gain / Volume
37H	00H	Panel Size / H
37H	01H	Panel Size / V
38H	00H	Panel Position / H
38H	01H	Panel Position / V
39H	00H	Signal Level / White Gain
3AH	00H	Ref. White Bal. / Brightness R
3AH	01H	Ref. White Bal. / Brightness G
3AH	02H	Ref. White Bal. / Brightness B
3AH	03H	Ref. White Bal. / Contrast R
3AH	04H	Ref. White Bal. / Contrast G
3AH	05H	Ref. White Bal. / Contrast B
3BH	00H	Overscan
3CH	00H	Edge
3DH	00H	Synchronize / Off/On
3DH	01H	Synchronize / Adjust
3EH	00H	Input Signal Position / H
3EH	01H	Input Signal Position / V
3FH	00H	Signal Type
40H	00H	Color Correct / On/Off
40H	01H	Color Correct / G-R Gain
40H	02H	Color Correct / G-B Gain
40H	03H	Color Correct / B-R Gain
40H	04H	Color Correct / B-G Gain
40H	05H	Color Correct / R-G Gain
40H	06H	Color Correct / R-B Gain
40H	07H	Color Correct / U Gain
40H	08H	Color Correct / V Gain
41H	00H	HD Delay
42H	00H	Ref. Pedestal Level / U Level
42H	01H	Ref. Pedestal Level / V Level
43H	00H	Stack Clock
44H	00H	Sub Brightness / R
44H	01H	Sub Brightness / G
44H	02H	Sub Brightness / B
45H	00H	Y Contrast
46H	00H	Y Gamma Correction
47H	00H	Setup Level
47H	01H	Setup Level / Adjust
47H	02H	Setup Level / Correction
48H	00H	DCL
49H	00H	Color Space
4AH	00H	RGB Sharpness
4BH	00H	F-CLK Phase
4CH	00H	Color Correction / Mode
4CH	01H	Color Correction / Color Tune
4CH	02H	Color Correction / Yellow
4CH	03H	Color Correction / Magenta
4CH	04H	Color Correction / Cyan
4CH	05H	Color Correction / White
4CH	06H	Color Correction / Color Tune

4CH	07H	Color Correction / Yellow
4CH	08H	Color Correction / Magenta
4CH	09H	Color Correction / Cyan
4CH	0AH	Color Correction / White
4DH	00H	Through
4EH	00H	Ref. Auto White / Color Temp R
4EH	01H	Ref. Auto White / Color Temp G
4EH	02H	Ref. Auto White / Color Temp B
4FH	00H	Position
50H	00H	Screen Position
51H	00H	Sweet Vision
51H	01H	Sweet Vision / Split
52H	00H	Sub Color / R
52H	01H	Sub Color / G
52H	02H	Sub Color / B
53H	00H	Picture Management
54H	00H	Color Correction 2 Red
54H	01H	Color Correction 2 Green
54H	02H	Color Correction 2 Blue
54H	03H	Color Correction 2 Yellow
54H	04H	Color Correction 2 Magenta
54H	05H	Color Correction 2 Cyan
54H	06H	Color Correction 2 Color Gain
55H	00H	Color Temperature(Enable)
56H	00H	White Peaking
57H	00H	3D Y/C Separation
58H	00H	Deinterlace
59H	00H	Base Setting
5AH	00H	Cornerstone T-Left H
5AH	01H	Cornerstone T-Left V
5AH	02H	Cornerstone T-Right H
5AH	03H	Cornerstone T-Right V
5AH	04H	Cornerstone B-Right H
5AH	05H	Cornerstone B-Right V
5AH	06H	Cornerstone B-Left H
5AH	07H	Cornerstone B-Left V
5AH	08H	Cornerstone Execute
5BH	00H	Contrast Enhancement
5CH	00H	Variable Y/C Delay
5DH	00H	Tint Correction
5EH	00H	Y Gamma
5FH	00H	Ref. Color Cor. / Red
5FH	01H	Ref. Color Cor. / Green
5FH	02H	Ref. Color Cor. / Blue
5FH	03H	Ref. Color Cor. / Yellow
5FH	04H	Ref. Color Cor. / Magenta
5FH	05H	Ref. Color Cor. / Cyan
5FH	06H	Ref. Color Cor. / Color Gain
60H	00H	Saturation
61H	00H	Pincushion / Horizontal
61H	01H	Pincushion / Vertical
61H	02H	Pincushion / Balance
62H	00H	Digital Zoom / Zoom
62H	01H	Digital Zoom / Horizontal Position
62H	02H	Digital Zoom / Vertical Position
63H	00H	White Bal. Dual / Brightness R
63H	01H	White Bal. Dual / Brightness G
63H	02H	White Bal. Dual / Brightness B
63H	03H	White Bal. Dual / Contrast R
63H	04H	White Bal. Dual / Contrast G
63H	05H	White Bal. Dual / Contrast B
64H	00H	White Bal. Lamp1 / Brightness R
64H	01H	White Bal. Lamp1 / Brightness G
64H	02H	White Bal. Lamp1 / Brightness B
64H	03H	White Bal. Lamp1 / Contrast R
64H	04H	White Bal. Lamp1 / Contrast G
64H	05H	White Bal. Lamp1 / Contrast B
65H	00H	White Bal. Lamp2 / Brightness R
65H	01H	White Bal. Lamp2 / Brightness G
65H	02H	White Bal. Lamp2 / Brightness B
65H	03H	White Bal. Lamp2 / Contrast R
65H	04H	White Bal. Lamp2 / Contrast G
65H	05H	White Bal. Lamp2 / Contrast B
66H	00H	Color Cor. Dual / Red

66H	01H	Color Cor. Dual / Green
66H	02H	Color Cor. Dual / Blue
66H	03H	Color Cor. Dual / Yellow
66H	04H	Color Cor. Dual / Magenta
66H	05H	Color Cor. Dual / Cyan
66H	06H	Color Cor. Dual / Color Gain
67H	00H	Color Cor. Lamp1 / Red
67H	01H	Color Cor. Lamp1 / Green
67H	02H	Color Cor. Lamp1 / Blue
67H	03H	Color Cor. Lamp1 / Yellow
67H	04H	Color Cor. Lamp1 / Magenta
67H	05H	Color Cor. Lamp1 / Cyan
67H	06H	Color Cor. Lamp1 / Color Gain
68H	00H	Color Cor. Lamp2 / Red
68H	01H	Color Cor. Lamp2 / Green
68H	02H	Color Cor. Lamp2 / Blue
68H	03H	Color Cor. Lamp2 / Yellow
68H	04H	Color Cor. Lamp2 / Magenta
68H	05H	Color Cor. Lamp2 / Cyan
68H	06H	Color Cor. Lamp2 / Color Gain
90H	00H	Picture Preset
91H	00H	SweetVision Mode
92H	00H	SweetVision Level
94H	00H	Vertical Enhancer
95H	00H	I/P Converter
96H	00H	Lamp Mode Adjust
97H	00H	Wall Color
Command example:		
* In case of acquiring Picture Brightness		
03H 04H 00H 00H 03H 00H 00H 00H 0AH		

077. MUTE CONTROL
****
Function:
This command controls the mute of picture, sound and on-screen.

Command:
  02H 1AH 00H 00H 02H DATA01 DATA02 CKS
                                        (*3)

  Data Portion Contents

  DATA01   Setting items
          00H : Picture
          01H : Sound
          02H : On-Screen

  DATA02   Setting Value
          00H : OFF
          01H : ON

Response: At the time of a success
  22H 1AH 01H xxH 01H DATA01 CKS
          (*1) (*2)   (*3)

  Data Portion Contents

  DATA01   Results
          00H : Normal
          01H : Error

Response: At the time of a failure
  A2H 1AH 01H xxH 02H DATA01 DATA02 CKS
          (*1) (*2)   (*4)   (*3)

Supplement:
 * Sound mute is cancelled in the following cases:
   Input connector switching
   Video signal switching
   Volume adjustment

 078-1. SETTING REQUEST
****
Function:
This command acquires the function information of projector.

Command:
  00H 85H 00H 00H 01H 00H 86H

Response: At the time of a success
  20H 85H 01H xxH 20H DATA01 .. DATA32 CKS
          (*1) (*2)   (*3)

Data Portion Contents

DATA01 .. 03 Projector type

DATA01	DATA02	DATA03	Current Models
08H	00H	10H	NP4100
08H	01H	10H	NP4100W
11H	00H	12H	NP64
11H	03H	12H	NP43
13H	01H	10H	M300X
13H	02H	10H	M300W
13H	05H	10H	M260X
13H	06H	10H	M260W
13H	00H	11H	P420X
13H	01H	11H	P350X
13H	02H	11H	P350W
13H	00H	12H	UM330X
13H	01H	12H	UM330W
13H	00H	13H	M361X
13H	01H	13H	M311W
13H	02H	13H	M271X
13H	03H	13H	M311W
14H	02H	10H	U300X
14H	04H	10H	U310W
15H	00H	10H	PA600X
15H	01H	10H	PA500X
15H	02H	10H	PA550W
15H	03H	10H	PA500U
16H	00H	10H	V300X
16H	01H	10H	V260X
16H	03H	10H	V260
16H	01H	11H	VE281X/VE281XB
16H	04H	11H	VE281/VE281B
17H	00H	10H	PX750U
17H	01H	10H	PX700W
17H	02H	10H	PX800X
19H	00H	10H	PH1000U
19H	00H	10H	P501X
19H	01H	10H	P451X
19H	02H	10H	P451W
19H	03H	10H	P401W

			Legacy Models
01H	00H	03H	MT1060/MT1065
01H	01H	03H	MT860
01H	02H	03H	MT1075
01H	00H	06H	NP1000/NP2000
02H	00H	03H	LT240/LT260
02H	01H	03H	LT220
02H	02H	03H	LT240K/LT260K
02H	00H	05H	LT245/LT265
02H	00H	06H	LT380
02H	01H	06H	LT280
03H	00H	06H	VT80 Series
03H	00H	07H	VT90 Series
04H	00H	01H	GT1150
04H	01H	01H	GT2150
04H	00H	03H	GT5000
04H	01H	03H	GT6000
05H	00H	03H	HT1000
06H	00H	03H	WT600
06H	00H	05H	WT610/WT615
08H	00H	07H	NP4000/NP4001
08H	00H	10H	NP4100
08H	01H	10H	NP4100W
10H	00H	08H	VT700
10H	00H	09H	NP600
10H	01H	09H	NP500
10H	02H	09H	NP500 W
10H	03H	09H	NP400
10H	04H	09H	NP300
10H	00H	10H	NP610
10H	01H	10H	NP510
10H	02H	10H	NP510W
10H	03H	10H	NP410
10H	05H	10H	NP310
10H	07H	10H	NP610S
10H	08H	10H	NP510WS
10H	09H	10H	NP410
10H	01H	11H	NP2200
10H	02H	11H	NP1200
11H	00H	00H	NP41/61
11H	01H	00H	NP62
11H	00H	11H	NP215
11H	02H	11H	NP1150/NP2150/NP3150
11H	02H	11H	NP115
11H	03H	11H	NP110
11H	04H	11H	NP216
12H	00H	08H	NP1150/NP2150/NP3150
12H	01H	08H	NP3151W
12H	00H	09H	NP905
12H	01H	09H	NP901W
12H	02H	09H	VT800
12H	00H	10H	NP1250/NP2250/NP3250

DATA04　　　Sound function
　　　　00H : Not available
　　　　01H : Available

DATA05   Calendar function
        00H : No function
        01H or 03H : Timer function, sleep timer function
        02H : Sleep timer function

DATA06 .. 32   Reserved

Response: At the time of a failure
  A0H 85H 01H xxH 02H DATA01 DATA02 CKS
        (*1) (*2)   (*4)   (*3)

 078-2. RUNNING STATUS REQUEST
****
Function:
This command acquires the status of the projector operation.

Command:
  00H 85H 00H 00H 01H 01H 87H

Response: At the time of a success
  20H 85H 01H xxH 10H DATA01 .. DATA16 CKS
        (*1) (*2)   (*3)

  Data Portion Contents

  DATA01 .. 02 Reserved
  DATA03   Projector status
        00H : Idling
        01H : Power On

  DATA04   Cooling processing
        00H : No execution(Normal condition)
        01H : During execution

  DATA05   Power On/Off processing
        00H : No execution(Normal condition)
        01H : During execution

  DATA06   Status of operation
        00H : Idling
        04H : Power On
        05H : Cooling
        06H : Idling(Error occurrence)
        Other than above : (nondisclosure)
        Internal use of code during a state transition period

  DATA07   PC Card insertion
        00H : Not inserted
        01H : Inserted

  DATA08   USB Mouse connection
        00H : Not connected
        01H : Connected

  DATA09 .. 16 Reserved

Response: At the time of a failure
  A0H 85H 01H xxH 02H DATA01 DATA02 CKS

078-3. INPUT STATUS REQUEST
****
Function:
This command acquires the status of input signal of the projector.

Command:
  00H 85H 00H 00H 01H 02H 88H

Response: At the time of a success
  20H 85H 01H xxH 10H DATA01 .. DATA16 CKS
            (*1)   (*2)   (*3)

Data Portion Contents

  DATA01   Selecting signal processing
            00H : No execution(Normal condition)
            01H : During execution

  DATA02   Signal number(Entry list number - 1)
            0 .. 199

DATA03 .. 04 Selected input terminal

Terminal name	DATA03	DATA04
RGB1(RGB)(*5)	01H	01H
RGB2(*5)	02H	01H
DVI(Analog)	02H	01H
Video	01H	02H
S-Video	01H	03H
Component	01H	04H
Component	02H	04H
Component	03H	04H
DVI(*6)	01H	06H
DVI(DIGITAL)(*6)	01H	06H
HDMI	01H	06H
DisplayPort	02H	06H
Slot	03H	06H
Viewer	01H	07H
LAN	02H	07H
USB Display	04H	07H
Slot1-1	01H	08H
Slot1-2	02H	08H
Slot2-1	01H	09H
Slot2-2	02H	09H
RGB(Video)	02H	02H
RGB(S-Video)	02H	03H

  DATA05   Entry list type
            01H : Default
            02H : User

  DATA06   Test pattern display
            00H : No display(Normal condition)

01H : Displaying
DATA07 ..08   Reserved

DATA09   Indicate Contents
        00H = Picture signal displaying
        01H = No signal
        02H = Viewer displaying
        03H = Test pattern displaying
        04H = LAN displaying

DATA10 .. 16 Reserved

Response: At the time of a failure
  A0H 85H 01H xxH 02H DATA01 DATA02 CKS
            (*1) (*2)   (*4)   (*3)

 078-4. MUTE STATUS REQUEST
****
Function:
This command acquires the status of the mute of projector.

Command:
  00H 85H 00H 00H 01H 03H 89H

Response: At the time of a success
  20H 85H 01H xxH 10H DATA01 .. DATA16 CKS
            (*1) (*2)   (*3)

  Data Portion Contents

  DATA01   Picture mute
        00H : OFF
        01H : ON

  DATA02   Sound mute
        00H : OFF
        01H : ON

  DATA03   On-screen mute
        00H : OFF
        01H : ON

  DATA04   Forced on-screen mute
        00H : OFF
        01H : ON

  DATA05   On-screen display
        00H : No display
        01H : Displaying

  DATA06 .. 16 Reserved

Response: At the time of a failure
  A0H 85H 01H xxH 02H DATA01 DATA02 CKS
            (*1) (*2)   (*4)   (*3)

078-5. MODEL NAME REQUEST

****

Function:

This command acquires the model name of the projector.

Command:
  00H 85H 00H 00H 01H 04H 8AH

Response: At the time of a success
  20H 85H 01H xxH 20H DATA01 .. DATA32 CKS
            (*1) (*2)   (*3)

  Data Portion Contents

  DATA01 .. 32 Model name (NULL termination character string)

Response: At the time of a failure
  A0H 85H 01H xxH 02H DATA01 DATA02 CKS
            (*1) (*2)   (*4)   (*3)

==
6. Table of Response Error Codes

DATA01	DATA02	
Error types	Error descriptio	Error contents
00H	00H	Unknown command
00H	01H	The current model does not support this function.
01H	00H	Unvalid values specified.
01H	01H	Specified terminal is unavailable or cannot be selected.
01H	02H	Selected language is not available.
02H	00H	Available memory reservation error
02H	02H	Operating memory
02H	03H	Setting not possible
02H	04H	On Forced on-screen mute mode
02H	06H	Displaying a signal other than PC Viewer
02H	07H	-No signal-
02H	08H	Displaying a test pattern or PC Card files screen.
02H	09H	No PC card is inserted
02H	0AH	Memory operation failed
02H	0CH	Displaying the Entry List
02H	0DH	Power Off inhibited
02H	0EH	Execution error
02H	0FH	No operation authority
03H	00H	Specified gain number is wrong
03H	01H	Selected gain is not available.
03H	02H	Adjustment failed

[079. FREEZE CONTROL]

****

Function:
This command controls the freeze.

Command:
  01H 98H 00H 00H 01H DATA01 CKS

                    Operation types
  DATA01: 00H : Reserved
             01H : Freeze start
             02H : Freeze cancel

Response: At the time of a success
  21H 98H ID *0H 01H DATA01 CKS

  Data Portion Contents

  DATA01   Results
          00H : Normal
          01H : Error

Response: At the time of a failure
  A1H 98H 01H xxH 02H DATA01 DATA02 CKS
            (*1) (*2)   (*4)   (*3)

097-196.WXGA MODE SETTING REQUEST
****
Function:
This command acquires the setting of the WXGA Mode of projector.

Command:
  03H B0H 00H 00H 01H C3H 77H

Response: At the time of a success
  23H B0H 01H xxH 02H DATA01 DATA02 CKS
        (*1) (*2)   (*3)

  Data Portion   Contents

  DATA01   C3H fixed
  DATA02   Setting Value
          00H : OFF
          01H : ON

Response: At the time of a failure
  A3H B0H 01H xxH 02H DATA01 DATA02 CKS
        (*1) (*2)   (*4)   (*3)

097-198. PIP/SIDE BY SIDE REQUEST
****
Function:
This command acquires the setting of the PIP/SIDE BY SIDE of projector.

Command:
  03H B0H 00H 00H 02H DATA01 DATA02 CKS

```
  Data Portion  Contents
  ---------------------------------------------------------------------
  DATA01      C5H fixed
  DATA02    Acquisition Object
          00H : MODE
          01H : POSITION
          02H : SOURCE


Response: At the time of a success
  23H  B0H  01H  xxH  03H  DATA01  DATA02  DATA03  CKS
         (*1)  (*2)                              (*3)

  Data Portion  Contents
  ---------------------------------------------------------------------
  DATA01      C5H fixed
  DATA02      Acquisition item(Same as DATA02 of the transmit data)
  DATA03      Setting Value
          if DATA02 is MODE(00H)
           00H : PIP
           01H : SIDE BY SIDE
          if DATA02 is POSITION(01H)
           00H : TOP-LEFT
           01H : TOP-RIGHT
           02H : BOTTOM-LEFT
           03H : BOTTOM-RIGHT
          if DATA02 is SOURCE(02H)
           00H : OFF
           01H : VIDEO
           02H : S-VIDEO

Response: At the time of a failure
  A3H  B0H  01H  xxH  02H  DATA01  DATA02  CKS
         (*1)  (*2)              (*4)        (*3)
```

098-198. PIP/SIDE BY SIDE SET
****
Function:
This command sets the PIP/SIDE BY SIDE of projector.

Command:
```
  03H  B1H  00H  00H  03H  DATA01  DATA02  DATA03  CKS

  Data Portion    Contents
  ---------------------------------------------------------------------
  DATA01        C5H fixed
  DATA02        Update target
           00H : MODE
           01H : POSITION
           02H : SOURCE
  DATA03        Setting Value
          if DATA02 is MODE(00H)
           00H : PIP
           01H : SIDE BY SIDE
          if DATA02 is POSITION(01H)
           00H : TOP-LEFT
           01H : TOP-RIGHT
           02H : BOTTOM-LEFT
           03H : BOTTOM-RIGHT
```

```
         if DATA02 is SOURCE(02H)
           00H : OFF
           01H : VIDEO
           02H : S-VIDEO
```

Response: At the time of a success
```
  23H  B1H  01H  xxH  03H  DATA01  DATA02  DATA03  CKS
             (*1)  (*2)                              (*3)
```

Data Portion Contents
```
-----------------------------------------------------------------
DATA01      00H fixed
DATA02      Update target
          ( Same as DATA02 of the transmit data )
DATA03      Results
          00H : Normal
          01H : Error
```

Response: At the time of a failure
```
  A3H  B1H  01H  xxH  02H  DATA01  DATA02  CKS
             (*1)  (*2)           (*4)          (*3)
```

110. AUTO FUNCTIONS EXECUTE
****

Function:
This command executes the auto functions.

Command:
```
  03H  B6H  00H  00H  01H  DATA01  CKS
                                     (*3)
```

Data Portion Contents
```
-----------------------------------------------------------------
DATA01      Execution items
```

	Focus
00H	!
01H	*

   !: According to projector setting
   *: Executing

Response: At the time of a success
```
  23H  B6H  01H  xxH  02H  DATA01  DATA02  CKS
             (*1)  (*2)                      (*3)
```
Data Portion Contents
```
-----------------------------------------------------------------
DATA01      Execution items (Same as DATA01 of the transmit data)
DATA02      Results
          00H : Normal
          01H : Error
```

Response: At the time of a failure
```
  A3H  B6H  01H  xxH  02H  DATA01  DATA02  CKS
             (*1)  (*2)           (*4)          (*3)
```

111. AUTO ADJUST EXECUTE2

****

Function:
This command executes the Auto Adjust.

Command:
  03H BAH 00H 00H 01H 00H BEH

Response: At the time of a success
  23H BAH 01H xxH 01H 00H CKS
          (*1) (*2)   (*3)

Response: At the time of a failure
  A3H BAH 01H xxH 02H DATA01 DATA02 CKS
          (*1) (*2)   (*4)   (*3)

305-1. BASE MODEL TYPE REQUEST

****

Function:
This command acquires the projector type.

Command:
  00H BFH 00H 00H 01H 00H C0H

Response: At the time of a success
  20H BFH 01H xxH 10H DATA01 ... DATA16 CKS
          (*1) (*2)   (*3)

  Data Portion Contents

  DATA01   00H fixed
  DATA02 ... 03   Projector type
            See DATA13...14
  DATA04 ... 12   Model name (NULL termination character string)
  DATA13 ... 14   Projector type

DATA02	DATA03	DATA13	DATA14	Current Models
03H	08H	00H	10H	NP4100
03H	08H	01H	10H	NP4100W
FFH	11H	00H	12H	NP64
FFH	11H	03H	12H	NP43
FFH	13H	01H	10H	M300X
FFH	13H	02H	10H	M300W
FFH	13H	05H	10H	M260X
FFH	13H	06H	10H	M260W
FFH	13H	00H	11H	P420X
FFH	13H	01H	11H	P350X
FFH	13H	02H	11H	P350W
FFH	13H	00H	13H	M361X
FFH	13H	01H	13H	M311W
FFH	13H	02H	13H	M271X
FFH	13H	03H	13H	M311X
FFH	13H	00H	12H	UM330X
FFH	13H	03H	12H	UM330W
FFH	14H	02H	10H	U300X
FFH	14H	04H	10H	U310W
FFH	15H	00H	10H	PA600X
FFH	15H	01H	10H	PA500X
FFH	15H	02H	10H	PA550W
FFH	15H	03H	10H	PA500U
FFH	16H	00H	10H	V300X
FFH	16H	01H	10H	V260X
FFH	16H	03H	10H	V260
FFH	16H	01H	11H	VE281X/VE281XB
FFH	16H	04H	11H	VE281/VE281B
FFH	17H	00H	10H	PX750U
FFH	17H	01H	10H	PX700W
FFH	17H	02H	10H	PX800X
FFH	19H	00H	10H	PH1000
FFH	20H	00H	10H	P501X
FFH	20H	01H	10H	P451X
FFH	20H	02H	10H	P451W
FFH	20H	03H	10H	P401W

				Legacy Models
00H	01H	00H	03H	MT1060/1065
00H	01H	02H	03H	MT860
00H	01H	02H	03H	MT1075
00H	01H	00H	06H	NP1000/NP2000
00H	02H	00H	03H	LT240/LT260
00H	02H	01H	03H	LT220
00H	02H	02H	03H	LT260K
00H	02H	00H	05H	LT245/LT265
00H	02H	00H	06H	LT380
00H	02H	01H	06H	LT280
02H	02H	00H	05H	LT180
02H	02H	00H	06H	LT25/LT30/LT35
02H	02H	00H	07H	NP40/NP50/NP60
00H	03H	00H	04H	VT770
01H	03H	00H	06H	VT80 Series
01H	03H	00H	07H	VT90 Series
00H	04H	00H	03H	GT5000
00H	04H	01H	03H	GT6000
00H	04H	02H	03H	GT6000R
00H	05H	00H	03H	HT1000
00H	05H	00H	04H	HT1100
02H	05H	00H	05H	HT410
02H	05H	00H	05H	HT510
00H	06H	00H	03H	WT600
00H	06H	00H	05H	WT610/WT615
03H	08H	00H	07H	NP4000/NP4001
01H	10H	00H	08H	VT700
FFH	10H	00H	09H	NP600
FFH	10H	01H	09H	NP500
FFH	10H	02H	09H	NP500W
FFH	10H	03H	09H	NP400
FFH	10H	04H	09H	NP300
FFH	10H	00H	10H	NP610
FFH	10H	01H	10H	NP510
FFH	10H	02H	10H	NP510W
FFH	10H	03H	10H	NP410
FFH	10H	05H	10H	NP310
FFH	10H	07H	10H	NP610S
FFH	10H	08H	10H	NP510WS
FFH	10H	09H	10H	NP410
FFH	10H	01H	11H	NP2200
FFH	10H	02H	11H	NP1200
FFH	11H	00H	00H	NP41/61
FFH	11H	01H	00H	NP62
FFH	11H	00H	11H	NP215
FFH	11H	02H	11H	NP115
FFH	11H	03H	11H	NP110
FFH	11H	04H	11H	NP216
FFH	12H	00H	08H	NP1150/NP2150/NP3150
FFH	12H	01H	08H	NP3151W
FFH	12H	00H	09H	NP905
FFH	12H	01H	09H	NP901W
FFH	12H	02H	09H	VT800
FFH	12H	00H	10H	NP1250/NP2250/NP3250
FFH	12H	01H	10H	NP3250W

DATA15 ... 16   Reserved

Response: At the time of a failure
  A0H BFH 01H xxH 02H DATA01 DATA02 CKS
          (*1) (*2)   (*4)   (*3)

 305-3. PROJECTOR INFORMATION REQUEST
****
Function:
This command acquires basic operation states of projector.

Command:
  00H BFH 00H 00H 01H 02H C2H

Response: At the time of a success
  20H BFH 01H xxH 10H DATA01 ... DATA16 CKS
          (*1) (*2)   (*3)

  Data Portion Contents

  DATA01   02H fixed
  DATA02   Projector Processing Status
              00H : Idle
              04H : Power On
              05H : Cooling
              06H : Idle(Error Standby)
              Other : Not Support
        Other than above : (nondisclosure)
                  Internal use of code during a state transition period
  DATA03   Indicate Contents
              00H : Picture signal displaying
              01H : No Signal
              02H : Viewer displaying
              03H : Test Pattern displaying
              04H : LAN displaying
              05H : Test Pattern (User) displaying
              10H : Signal selection in progress
              Other : Not Support
  DATA04   Select source input type 1
              01H : 1
              02H : 2
              03H : 3
              04H : 4
              05H : 5
              Other : Not Support
  DATA05   Select source input type 2
              01H : COMPUTER (RGB)
              02H : VIDEO
              03H : S-VIDEO
              04H : COMPONENT
              05H : Reserved
              06H : DIGITAL
              07H : VIEWER
              08H : SLOT1
              09H : SLOT2
              0AH : SLOT3
              0BH : SLOT4

```
            0CH : DIGITAL2
            0DH : SCART
            10H : AUTO
            FFH : Not Source Input
            Other : Not Support
DATA06        Indication signal type
          (Effective only when Select source input type 2 is 02H or 03H)
            x0H : NTSC3.58
            x1H : NTSC4.43
            x2H : PAL
            x3H : PAL60
            x4H : SECAM
            x5H : B/W60
            x6H : B/W50
            x7H : PALNM
            x8H : NTSC3.58 LBX
            x9H : NTSC3.58 SQZ
            xAH : COMPONENT(60Hz)
            xBH : COMPONENT(50Hz)
            xCH : Un known
            xDH : NTSC
            xEH : PAL-M
            xFH : PAL-N
            FFH : Not Video Input
            Other : Not Support
DATA07        Picture Mute
            00H : OFF
            01H : ON
DATA08        Sound Mute
            00H : OFF
            01H : ON
DATA09        On-screen mute
            00H : OFF
            01H : ON
DATA10...DATA16  Reserved

Response: At the time of a failure
  A0H  BFH  01H  xxH  02H  DATA01  DATA02  CKS
        (*1)  (*2)            (*4)         (*3)
```

==
 6.1. Response
----
* At the time of a success (ACK)

This returns ACK without adding data portion to the command that does not request data.
This returns ACK with adding data to the data portion for the command that requests data.

* At the time of a failure (NAK)

This adds a cause of not accepting the command to data portion to return it.

(Example) Power On

 Command:
 02H 00H FFH F0H 00H CKS

 NAK:
 A2H 00H 01H 20H 02H DATA01 DATA02 CKS
==
6. Data Portion of Response

DATA01	DATA02	
Error types	Error description	Error contents
00H	00H	Unknown command
00H	01H	The current model does not support this function.
01H	00H	Unvalid values specified.
01H	01H	Specified terminal is unavailable or cannot be selected.
01H	02H	Selected language is not available.
02H	00H	Available memory reservation error
02H	02H	Operating memory
02H	03H	Setting not possible
02H	04H	On Forced on-screen mute mode
02H	07H	-No signal-
02H	08H	Displaying a test pattern or PC Card Fills screen.
02H	0AH	Memory operation failed
02H	0DH	Power Off inhibited
02H	0EH	Execution error
02H	0FH	No operation authority
03H	00H	Specified gain number is wrong
03H	01H	Selected gain is not available.
03H	02H	Adjustment failed