

SMS Command List

These commands are implemented by short message service (SMS) sent from the mobile phone to the SIM card of the watch. The watch SIM should support SMS and balance, and the watch firmware would decode and execute the command.

The format of command is **Password#Command ID=Parameters#**. The firmware would check the password then execute the command with correct password. It won't reply or execute any information but only play short ringtone to remind for receiving command with wrong password. It will reply ERROR SMS to remind for the command with incorrect parameter of format.

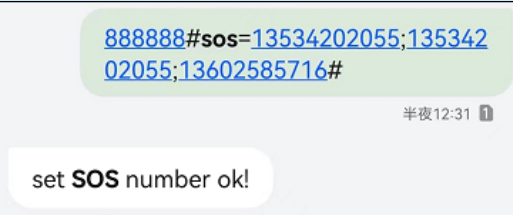
1. Password management

Command format	Description	Example
Password#PW=Newpassword#	The command ID is PW . The password should be six letters or numbers. The initial password is Ifjmm The watch is supposed to reply with <i>SET SMS PW ok +New password</i>	The example shows a sequence of SMS messages. It starts with a green bubble containing 'Ifjmm#PW=888888#' and a timestamp '半夜12:12'. This is followed by a white bubble containing 'SET SMS PW ok 888888'. Then another green bubble with '888888#PW=999999#' and a timestamp '晚上9:46'. Finally, a white bubble with 'SET SMS PW ok 999999'.

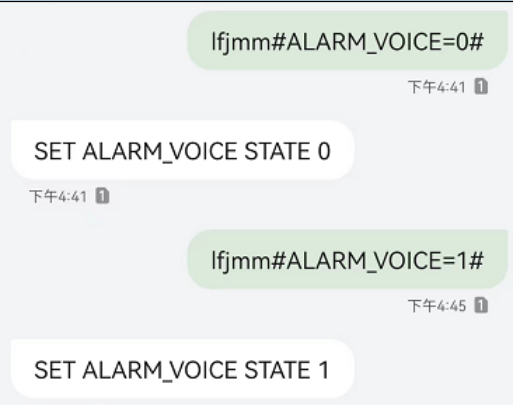
2. White list management

Command format	Description	Example
Password #WHITE_LIST_ENABLE=Parameter#	The command ID is WHITE_LIST_ENABLE . Enable or disable the white list function. The watch would only answer the incoming call from white list with white list enabled. It would answer all incoming call from any phone number with white list disabled. Parameter=1 means enable. Parameter=0 means disable. The watch is supposed to reply with <i>SET WHITE LIST ENABLE result: true/false</i>	The example shows two parts of a conversation. The first part has a green bubble with '888888#WHITE_LIST_ENABLE=1#' and a timestamp '半夜11:00', followed by a white bubble with 'SET WHITE LIST ENABLE result : true'. The second part has a green bubble with 'Ifjmm#WHITE_LIST_ENABLE=0#' and a timestamp '中午12:05', followed by a white bubble with 'SET WHITE LIST ENABLE result : true'.
Password#WHITE_LIST= Whitelistname1-Phonenumber1, Whitelistname2-Phonenumber2, Whitelistname3-Phonenumber3#	The command ID is WHITE_LIST . Setting white list number and its name. The first white list number will be admin number. The watch would only answer the incoming call from white list. The white list is no more than 10 numbers. The watch is supposed to reply with <i>SET SMS WHITE LIST ok+ Quantity of White list</i>	The example shows a green bubble with 'Ifjmm#WHITE_LIST=test1-13534202055,test2-13691793247#' and a timestamp '晚上9:53', followed by a white bubble with 'SET SMS WHITE LIST ok 2'.
Password #ADMIN_NUMBER#	The command ID is Admin_Number . The watch would reply admin number command from any phone number. The watch is supposed to reply with: Admin phone number is :+The admin number	The example shows a green bubble with '888888#ADMIN_NUMBER#' and a timestamp '上午10:30', followed by a white bubble with 'admin phone number is: 13534202055'.

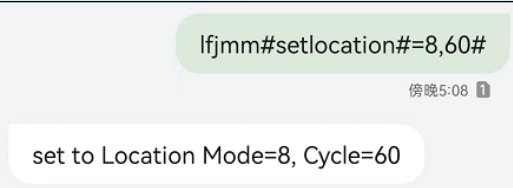
3. SOS number management

Command format	Description	Example
Password#sos=SOSnumber1;SOSnumber2;SOSnumber3#	The command ID is sos. Setting SOS number. The watch is supposed to reply with <i>Set SOS number ok!</i> The watch would dial all SOS phone numbers in turn, and upload GPRS SOS alert with latest location by pressing the SOS button. The dialing will be repeated for three times until a call is connected or the SOS button is pressed again to cancel the SOS process.	

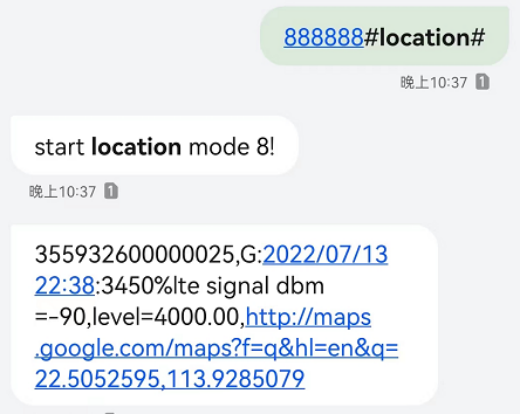
4. Alarm voice switch

Command format	Description	Example
Password#ALARM_VOICE=Parameter#	The command ID is ALARM_VOICE. Enable or disable the alarm voice. The watch would play alarm voice for tamper alert with alarm voice enabled. Parameter=1 means enable. Parameter=0 means disable. The watch is supposed to reply with <i>SET ALARM_VOICE STATE: true/false</i>	

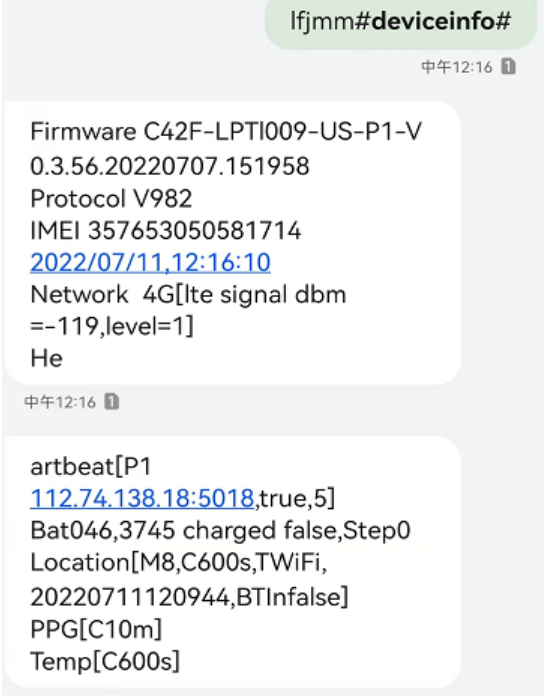
5. Working mode and GPS interval management

Command format	Description	Example
Password#setlocation#=Mode,parameter#	The command ID is setlocation. Configure the working mode and GPS upload interval. Mode=8 means GPS location takes precedence over WiFi location. The watch would try to search GPS signal for 90 seconds then upload GPS location for success, or upload the last WiFi location for failed. The parameter is upload interval of GPS location. The unit is second. The watch is supposed to reply with <i>Set to Location Mode=value, Cycle=value</i>	

6. Check location

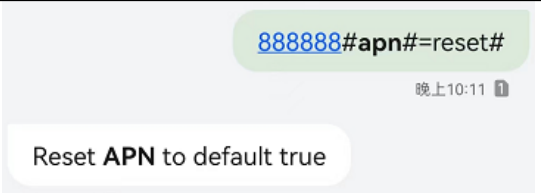
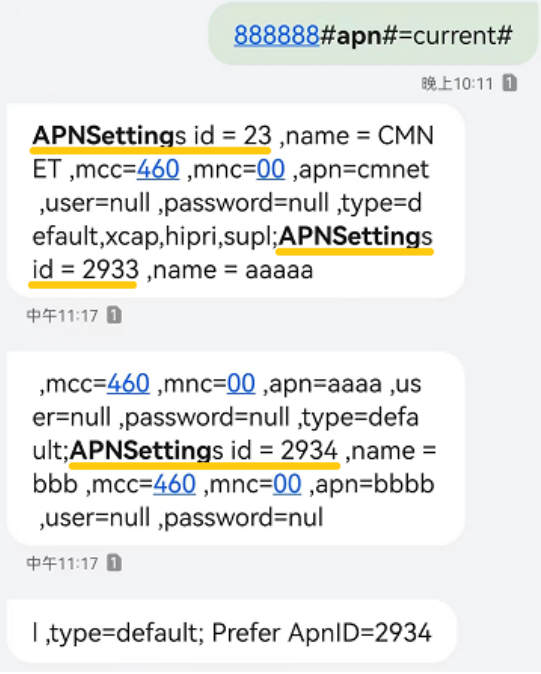
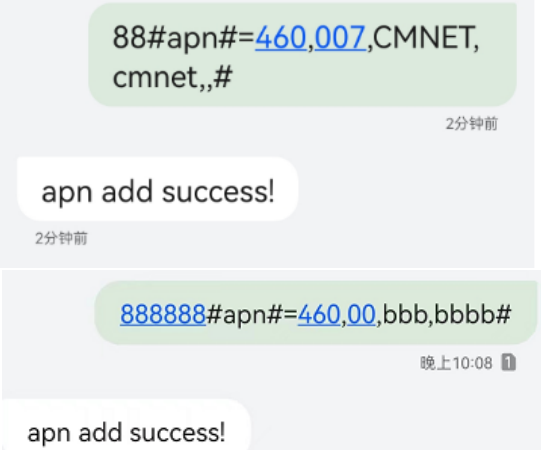
Command format	Description	Example
Password#location#	The command ID is <i>location</i>. The watch is supposed to reply with <i>Start location mode value!+IMEI+location time +battery level+GPRS signal+network level+Google map link</i>. Mode=8 means GPS location takes precedence over WiFi location. The watch would try to search GPS signal for 90 seconds then upload GPS location for success. If the device inside the building, it will return the last GPS location storage in CACHE, it may not be accurate.	 888888#location# 晚上10:37 start location mode 8! 晚上10:37 355932600000025,G:2022/07/13 22:38:3450%lte signal dbm ==-90,level=4000.00,http://maps.google.com/maps?f=q&hl=en&q=22.5052595,113.9285079

7. Reviewing the Device Status

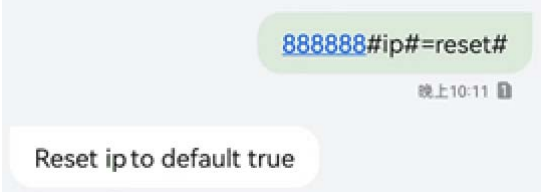
Command format	Description	Example
Password#status#	The command ID is status. The device sim is supposed to reply with <i>IMEI +IMSI +device firmware version+battery level</i>.	 888888#status# 晚上8:54 IMEI=355932600001064 IMSI=460024754472298 SW:V991 I009-US-V3.57.20221221.220238 Battery:039%
Password#deviceinfo#	The command ID is deviceinfo. The device is supposed to reply with device's information, such as working mode, time interval of GPS tracking, the last time of location, etc.	 lfjmm#deviceinfo# 中午12:16 Firmware C42F-LPTI009-US-P1-V 0.3.56.20220707.151958 Protocol V982 IMEI 357653050581714 2022/07/11,12:16:10 Network 4G[lte signal dbm ==-119,level=1] He 中午12:16 artbeat[P1 112.74.138.18:5018,true,5] Bat046,3745 charged false,Step0 Location[M8,C600s,TWiFi, 20220711120944,BTInfalse] PPG[C10m] Temp[C600s]

	Contents of reply SMS	Description
	Firmware C42F-LPTI009-US-P1-V0.3.56. 20220707.151958	The version of device firmware
	Protocol V982	The version of communication protocol implemented to the device
	IMEI 357653050581714	IMEI No. assigned to the device.
	2022/07/11,12:16:10	The time of reply the command.
	Network 4G[lte signal dbm =-119,level=1]	The current network is 4G, the signal level of 4G is 1 (The best signal level is 5).
	Heartbeat [P1 112.74.138.18:5018,true,5]	The server IP for uploading the heartbeat values. The value "true" means connected to the tracking server successfully. The value "5" means heartbeat uploading interval is 5 minutes.
	Bat046,3745 charged false, Step0	Battery level and pedometer value The value "046" means the battery level is 46%. The value "3745" means the voltage value is 3.745v. The value "0" means the pedometer is 0 steps.
	Location [M8,C600s,TWiFi, 20220711120944,BTInfalse]	The value "M8" means the device is working in tracking mode 8.The The value "C600s" means location data uploading interval is 600 seconds. TWiFi means the tracking way of last location is WiFi The value "20220711120944" is location time of the last location.It is 2022-07-11 12:09:44. BTInfalse is undefined for 4G device.
	PPG[C10m] or PPG[C5,P64,H108,L70,T31.00, TA35.55,20200225230645]	Heart rate detection interval C0m means the device don't support heart rate detection The value "C10" means the heart reat uploading interval is 5 mins, The value "P64" means the value of heart rate is 64, The value "H108" means the high pressure of blood pressure is 108, The value "L70" means the low pressure of blood pressure is 70, The value "T31.00" means the wrist temperature is 31.00 degrees Celsius, The value "TA35.55" means the body temperature is 35.55 degrees Celsius, The value " 20200225230645" means the heart rate and temperature data detection time is 2020-02-25 23:06:45.
	Temp[C0s] or Temp[C600s]	Temperature detection interval The value "C0s" means the device don't support body temperature detection. The value "C600s" means the temperature data uploading interval is 600 seconds.

8. Setting up APN

Command format	Description	Example
Password#apn#=reset#	The command ID is apn . Reset the APN configuration to default value. The device is supposed to reply with <i>Reset APN to default true/false</i> .	
Password#apn#=current#	The command ID is apn . To check the existing APN saved in device firmware. The device is supposed to reply with The APN which are matching the current MCCMNC. It won't list all APN parameters. Every APN parameter start with APN Settings ID such as APNSettings id=23.	
Password#apn#=MCC,MNC,Apn Name,apn,user,password#	The command ID is apn . Configure and enable a new APN parameter,or enable an existing APN parameter which is already in the firmware. The device is supposed to reply with <i>apn add success!</i> Repeatedly setting the same APN parameters may cause the device to reply with ERROR reminder SMS.	

9. IP Setting up Server IP

Command format	Description	Example
Password#ip#=reset#	The command ID is ip . To reset the server IP as factory settings. The device is supposed to reply with <i>Reset ip to default true/false</i>	

Password#ip#=IP:PORT#	The command ID is ip. To set up server IP and port, support domain name. The device is supposed to reply with <i>Password#ip#= IP:PORT#success/fault!</i>	999999#ip#=47.91.108.213:5018# 半夜11:12 999999#ip#=47.91.108.213:5018# success!
Password#ip#=current#	The command ID is ip. To check the existing server IP saved in device firmware. The device is supposed to reply with <i>Current server Address: IP:PORT</i>	888888#ip#=current# 凌晨2:56 current serverAddress: 120.76.153.92:5018 Ifjmm#ip#=current# 晚上9:31 current serverAddress: en.beehome360.com:5018

10.Power OFF the Device

Command format	Description	Example
Password#poweroff#	The command ID is poweroff. To power OFF the device remotely. The device is supposed to reply with <i>do poweroff ok!</i> then execute the command.	Ifjmm#poweroff# 晚上8:02 do poweroff ok!

11.Reboot the Device

Command format	Description	Example
Password#reboot#	The command ID is reboot. To restart the device remotely. The device will reply OK SMS then execute the command.	888888#reboot# 凌晨2:58 do reboot ok!

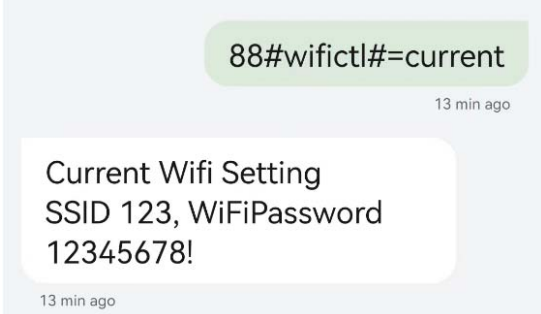
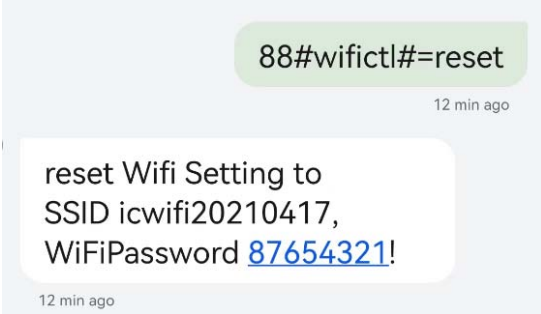
12.Mail the Device log

Command format	Description	Example
Password#maillog#	The command ID is maillog. To send the log of device by mail. The device will reply mail Android/ic to mailbox then execute the command. The device would reply with success after all log sent.	888888#maillog# 晚上8:53 mail Android/ic to tangrixin716@163.com ... 晚上8:53 mail Android/ic to tangrixin716@163.com success!

13. To Reset the Watch as Factory Settings

Command format	Description	Example
Password#factoryreset#	To reset all parameters to factory default value remotely. The device will reply OK SMS then execute the command.	 A screenshot of a text conversation on a light blue background. At the top, a green bubble contains the command '88#factoryreset#'. Below it, a white bubble contains the response 'do factoryreset ok!'. The green bubble is timestamped '12 min ago' and the white bubble is timestamped '12 min ago'.

14. Setting up WiFi

Command format	Description	Example
Password#wifictl#=current	To check the WiFi settings.	 A screenshot of a text conversation on a light blue background. At the top, a green bubble contains the command '88#wifictl#=current'. Below it, a white bubble contains the response 'Current Wifi Setting SSID 123, WiFiPassword 12345678!'. The green bubble is timestamped '13 min ago' and the white bubble is timestamped '13 min ago'.
Password#wifictl#=reset	To remove existing WiFi settings.	 A screenshot of a text conversation on a light blue background. At the top, a green bubble contains the command '88#wifictl#=reset'. Below it, a white bubble contains the response 'reset Wifi Setting to SSID icwifi20210417, WiFiPassword 87654321!'. The green bubble is timestamped '12 min ago' and the white bubble is timestamped '12 min ago'.
Password#wifictl#=switch	Password#wifictl#=switch,1 Password#wifictl#=switch,0	 A screenshot of a text conversation on a light blue background. It shows two separate exchanges. The first exchange has a green bubble with 'lfjmm#wifictl#=switch,1' and a white bubble with 'WiFi Switch On !'. The second exchange has a green bubble with 'lfjmm#wifictl#=switch,0' and a white bubble with 'WiFi Switch Off !'. The first green bubble is timestamped '14:46' and the first white bubble is timestamped '14:46'. The second green bubble is timestamped '11 min ago' and the second white bubble is timestamped '11 min ago'.

Password#wifictl#=connect,SSID,password,encryptType	To set up the WiFi connection parameters. It need enable WiFi with command Password#wifictl#=switch,1,then configure the Wifi by sending this command. Otherwise, Wifi will not be executed. SSID means the WiFi name, password means the WiFi password, encrypt Type means the way to encrypt the WiFi connection.	The screenshot shows a mobile app interface with a light blue background. At the top, there is a green bubble containing the command 'Ifjmm#wifictl#=connect, 123,12345678,psk'. Below it, a white bubble contains the response 'set and connect to Wifi SSID 123, WiFiPassword 12345678, encryptType psk!'. The time '14:47' is visible in the top right corner.
---	--	--

15. 2-minutes Wearing Detection

Command format	Description	Example
Ifjmm#en_cutalarm_repeat#=true#	To enable 2-minutes wearing detection. After you send this command to the device, please reboot the device. If the strap is not worn, there will be an “Tamper Alarm” on the device and to tracking platform every two mins.	The screenshot shows a mobile app interface with a light blue background. At the top, there is a green bubble containing the command 'Ifjmm#en_cutalarm_repeat#=true#'. Below it, a white bubble contains the response 'SET CutAlarm repeat ENABLE result : true'. The time '11:13' is visible in the top right corner.
Ifjmm#en_cutalarm_repeat#=false#	To disable the 2-minutes wearing detection. After you send this command to the device, please reboot the device.	The screenshot shows a mobile app interface with a light blue background. At the top, there is a green bubble containing the command 'Ifjmm#en_cutalarm_repeat#=false#'. Below it, a white bubble contains the response 'SET CutAlarm repeat ENABLE result : false'. The time '18:50' is visible in the top right corner.