

صناعة قطرية بجودة ألمانية


QATARI INDUSTRY WITH
GERMAN QUALITY



يوبي في سي

مصنع الثريا
للپلاستيك

AL-THURAIYA PLASTIC FACTORY
UPVC

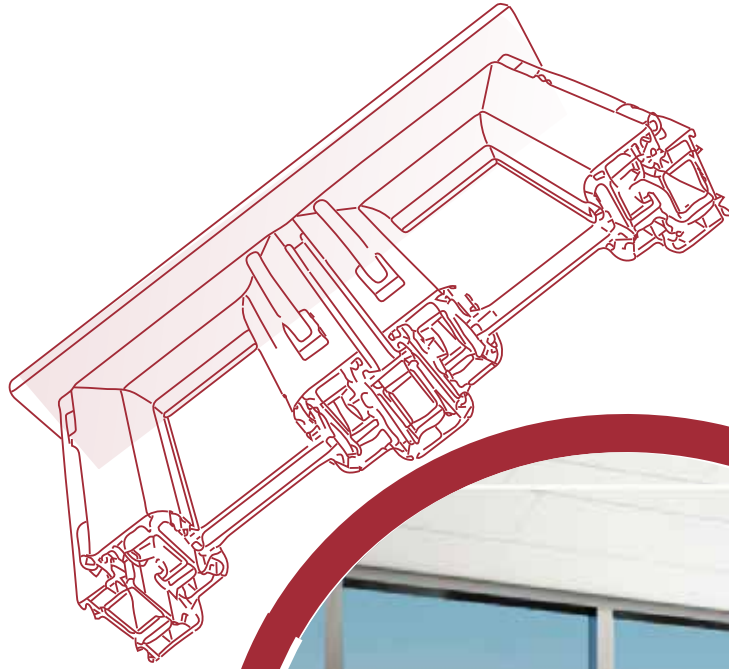


SCAN TO WEB CATALOG
إمسح للملف الإلكتروني



إمسح لملف ال PDF للكتلوج

اول مصنع لإنتاج
قطاعات
اليوبي في سي
في قطر
THE FIRST FACTORY TO
PRODUCE SECTORS
UPVC
IN QATAR

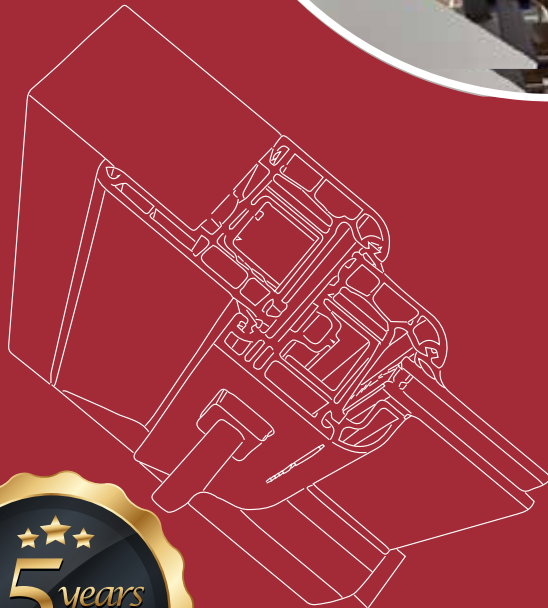

www.althuraiyaupvc.qa

مقدمة:

إنه لمن دواعي الفخر لشركتنا بأن تكون الأولى في دولة قطر لإنتاج قطاعات الأبواب والنوافذ المصنعة من مادة UPVC تقوم شركتنا بإنتاج بروفييل الأبواب والشبابيك ويعتبر الحل في هذا المضمار بنظامية الألماني المتميز والمطابق للمقاييس العالمية والمناسب لكل الظروف والأذواق حيث يتم التصنيع من خلال أحدث المكينات التي حصلنا عليها بعد البحث والتحري الطويل وبأحدث النظم والتكنولوجيا المتقدمة وبواسطة خبراء متميزين في هذا المجال ويتم تسليم المنتج بعد إجراء الفحوصات النوعية بكل مراحل الإنتاج وفقاً لمتطلبات السوق العالمية.

نصنع حصراً وفق المواصفات القياسية الألمانية DIN، كما نعتمد الأبحاث الدورية والتطوير المستمر للمنتجات وأساليب العمل والخدمات الدورية والتطوير المستمر للمنتجات وأساليب العمل والخدمات لترسيخ فلسفتنا الديناميكية تجاه الاحتياجات المتغيرة فقمنا بتطوير طرق التصنيع مما مكننا من تطوير أنظمة مناسبة، ومن مميزات منتجاتنا أنها صديقة للبيئة حيث أنها خالية من مادة الرصاص .

إن نجاح وإزدهار منتجاتنا مرهون برضاء زبائننا وتطوير مواردها البشرية وهي معادلة صعبة نحلها عن طريق أداء متميز يضمن الربح لأطرافها الثلاثة نحن - شركاؤنا - الزبون إذ نعتبر مواردها البشرية هم شركاؤنا.

INTRODUCTION:

It's a source of pride for our company to be the first in the state of Qatar to produce profiles of doors and windows made of UPVC material. Our company produces UPVC profile Door and Window, which is characterized by the quality of luxury that is considered the best solution in this regard, with its distinguished German system and conforming to international standards and appropriate for all conditions and tastes where manufacturing is done through the latest machines that we obtained after research, long investigation, the latest systems, and advanced technology by experts in this field, the product is delivered after conducting quality checks for all production. We manufacture exclusively according to the German standards (DIN). We also adopt periodic research and continuous development of products, methods of work, and services to consolidate our dynamic philosophy towards changing needs. One of the advantages of our products is that it is environmental friendly and lead-free. We have developed manufacturing methods, which enabled us to develop systems appropriate for different weather conditions in the word.

The success and prosperity of our products depend on the satisfaction of our customers and the development of profit for its three parties, who are we (the producer), our partners, and the customers, as we consider our human resources to be our partners.



ما هو ال U-P.V.C؟

هي إختصار للمركب الكيميائي **Unplasticized Polyvinyl Chloride** وهو يصنع بإستخراج غاز الكلور من ملح الطعام والاثيلين والنفط. ثم يجمع الكلور والاثيلين معاً مع عملية البلمرة للوصول إلى بودرة بيضاء هي ال **PVC** حرف ال **U** هو للدلالة على عدم إضافة زيوت للمواد ليبقى المركب أكثر صلابي بل يضاف له الميتا اكريليت وثاني أكسيد التيتانيوم وبعض المثبتات الحرارية لرفع خواصه الفيزيائية ومقاومة للعوامل الجوية.

لماذا تم إختيار مادة ال UPVC

إن الإتجاه العالمي حالياً هو نحو منتجات تجمع بين الأداء العالي والإقتصادي معاً.

خصائص عامة:

- عازلية الحرارة ، يعتبر **U-P.V.C** من أفضل مواد البناء عزل للحرارة ، ويتمتع بمقاومة عالية للأشعة فوق البنفسجية وبالتالي يحافظ على ثبات لونه ولا يتأثر بالتبدلات الحرارية حتى ٩٢ درجة مئوية.
- لقد صممت بروفيلات الثريا بعدة حجات لزيادة العزل وضمان الهدوء والراحة وزودت بجوانات من مادة **TPE** التي تعطي للقطاع قدرة عزل جيدة.
- غير قابل للإشتعال
- لا يشتعل عند تعرضه للهب وفي حال الحريق وارتفاع درجات الحرارة وينطفئ من تلقاء ذاته في تلك الحالة.
- فهو لا يتأثر بالماء والرطوبة بل يستخدم لإخفاء آثار الرطوبة في الأسقف والجدران وهو قابل للتنظيف بالماء والمنظفات .
- مقاوم للمواد الحامضية والقلوية.
- حتى أنه يقاوم الأسيد العالي التركيز دون أن يتأثر بعكس المواد الأخرى كما أنه عازل للكهرباء.
- مقاوم جيد للصدمات الميكانيكية. مظهر أنيق والوان جذابة ثابتة.
- قابلية عالية للتشكيل.

What is UPVC?

It is an abbreviation of the chemical compound of the Unplasti-cized Polyvinyl Chloride.

It is made by extracting chlorine gas from table salt and ethylene from oil, then collecting chlorine and ethylene with the polymeri-zation process to reach a white powder, which is PVC.

The letter (U) indicates the non-addition of these coloring oil to keep the compound more solid, but to add, meta-acrylate, titanium dioxide, and some thermal stabilizers to raise its physical properties and resistance to weather factors.

Why was UPVC chosen?

The current global trend is towards products that combine high and economic performance.

General features:

UPVC is considered one of the best building materials for heat insulation and it has a high resistance to ultraviolet radiation, and thus maintains its color constancy and it is not affected by heat changes up to 92 degrees Celsius.

Sound insulation:


AL-THURAIYA profiles are designed with Multichambers to increase insulation and to ensure calm and comfort, and it is supplied with **TPE** gasket. Which gives the profile strong insulation power.

Nonflammable:

It doesn't ignite when exposed to flame and in the event of fire and high, but rather extinguishes on its own that case.

Moister and water resistance:

- It is not affected by water or moisture. Rather, it is used to hide the effects of moisture on ceilings .
- It is cleanable with water and regular detergents.
- Resistant to acid and the alkali, it even resists the highly concentrated acid without being affected, which is opposite to other materials, it is also an electrical insulator.
- Mechanical shock resistant.
- Good looking and attractive constant color.
- High formability.

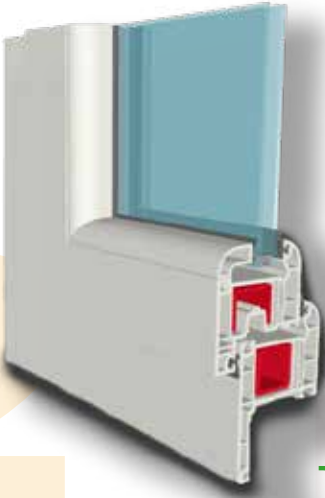

نظام الوجبة ٦٠


لماذا نظام الوجبة ٦٠؟

٦٠مم عرض حسب معيار السماكة الأوروبي ويتميز بالقوة وقدرة كبيرة على التحمل.
٤ غرف مزودة بقنوات تصريف مياه مثالية توفر عزلاً كبيراً للصوت والحرارة.
نوع واحد من الفولاذ الداعم ونوع واحد من الحشوة أو الجوان يقلل من تكلفة التخزين.
٤ غرف تزيد من القوة حسب معيار السماكة الأوروبي ويتميز بالقوة وقدرة كبيرة على التحمل.
قنوات مغلقة توفر مظهراً زخرفياً ونظافة طويلة الأمد.
يمكن لنماذج أو موديلات الحشوة المزخرفة والذاتية إرضاء جميع الأذواق على أكمل وجه.
مناسب لجميع الإكسسوارات أو الملحقات المحليو والعالمية بشكل مثالي.

SYSTEM AL WAJBA 60

Why System Al Wajba 60?

60mm width, due to European thickness standard. It is stronger and more support.
4 Chambered with perfect water drainage channels which provide great isolation for sound and heat.
One type of support steel and one type of gasket decreases cost of storage.
Decorative and self-gasket models can absolutely satisfy all tastes.
Suitable for all local and international accessories which fits perfect.

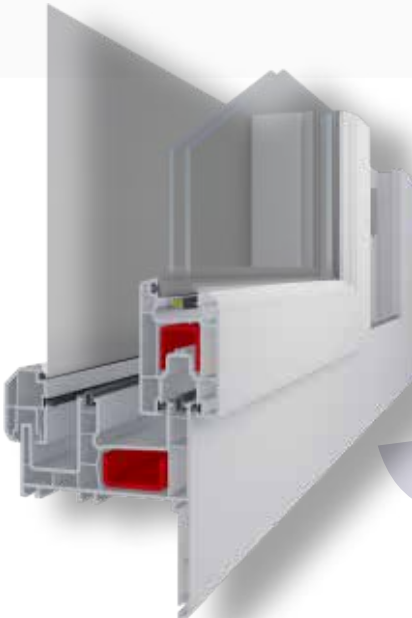

نظام الريان ٧٠

لماذا نظام ٧٠؟

٧٠مم عرض حسب معيار السماكة الأوروبي ويتميز بالقوة وقدرة كبيرة على التحمل.
٤ غرف مزودة بقنوات تصريف مياه مثالية توفر عزلاً كبيراً للصوت والحرارة.
نوع واحد من الفولاذ الداعم ونوع واحد من الحشوة أو الجوان يقلل من تكلفة التخزين.
٤ غرف تزيد من القوة حسب معيار السماكة الأوروبي ويتميز بالقوة وقدرة كبيرة على التحمل.
قنوات مغلقة توفر مظهراً زخرفياً ونظافة طويلة الأمد.
يمكن لنماذج أو موديلات الحشوة المزخرفة والذاتية إرضاء جميع الأذواق على أكمل وجه.
مناسب لجميع الإكسسوارات أو الملحقات المحلية والعالمية بشكل مثالي.

SYSTEM AL RAYYAN 70

Why System 70?

70mm width, due to European thickness standard. It is stronger and more support.
4 chambered with perfect water drainage channels which provide great isolation for sound and heat.
One type of support steel and one type of gasket decreases cost of storage.
4 Chambers increases strength, due to European thick-ness standard. It is stronger and more bear.
Closed rail channels provide decorative look and long lasting cleanliness.
Decorative and self-gasket models can absolutely satisfy all tastes.
Suitable for all local and international accessories which fits perfect.

نظام الجزيرة ٦٠ سحب

لماذا نظام الجزيرة ٦٠ سحب؟

٤ غرف مزودة بقنوات تصريف مياه مثالية توفر عزلاً رائعاً للصوت والحرارة.
نوع واحد من الصلب الداعم ونوع واحد من الحشوة يقلل من تكلفة التخزين.
٤ غرف تزيد من القوة ، بسبب معيار السمك الأوروبي. إنه أقوى وأكثر احتمالاً.
توفر قناة السكك الحديدية المغلقة مظهراً زخرفياً ونظافة طويلة الأمد.
يمكن أن ترضي نماذج الديكور والحشية الذاتية جميع الأذواق.
مناسب لجميع الإكسسوارات المحلية والعالمية التي تناسب تماماً.

SYSTEM AL-JAZEERA SLIDING 60

Why System Al Jazeera 60?


4 chambered with perfect water drainage channels which provide great isolation for sound and heat.
One type of support steel and one type of gasket decreases cost of storage.
4 Chambered increases strength, due to European thick-ness standard. It is stronger and more bearable.
A closed rail channel provides a decorative look and long-lasting cleanliness.
Decorative and self-gasket models can satisfy all tastes.
Suitable for all local and international accessories which fit perfectly.



METAL SILVER GREY



DARK WALNUT-1

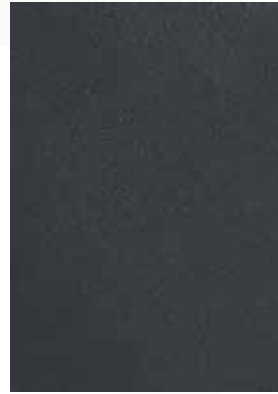

COAL GREY



GOLDEN OAK-1



BRONZE PLATIN




MAHOGANY-1



CARBON BLACK



نظام الريان 70 SYSTEM AL RAYYAN 70

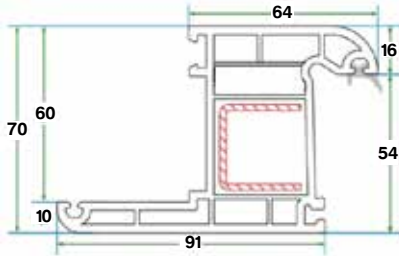


بروفايل الفريم مع حاجب 70
Fringed Frame Profile 70

PROFILE CODE

TH1- 7041
COLOR:WHITE

TH4- 7041
COLOR:LAMINATED

PIECES PACKAGE: 4 PCS. / METER PACKAGE: 24 M




بروفايل الفريم بدون حاجب 70
Frame Profile 70

PROFILE CODE

TH1- 7047
COLOR:WHITE

TH4- 7047
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36 M




بروفايل القائم الوسطي 70
MULLION PROFILE 70

PROFILE CODE

TH1- 7042
COLOR:WHITE

TH4- 7042
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36 M




بروفايل ضلفة الشباك 70
Sash Profile 70

PROFILE CODE

TH1- 7043
COLOR:WHITE

TH4- 7043
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36 M




بروفايل ضلفة الشباك 80
Sash Profile 80

PROFILE CODE

TH1- 8047
COLOR:WHITE

TH4- 8047
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36 M




بروفايل ضلفة الشباك للخارج 70
window Sash Profile 70 (opening out)

PROFILE CODE

TH1- 7049
COLOR:WHITE

TH4- 7049
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36 M

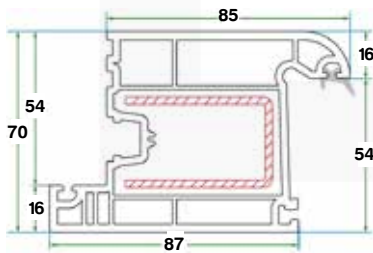


بروفايل ضلفة الباب للداخل 70
Door Sash Profile 70 (opening in)

PROFILE CODE

TH1- 7045
COLOR:WHITE

TH4- 7045
COLOR:LAMINATED

PIECES PACKAGE: 4 PCS. / METER PACKAGE: 24 M

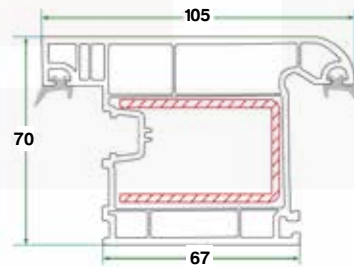


بروفايل ضلفة الباب للخارج 70
Door Sash Profile 70 (opening out)

PROFILE CODE

TH1- 7046
COLOR:WHITE

TH4- 7046
COLOR:LAMINATED

PIECES PACKAGE: 4 PCS. / METER PACKAGE: 24 M




بروفايل القائم الوسطي المتحرك 70
Movabel Mullion Profile 70

PROFILE CODE


TH1- 7044
COLOR:WHITE

TH4- 7044
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36 M







steel size 26



steel size 33

بروفائلات مساعدة ASSISTANT PROFILES



بروفائلات لاقط زجاج مفرد
Single Glazing Bead

PROFILE CODE

TH1- 02
COLOR:WHITE

TH2- 02
COLOR:LAMINATED

PIECES PACKAGE: 25 PCS/ METER PACKAGE: 150 M

بروفائلات لاقط زجاج دبل
Double Glazing Bead 20/24 mm

PROFILE CODE

TH1- 03
COLOR:WHITE

TH2- 03
COLOR:LAMINATED

PIECES PACKAGE: 25 PCS/ METER PACKAGE: 150 M

بروفائلات لاقط زجاج ثلاثي
Tripple Glazing Bead

PROFILE CODE

TH1- 04
COLOR:WHITE

TH2- 04
COLOR:LAMINATED

PIECES PACKAGE: 25 PCS/ METER PACKAGE: 150 M





بروفائلات برواز حاجب
Pipe profile

PROFILE CODE

TH1- 40
COLOR:WHITE

TH4- 40
COLOR:LAMINATED

PIECES PACKAGE: 25 PCS/ METER PACKAGE: 150 M



بروفائلات برواز زاوية
Casing profile

PROFILE CODE

TH1- 20
COLOR:WHITE

TH2- 20
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36M

بروفائلات حشوة ٢٤ ملم
Panel profile 24 mm

PROFILE CODE

TH1- 30
COLOR:WHITE

TH2- 30
COLOR:LAMINATED

PIECES PACKAGE: 10 PCS/ METER PACKAGE: 60M

كورنر بروفائلات
Corner profile

PROFILE CODE

TH1- 7048
COLOR:WHITE

TH4- 7048
COLOR:LAMINATED

PIECES PACKAGE: 8 PCS. / METER PACKAGE: 48M



بروفائلات ماسورة للواجهات
Pipe profile

PROFILE CODE


TH1- 10
COLOR:WHITE

TH4- 10
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36M

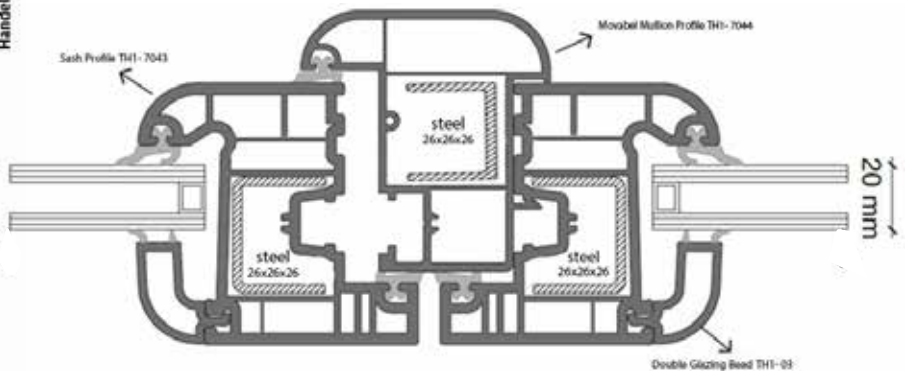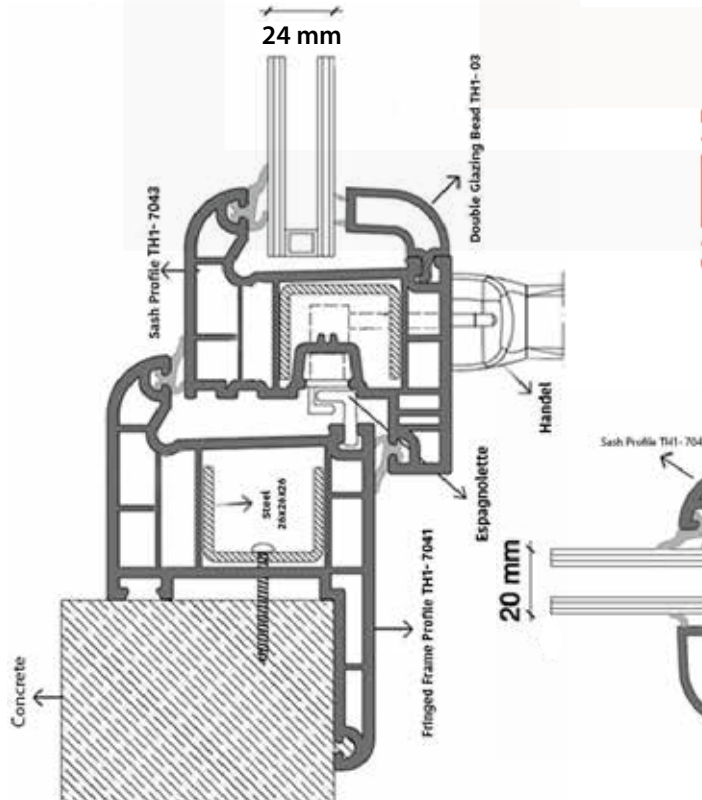

نظام الوجبة ٦٠ SYSTEM AL WAJBA 60

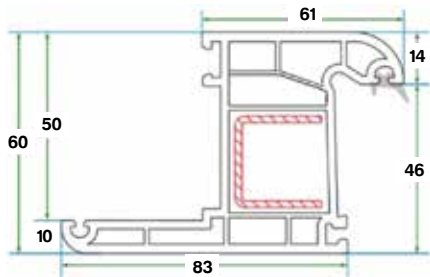


بروفايل الفريم مع حاجب 60
Fringed Frame Profile 60

PROFILE CODE

TH1- 6044
COLOR:WHITE

TH4- 6044
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36 M




بروفايل الفريم بدون حاجب 60
Frame Profile 60

PROFILE CODE

TH1- 6041
COLOR:WHITE

TH4- 6041
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36 M




بروفايل القائم الوسطي 60 + سحب
MULLION PROFILE 60 +SLIDING

PROFILE CODE

TH1- 6042
COLOR:WHITE

TH4- 6042
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36 M




بروفايل ضلفة الشباك 60
Sash Profile 60

PROFILE CODE

TH1- 6043
COLOR:WHITE

TH4- 6043
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36 M

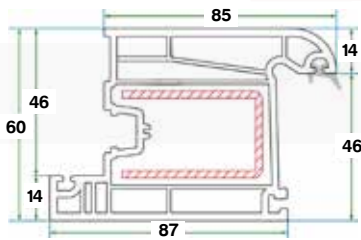


بروفايل ضلفة الباب للداخل 60
Door Sash Profile 60 (opening in)

PROFILE CODE

TH1- 6045
COLOR:WHITE

TH4- 6045
COLOR:LAMINATED

PIECES PACKAGE: 4 PCS. / METER PACKAGE: 24 M




بروفايل القائم الوسطي المتحرك 60
Movable mullion profile 60

PROFILE CODE


TH1- 6047
COLOR:WHITE

TH4- 6047
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36 M





steel size 26



steel size 33

بروفائلات مساعدة ASSISTANT PROFILES



بروفال لاقط زجاج مفرد
Single Glazing Bead

PROFILE CODE

TH1- 01
COLOR:WHITE

TH2- 01
COLOR:LAMINATED

PIECES PACKAGE: 25 PCS/ METER PACKAGE: 150 M

بروفال لاقط زجاج دبل
Double Glazing Bead 24 mm

PROFILE CODE

TH1- 04
COLOR:WHITE

TH2- 04
COLOR:LAMINATED

PIECES PACKAGE: 25 PCS/ METER PACKAGE: 150 M





بروفال ماسورة للواجهات
Pipe profile

PROFILE CODE

TH1- 40
COLOR:WHITE

TH4- 40
COLOR:LAMINATED

PIECES PACKAGE: 25 PCS/ METER PACKAGE: 150M



بروفال برواز زاوية
Casing profile

PROFILE CODE

TH1- 20
COLOR:WHITE

TH2- 20
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36M

بروفال حشوة ٢٤ ملم
Panel profile 24 mm

PROFILE CODE

TH1- 30
COLOR:WHITE

TH2- 30
COLOR:LAMINATED

PIECES PACKAGE: 10 PCS/ METER PACKAGE: 60M

كورنر بروفال
Corner profile

PROFILE CODE

TH1- 6048
COLOR:WHITE

TH4- 6048
COLOR:LAMINATED

PIECES PACKAGE: 8 PCS. / METER PACKAGE: 48M




بروفال ماسورة للواجهات
Pipe profile

PROFILE CODE


TH1- 10
COLOR:WHITE

TH4- 10
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36M

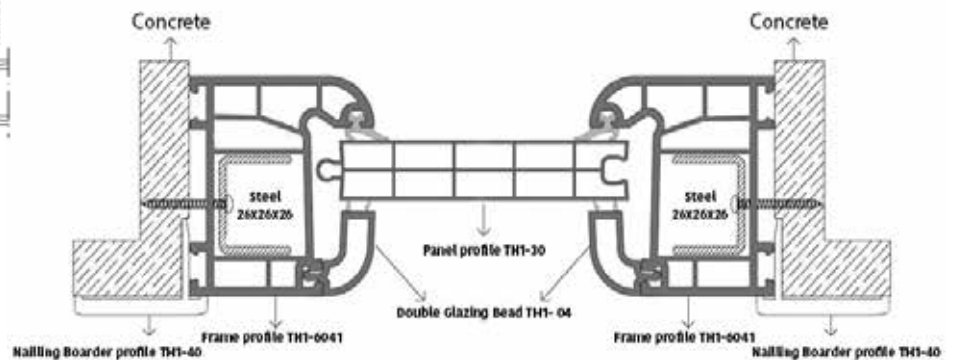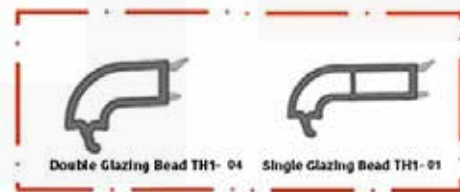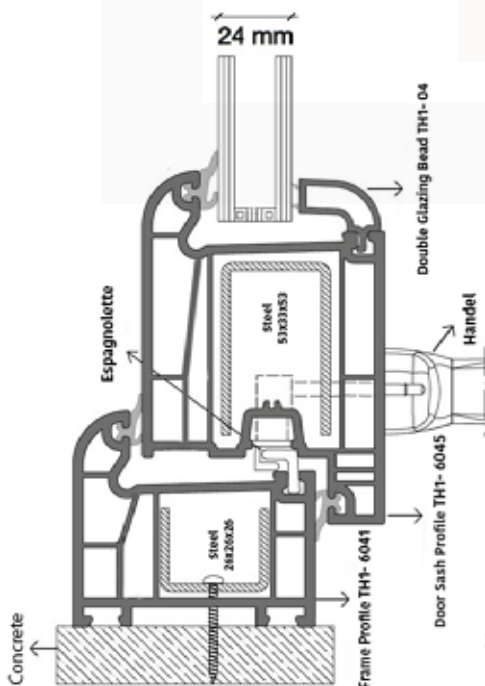

نظام الجزيرة ٦٠ سحاب SYSTEM AL-JAZEERA SLIDING 60

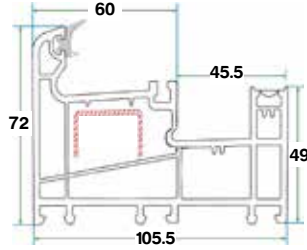


بروفايل الفريم ثابت سحاب 60
Sliding Fix Frame Profile 60

PROFILE CODE

TH1- 50
COLOR:WHITE

TH4- 50
COLOR:LAMINATED

PIECES PACKAGE: 4 PCS. / METER PACKAGE: 24 M

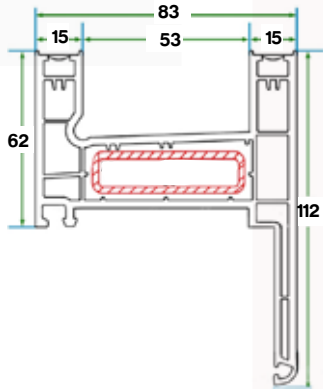


بروفايل الفريم سحاب مع حاجب 60
Sliding Fringed Frame Profile 60

PROFILE CODE

TH1- 120
COLOR:WHITE

TH4- 120
COLOR:LAMINATED

PIECES PACKAGE: 4 PCS. / METER PACKAGE: 24 M

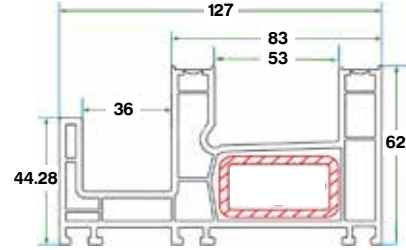


بروفايل سحاب مع مانع ذباب 60
Flyscreen sliding Frame Profile 60

PROFILE CODE

TH1- 60
COLOR:WHITE

TH4- 60
COLOR:LAMINATED

PIECES PACKAGE: 4 PCS. / METER PACKAGE: 24 M




بروفايل ضلفة شبك وياپ سحاب 60
Sliding Sash Profile 60

PROFILE CODE

TH1- 70
COLOR:WHITE

TH4- 70
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36 M

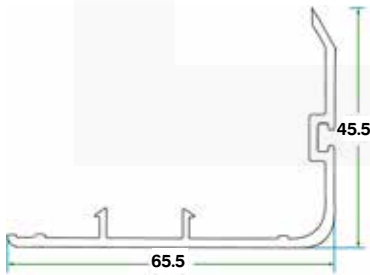


بروفايل اغلاق القفل سحاب 60
Sliding Interlock Profile 60

PROFILE CODE

TH1- 80
COLOR:WHITE

TH2- 80
COLOR:LAMINATED

PIECES PACKAGE: 10 PCS/ METER PACKAGE: 60 M




بروفايل ضلفة مانع الذباب سحاب 60
Sliding Fly Screen Sash Profile 60

PROFILE CODE

TH1- 90
COLOR:WHITE

TH4- 90
COLOR:LAMINATED

PIECES PACKAGE: 10 PCS/ METER PACKAGE: 60 M





بروفايل القائم الوسطي لمانع الذباب سحاب 60
Fly Screen Sliding Mullion Profile 60

PROFILE CODE




TH1- 100
COLOR:WHITE

TH4- 100
COLOR:LAMINATED

PIECES PACKAGE: 12 PCS/ METER PACKAGE: 72 M

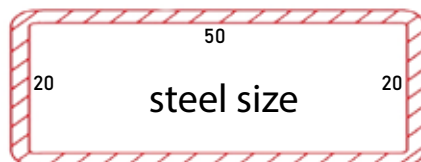

بروفايلات مساعدة ASSISTANT PROFILES



بروفايل لاقط زجاج مفرد
Single Glazing Bead

PROFILE CODE

TH1- 02
COLOR:WHITE

TH2- 02
COLOR:LAMINATED

PIECES PACKAGE: 25 PCS/ METER PACKAGE: 150 M

بروفايل لاقط زجاج دبل
Double Glazing Bead 20/24 mm

PROFILE CODE

TH1- 04
COLOR:WHITE

TH2- 04
COLOR:LAMINATED

PIECES PACKAGE: 25 PCS/ METER PACKAGE: 150 M




بروفايل بروزاز حاجب
Nailing Boarder profile

PROFILE CODE

TH1- 40
COLOR:WHITE

TH4- 40
COLOR:LAMINATED

PIECES PACKAGE: 25 PCS/ METER PACKAGE: 150M



بروفايل بروزاز زاوية
Casing profile

PROFILE CODE

TH1- 20
COLOR:WHITE

TH2- 20
COLOR:LAMINATED

PIECES PACKAGE: 6 PCS. / METER PACKAGE: 36M

بروفايل حشوة ٢٤ ملم
Panel profile 24 mm

PROFILE CODE

TH1- 30
COLOR:WHITE

TH2- 30
COLOR:LAMINATED

PIECES PACKAGE: 10 PCS/ METER PACKAGE: 60M



بروفايل اغلاق الفريم الثابت سحب ٢٤ ملم
Sliding railed Frame lock profile 24 mm

PROFILE CODE

TH1- 110
COLOR:WHITE

TH2- 110
COLOR:LAMINATED

PIECES PACKAGE: 12 PCS/ METER PACKAGE: 72M

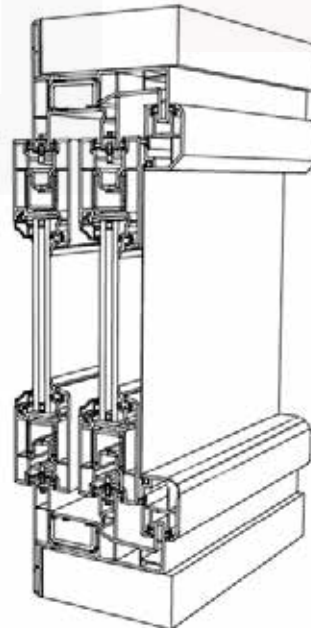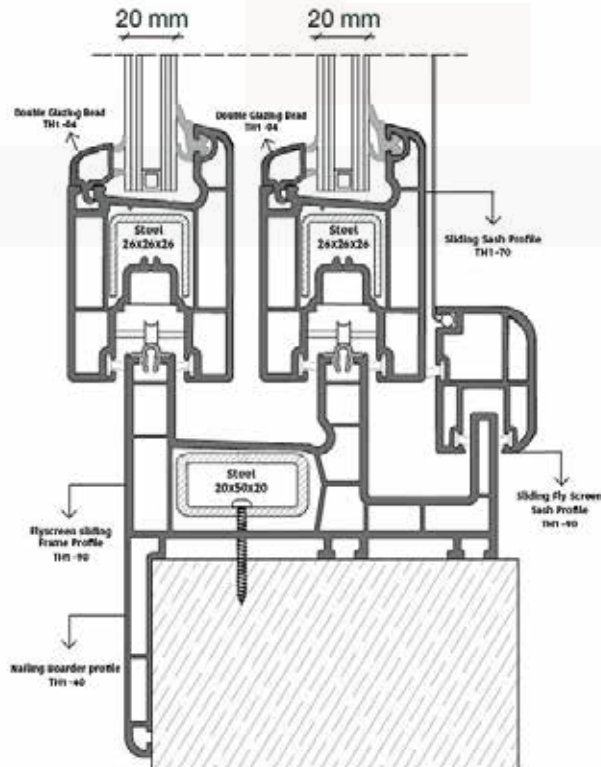

PVC COMBO DOOR

New Generation Al Thuraiya Door consumption places classified as room, office, public buildings. Durable structure and unique connection of wood, plastic mixture with beautiful design are produced as to complete each of its tasks in the field where it's used. Al Thuraiya Doors are Health, resistant to moisture and humidity, and isolated from sound and dust.

Product: PVC Combo Door


Design: as below

Width: 42mm

Size Available: As per Customer demand

Glue Used: Fevicol Probond

Glue TDS: As below

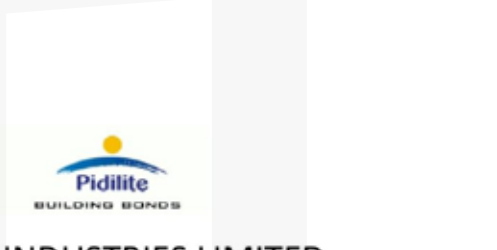

PIDILITE INDUSTRIES LIMITED

Marketing Division: P. B. No. 17411, Andheri (East), Mumbai 400 059 (India)

TECHNICAL DATA SHEET

FEVICOL PROBOND

FEVICOL PROBOND is water based synthetic resin based emulsion adhesive suitable for lamination of PVC/ ACRYLIC sheet to MDF/ Plywood. It is also used for manual edge banding of PVC strip to MDF, Particle Board, Ply etc. without using any edge banding machine.

TYPICAL PROPERTIES:-

- | | |
|--------------------------|----------------------------------|
| • Type | : Water based |
| • Appearance | : Milky white |
| • Chemical Composition | : Synthetic Resin Based Emulsion |
| • Viscosity at 30 ± 2 °C | : 35 – 80 Poise |
| • (By B.F. RVT) | |
| • pH | : 4.0 to 6.0 |
| • Flow | : Continuous |
| • Spread ability | : Smooth and easy |


Type of Applicators : Can be used by Notch trowel, knife Brush, Roller

Area of Application:-

- It is used for lamination of PVC sheet, Acrylic sheet to Plywood & MDF.
- It is also used for manual edge banding of PVC strip to MDF, Particle Board, Ply etc. without using any edge banding machine.

Application Method:-

Apply Fevicol PROBOND using knife, brush or roller on the wooden surface. Immediately press the PVC sheet on the top of the adhesive for 2 – 5 minute using manual hand pressure. The handling strength is obtained within 4-6 hrs. However for full strength, it takes about 24 hrs. To achieve quick setting of adhesive, one can use Hot iron / Hot Air blower and apply heat on bonded surface covered with thick cotton cloth (to avoid any shrinkage/ de-shaping and any structural damage of PVC substrate as PVC is very sensitive with heat -above 75 to 80 °C for longer time). Water can be used as DILUENTS if necessary to adjust viscosity for easy applications.

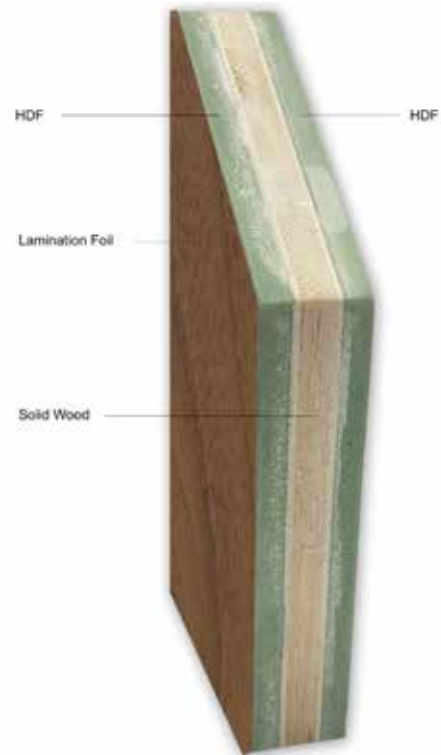

صحية
HEALTHY



آمن
SAFE



مضاد للبكتيريا
ANTIBACTERIAL



مقاومة الماء والرطوبة
WATER & MOISTURE
RESISTANT



مقاوم لصددمات
RESISTANT TO
IMPACT



الطلاء والصيانة غير مطلوبين
PAINT & MAINTENANCE
IS NOT REQUIRED



اشكال اليفة
ESTHETIC

TD 01



TD 02



TD 03



TD 04



TD 06



TD 07



TD 05



TD 09



ENJOY WITH CHOICE COLOR

استمتع بأختيارك اللون



WHITE HUS



BUTE WHITE



GOLD CEVIZ




SANTANA



ANKA MESE



ITALYAN CEVIZ



SATEN WHITE



GOLE TEAK



BOSSE CONCEPT

SKZ

Das Kunststoff-Zentrum

SKZ, Thuringerstr. 1, Industriepark Ing. Dr. 07518 Weimerg.

HANWHA L&C

Mr. Lee
8F, Miss Asset Center
25 Eui-Po 3-Gil, Jung-Gu
04536 SEOUL
KOREA

SKZ

SKZ, Thuringerstr. 1
Tel.: +49 373 4704 220
Fax: +49 373 4704 271
www.skz.de

19. Aug. 2017 14:01

Final results of the weathering fastness test (colour fastness) according to RAL-GZ 716, technical appendix, section 5, part 3-4-3 on window profiles made of PVC-U laminated with foil

Test order no. 134153/17 (Continuation of order no. 114536/15)

Dear Mr. Lee,

Please find below the following results of the final assessment of the weathering fastness after the artificial weathering of approx. **18,218 hours**

Irradiation energy: approx. **30 GJ/m²**

Artificial weathering according to (DIN) EN 513: 1996-10, procedure 1 (simulation of a moderate climate zone III, up to an irradiation dose of 30 GJ/m² in the wave length range between 200 nm and 800 nm).

1. Colourimetric assessment:

The sample colour was measured by means of a spectrophotometer of a total length area of 360 x 750 mm, standard light type D65, gloss inclusion, 10° normal incidence. The colour distance ΔE^*_{ab} was determined according to DIN EN ISO 11064-4: 2012-08. Prior to and after artificial weathering, colour was measured at the same position on the sample to obtain reproducible results despite the structured surface.

Please note that the colorimetric assessment of the structured foil can only be taken as a guide value.

SKZ, Thuringerstr. 1, Industriepark Ing. Dr. 07518 Weimerg.
SKZ, Thuringerstr. 1, Industriepark Ing. Dr. 07518 Weimerg.
Tel.: +49 373 4704 220
Fax: +49 373 4704 271
www.skz.de



صحي
HEALTHY



آمن
SAFE



مضاد للبكتيريا
ANTIBACTERIAL



مقاومة الماء والرطوبة
WATER & MOISTURE
RESISTANT



مقاوم لصددمات
RESISTANT TO
IMPACT



الطلاء والصيانة غير مطلوبين
PAINT & MAINTENANCE
IS NOT REQUIRED



اشكال انيقة
ESTHETIC

Kunststoffe
Polymersysteme
Entwicklungs- & Produktionsysteme
Kunststoffe

Hyundai L&C Europe GmbH

Düsseldorfer Straße 18, D-45760 Eschborn

HYUNDAI

L & C



RAL Gütegemeinschaft Kunststoff-Fensterprofilesysteme e.V. confirms the foil and patterns as listed on www.gkz.de to be certified and regularly audited acc. to the relevant quality and test requirements.

Since 20.11.2019
valid until 31.12.2020

David Fagundes
David Fagundes


The company may use the registered mark „GK“ as well as the logo „Foil and patterns“ as shown above, for marking and promoting their listed foil and patterns as part of their public relations work.

The company has committed to ensure compliance with the Technical Appendix and to subject the production of the registered foil and patterns to regular quality control by a mutual inspection body.


The valid official license is available on the website www.gkz.de




SANDWICH PANEL DOOR

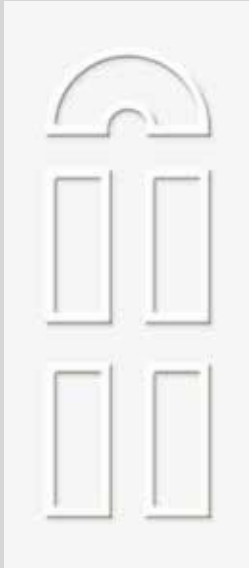

THD-CLASSIC 04

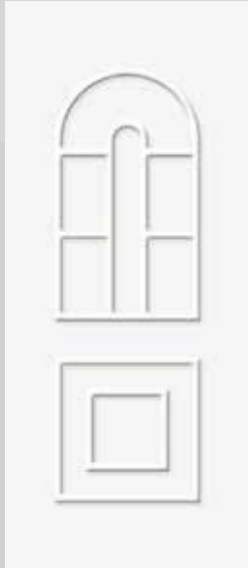


THD-CLASSIC 06

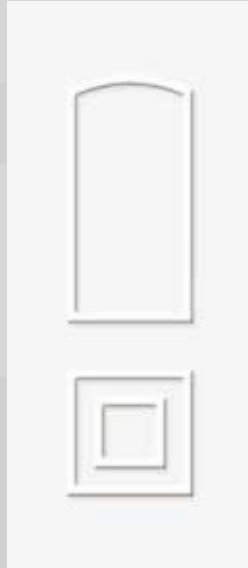

THD-CLASSIC 08



THD-CLASSIC 27

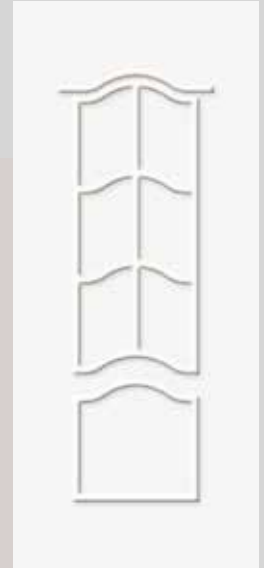

THD-CLASSIC 32



THD-CLASSIC 05



THD-CLASSIC 07



THD-CLASSIC 09



THD-CLASSIC 28



THD-CLASSIC 33

ENJOY WITH CHOICE COLOR
استمتع بأختيارك اللون



Golden Oak-3
GOR2H



Dark Oak-2
DO11H



Dark Walnut-2
DWZ2H





Mahogany-1
MG11H





PVC LUXE DOOR

150 PVC FRAME PROFILE

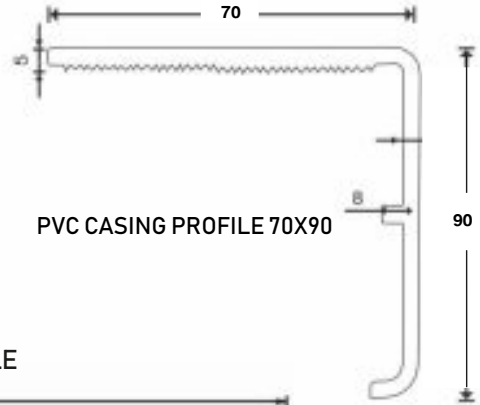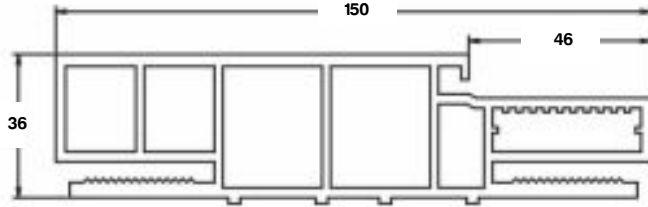


PVC CASING PROFILE 70X90

200 PVC FRAME PROFILE

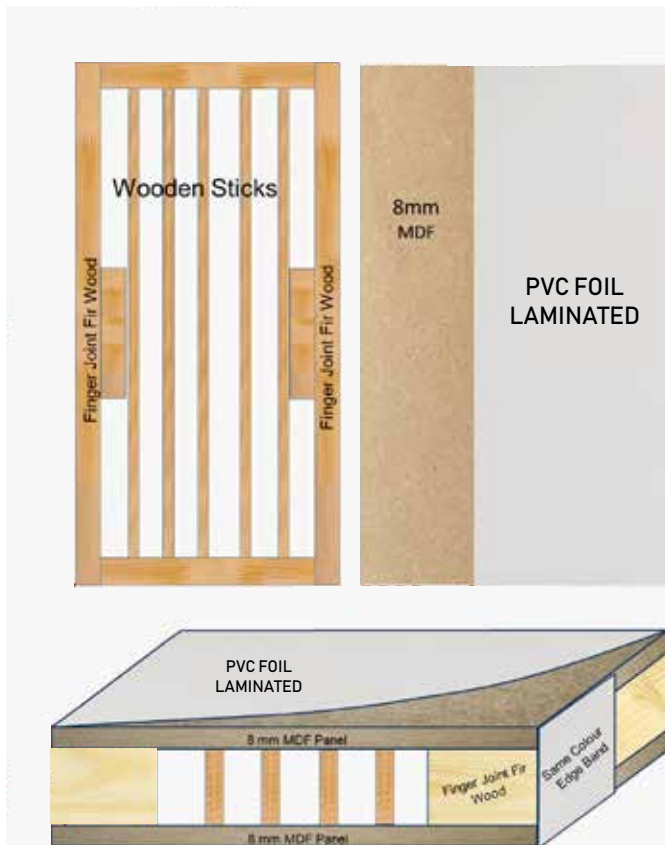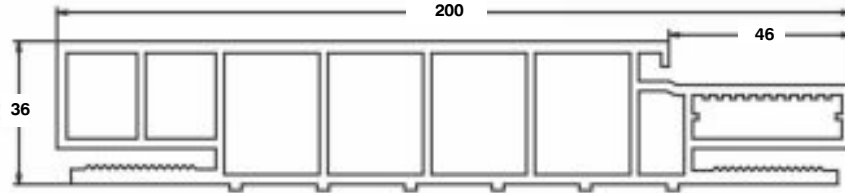

PVC FRAME WITH CASING

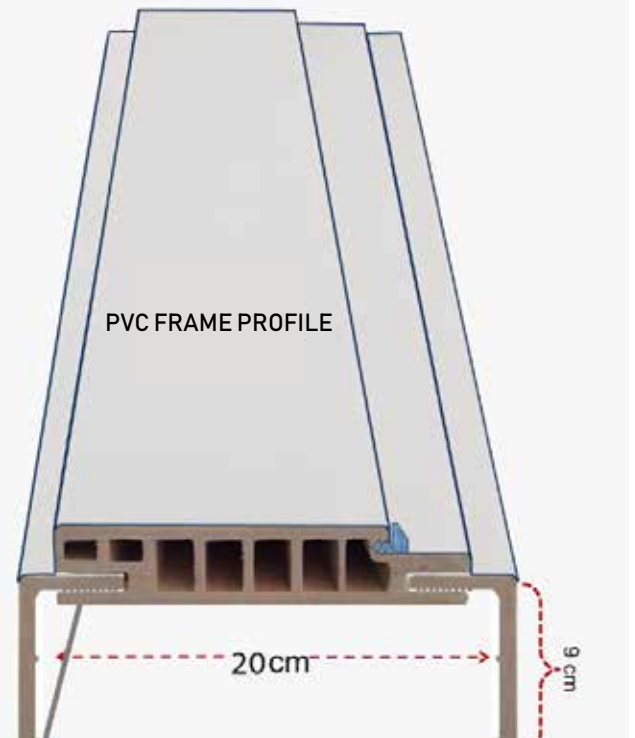

PVC CASING PROFILE

LUX01



LUX02



LUX03



LUX04



LUX05



LUX06



LUX07



LUX08




ENJOY WITH CHOICE COLOR

استمتع بأختيارك اللون



WHITE HUS



BUTE WHITE



GOLD CEVIZ



SANTANA



ANKA MESE



ITALYAN CEVIZ



VENGE



GOLE TEAK



BOSSE CONCEPT





European Assessment and Certification

This Certificate of Conformity has been awarded to

AL-THURAIYA PLASTIC FACTORY

New Industrial Area, St. No.01,
Factory No.09, Doha, Qatar.

In recognition of the organization's Quality System that conforms to the requirements of the applicable
Harmonized Standard EN 14351 --+1:2006A2:2016; EN 12208:2000 under

CE CONFORMITÉ EUROPÉENNE

The quality system has been assessed, approved and is subject to continuous surveillance according to the
Council Directive on Construction Product Regulation (EU) 2011/305 as Amended 106/89/EEC. The
Certification Body has performed an audit of the above product quality system covering the design,
manufacture and final inspection of the certified product

Manufacturer of Doors & Windows Profiles
PVC - U Profile (TH1 - Unique Code)

Certificate No : CE -9839

Certificate issue date : 16 -11-2020 1st Surveillance due before : 15 -11-2021
Certificate expiry date : 15 -11-2023 2nd Surveillance due before : 15 -11-2022



Signature

Authorised Signatory
European Assessment and Certification

European Assessment and Certification Ltd. is Accredited by ASIB (Accred Services International Board (Europe) Limited)
Certification Body CRN : 12819256 Registered Office : 19, Layton Crescent, Slough, SL38DP, United Kingdom.
Accreditation Body CRN : 12348070 Registered Office : Kemp House, 160 City Road, London, United Kingdom.
This certificate remains valid while the holder maintains the management system in accordance with the standard(s) above, which will be periodically audited by EAC.
This certificate remains the property of European Assessment and Certification Ltd and must be returned on request. In the issuance of this certificate, European
Assessment and Certification Ltd assumes no liability to any party other than to the client, and then only in accordance with the agreed upon certification agreement.
Validity of this certificate may be confirmed at www.e-ac.uk, directly through QR code by using any device with correct information or email to info@e-ac.uk.

www.e-ac.uk



Management System Certification Body No. MSCB-108

CERTIFICATE

No. 20-A-0707 Rev.0

This is to certify that the Quality Management System of

Al Thuraiya Plastic Factory

of
New Industrial Area, St. No. 01, Factory No.09 Doha Qatar

Company Reg. No.: 76617

has implemented and documented a quality management system in
compliance with the requirements of the standard

ISO 9001:2015

for
Manufacturing of UPVC Profile for Doors and Windows
Lamination of UPVC Profile for Doors and Windows
Manufacturing of Door Panels

The certificate is issued on the basis of the results mentioned in the pertinent audit report.
Validity of the certificate is conditionally limited by positive results of surveillance audits,
which the certified company committed to undergo.

This certificate can be invalid if the certificate holder does not fulfill the conditions set out in
the certification agreement.



Initial issue date: Jul. 21, 2020
Expire date: Jul. 20, 2023

Signature
Tyronne Dye
Head of Certification Body

904 E. Windsor Road #102, Glendale, CA 91205
<http://www.gicert.org/>



Management System Certification Body No. MSCB-108

CERTIFICATE

No. 20-C-0102 Rev.0

This is to certify that the Occupational Health and Safety Management System of

Al Thuraiya Plastic Factory

of
New Industrial Area, St. No. 01, Factory No.09 Doha Qatar

Company Reg. No.: 76617

has implemented and documented an occupational health & safety
management system in compliance with the requirements of the standard

ISO 45001:2018

for
Manufacturing of UPVC Profile for Doors and Windows
Lamination of UPVC Profile for Doors and Windows
Manufacturing of Door Panels

The certificate is issued on the basis of the results mentioned in the pertinent audit report.
Validity of the certificate is conditionally limited by positive results of surveillance audits,
which the certified company committed to undergo.

This certificate can be invalid if the certificate holder does not fulfill the conditions set out in
the certification agreement.



Initial issue date: Jul. 21, 2020
Expire date: Jul. 20, 2023

Signature
Tyronne Dye
Head of Certification Body

904 E. Windsor Road #102, Glendale, CA 91205
<http://www.gicert.org/>



Management System Certification Body No. MSCB -108

CERTIFICATE

No. 20-C-0312 Rev.0

This is to certify that the Environmental Management System of

Al Thuraiya Plastic Factory

of
New Industrial Area, St. No. 01, Factory No.09 Doha Qatar

Company Reg. No.: 76617

has implemented and documented an environmental management system in
compliance with the requirements of the standard

ISO 14001:2015

for
Manufacturing of UPVC Profile for Doors and Windows
Lamination of UPVC Profile for Doors and Windows
Manufacturing of Door Panels

The certificate is issued on the basis of the results mentioned in the pertinent audit report.
Validity of the certificate is conditionally limited by positive results of surveillance audits,
which the certified company committed to undergo.

This certificate can be invalid if the certificate holder does not fulfill the conditions set out in
the certification agreement.



Initial issue date: Jul. 21, 2020
Expire date: Jul. 20, 2023

Signature
Tyronne Dye
Head of Certification Body

904 E. Windsor Road #102, Glendale, CA 91205
<http://www.gicert.org/>

يؤبى فى سى

مصنع الثرىا للبلاستىك

AL-THURAIYA PLASTIC FACTORY
UPVC



+974 311 411 48

+974 4 41 41 699 +974 4 41 41 669

sales@althuraiyaupvc.qa

info@althuraiyaupvc.qa



المنطقة الصناعية الجديدة ، شارع رقم ٠١ ، مصنع رقم ٠٩ ، الدوحة - قطر
New Industrial Area, St. No.01, Factory No.09, Doha-Qatar