

X1/X3 Hybrid G4 Battery Selection



X1 Hybrid G4 Inverter Battery Port Information

Here's some data on the inverter's battery port of X1 Hybrid G4.

Table 1 Battery Port Data

Inverter Type	X1-Hybrid-G4
Battery voltage range [V]	80-480
Max. charge / Discharge current [A]	30

X1 Hybrid G4 Battery Check

The X1-Hybrid G4 is available with the following three types of batteries

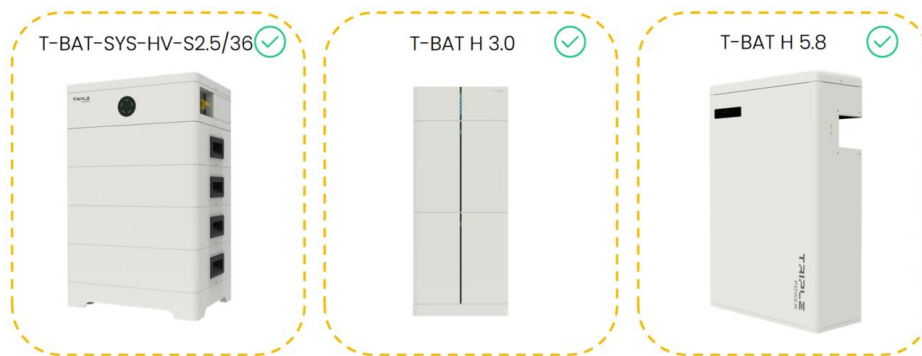


Figure 1 Batteries for X1 Hybrid G4

X1 Hybrid G4 Battery Selection——T30

1. T30 Normal Solution

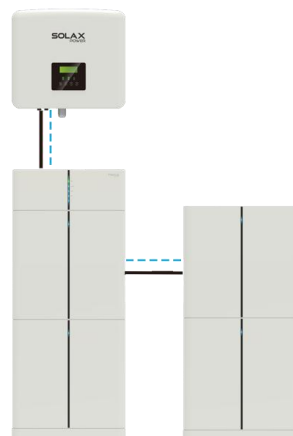


Figure 2 X1 Hybrid G4+One BAT port

Note:

- The X1 Hybrid G4's battery port can take a minimum of 1 T30 battery and a maximum of 4 batteries.

Table 2 Basic Data for T30 Normal Solution

Inverter Type	T-BAT H 3.0
Adaptable Quantity	1-4 pcs
Total Capacity	3.1-12.3 kWh
Max. charge / discharge current [A]	30
Nominal voltage [V]	102.4-409.6
Power [kW]	3.0-12.2

2. T30 BMS Parallel Box II G2 Solution

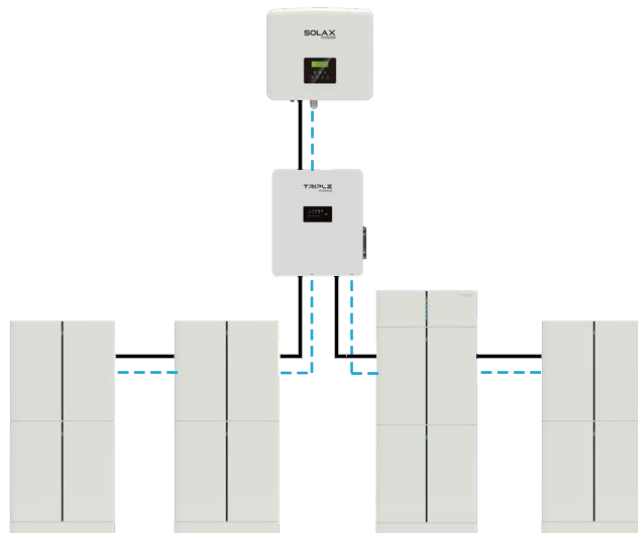


Figure 3 X1 Hybrid G4 + BMS Parallel Box II G2 + T30

Note:

- Each BMS Parallel Box G2 can connect 2 strings battery.
- The number of batteries in both strings needs to be the same

Table 3 Basic Data for T30 BMS Parallel Box II G2 Solution

Inverter Type	T-BAT H 3.0
Adaptable Quantity	2 or 4 or 6 or 8 pcs
Total Capacity	6.1 or 12.3 or 18.4 or 24.4 kWh
Max. charge / discharge current [A]	30× 2
Nominal voltage [V]	102.4-409.6
Power [kW]	(3.0 or 6.1 or 9.2 or 12.2)× 2

3. Parallel Solution

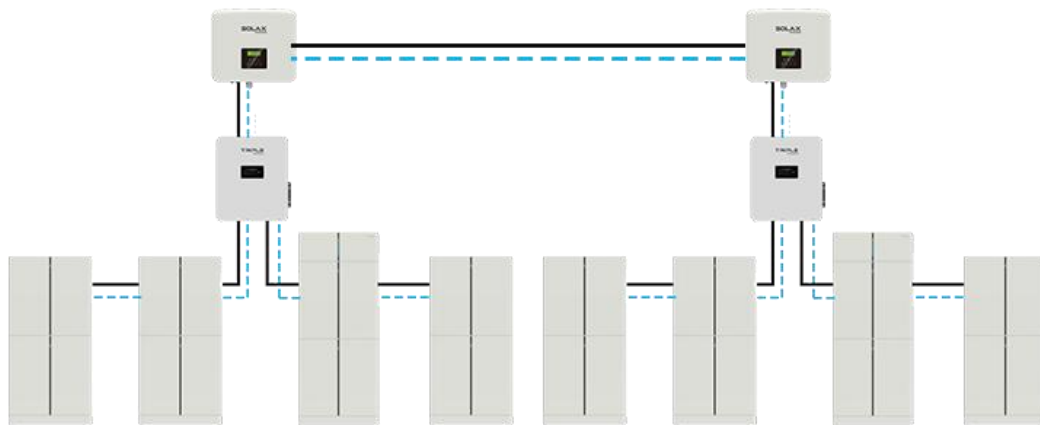


Figure 4 X1 Hybrid G4 + BMS Parallel Box II G2 + T30

Note:

- Each X1 Hybrid G4 can be paralleled by internal switch up to 2 pcs.
- Each BMS Parallel Box G2 can connect 2 strings battery, total of 4 strings.
- The number of batteries in both strings needs to be the same.

Table 4 Basic Data for Parallel Solution

Inverter Type	T-BAT H 3.0
Adaptable Quantity	(2 or 4 or 6 or 8) × 2 pcs
Total Capacity	(6.1 or 12.3 or 18.4 or 24.4) × 2 kWh
Max. charge / discharge current [A]	30× 2× 2
Nominal voltage [V]	102.4-409.6
Power [kW]	(3.0 or 6.1 or 9.2 or 12.2) × 2× 2

X1 Hybrid G4 Battery Selection——T58

1.T58 Normal Solution

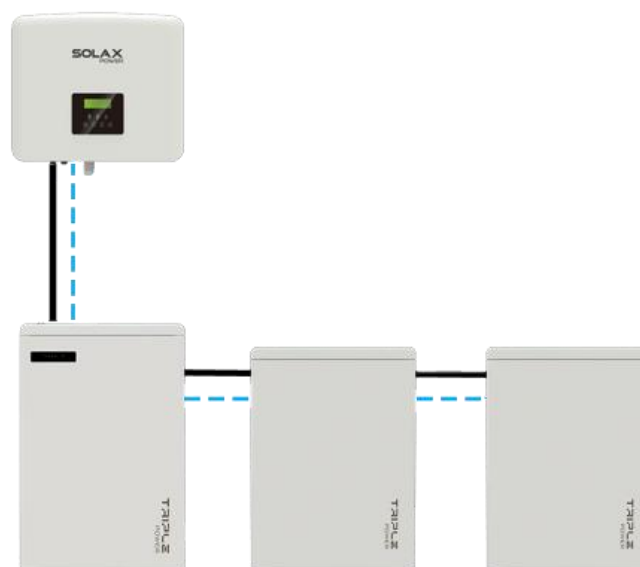


Figure 5 T58 Normal Solution

Note:

- The battery port of X1 Hybrid G4 can connect at least 1 pcs T58 and up to 3 pcs.

Table 5 Basic Data for Parallel Solution

Inverter Type	T-BAT H 5.8
Adaptable Quantity	1-3 pcs
Total Capacity	5.8-17.3 kWh
Max. charge / discharge current [A]	30× 2× 2
Nominal voltage [V]	115.2-345.6
Power [kW]	3.4-10.3

2. T58 BMS Parallel Box II Solution

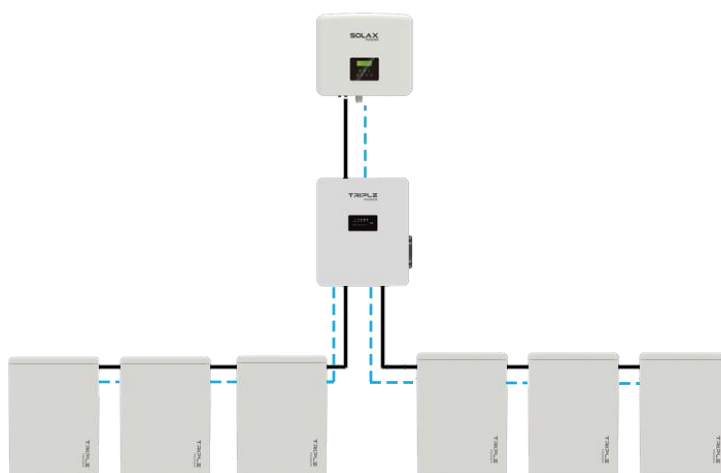


Figure 6 X1 Hybrid G4 + BMS Parallel Box II + T58

Note:

- The BMS Parallel Box II can connect 2 strings of batteries.
- If both strings of batteries are connected, the number of batteries in these both strings must be the same.
- In this solution, the X1 Hybrid G4 can be adaptable to 1-4 or 6 batteries.

Table 6 Basic Data for Parallel Solution

Inverter Type	T-BAT H 5.8
Adaptable Quantity	1-4 or 6
Total Capacity	5.8-23.0 or 34.6 kWh
Max. charge / discharge current [A]	30× 2
Nominal voltage [V]	115.2-460.8 or 345.6
Power [kW]	3.4-13.8 or 10.3

3. T58 BMS Parallel Box II G2 Solution

① BMS Parallel Box II can only match with T58, while G2 can match with T30 in addition to T58;

② BMS Parallel Box II two towers of batteries have the same bottom terminals, while G2 two towers of batteries have different bottom terminals, divided into Main port and Slave port;

③ Taking T58 batteries as an example, both BMS Parallel Box II towers can only be connected to T58 slave (i.e. HV11550), while G2 Main tower needs to be connected to BMS, and Slave tower only needs to be connected to slave control;

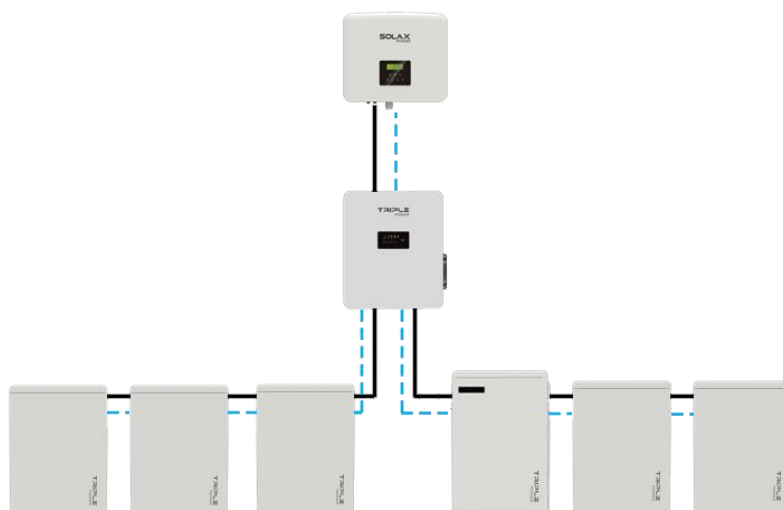


Figure 7 X1 Hybrid G4 + BMS Parallel Box II G2+ T58

Note:

- The BMS Parallel Box II G2 can connect 2 strings of batteries.

- If both strings of batteries are connected, the number of batteries in these both strings must be the same.
- In this solution, the X1 Hybrid G4 can be adaptable to 2 or 4 or 6 batteries.
- Each X1 Hybrid G4 can be paralleled by internal switch up to 2 pcs, and the X1 Hybrid G4 can be adaptable to $(2 \text{ or } 4 \text{ or } 6) \times 2$ batteries in this condition.

Table 7 Basic Data for T58 BMS Parallel Box II G2 Solution

Inverter Type	T-BAT H 5.8
Adaptable Quantity	2 or 4 or 6
Total Capacity	11.5 or 23.0 or 34.6 kWh
Max. charge / discharge current [A]	30× 2
Nominal voltage [V]	115.2 or 230.4 or 345.6
Power [kW]	3.4 or 6.9 or 10.3

X1 Hybrid G4 Battery Selection——HS25/36

1. HS25/36 Normal Solution



Figure 8 X1 Hybrid G4 + HS25/36

Note:

- In this solution, the X1 Hybrid G4 can be adaptable to 2-8 pcs HS25/36 batteries.

Table 8 Basic Data for HS25/36 Normal Solution

Inverter Type	HS25	HS36
Adaptable Quantity	2-8 pcs	2-8 pcs
Total Capacity	5.1-20.4 kWh	7.3-29.4 kWh
Max. charge / discharge current [A]	30	30
Nominal voltage [V]	102.4-409.6	102.4-409.6
Power [kW]	3.0-12.2	3.0-12.2

X3 Hybrid G4 Battery Port information

Here's some data on the inverter's battery port of X3 Hybrid G4.

Table 9 X3 G4 BAT Port Information

Inverter Type	X3-Hybrid G4
Battery voltage range [V]	180-800
Max. charge / Discharge current [A]	30

X3 Hybrid G4 Battery Check

The X3-Hybrid G4 is available with the following three types of batteries

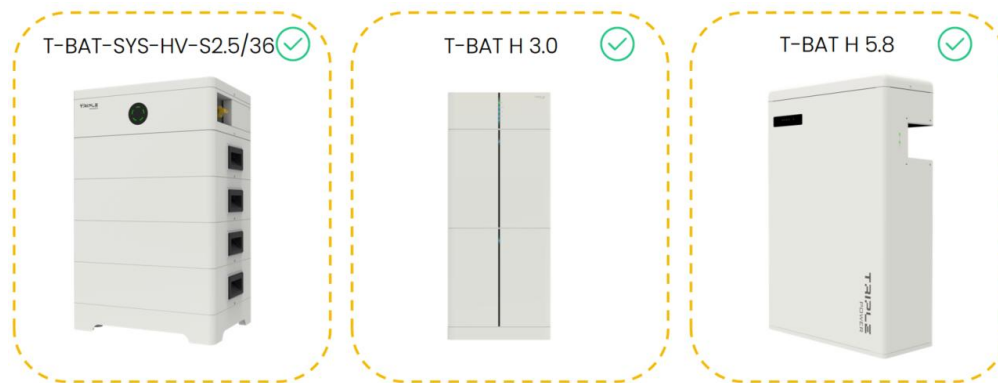


Figure 9 Batteries for X3 Hybrid G4

X3 Hybrid G4 Battery Selection——T30

1. T30 Normal Solution

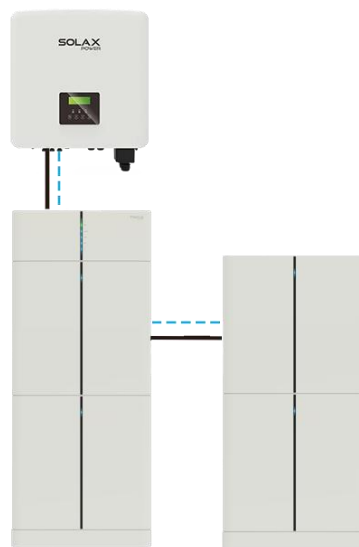


Figure 10 X3 Hybrid G4 + T30

Note:

- The X3 Hybrid G4's battery port can take a minimum of 2 T30 battery and a maximum of 4 batteries.

Table 10 T30 Normal Solution

Inverter Type	T-BAT H 3.0
Adaptable Quantity	2-4 pcs

Total Capacity	6.1-12.3 kWh
Max. charge / discharge current [A]	30
Nominal voltage [V]	102.4-409.6
Power [kW]	6.0-12.2

2. T30 BMS Parallel Box II G2 Solution

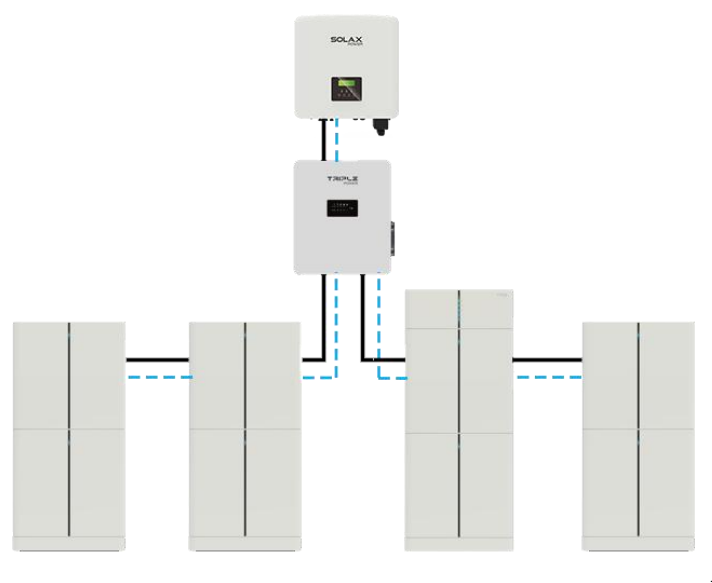


Figure 11 X3 Hybrid G4 + BMS Parallel Box II G2 + T30

Note:

- Each BMS Parallel Box G2 can connect 2 strings battery, total of 4 strings.
- The number of batteries in both strings needs to be the same

Table 11 T30 Normal Solution

Inverter Type	T-BAT H 3.0
Adaptable Quantity	4 or 6 or 8 pcs
Total Capacity	12.3 or 18.4 or 24.6 kWh
Max. charge / discharge current [A]	30× 2
Nominal voltage [V]	204.8 or 307.2 or 409.6

Power [kW]	$(6.0 \text{ or } 9.2 \text{ or } 12.2) \times 2$
------------	---

3. External switching parallel Solution

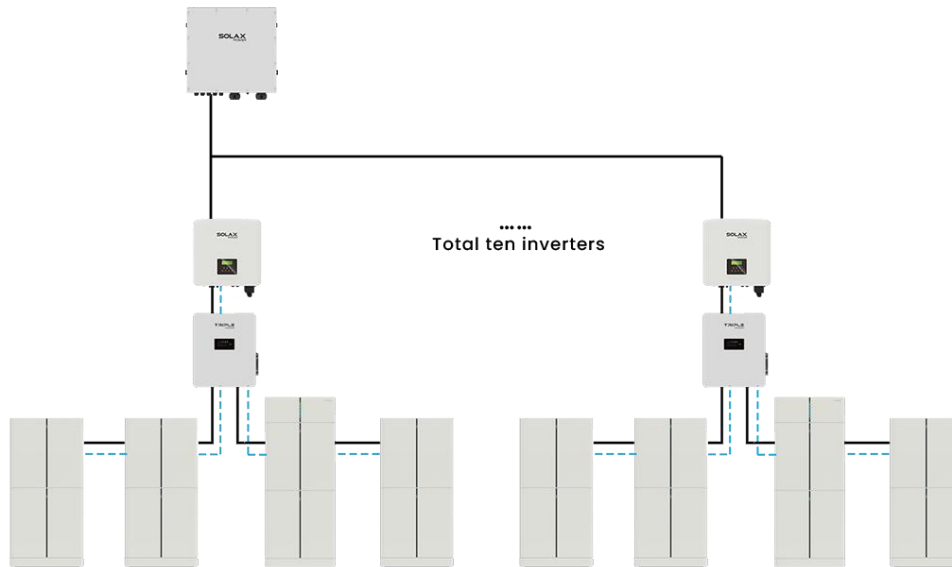


Figure 12 X1 Hybrid G4 + EPS Parallel Box +BMS Parallel Box G2 + T30

Note:

- Each X3 Hybrid G4 can be paralleled by EPS Parallel Box up to 10 pcs.
- If the number of parallel inverters exceeds 3, the EPS parallel box must be used.

Table 12 External switching parallel Solution

Inverter Type	T-BAT H 3.0
Adaptable Quantity	$(4 \text{ or } 6 \text{ or } 8) \times 10 \text{ pcs}$
Total Capacity	$(12.3 \text{ or } 18.4 \text{ or } 24.6) \times 10 \text{ kWh}$
Max. charge / discharge current [A]	$30 \times 2 \times 10$
Nominal voltage [V]	204.8 or 307.2 or 409.6
Power [kW]	$(6.0 \text{ or } 9.2 \text{ or } 12.2) \times 2 \times 10$

X3 Hybrid G4 Battery Check——T58

1. T58 Normal Solution



Figure 13 T58 Normal Solution

Note:

- The battery port of X3 Hybrid G4 can connect at least 2 pcs T58 and up to 4 pcs.

Table 13 Data for T58 Normal Solution

Inverter Type	T-BAT H 5.8
Adaptable Quantity	2-4 pcs
Total Capacity	11.5-23.0 kWh
Max. charge / discharge current [A]	30
Nominal voltage [V]	230.4-460.8
Power [kW]	6.9-13.8

2. T58 BMS Parallel Box II Solution

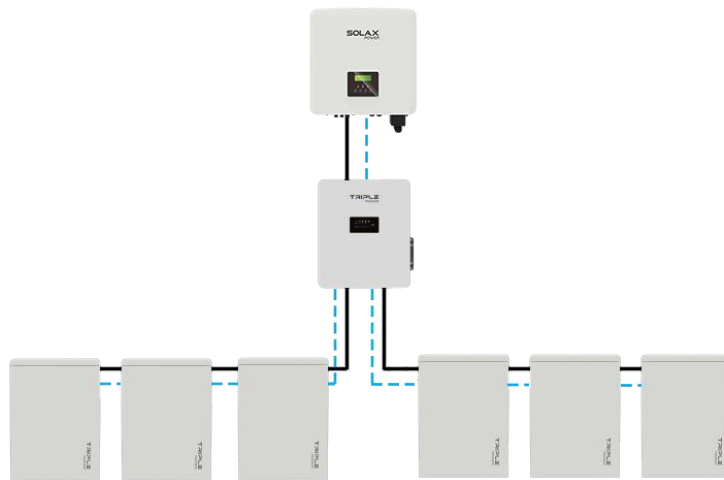


Figure 14 X3 Hybrid G4 + BMS Parallel Box II + T58

Note:

- The BMS Parallel Box II can connect 2 strings of batteries.
- If both strings of batteries are connected, the number of batteries in these both strings must be the same.
- In this solution, the X1 Hybrid G4 can be adaptable to 2-4 or 6 batteries.

Table 14 Data for T58 BMS Parallel Box II Solution

Inverter Type	T-BAT H 5.8
Adaptable Quantity	2-4 or 6 pcs
Total Capacity	115.2-230.4 or 345.6 or 460.8 kWh
Max. charge / discharge current [A]	30× 2
Nominal voltage [V]	115.2-230.4 or 345.6 or 460.8
Power [kW]	3.4-13.8

3. T58 BMS Parallel Box II G2 Solution

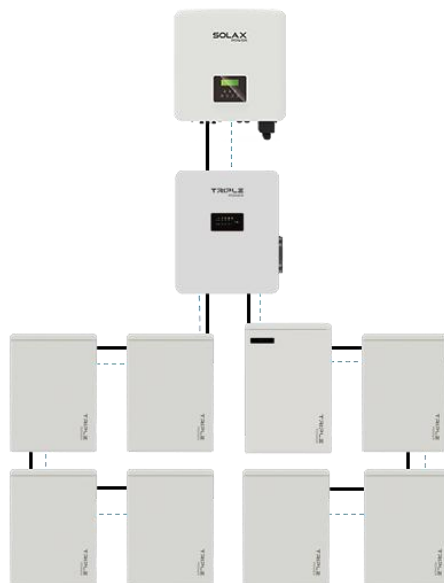


Figure 15 X3 Hybrid G4 + BMS Parallel Box II G2+ T58

Note:

- The BMS Parallel Box II G2 can connect 2 strings of batteries.
- If both strings of batteries are connected, the number of batteries in these both strings must be the same.
- In this solution, the X3 Hybrid G4 can be adaptable to 4 or 6 or 8 batteries.

Table 15 Data for T58 BMS Parallel Box II G2 Solution

Inverter Type	T-BAT H 5.8
Adaptable Quantity	4 or 6 or 8 pcs
Total Capacity	23 or 34.6 or 46.1 kWh
Max. charge / discharge current [A]	30× 2
Nominal voltage [V]	230.4-460.8
Power [kW]	6.9-13.8

4. External switching parallel Solution

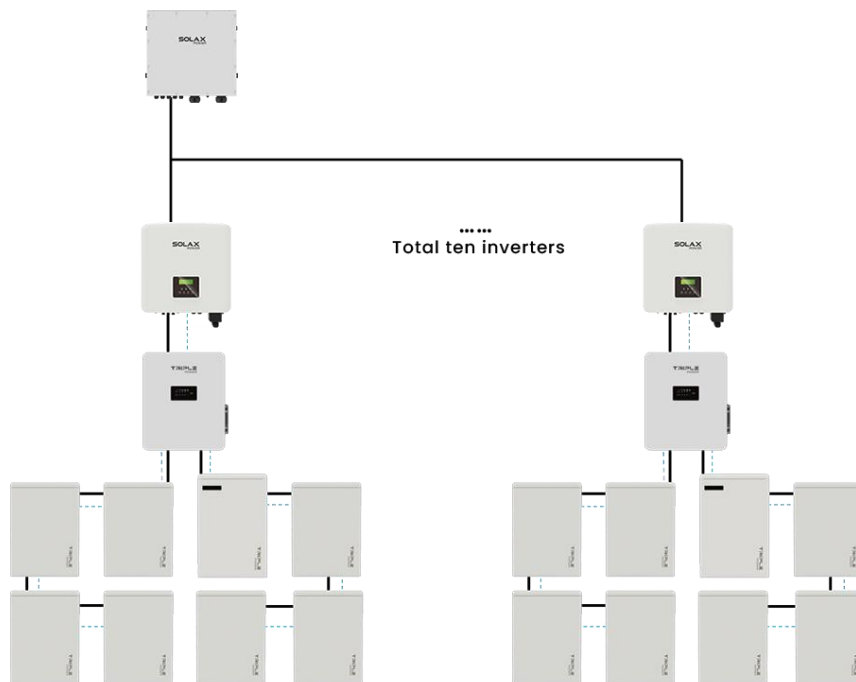


Figure 16 X3 Hybrid G4 + EPS Parallel Box + BMS Parallel Box II G2 + T58

Note:

- X3 Hybrid G4 can be paralleled by EPS Parallel Box up to 10 pcs.
- If the number of parallel inverters exceeds 3, the EPS parallel box must be used.

X3 Hybrid G4 Battery Check——HS25/36

1. HS25/36 Normal Solution

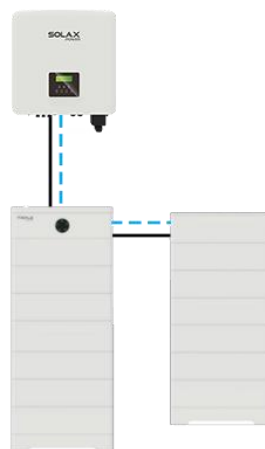


Figure 17 X3 Hybrid G4 + HS25/36

Note:

- In this solution, the X3 Hybrid G4 can be adaptable to 3-13 pcs HS25/36 batteries.

Table 16 Basic Data for HS25/36 Normal Solution

Inverter Type	HS25	HS36
Adaptable Quantity	3-13 pcs	3-13 pcs
Total Capacity	7.6-33.2 kWh	11.0-47.9 kWh
Max. charge / discharge current [A]	30	30
Nominal voltage [V]	153.6-665.6	153.6-665.6
Power [kW]	4.6-19.9	5.3-23.2

2. External switching parallel Solution

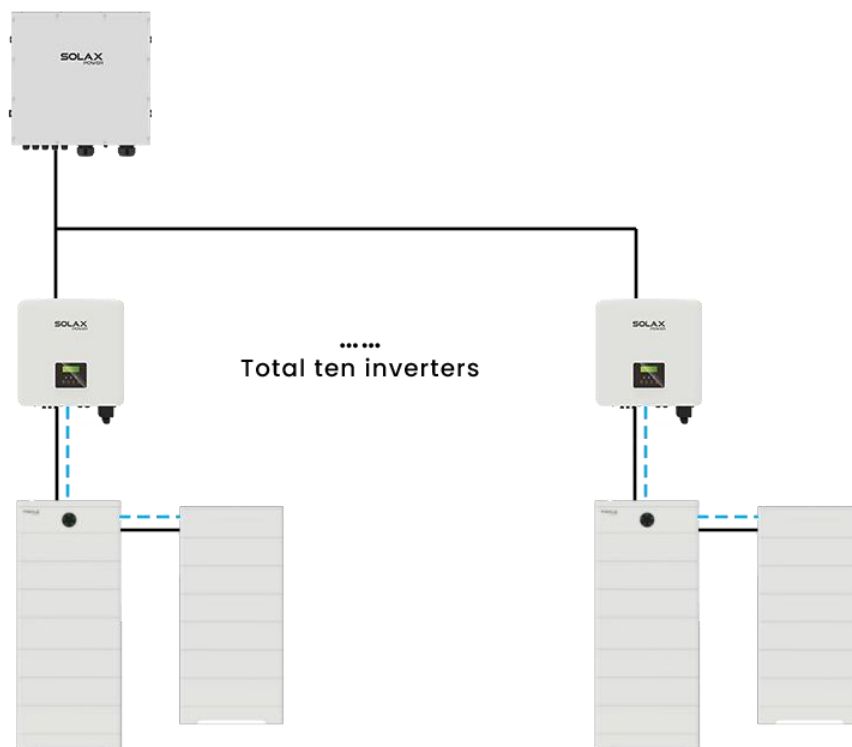


Figure 18 X3 Hybrid G4 + EPS Parallel Box + HS25/36

Note:

- X3 Hybrid G4 can be paralleled by EPS Parallel Box up to 10 pcs.
- If the number of parallel inverters exceeds 3, the EPS parallel box must be used.