



Configuration Guide on SolaXCloud V6 APP


APP Registration

Step 1: Scan the following QR code or search for the keyword "SolaxCloud" in the APP Store to download the Monitoring APP.



Step 2: Click the [More >] button at upper left corner to choose language.

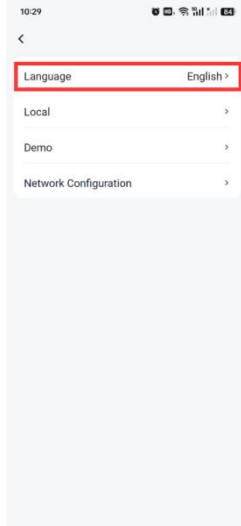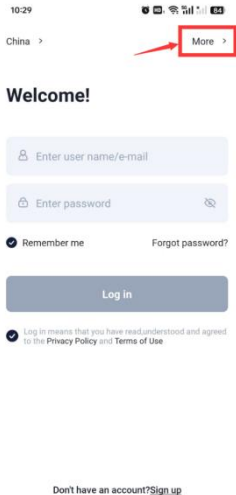



Step 3: Click “Sign Up” at the bottom of Monitoring App, select “End User”.

Step 4: Fill in your registration Email, input the Verification code, and enter your password to create the account.



Welcome!

☒ Remember me [Forgot password?](#)

[Log in](#)

☒ Log in means that you have read, understood and agreed to the [Privacy Policy](#) and [Terms of Use](#)

Don't have an account

[Sign up](#)

Sign up

1

4 [Send](#) 3

2

[Sign up](#) 6

☒ Log in means that you have read, understood and agreed to the [Privacy Policy](#) and [Terms of Use](#)

5 [Already have an account? Log in](#)

11:46



English >

Please choose your identity

Distributor/ Installer

Users who provide
services to owners



1



End User

Users who will or already
have their own site



Next

2

11:46



Please confirm a server

Country/Region *



Product features may vary by country/region. Please choose
carefully based on your location.

1


Server *



The server is automatically confirmed based on your
country/region and modification is not supported.

Next

2

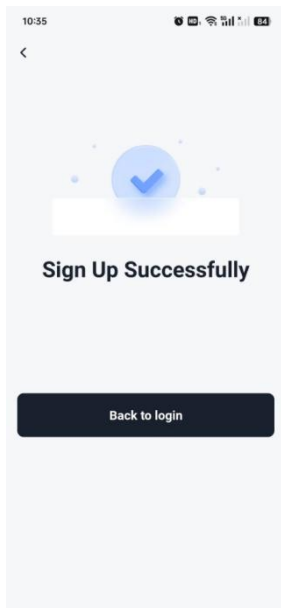




NOTICE!



- If the registration fails, please contact the supplier.

WiFi Connection

Step 1: Log in your account, create a plant and add a device.

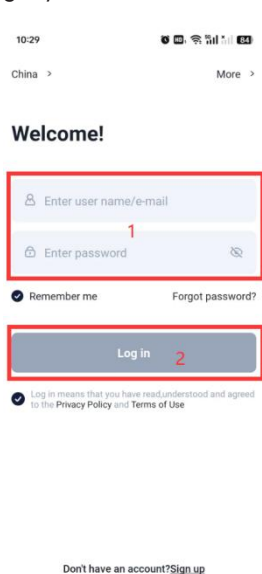

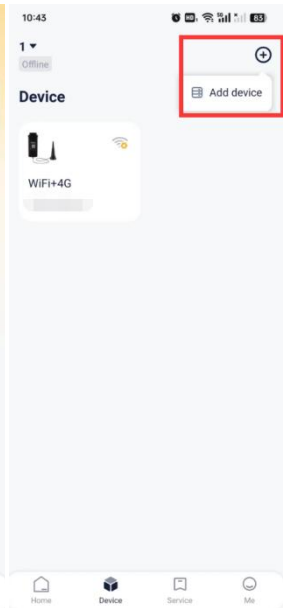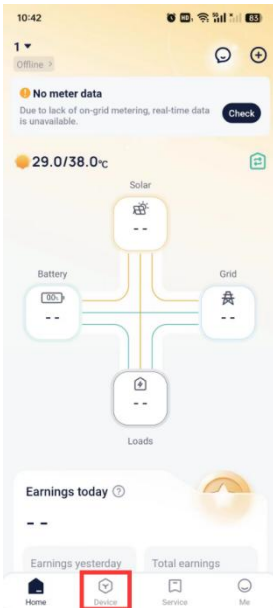

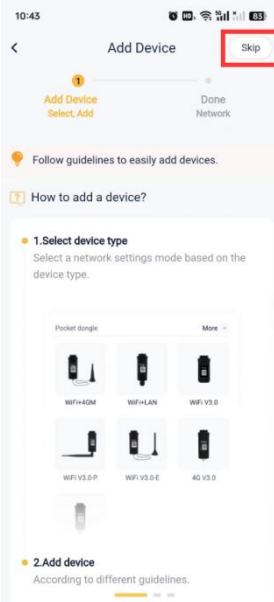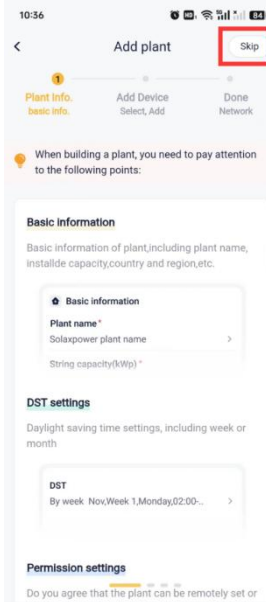



Add plant

Please fill in the basic information of the power station.

* Plant name

* System Size (kWp)

Battery capacity (kWh)

1

* Country and region

UNITED STATES



* Timezone

(UTC+08:00)Beijing,Chongqing,Hong K



* Location

浙江省-杭州市-西湖区



☐ Default top display

☐ Use&Set DST


☐ I agree that the power station can be remotely maintained and functionally set by the agent/installer.(Non personal data will be used)


2

Next

3


Step 2: Select the device to be configured, scan the QR code on the device to bind a device.

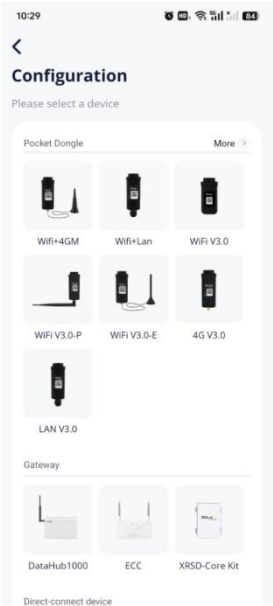

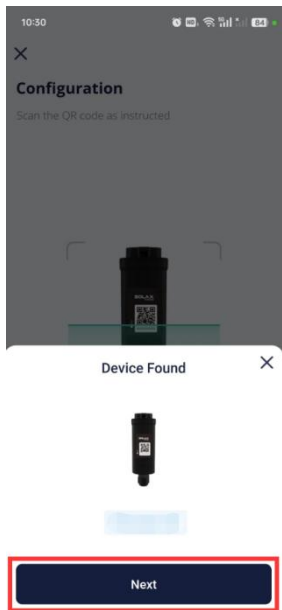

Step 3: Connect to your home WiFi, connect to the device hotspot(Wifi_Sxxxxxxx; Sxxxxxx refers to the Registration No. on the device).



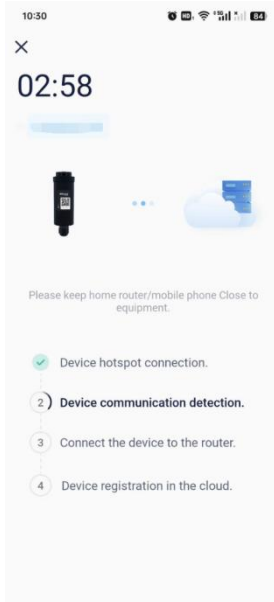


Step 4: If you need proceed operations following network configuration, please switch to your home WiFi.

NOTICE!


- You can also configure WiFi on the login interface.


Step 5: Click [More >] -> [Network Configuration] and start to configure WiFi as describe above.

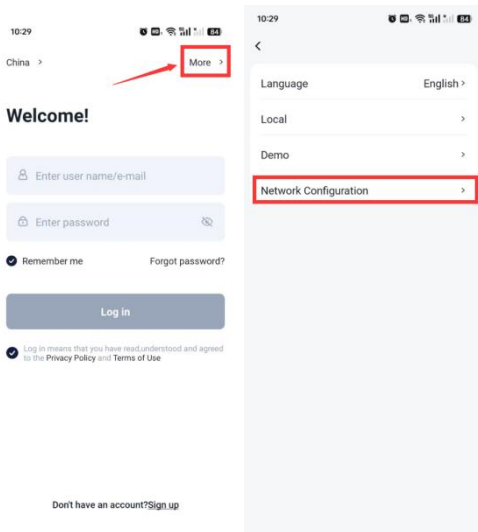

4G connection (skip this step if you didn't buy Pocket WiFi+4GM/ Pocket 4G V3.0)

Step 1: Click [More >] -> [Local], scan the QR code on the device.

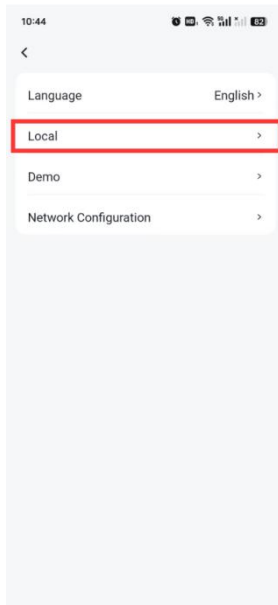

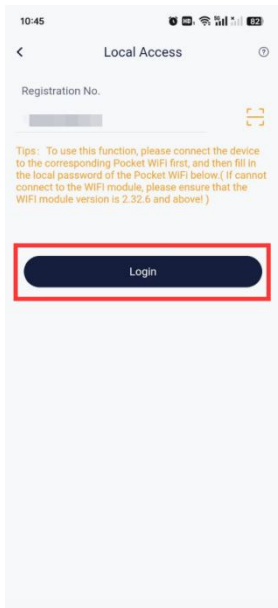

Step 2: Click [Dongle] -> [⚙️], choose [4G], and start 4G configuration.

10:45

Dongle 2 

Mode WiFi

Firmware version	2.1
Internal Code	1.003.05
Connect with inverter	H34C10K1198089
Connect with router	SolaxGuest
Wi-Fi signal	100
IP address	192.168.110.101
MAC address	34-85-18-BE-05-88
Connect with server	220.189.210.130

Change WiFi local password

Old password

New password

Pocket WiFi SSID Broadcast 

Save

Overview Alarm Data 1 **Dongle**

10:45

1 4G 

Configuration

config Manual configuration


APN* 2

Network deployment 3 NB_IOT >


Next 4

NOTICE!

- For APN information, you need to consult the network operator from whom you purchased the 4G SIM card, as different operators provide different APNs.
- If you are an American end user, it is recommended to select [Cat M] for [Network deployment].

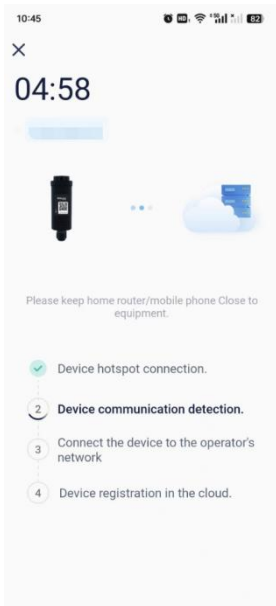

Step 3: If you need proceed operations following network configuration, please switch to your home WiFi.

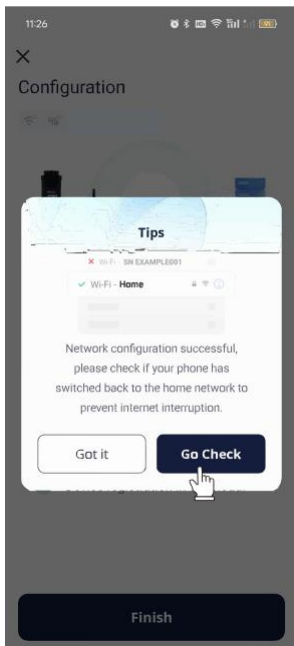

Troubleshooting

If the WiFi configuration fails, please check the following table to diagnose and seek solutions.

Process	Description	Solutions
Device hotspot connection	The connection status between APP and module network WiFi_ SXXXXXXXXX.	If this step fails, check whether the WiFi_SXXXXXXXXX network can be searched by your cell phone; if not, pull the Pocket WiFi from the equipment and plug it again.
Device communication detection	The connection status between Pocket WiFi and inverter.	If this step fails, pull the Pocket WiFi from the equipment and plug it again. Ensure that the WiFi module is plugged in properly.
Connect the device to the operator's network	The connection status between Pocket WiFi and router.	If this step fails: Check if the SSID and password of the router is correct. (1) Check if the router supports 2.4GHz communication (the WiFi module only supports 2.4GHz). (2) Check if the router signal is good at the location of WiFi module through the WiFi network of your mobile phone. (3) Check if the APP is the latest version (when the WiFi configuration process time out).
Device registration in the cloud	The connection status between Pocket WiFi and server.	If this step fails, check if the router supports web browsing through the WiFi network of your mobile phone.