

Help & Feedback (WEB Operation Manual)

Product introduction

SolaXCloud is an intelligent management platform for home energy, which integrates energy efficiency monitoring, device management, data security communication and other integrated capabilities. While managing your home energy device, it helps you optimize the efficiency of electricity consumption, improve the revenue of power generation, and meet the unknown energy challenges.



Account and security

In this section, you will get the information about personal account management and account information modification.

- [How to create an account](#)
- [Log in to SolaXCloud](#)
- [Forgot password](#)
- [Modify personal information](#)



How to create an account

Before using [SolaXCloud], you need to register an SolaXCloud account first. You can [[Create a new account](#)] using your email address.

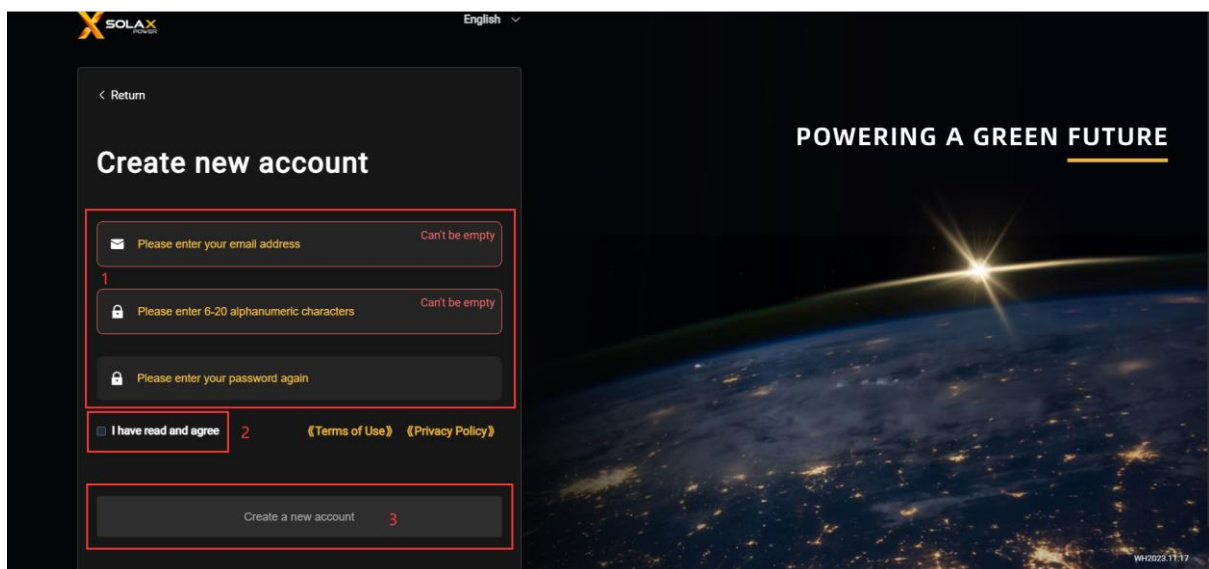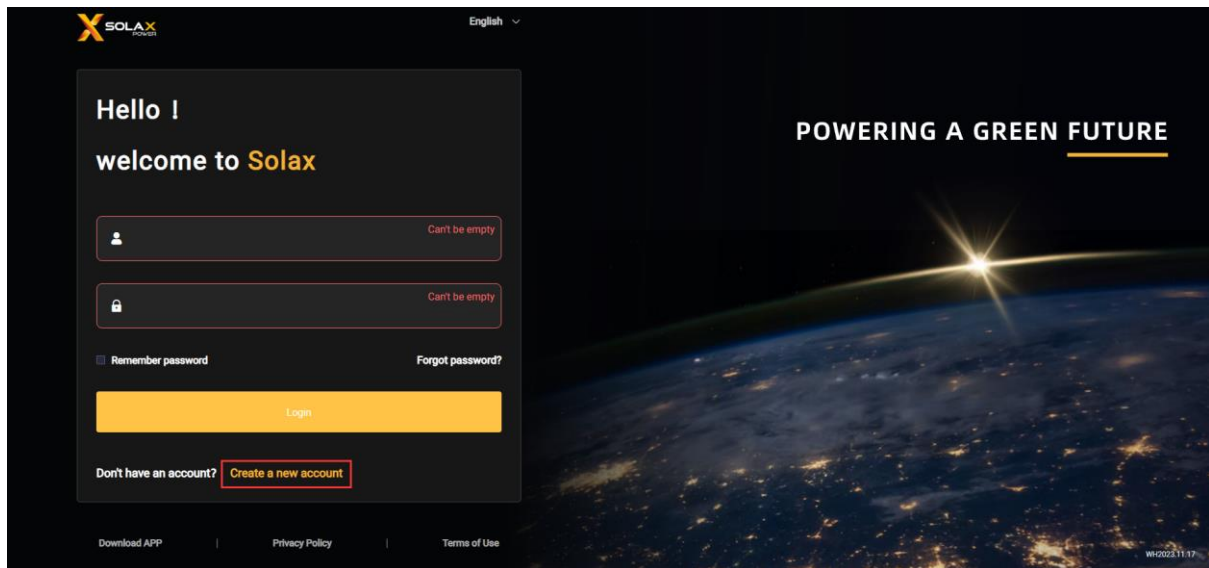

Log in to SolaXCloud


1. You need to create a SolaXCloud account
2. Enter the account and password and click [Login].

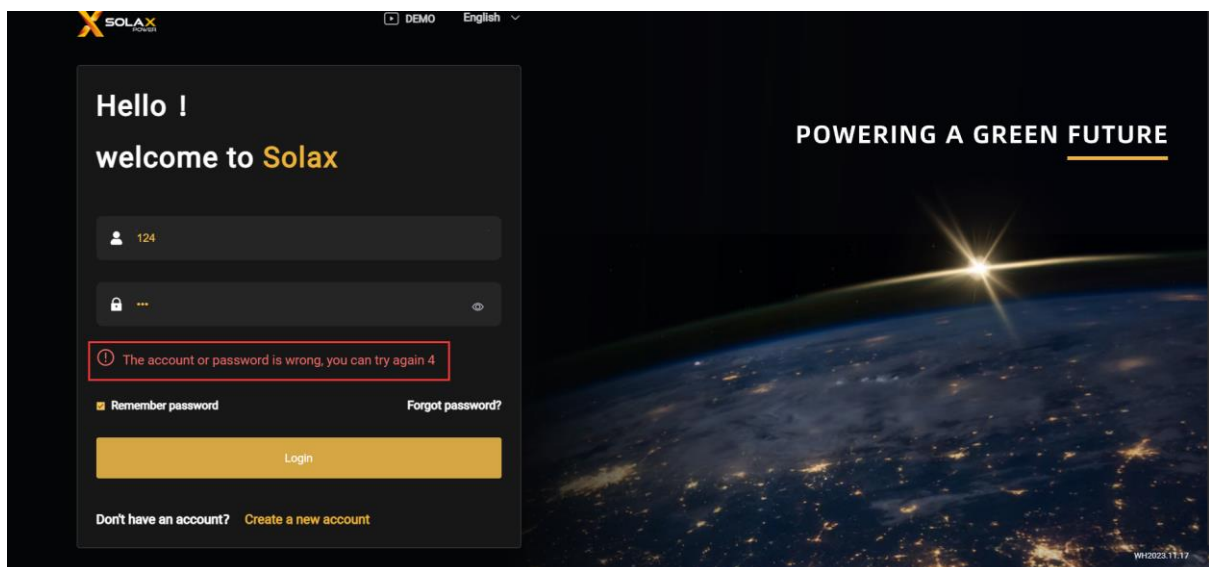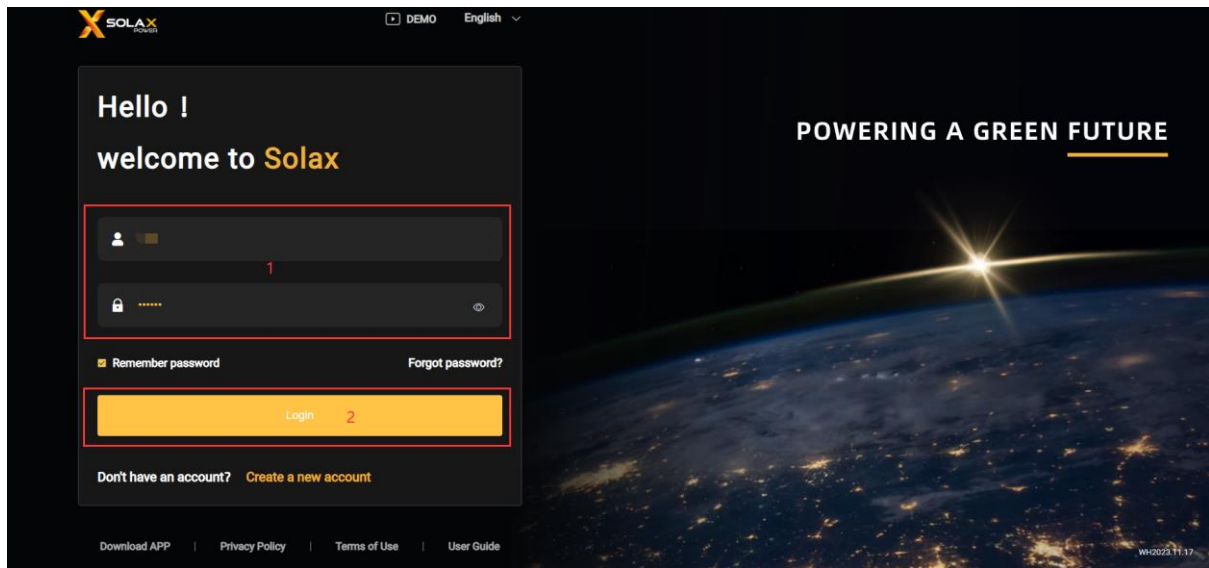


If you fill in the wrong password several times, we will temporarily freeze the login of the account, and you can retrieve it through the [“Forgot password”](#) option.

Forgot password


1. You can retrieve the password of the account through the [Forgot password] option in the login page.

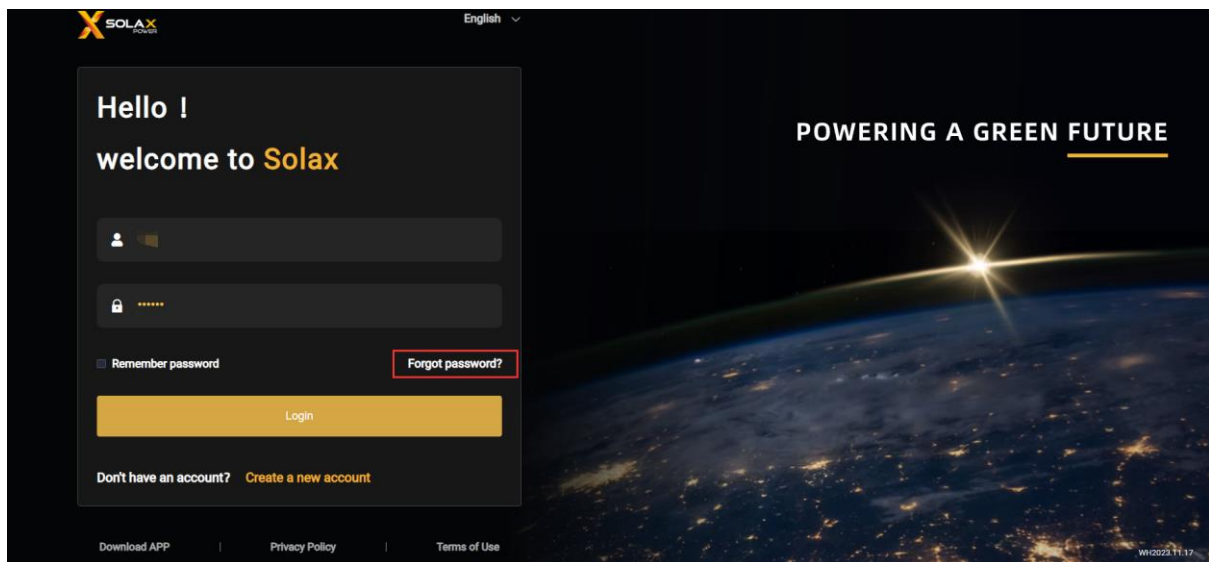


2. Fill in your registered email address and click [Send] to send verification code.

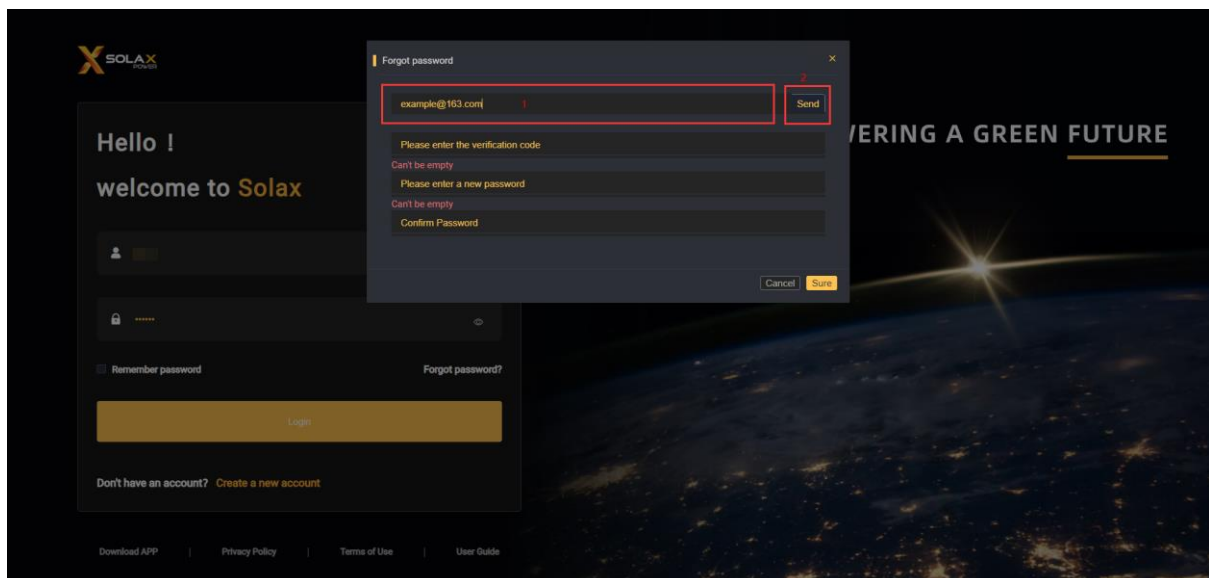

3. Find the verification code sent by [SolaXCloud] in your mailbox and type in the code on the website.

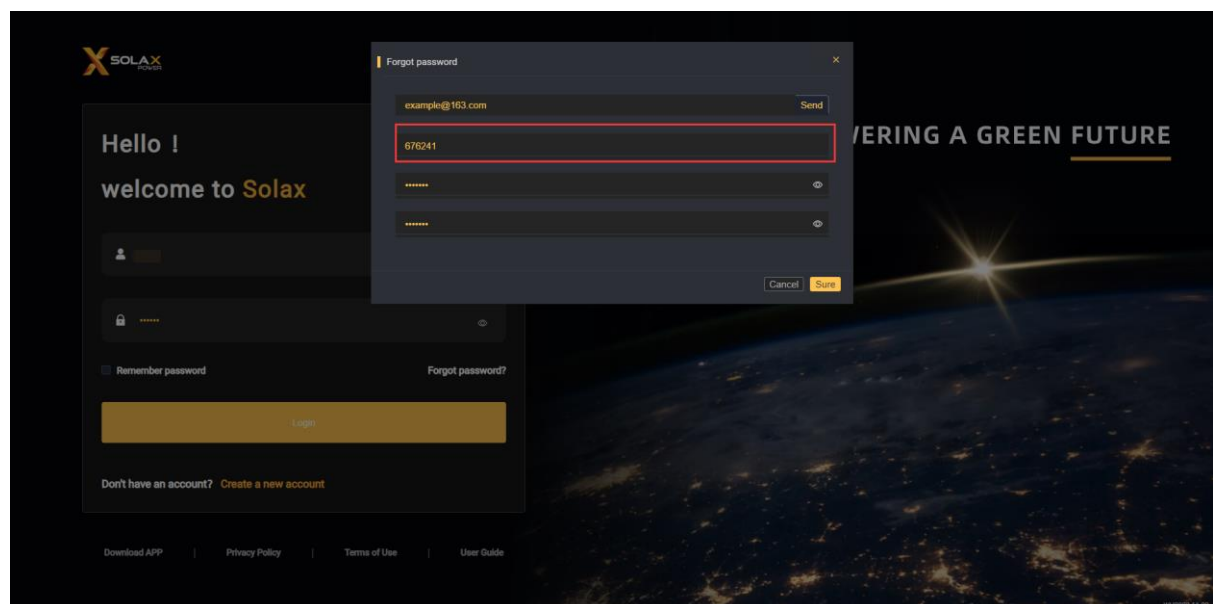


4. Fill in the new password and double confirm.

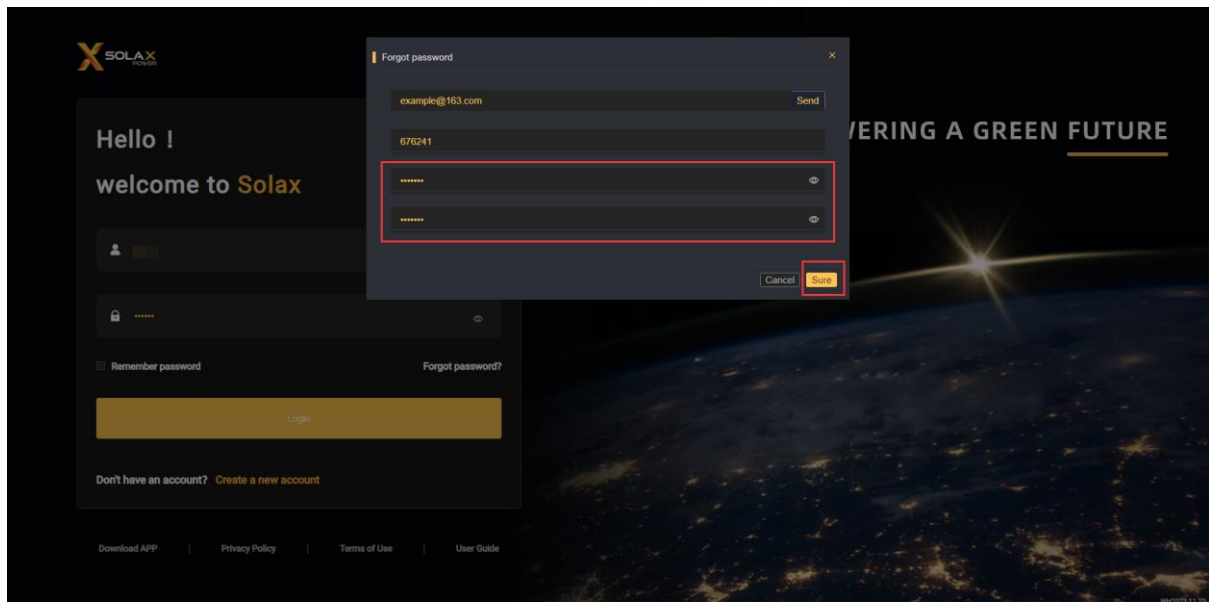


Modify account information

1. Log in to your [SolaXCloud] account
2. Click on your account name
3. You can modify your login account and email.

Please be careful to click [log out User] unless you confirm that [SolaXCloud] is no longer used.

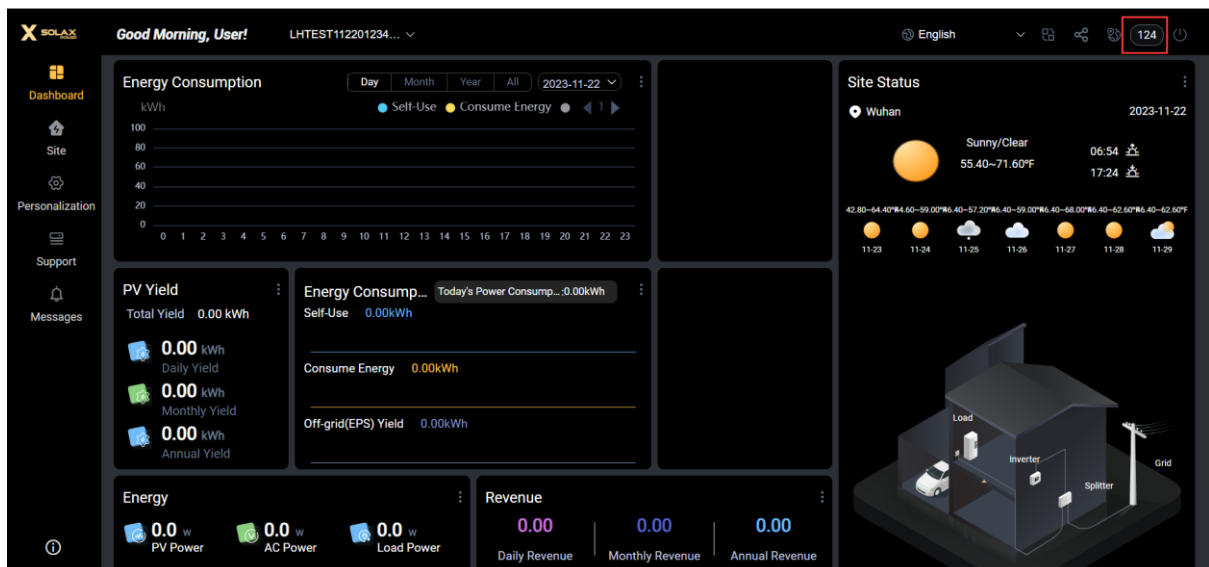

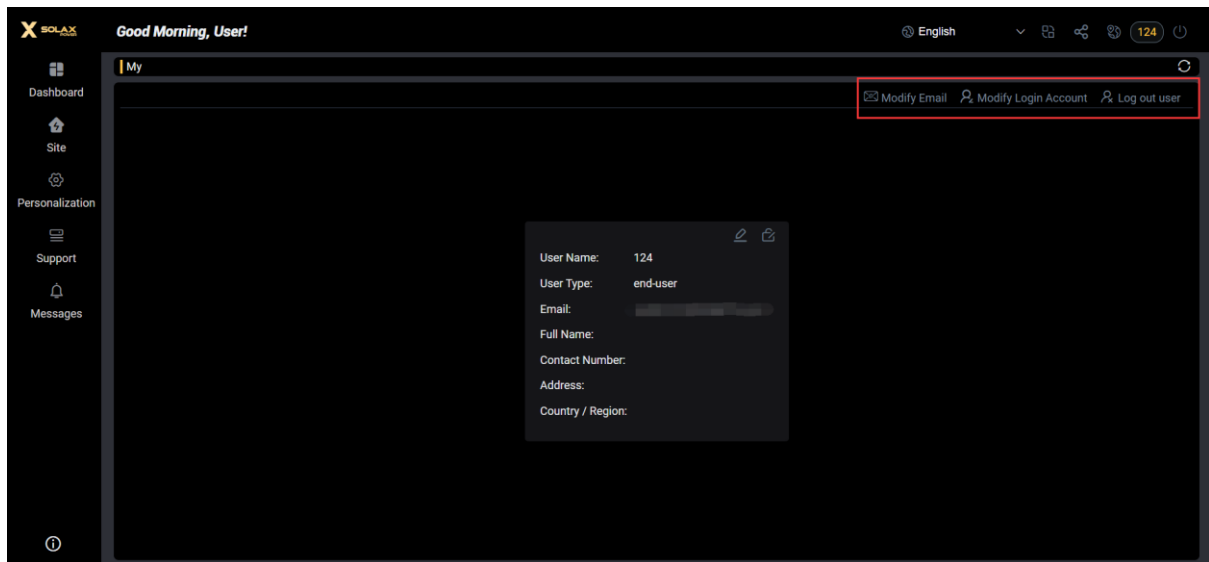

Manage your home power site

In this section, you will learn how to create a power site for your home and how to manage it.


- How to create a site
- View site information
- Set the tariff
- Remote access authorization

How to create a site

1. Create your home power site at [Site]-[Add Site]



2. Fill in your home power site information and registration number

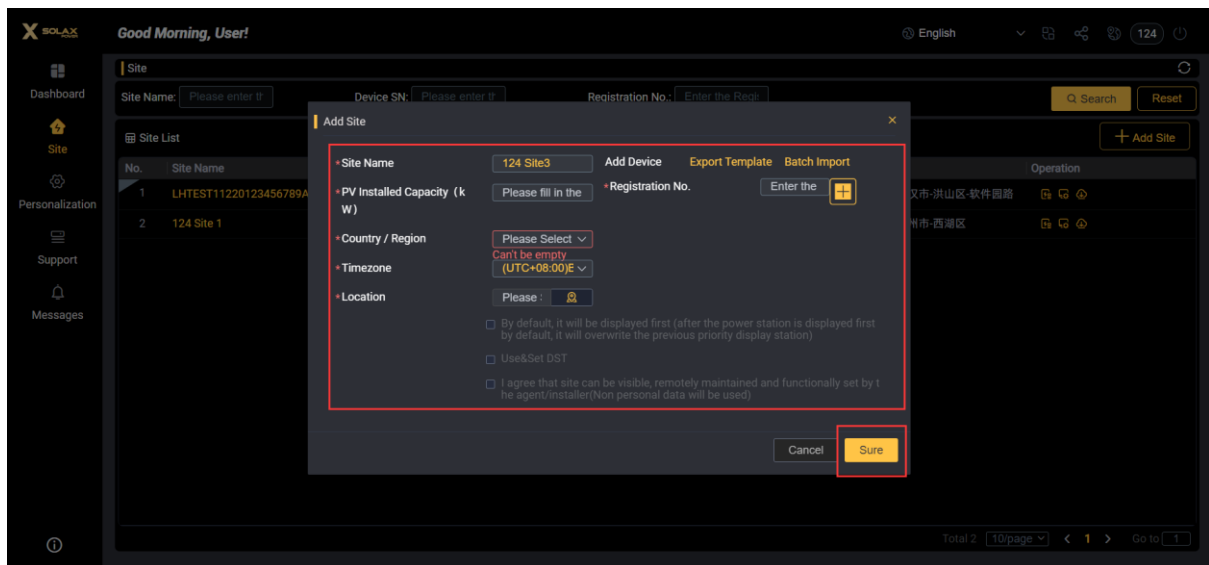

3. Registration number

The registration number is the unique identification number of [SolaXCloud] Pocket Dongle and other network device. You can find it by the nameplate on the outer package or terminal.


Please note that the registration number is the unique identification of Pocket dongle. Please keep your Pocket dongle information properly. If it is leaked, it may be occupied and cannot be bound.



View the site information


1. Click the name of your site, and you can view the device information associated with the site.


A screenshot of the SOLAX Power web interface. The top navigation bar includes the SOLAX logo, a greeting 'Good Morning, User!', language settings (English), and user information (124). The left sidebar contains navigation links: Dashboard, Site, Personalization, Support, and Messages. The main content area is titled 'Site' and includes search and filter fields for Site Name, Device SN, and Registration No. Below this is a 'Site List' table with columns for No., Site Name, System Size (kW), Country / Region, Timezone, Location, and Operation. Two sites are listed: Site 1 and Site 2. The 'Site Name' column for both sites is highlighted with a red box. At the bottom right, there is a pagination bar showing 'Total 2', '10/page', and 'Go to 1'.

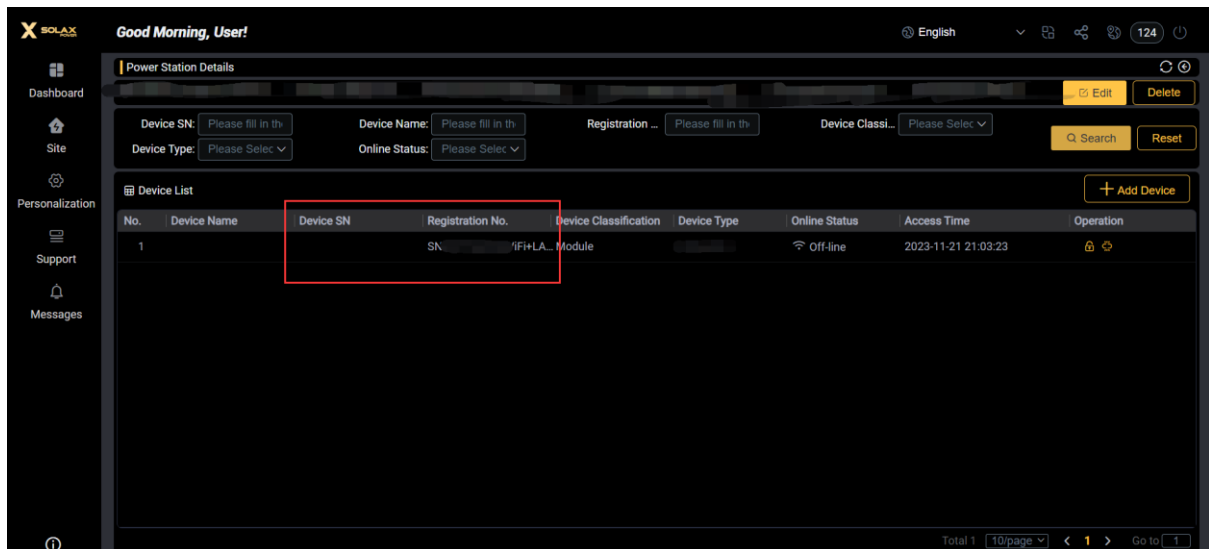

2. On the site details page, you can view all devices associated to the site, manage the relationship between device and Pocket dongle, and view device operation information.

2.1 When viewing detailed information, you can understand the device operation status through the data chart, such as power, energy yield, battery SOC and other information.

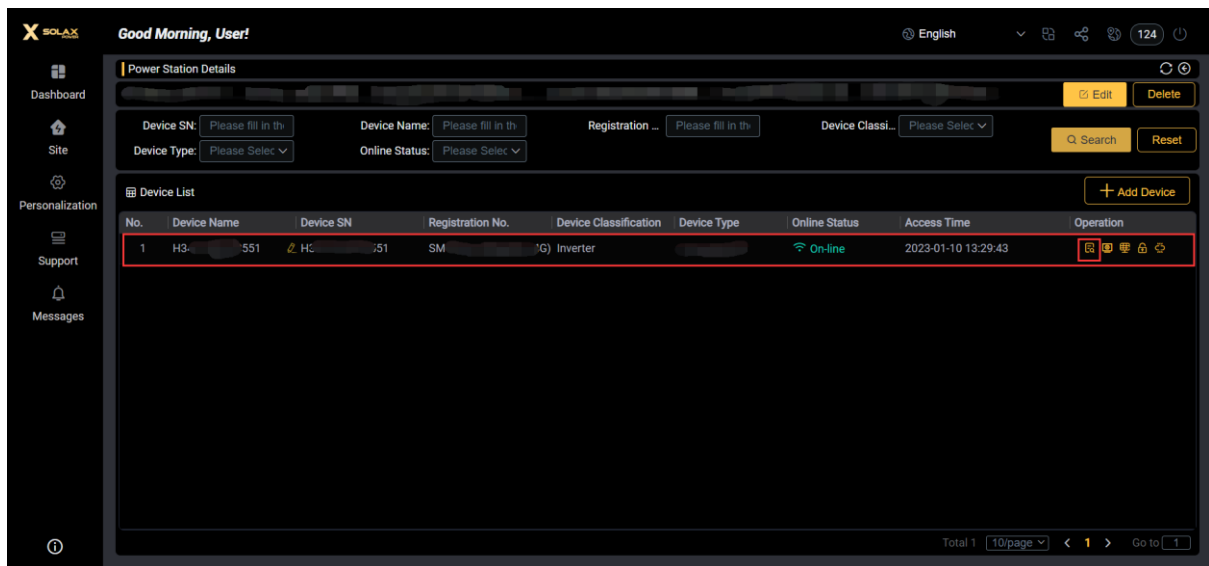

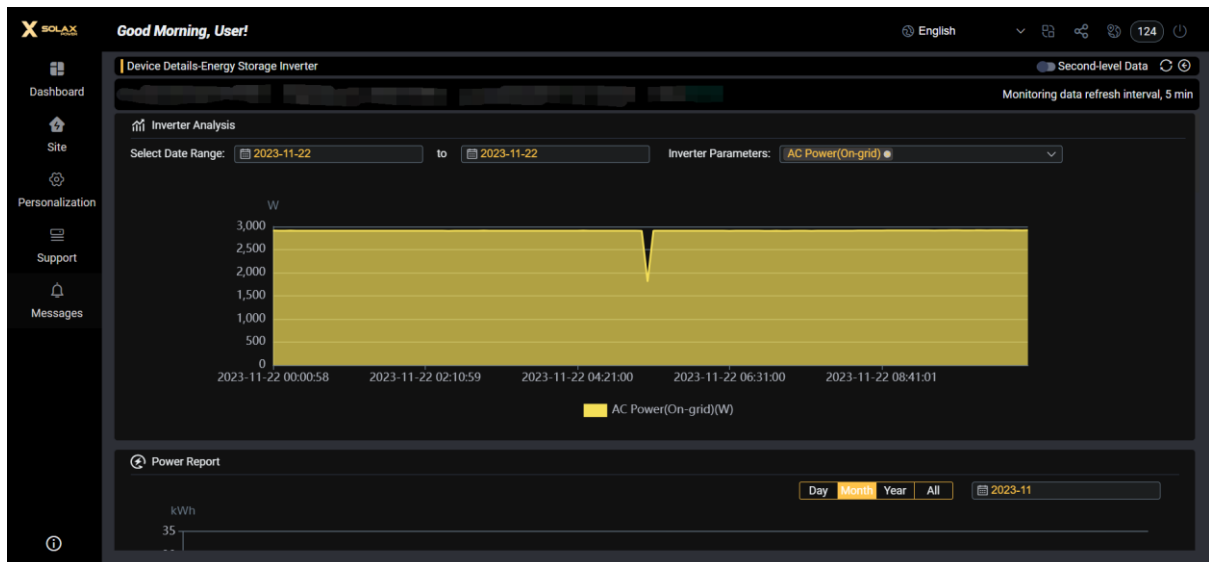



2.2 When you need to replace the Pocket dongle of the Inverter, you need to unbind the Pocket dongle from the current device, and then replace it to another inverter.

The screenshot shows the 'Power Station Details' page. It includes fields for Site Name, Country and region, Timezone, The Location, PV installed capacity, and Show first by default. Below these are input fields for Device SN, Device name, Registration No., Equipment CL, and Online Status. A 'Device List' table is displayed with columns: No., Device name, Device SN, Registration No., Equipment Classifcat..., Device Type, Online Status, Access Time, and Operation. A modal dialog titled 'Unbind prompt' is open, asking 'Are you sure to unbind?' with 'Cancel' and 'OK' buttons. The 'OK' button is highlighted with a red box. The 'Operation' column in the table also has icons, with one icon highlighted by a red box.

No.	Device name	Device SN	Registration No.	Equipment Classifcat...	Device Type	Online Status	Access Time	Operation
1	C32208ronghe01			PHD180(WP1)	PV Charger	Online	2023-10-19 12:56:20	
2	H34A106378551				X1703-EVC-G1.1	Online	2023-01-10 13:29:43	
3	XB3260CQC12345					Online	2022-09-28 14:26:06	
4						Off-line	2023-11-09 10:52:17	

Set the tariff

You can maintain the tariff (electricity price) information of your home energy power site, and the system will calculate your income for you by the information you set.


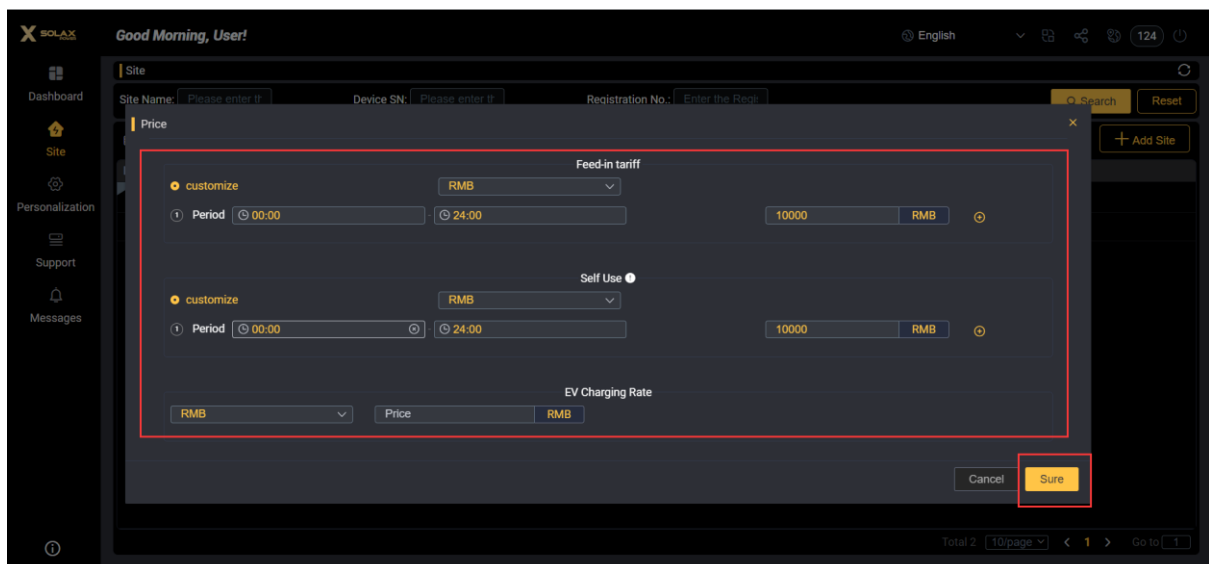
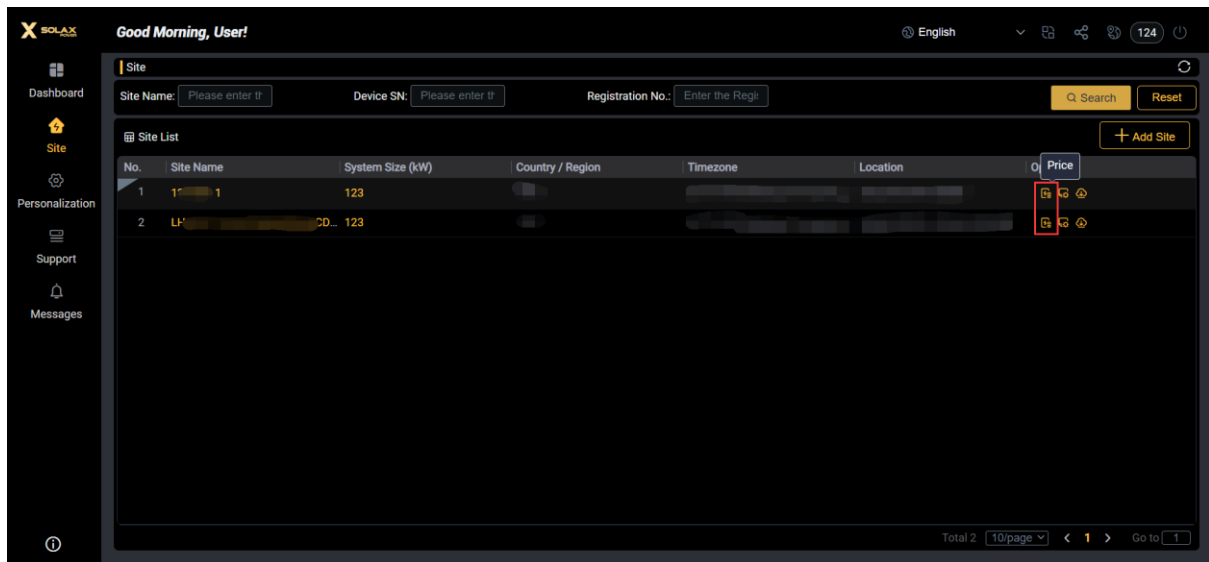


If the interface mode is selected, the system will obtain the Day-ahead tariff from the third-party electricity trading market.


Remote access authorization

Remote access authorization means that you actively authorize your installer/agent to help you maintain and manage your device.

To enable the authorization function, you need to check on the management page of the power site and make confirmation. After enabling the authorization function, the data and control rights of your power site will be available to the installer/agent. In this case, the installer can setup and maintain your device remotely.

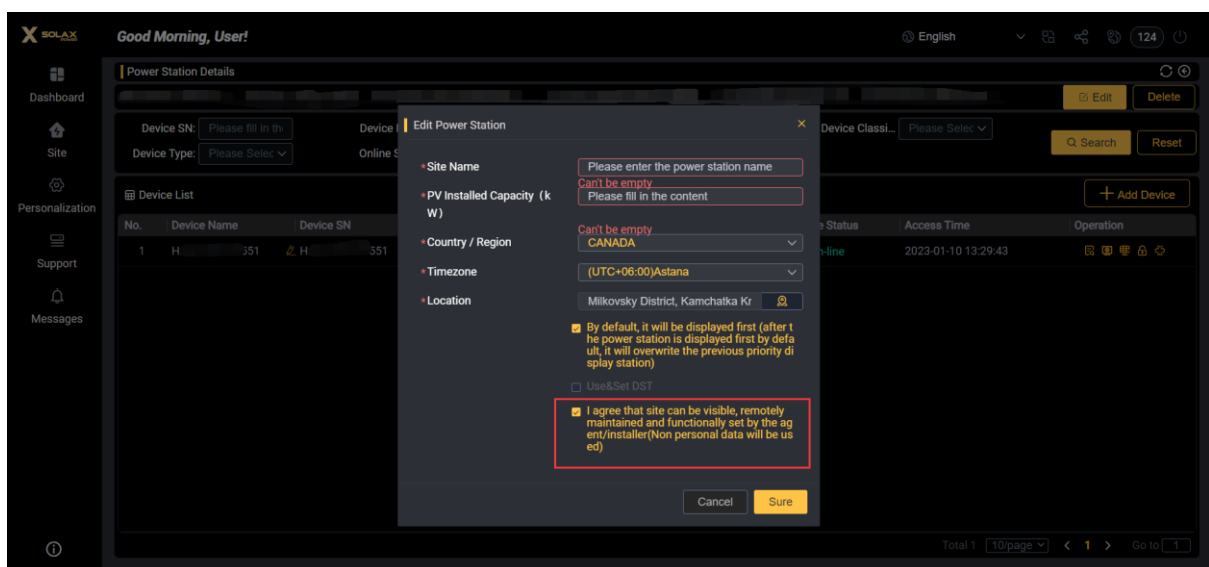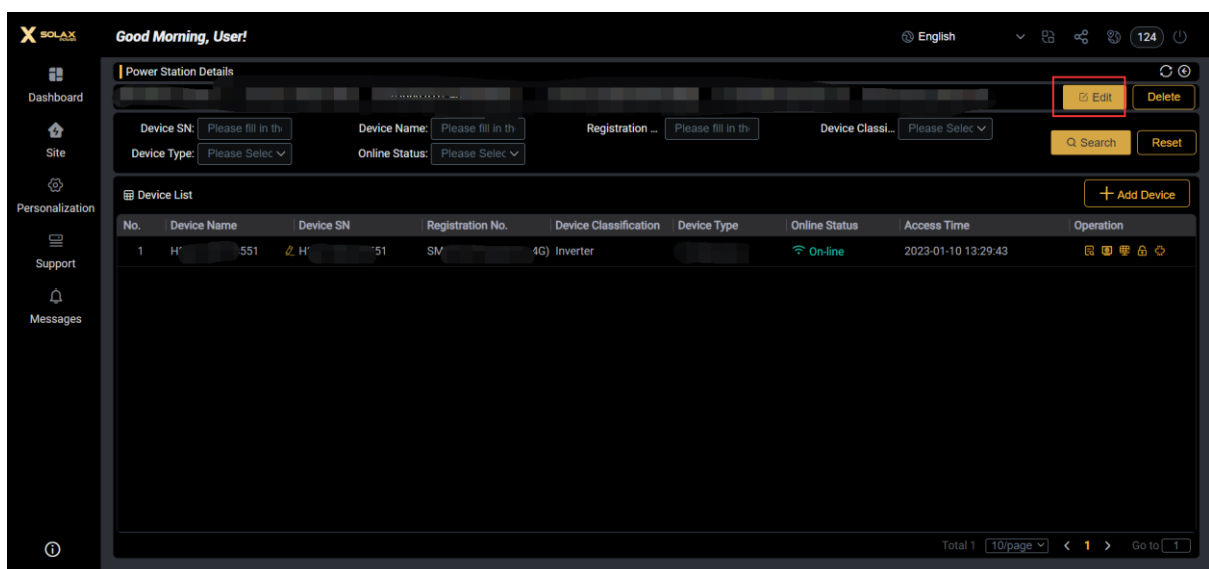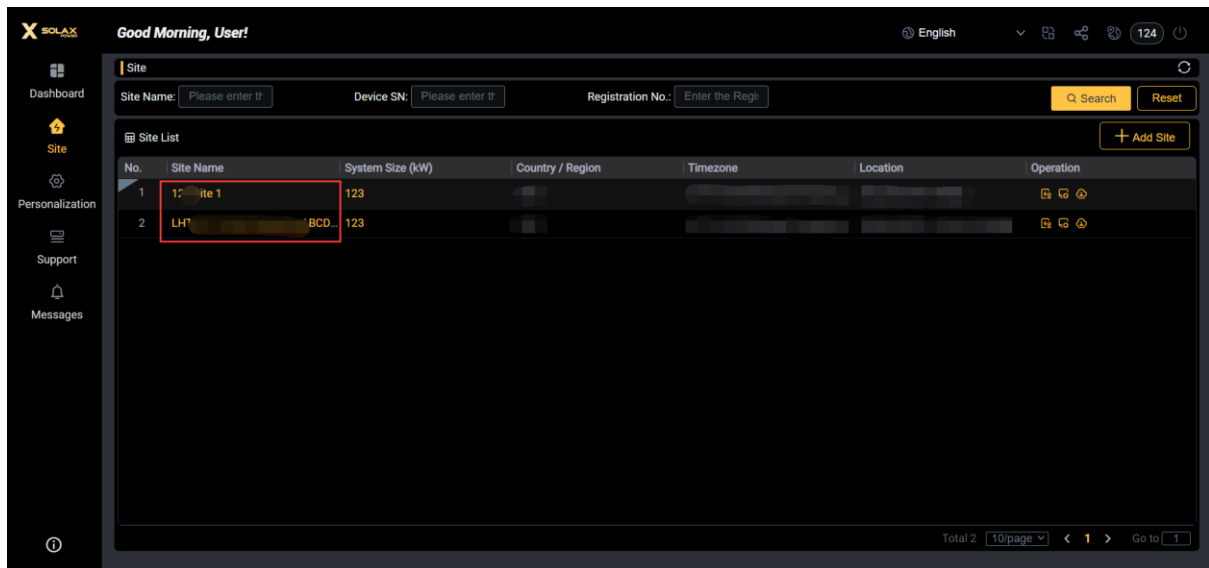

You can also manage your authorized installer/agent with the [Data Permission Settings] button. After the function is disabled, your site information will no longer be visible to them.

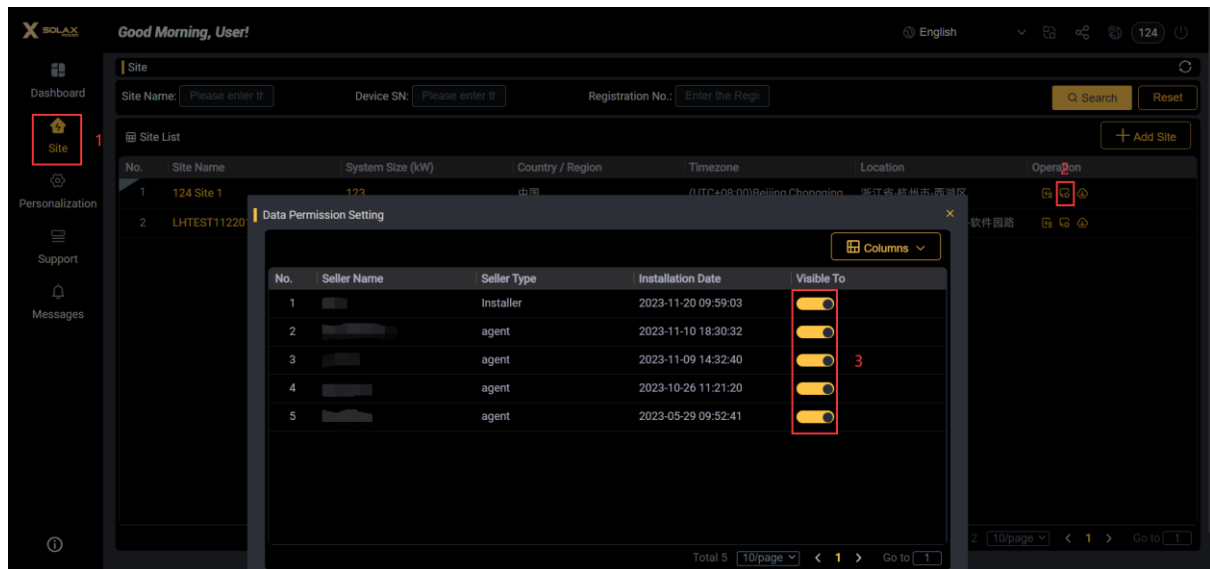

Manage your device



In this section, you will learn how to add devices to your home power site and how to configure the device network so that you can view and remotely control them with the Web & App.

- [How to add device](#)
- [Network configuration](#)
- [Remote setting](#)

How to add device

Go to your site, click [Add device], and fill in the [Registration No.] to add a new device.


For registration number, please see [\[How to create a site\]](#)

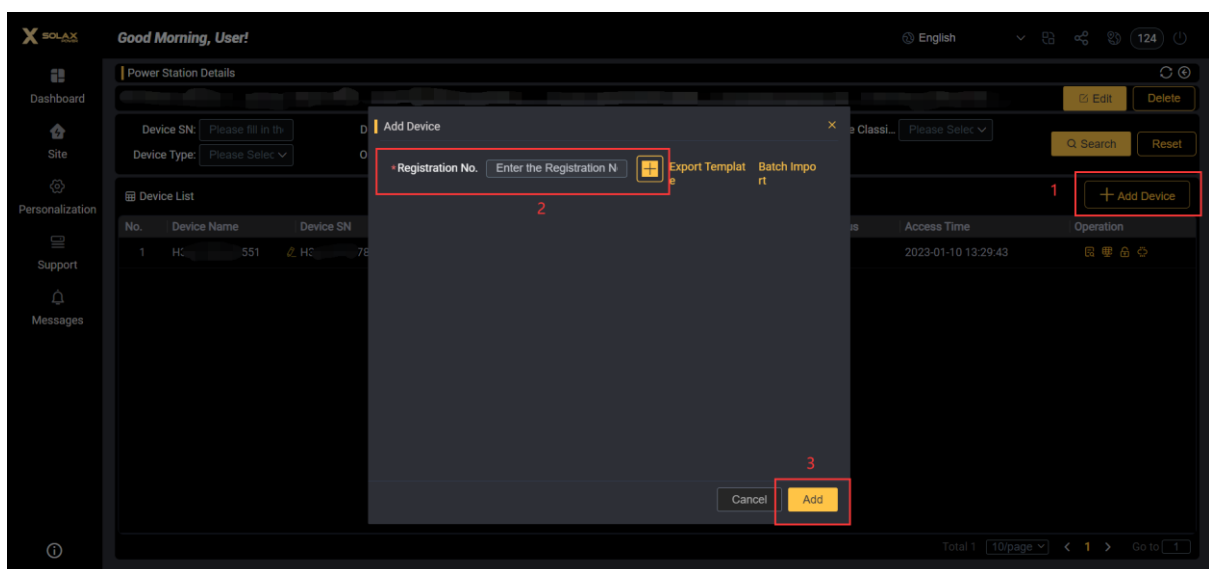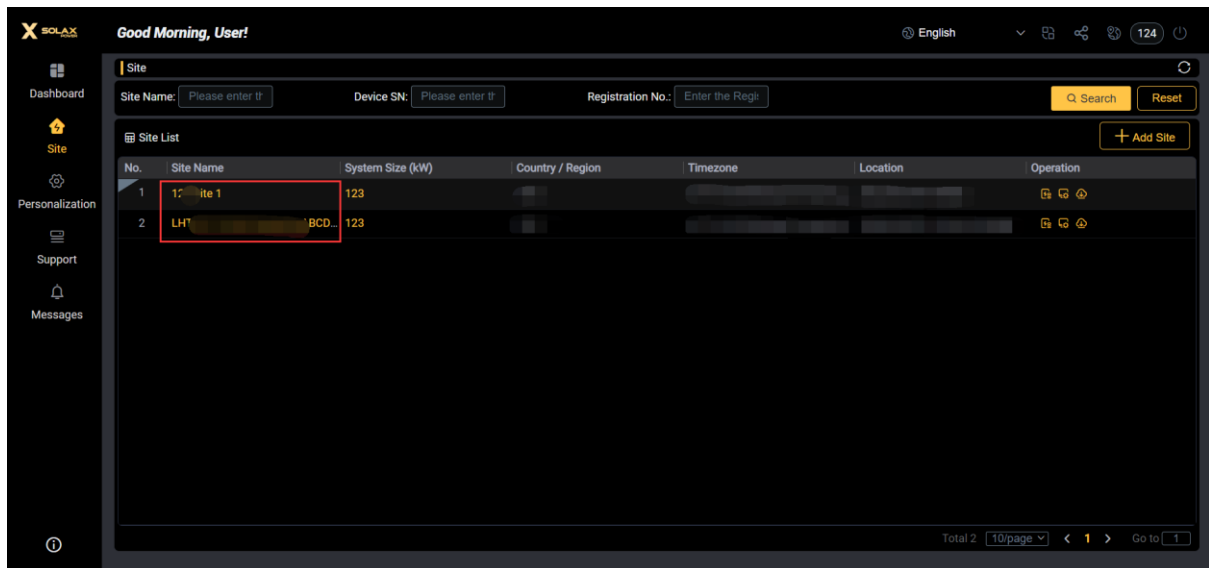

Network configuration


Network configuration can be seen as a process of "wireless router bridging" networking, which enables your Pocket dongle to connect to the Cloud server.


You can also configure the network connection with the [SolaXCloud] APP, which is more convenient than configuring on Web page. Operating instructions can be found in APP [Support]-[Help & Feedback]-[Help]-[read the documentation].

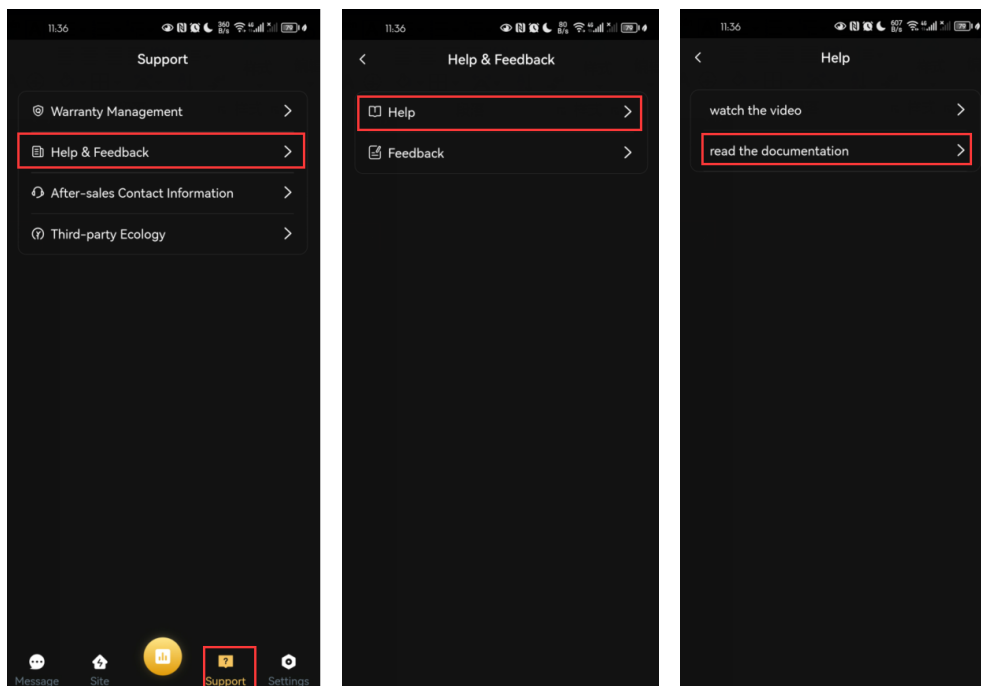

1. Plug your Pocket dongle into the Inverter.



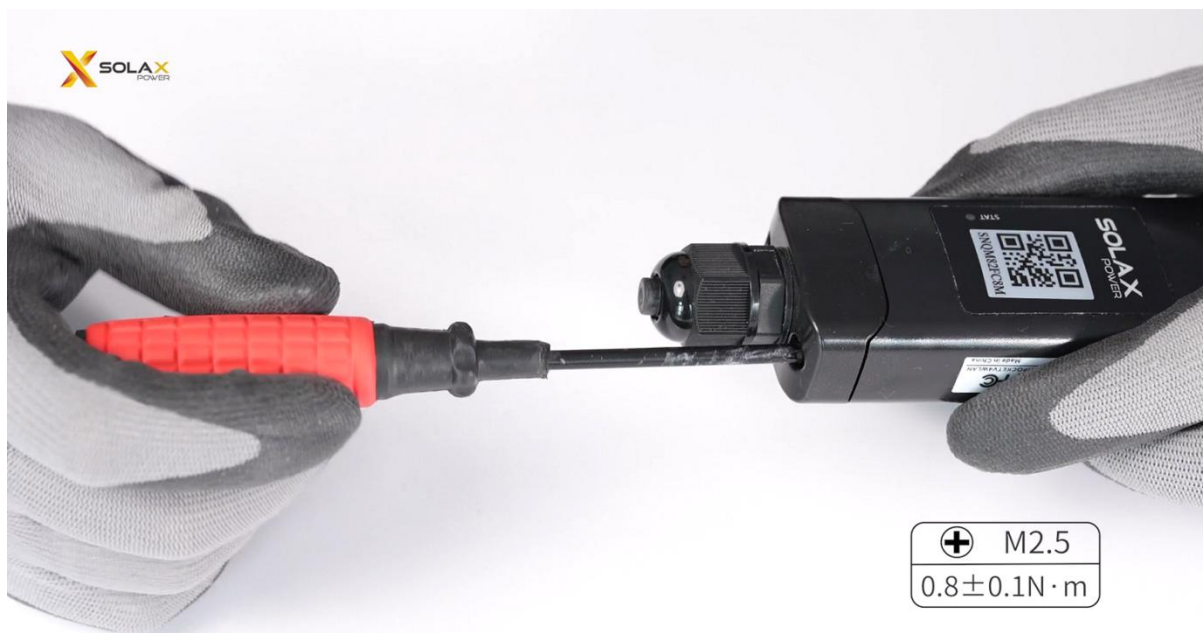


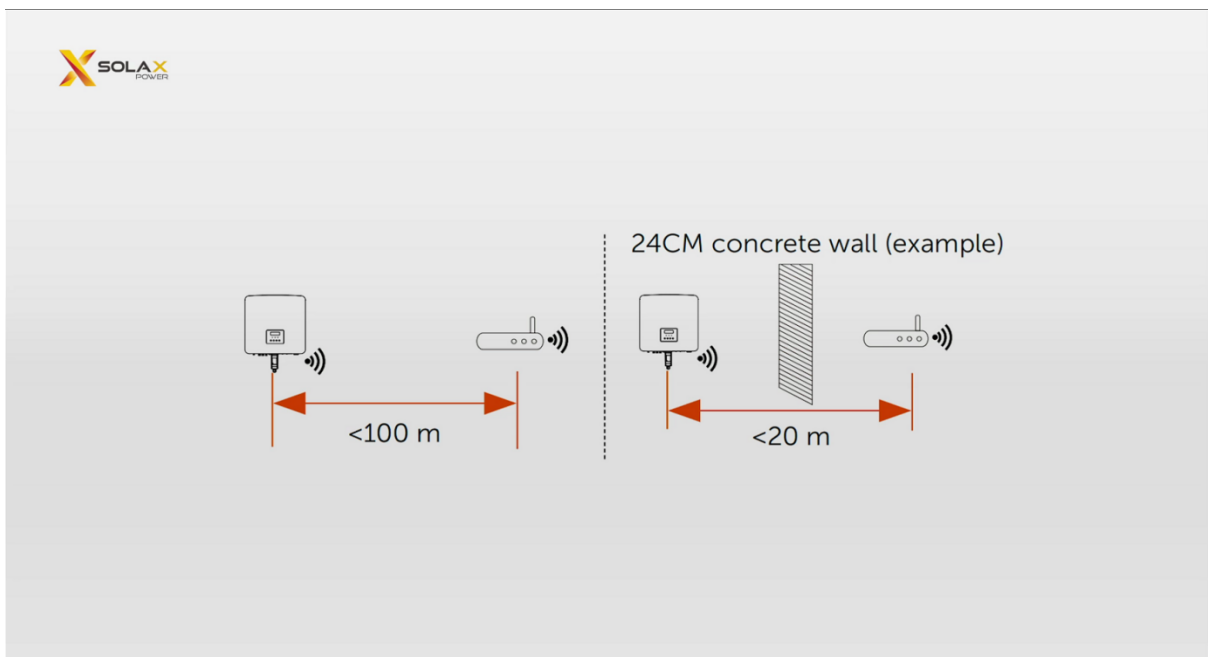

2. In the [Network and Internet] settings of your computer, find the WiFi network with the same registration number as Pocket dongle.



3. Log in to <http://192.168.10.10/DHCP.html>.

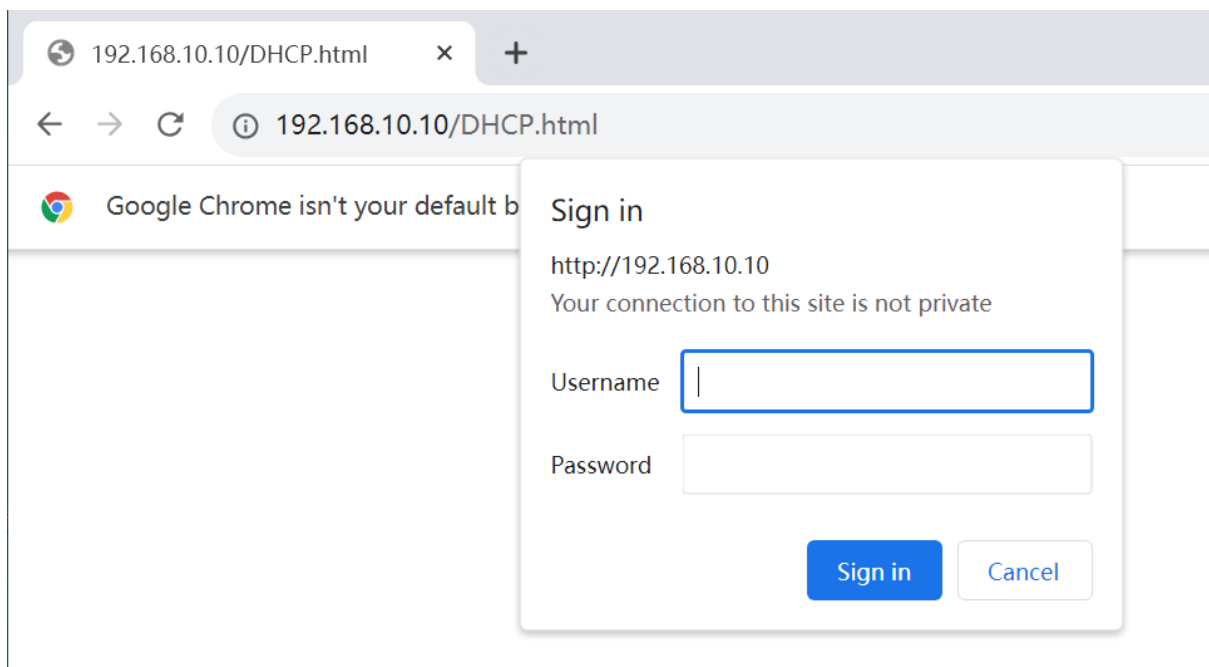

If you have connected one Pocket dongle before and fail to connect to the new one, it may be due to that your browser has saved the login account and password of the previous Pocket dongle. You need to delete the password information saved by the browser and clear the browser cache. Using Chrome as an example, you can operate in the following way

3.1 Open [chrome]-[settings]-[Autofill and passwords]-[Google Password Manager], find the information related with the domain name 192.168.68.10.10 stored in the browser, and delete it.

Settings

You and Google

Autofill and passwords

Privacy and security

Performance

Appearance

Search engine

Default browser

On startup

Languages

Downloads

Accessibility

System

Reset settings

Search settings

Autofill and passwords

Google Password Manager

Payment methods

Addresses and more

Password Manager

Passwords

Checkup

Settings

Search passwords

← http://192.168.10.10

Username

admin

Sites

http://192.168.10.10

Password

.....


Note

No note added

Edit

Delete

3.2 Clear the browser's cache information in [chrome]-[settings]-[Privacy and security]-[Clear browsing data].

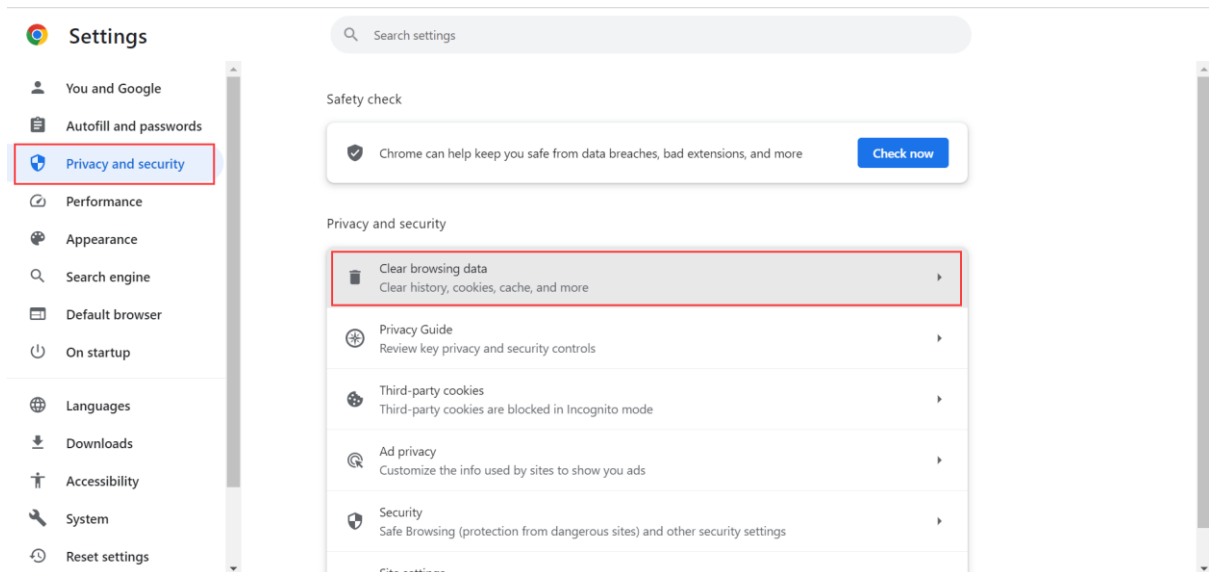


3.3 After completing the above steps, you can refresh the 192.168.10.10 page again, try to connect to the new Pocket dongle, and log in.

4. Fill in the account and password. The default account is “admin”, and the password is the registration number on the Pocket dongle.

Example:

Account: admin

Password: SS6*****M

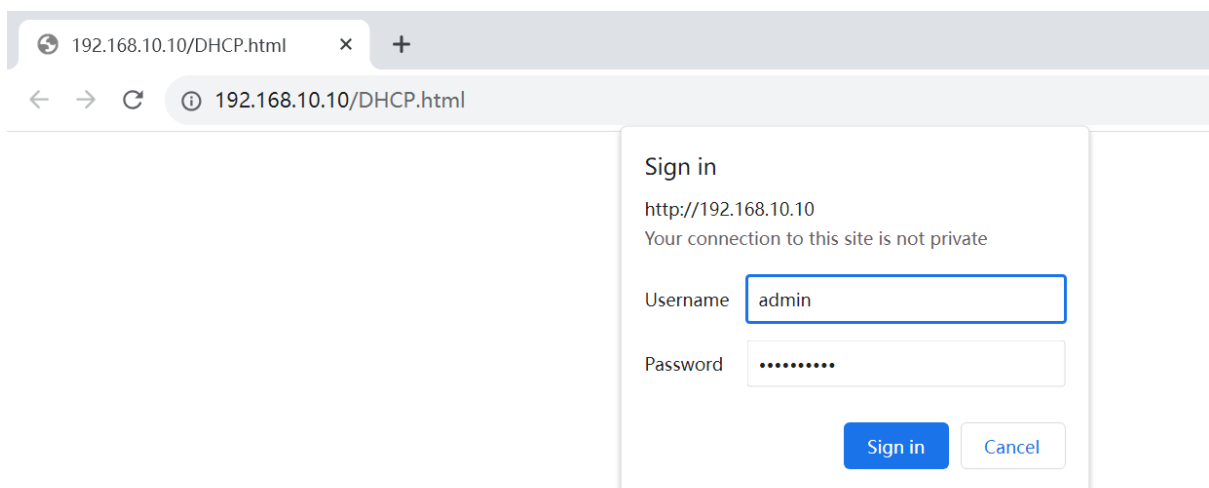

5. After successful login, you will enter the Pocket dongle's local network management center.

DHCP

Static IP

System

InternalCode:

0113

MAC address:

WiFi68-A8

4G_IMSI

4G_IMEI

SN:

SM-3N

IP address:

WiFi192-.5

4G

SSID:

SolaxGuest

Find AP

Key:

Unhide

save

6. Click [Find AP] and select your home network route

DHCP

Static IP

System

InternalCode:

0113

MAC address:

WiFi68-A8

4G_IMSI

4G_IMEI

SN:

SM-3N

IP address:

WiFi19-.5

4G

SSID:

SolaxGuest

Find AP

Key:

Unhide

save

7. Go to the local network selection page and select your home WiFi network

SSID:	Signal
Wifi_S1- S	100%
SolaxGuest	100%
SolaxOffice	100%
SolaxGlobal	100%
Wifi_S5- JV	100%
微信测试	100%
SolaxOffice	100%
SolaxGlobal	100%
Wifi_30N- 10A	100%
SolaxGlobal	100%


Refresh

8. Fill in your home network password in the [key] field.

DHCP	Static IP	System
InternalCode: 02		
MAC address: WiFi68- A8 4G_IMSI 4G_IMEI		
SN: SM 8N		
IP address: WiFi192.168.1.5 4G		
SSID: SolaxGuest Find AP		
Key: Unhide		
save		

If you forget the password of your home WiFi, you can reset the password of the router by resetting the router. Be very careful that you have the telecom account and password to reset the router.

8.1 Press and hold the reset button.

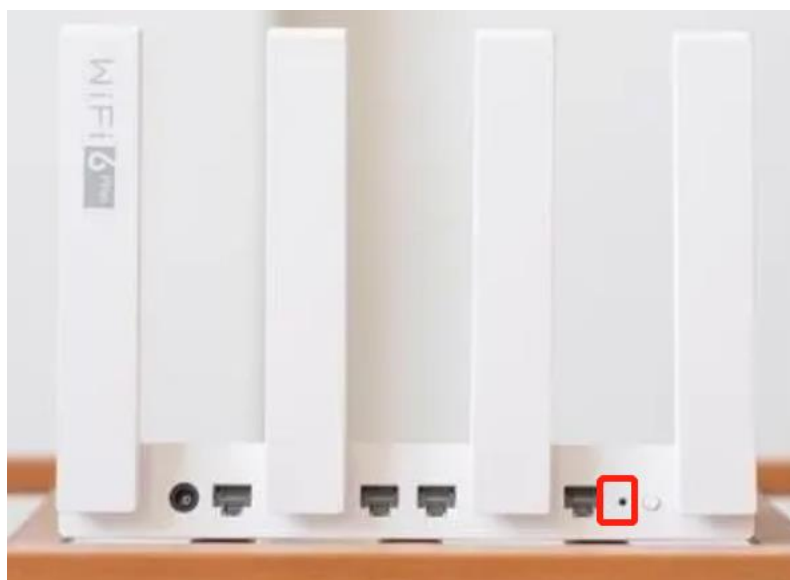

8.2 Fine your default account or password on the nameplate of your home router.

Wireless Router
 Model: MF253
 WLAN NAME(SSID):
 WLAN KEY:
 Device Manager Website : <http://192.168.0.1>
Website Password: admin
 FCC ID:SRQMF253
 IMEI:*****



S/N:*****



8.3 If your revised WIFI name/password after reset, please configure the WIFI one more time.

9. Click [save] and the system will start the configuration process, wait for a couple of seconds.

DHCP	Static IP	System
InternalCode: 0213		
MAC address: WiFi 68-...-A8		
4G_IMSI: 4G_IMEI		
SN: SM-...-P8N		
IP address: WiFi 192.1...5 4G		
SSID: SolaxGuest Find AP		
Key: Unhide		
save		

Save Config Done!Please wait 15 seconds!!![Return](#)

10. Click “Return” and check the “IP address” column. If [IP address] successfully obtains the local routing address, it indicates that the network configuration is completed.

Save Config Done!Please wait 15 seconds!!![Return](#)

DHCP	Static IP	System
InternalCode: 0213		
MAC address: WiFi 68-B...-A8		
4G_IMSI: 4G_IMEI		
SN: SM-...-P8N		
IP address: WiFi 192.1...5 4G		
SSID: SolaxGuest Find AP		
Key: Unhide		
save		

Remote setting

When you need to configure the parameters of your device, you can click the [Remote Settings] button.

After the parameters are configured remotely, the actual operating status of the device will be changed. It is recommended that you carry out this operation under the guidance of the installer.

Dashboard

Site

Personalization

Support

Messages

Good Morning, User!

English

124

Site

Site Name: Device SN: Registration No.:

Site List

No.

Site Name

System Size (kW)

Country / Region

Timezone

Location

Operation

1

1: 1

123

2

LHT 3CD

123

Total 2

10/page

< 1 >

Go to 1

Dashboard

Site

Personalization

Support

Messages

Good Morning, User!

English

124

Power Station Details

Device SN:

Device Name:

Registration No.:

Device Classification:

Device Type:

Online Status:

Device List

No.

Device Name

Device SN

Registration No.

Device Classification

Device Type

Online Status

Access Time

Operation

Remote Setting

1

H2 551

H2 551

SM 4G

Inverter

On-line

2023-01-10 13:29:43

2

SV 1.0

Module

Off-line



2023-11-22 11:53:12

Total 2

10/page

< 1 >

Go to 1

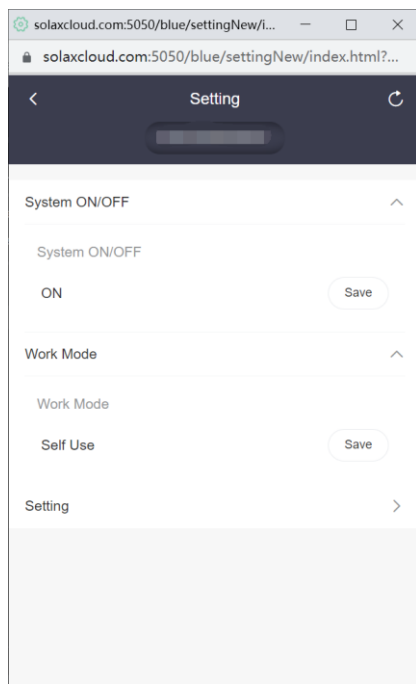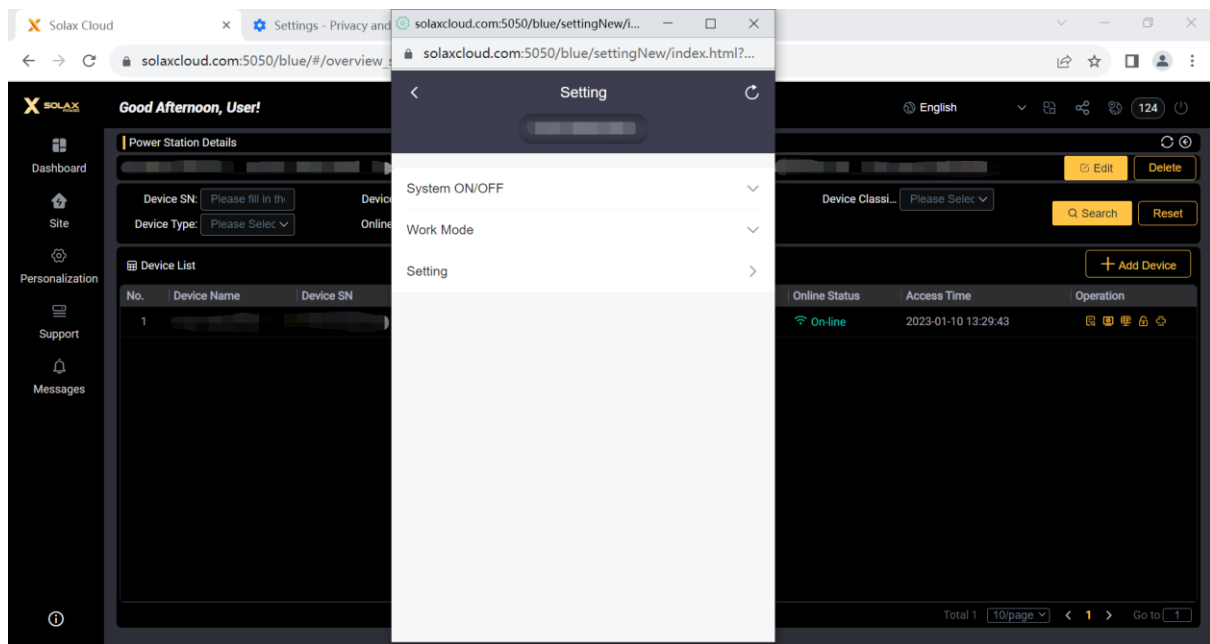


1. The configuration on the setting page needs to be guided with the installer.

Data Dashboard

Data Dashboard is used for conveniently viewing the data information of the power site and quickly control the device.

Customize dashboard


In the [Dashboard], click the Edit button [], you can customize the data information you often pay attention to and select the information cards you need. And find the right place in the [dashboard], drag and drop them.

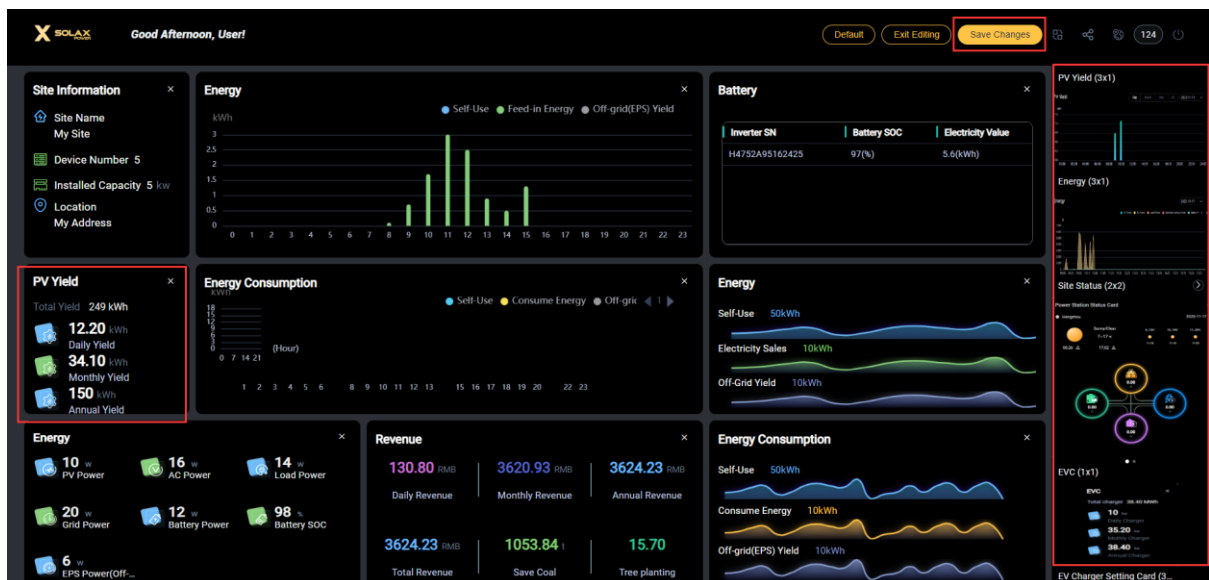

Service support

You will get the warranty information of your device, help and third-party ecosystem.

Warranty management

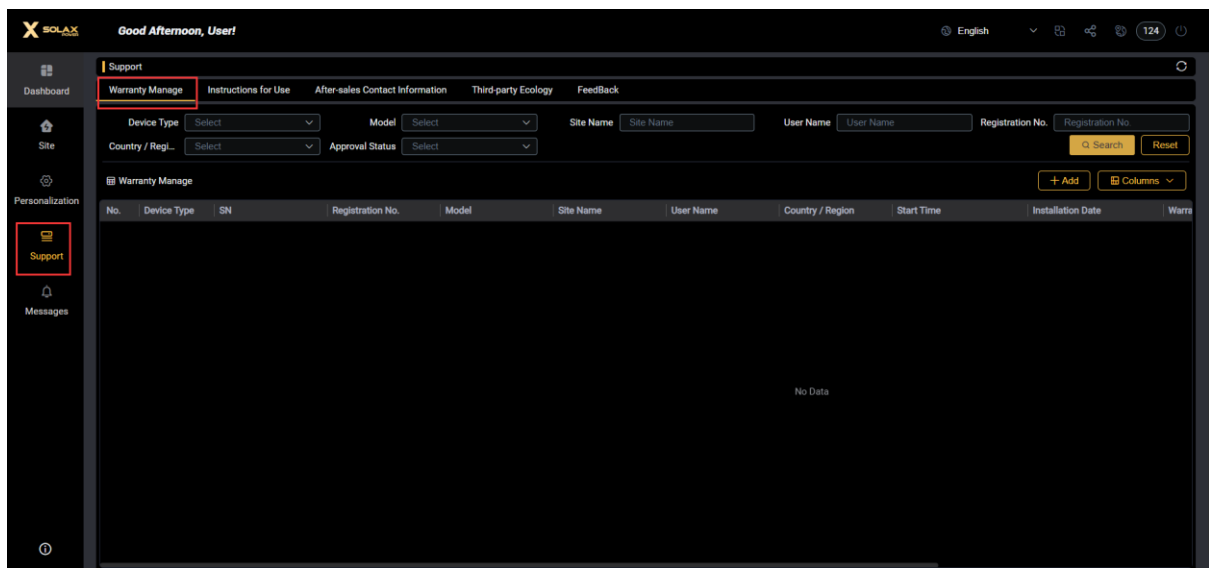


Notification information

You will get warning message and general message in this page.

- Warning message
- General message

Warning message

The system will inform you of the abnormal conditions generated during the operation of the device at [Alarm record], so that you can know whether it is running normally in real time.

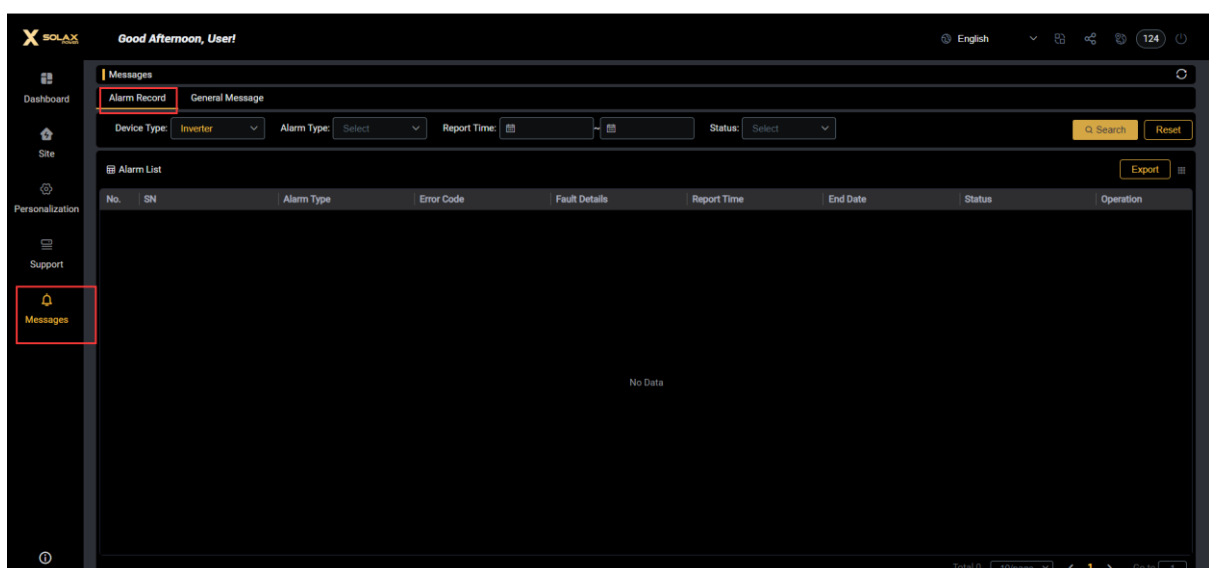

General message

You will receive general notification messages, e.g. [SolaXCloud] platform maintenance information.

