


# Marmotte HD2 Robot platform Technical Document

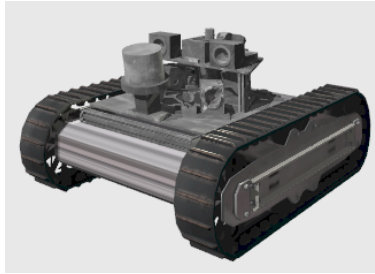

Presented to NORLab for SubT  
DARPA competition

by  
Nicolas Antonucci  
Electrical engineering intern at Norlab

Summer 2021 project

## Abstract

Technical document showing the low level electronics as well as the ROS packages used to control the robot with a controller. Design techniques are shown to help reduce electrical noise as much as possible as well as information on some of the electrical connections. Schematics of the PCB designs are provided as well. This document will continue to evolve over the course of summer 2021. I thank you in advance for taking the time to read this document. I will be happy to answer any questions as well as take any feedback on the layout and execution of this document or make any changes if necessary. I can be reached at nicolas.antonucci.1@ulaval.ca.

## Contents

<b>1</b>	<b>Robot design</b>	<b>3</b>
1.1	Platform . . . . .	3
1.2	Block diagram . . . . .	3
<b>2</b>	<b>D.C. Geared motors</b>	<b>4</b>
<b>3</b>	<b>Roboclaw 2x30A Motor Controller</b>	<b>7</b>
<b>4</b>	<b>Motion studio</b>	<b>10</b>
<b>5</b>	<b>ROS Driver</b>	<b>10</b>
<b>6</b>	<b>Remote Control</b>	<b>10</b>

## List of Figures

1	Platform . . . . .	3
2	Low level block diagram . . . . .	3
3	Motor config . . . . .	4
4	Motor wires . . . . .	4
5	Motor Controller . . . . .	7
6	Hardware overview reference table . . . . .	8
7	Control interface reference table . . . . .	8
8	Electrical specifications . . . . .	9
9	Safety wiring . . . . .	10

# 1 Robot design

## 1.1 Platform




**Figure 1:** Platform

This is the HD2 Treaded Tank Robot Platform from [superdroidrobots.com](http://superdroidrobots.com) [1]. This particular model was chosen because of its robustness and its ability to easily cross many obstacle. One of the main objectives of this robot is to quickly and effectively provide reconnaissance of an unknown area. Therefore our objectives for low level electronics and control is to have solid electrical connections that will withstand vibrations, heat and electrical noise as well as robust code that will not lag or glitch.

The platform is controlled through the Roboclaw 2X30A motor controller from basicmicro, [2], [3], [4]. The motors used are the IG52-04 24VDC 285 RPM Gear Motors, [5], [6], 2 of them with encoders. Encoders are not needed for the other 2 as they are connected in line with the same track.

## 1.2 Block diagram

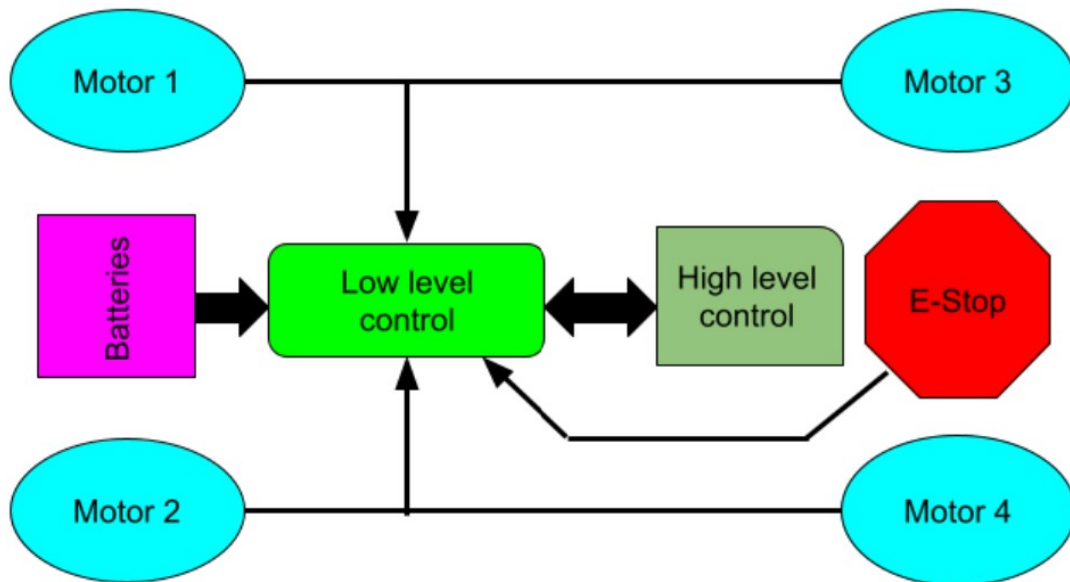

**Figure 2:** Low level block diagram

## 2 D.C. Geared motors

This next table shows the different motor configurations with their respective current draws and we can see our highlighted configuration at the bottom.

Motor Configuration			Approximate Current Draw <sup>1</sup> (total for all motors)			
Gross Weight limit <sup>2</sup>	Front Motors	Rear Motors	Driving Flat Straight	Pivot Turns on Grass	Pivot Turns on Concrete	Ascending Stairs
IG52-02 24VDC 103 RPM Gear Motor						
120lbs	2	0	3.5A	12A	8A	8A
200lbs	2	2	5A	13A	9A	8.5A
IG52-02 24VDC 290 RPM Gear Motor						
120lbs	2	2	11A	40A	21A	20A
IG52-04 24VDC 285 RPM Gear Motor						
120lbs	2	0	5A	24A (~Stall)	9.5A	12.5A
200lbs	2	2	8.5A	22.5A	11.5A	16A
<ol style="list-style-type: none"> <li>The current draw is approximate average. Higher inrush spikes, etc will be experienced.</li> <li>The robot weighs about 60lbs with motors. The weight of the batteries, sensors, controllers, aux equipment, cargo, etc should be added to this to get the gross weight. The robot itself is designed to carry even more weight, but since its skid steering, turning in deep grass, carpet etc will be difficult with heavier loads. If using on smooth surfaces, dirt or other low friction surfaces, pivot turning with heavier loads can be achieved.</li> </ol>						

**Figure 3:** Motor config

During the wiring of the motors we were careful to install ferrite beads as close as possible to each motor. We also twisted the positive and negative wire together. These actions help us reduce electrical noise from the motors. The encoders require a  $1K\Omega$  pull up resistor to VCC as you can see in the following pictures. We made sure to shrink wrap these connections to ensure a reliable connection. In the following pictures we can also see electrical characteristics




**Figure 4:** Motor wires

Motor




Pull up resistor attached

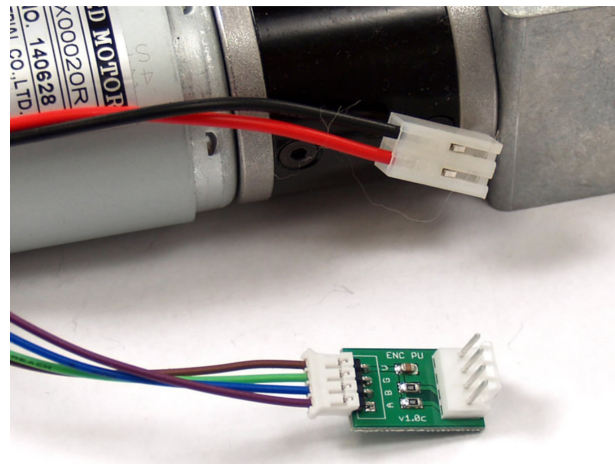

Cable layout

### Two Channel Encoder Connections

1. Black : - Motor
2. Red : + Motor
3. Brown : Hall Sensor Vcc
4. Green : Hall Sensor GND
5. Blue : Hall Sensor A Vout
6. Purple : Hall Sensor B Vout

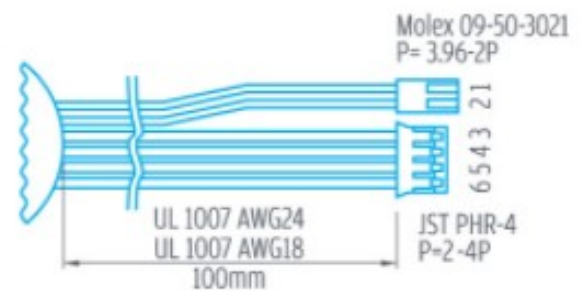

### Electrical characteristics

規格特性 Characteristics	代號 Symbol	測試條件 Test conditions	極小 Min.	基準 Ref.	最大 Max.	單位 Units
輸入電壓 Supply voltage	Vcc	- -	3.5	-	20	V
輸出飽和電壓 Output saturation voltage	Vce (sat)	Vcc = 14V ; IC = 20mA	-	300	700	mV
輸出漏電流 Output leakage current	Icex	Vcc = 14V ; Vce = 14V	-	< 0.1	10	μA
輸入電流 Supply current	Ice	Vcc = 20V Output open	-	5	10	mA
輸出上升時間 Output rise time	tr	Vcc = 14V ; RL = 820 Ω ; CL = 20pF	-	0.3	1.5	μs
輸出下降時間 Output fall time	tr	Vcc = 14V ; RL = 820 Ω ; CL = 20pF	-	0.3	1.5	μs


  

輸出電路 Output circuit	
輸出波形 Output wave	


- To reduce noise as much as possible in the system, twist positive and negative wires together and use ferrite beads at each motor connection.
- Bigger ferrite first over both wires and one smaller ferrite bead over each wire. (Don't forget the heatshrink)



### 3 Roboclaw 2x30A Motor Controller

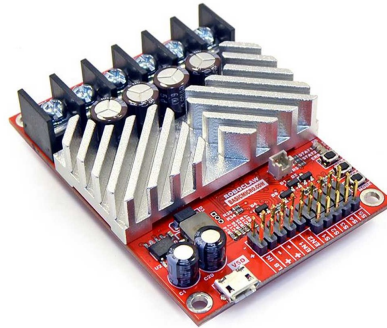

**Figure 5:** Motor Controller

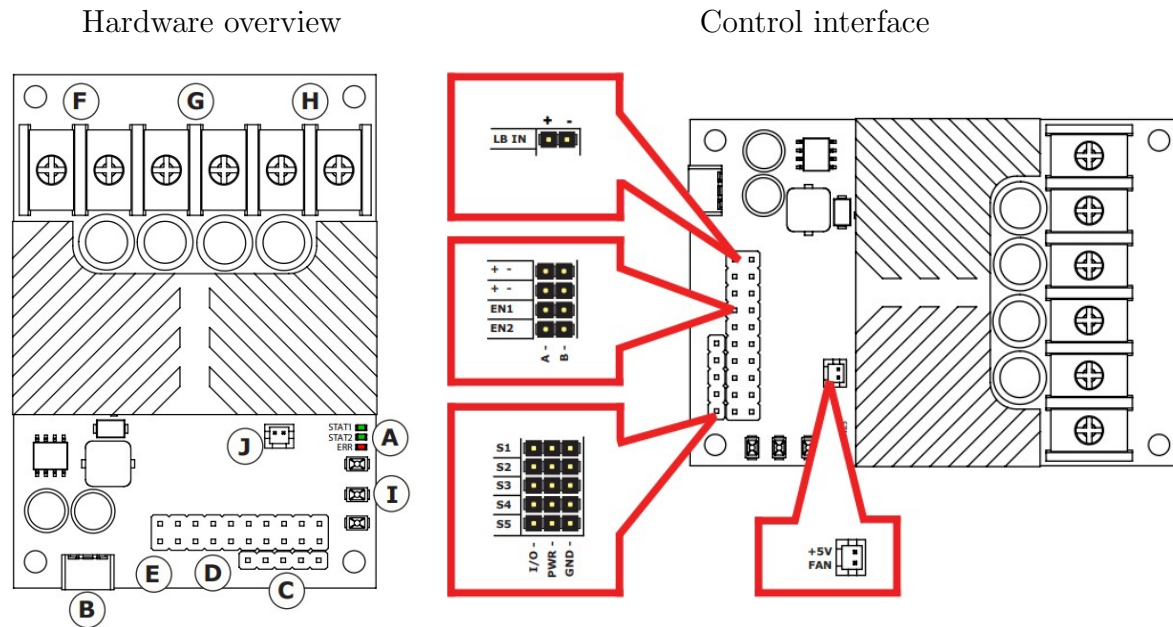

- Connect batteries to the main terminal (G).
- Connect encoder through pull up resistor chip to pins in section D.
- See schematic below for details.
- For initial tests connect roboclaw through usb to computer (batteries have to be connected to roboclaw to function). Use motion studio to check if motors and sensors work.

ID	Function	DESCRIPTION
A	Status LEDs	Provides RoboClaw status information.
B	USB Port	Communicate with RoboClaw via USB.
C	Control Inputs	S1,S2,S3,S4 and S5 control inputs.
D	Encoder Inputs	Dual encoder input and power pins.
E	Logic Battery	Logic battery jumper setup and logic battery power input.
F	Motor Channel 1	Motor driver output screw terminals for channel 1.
G	Main Battery	Main battery screw terminal input.
H	Motor Channel 2	Motor driver output screw terminals for channel 2.
I	Setup Buttons	Configure RoboClaw. Can bypass and use IonMotion PC setup utility.
J	Fan Control	Automatic fan control. 5VDC Fan. On at 45°C and off at 35°C

**Figure 6:** Hardware overview reference table

NAME	UART TTL	ANALOG	R/C PULSE	FLIP SWITCH	E-STOP	HOME	LIMIT	V-CLAMP	Encoder
S1	RX	Motor 1	Motor 1						
S2	TX	Motor 2	Motor 2						
S3				X	X			X	
S4					X	Motor 1	Motor 1	X	
S5					X	Motor 2	Motor 2	X	
EN1									Motor 1
EN2									Motor 2
+5V									
FAN									

**Figure 7:** Control interface reference table



Characteristic	Min	Typ	Max	Rating
Main Battery	6		34	VDC
Logic Battery	6	12	34	VDC
Maximum External Current Draw (BEC)			3	A
Motor Current Per Channel		30 <sup>(2)</sup>	60 <sup>(1,2)</sup>	A
Motor Current Bridged		60 <sup>(2)</sup>	120 <sup>(1,2)</sup>	
On Resistance		4.3		mOhm
Logic Circuit Current Draw		30mA		mA
Input Impedance		100		Ω
Input	0		5	VDC
Input Low	-0.3		0.8	VDC
Input High	2		5	VDC
I/O Output Voltage	0		3.3	VDC
Digital and Analog Input Voltage			5	VDC
Analog Useful Range	0		2	VDC
Analog Resolution		1		mV
Pulse Width	1		2	mS
Encoder Counters		32		Bits
Encoder Frequency			9,800,000	PPS
RS232 Baud Rate (Note 3)			460,800	Bits/s
RS232 Time Out (Note 3)	10			ms
Temperature Range	-40	40	100	°C
Temperature Protection Range	85		100	°C
Humidity Range			100 (4)	%

**Figure 8:** Electrical specifications

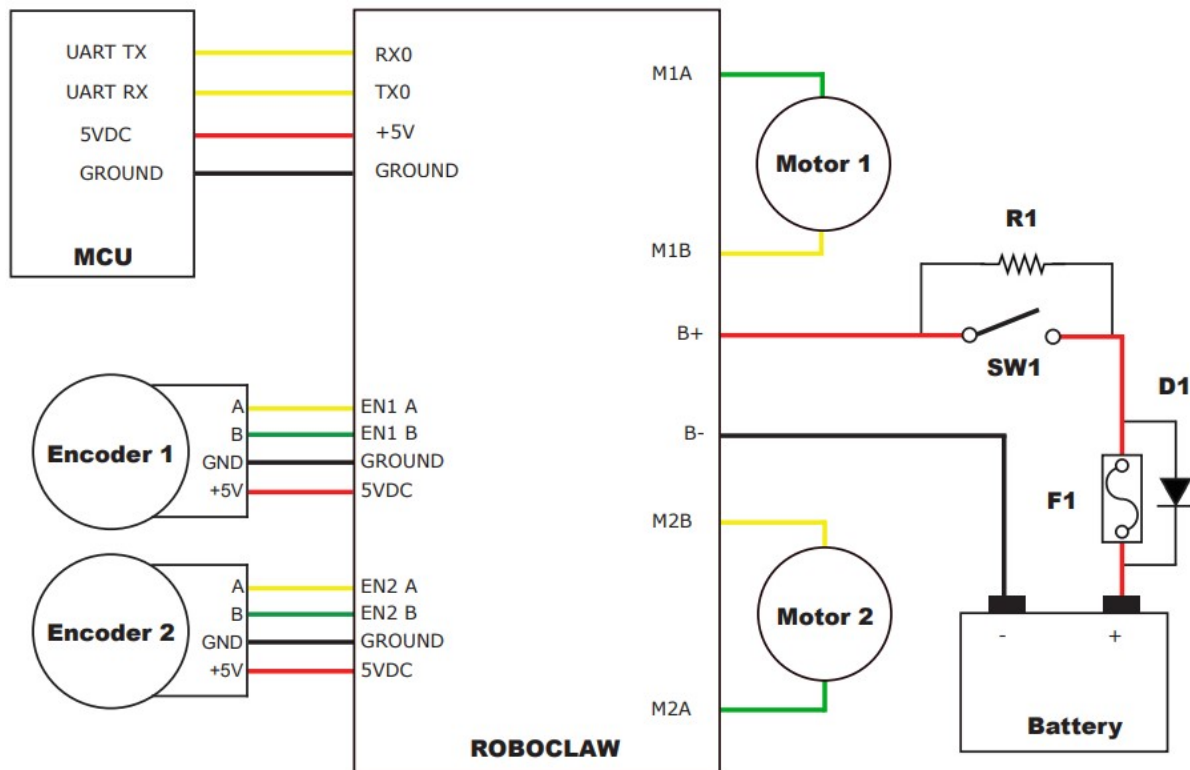


Figure 9: Safety wiring

- 4 Motion studio
- 5 ROS Driver
- 6 Remote Control

## References

- [1] *Hd2 robot webpage*, <https://www.superdroidrobots.com/shop/item.aspx/hd2-treaded-atr-tank-robot-platform/789/>, 2021.
- [2] *Roboclaw webpage*, [https://www.basicmicro.com/RoboClaw-2x30A-Motor-Controller\\_p\\_9.html](https://www.basicmicro.com/RoboClaw-2x30A-Motor-Controller_p_9.html), 2021.
- [3] *Roboclaw datasheet*, [https://downloads.basicmicro.com/docs/roboclaw\\_datasheet\\_2x30A.pdf](https://downloads.basicmicro.com/docs/roboclaw_datasheet_2x30A.pdf), 2021.
- [4] *Roboclaw user manual*, [https://downloads.basicmicro.com/docs/roboclaw\\_user\\_manual.pdf](https://downloads.basicmicro.com/docs/roboclaw_user_manual.pdf), 2021.
- [5] *Gear motors with encoders*, <https://www.superdroidrobots.com/shop/item.aspx/ig52-04-24vdc-285-rpm-gear-motor-with-encoder/843/>, 2021.
- [6] *Gear motors without encoders*, <https://www.superdroidrobots.com/shop/item.aspx/ig52-04-24vdc-285-rpm-gear-motor/871/>, 2021.