



Anycubic Vyper MCU-Board: STM32F103  
 TriGorilla+ 0.0.5 & 0.0.6 PinOut  
 date: 2021-12-04

**FREE USE AT YOUR OWN RISK!!!**

- |                           |                                 |
|---------------------------|---------------------------------|
| 01 Signal X-Endstop (PA7) | 08 2A of E-Stepper              |
| 02 GND                    | 09 1A of E-Stepper              |
| 03 1B of X-Stepper        | 10 1B of E-Stepper              |
| 04 1A of X-Stepper        | 11 + Filament-Sensor            |
| 05 2A of X-Stepper        | 12 – Filament Sensor (NC)       |
| 06 2B of X-Stepper        | 13 Signal Filament Sensor (PA5) |
| 07 2B of E-Stepper        | 14 NC                           |

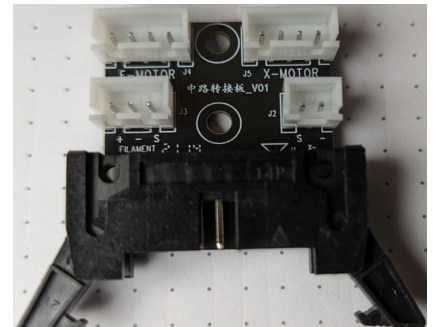

- |    |   |    |   |
|----|---|----|---|
| 13 | 1 | 11 | 1 |
| 14 | 2 | 12 | 2 |

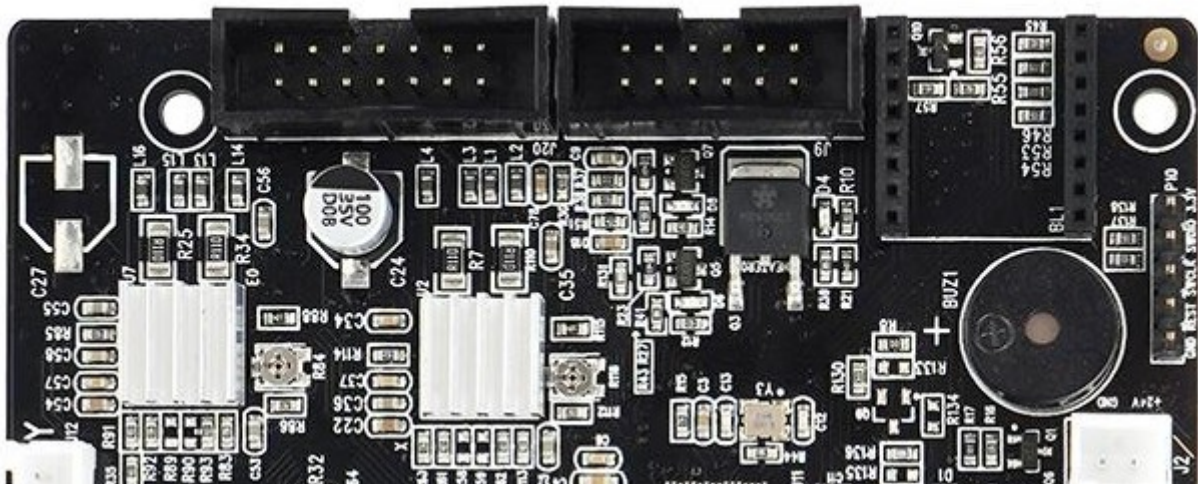

- |                         |                       |
|-------------------------|-----------------------|
| 01 Hotend Power (24VDC) | 07 FAN0 & FAN2 +24VDC |
| 02 Hotend Power (24VDC) | 08 FAN0 GND           |
| 03 Hotend Power (24VDC) | 09 ??                 |
| 04 Hotend Power (GND)   | 10 ??                 |
| 05 Hotend Power (GND)   | 11 Thermistor T0 (a)  |
| 06 Hotend Power (GND)   | 12 Thermistor T0 (b)  |

to be continued :-)