



Solar power pack consists of 1 x **POWER STATION Yeti 6000X** with **YETIX 600W POWER SUPPLY** + 3x **RANGER 300 BRIEFCASE Portable Solar Panels** + **GOAL ZERO 4X HIGH POWER PORT(HPP)**(connection up to 4 solar panels kits)

1. **Yeti 6000X** Powerful 2000W AC (3500W Surge) inverter allows to run power-hungry devices and appliances. It can handle surges from power tools, medical devices, and home appliances, including full-size refrigerators. Power a wide range of devices with seven different port options including fast-charging 60W USB-C Power Delivery, multiple USB-A ports, regulated 12V, and two 230V AC ports.



Hours of Runtime

Light-a-Life 350 (4.5 W): 1336
 Light Bulb (11 W): 547
 CPAP (65 W): 93
 TV (42" LED) (100 W): 60
 Pellet Grill (60 W): 100
 Microwave (1000 W): 6
 Portable Fridge (25 W): 241
 Wi Fi Router (25 W): 241
 Mini Fridge (35 W): 172
 Full Size Refrigerator (55 W): 110
 Circular Saw (13 Amp) (1500 W): 4

Recharges

Smart Phone (12 Wh): 501
 Tablet (30 Wh): 201
 Laptop (50 Wh): 120
 POV Camera (5 Wh): 1202
 DSLR Camera (18 Wh): 334
 Head Lamp (5 Wh): 1202

Ways to charge.

FROM THE SUN

Recharge from the sun by connecting a compatible solar panel. Charge times are dependent on the size of the solar panel.

FROM THE WALL

Plug it into the wall. Fully recharges in 12 hours using the included 600W Power Supply AC Wall Charger.

2. RANGER 300 BRIEFCASE (3 pcs of RANGER 300 for 1 Yeti 6000X)

Portable Solar Panel with cord and built-in kickstand & Canvas Carrying Bag



General

Weight: 37.71 lbs (17.12 kg)

Dimensions (folded): 31.26 x 23.39 x 3.8in (79.4 x 59.4 x 9.7cm)

Dimensions (unfolded, without leg stand): 31.26 x 94.29 x 0.9in (79.4 x 239.5 x 2.3cm)

Cable Length: 6ft

Cable Gauge: 12 AWG

Warranty: 2 Years

Solar

Rated Power: 300W

Open Circuit Voltage (Voc): 23.0V

Maximum Power Point Voltage (Vmpp): 19.3V

Rated Power: 300W

Open Circuit Voltage (Voc): 23.0V

Maximum Power Point Voltage (Vmpp): 19.3V

Charge times

Yeti 1000 Lithium: 5-10 Hours

Yeti 1000X: 4-8 Hours

Yeti 1400 Lithium: 7-14 Hours

Yeti 1500X: 6-12 Hours

Yeti 3000 Lithium: 12-24 Hours

Yeti 3000X: 12-24 Hours

Yeti 6000X: 24-48 Hours

Ports

High Power Port (6ft of 12AWG cable): 14-23V, up to 21A (300W max)

The Rangers are designed to withstand the elements. The junction box has a waterproof rating of IP65. However, you'll need to be sure that the products you are solar charging stay dry, so keep those power banks and power stations covered up and protected from the dust, rain, and snow.

The Ranger 300 Briefcase is not designed to be mounted permanently to a fixture; this briefcase fold-and-go style allows the panels to be more portable. For panels you can mount, look at our Boulder 50 and 100 Solar Panels.

3. **GOAL ZERO 4X HIGH POWER PORT(HPP) NAAR HIGH POWER PORT(HPP) CONNECTOR**



Used to safely combine two or more power sources or solar panels with High Power Port (HPP) connectors into an array with a single HPP Connector. For use with larger Goal Zero Yeti Portable Power Stations with an HPP input.

4. **YETI 600W POWER SUPPLY (is supplied with Yeti 6000X)**



Charge times

Yeti 1000X: 2 hours

1500X: 3 hours

Yeti 3000X: 6 hours

Yeti 6000X: 12 hours

Ports

Inputs: AC plug: 100-240V ~ 8A 50/60HZ

Outputs: HPP: 40V, up to 15A (600W max)

General

Weight (with AC cable): 3.09 lbs (1.4 kg)

Dimensions: 10 x 4.4 x 1.6 in. (25.4 x 11.2 x 4 cm)

Total Cable Length: 11 ft (3.3 m)

Certs: FCC, CE, UL

Warranty: 2 Years

AN INSTALLATION EXAMPLE

RANGER 300 BRIEFCASE
(3 pcs of RANGER 300 for 1 Yeti 6000X)

Yeti 6000X

230V AC port

YETIX 600W POWER SUPPLY




RANGER 300 BRIEFCASE
(3 pcs of RANGER 300 for 1 Yeti 6000X)

multiple USB-A ports

GOAL ZERO 4X HIGH
POWER PORT(HPP) for connecting
up to 4 RANGER 300 BRIEFCASE solar
panels with Yeti 6000X

Back View

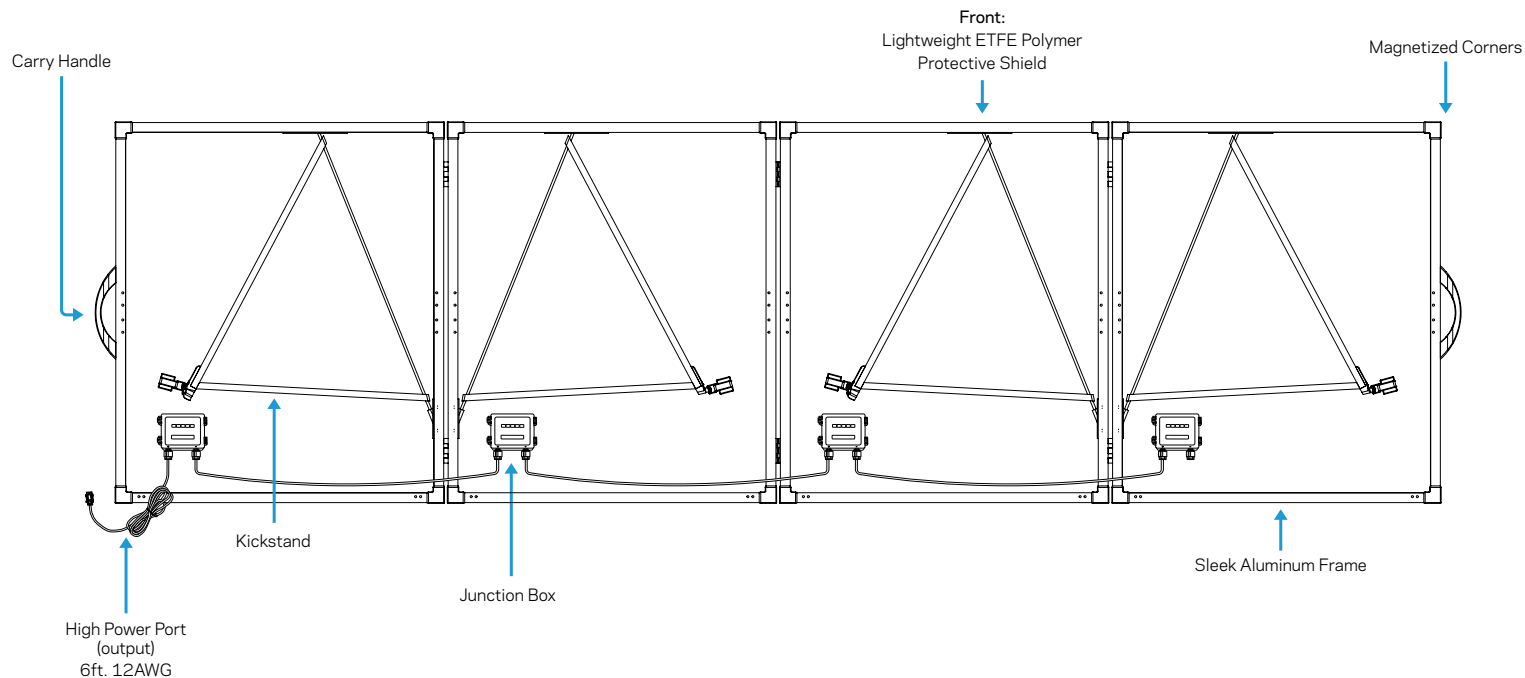

HOW IT WORKS

More solar, less weight. The Ranger 300 Briefcase lets you harness more power from the sun while maintaining enough portability to easily transport from place to place. Designed with ETFE polymer instead of glass and a thinner aluminum frame, the Ranger 300 Briefcase pairs perfectly with our Yeti 1000X power station and larger for a complete high-use solar power solution.

Plug the HPP connector into the input port on the Goal Zero Yeti power station. You'll get the best solar charging experience if you continue to reposition the solar panel throughout the day. Make sure to reference the specs of what you're plugging the Ranger 300 Briefcase in to. For Yeti power stations, you'll need to check the input specs.

Note: Legs come already connected and will automatically fold out to position the panel in place during use. If you would like to place the Ranger 300 Briefcase flat on the ground, you will need to disconnect the legs from one another using the metal clip and snap and store against the back of panel. When ready to prop the panel up again, unclip the leg from the back of the panel, pull upwards to join with the leg on the panel next to it. Secure in place using the metal clip. Each leg pairing will form a triangle to allow you to position the panel upright.

HOW TO CHAIN

To chain multiple Ranger 300 Briefcases together, you'll need to purchase the 4x High Power Port (HPP) to High Power Port (HPP) combiner cable from Goal Zero. Give our customer solutions center a call for help picking the right cable for your setup.

TECHNICAL SPECIFICATIONS

Ranger 300 Briefcase Solar Panel

Charge Times

Goal Zero Yeti 1000X	4-8 hrs
Goal Zero Yeti 1500X	6-12 hrs
Goal Zero Yeti 3000X	12-24 hrs
Goal Zero Yeti 6000X	24-48 hrs

Solar Panel

Rated Power	300W
Open Circuit Voltage	23V
Cell Type	Monocrystalline

Ports

High Power Port (HPP)	14-23V, up to 21A (300W max)
-----------------------	------------------------------

General

Weight	39 lbs (17.7 kg)
Dimensions (folded)	30.6 x 26.3 x 3.8 in (77.7 x 66.8 x 9.7 cm)
Dimensions (unfolded)	30.6 x 105.9 x 0.9 in (77.7 x 269.0 x 2.3 cm)
Certs	 
Warranty	24 months

FREQUENTLY ASKED QUESTIONS

Q: Are the Ranger Solar Panels waterproof?

A: Yes. The Rangers are designed to withstand the elements. The junction box has a waterproof rating of IP65. However, you'll need to be sure that the products you are solar charging stay dry, so keep those power banks and power stations covered up and protected from the dust, rain, and snow.

Q: Can I chain a Ranger 300 Briefcase with other Ranger solar panels?

A: Yes, by using the correct combiner cables you can chain the Ranger 300 Briefcase with other Goal Zero solar panels, including multiple Ranger 300. For help picking the right combiner cable, visit www.goalzero.com or call our customer solutions center at 1-888-794-6250

Q: Can I extend the distance between the Ranger 300 and Yeti Power Station?

A: Yes, you can extend the distance using Goal Zero High Power Port (HPP) Extension cables.

Q: What can I charge directly from the Ranger 300?

A: The Ranger 300 Briefcase comes with an HPP connector, so it's designed to charge larger Goal Zero Yeti Portable Power Stations. If you're looking to recharge things like headlamps, phones, and other USB devices, check out our foldable Nomad Solar Panels

Q: Can I mount the Ranger 300 to my roof?

A: The Ranger 300 Briefcase is not designed to be mounted permanently to a fixture; this briefcase fold-and-go style allows the panels to be more portable. For panels you can mount, take a look at our Boulder 50 and 100 Solar Panels.