




USER MANUAL

CP05ST-3000W Portable Power Station

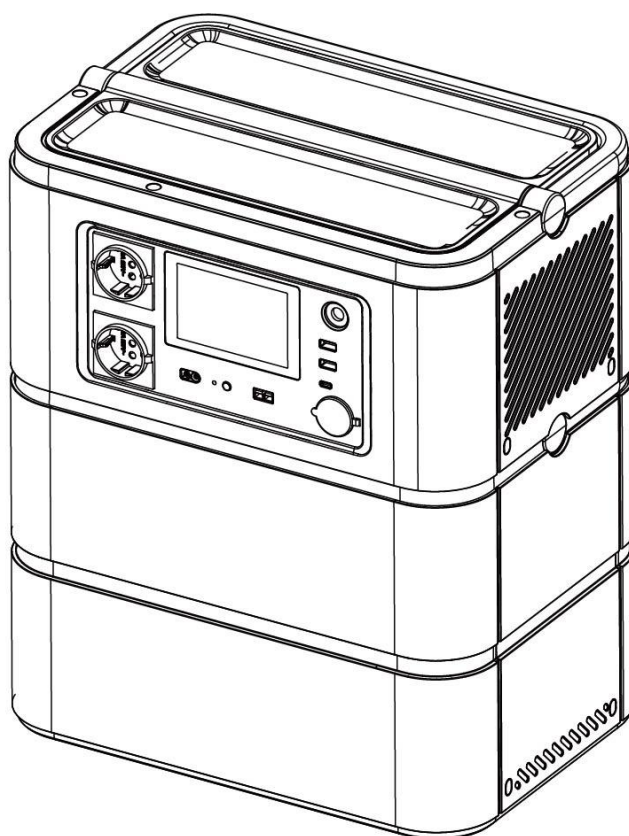

Contents

1. Technical Specification	- 1 -
2. Safety Instructions	- 2 -
2.1 Notice for Use	- 2 -
2.2 Notice for Disposal	- 3 -
3. Quick Start Guide	- 4 -
3.1 Features of Product	- 4 -
3.2 Screen Features	- 6 -
3.3 How to Use	- 7 -
3.4 How to Recharge	- 9 -
3.5 Bypass Feature	- 11 -
3.6 ECO Feature	- 11 -
4. FAQs	- 12 -
5. Fault Indication and Troubleshooting	- 13 -
6. Package List	- 14 -

1. Technical Specification

General Specs

Net Weight	Approx. 29.1 kg
Dimensions (L*W*H)	400*280*484 mm
Capacity	46Ah/51.2V (2355Wh)

Outputs

AC Output (x2)	3000W (Peak 6000W), 230V~10A 50Hz for each socket
USB-A Output (x2)	5V= 3A 15W (QC2.0&QC3.0)
USB-C Output (x1)	5/9/12/15V= 3A 20V= 5A
Car Outlet Output (12V Cigarette Lighter)	12V= 10A 120W

Inputs

AC Input Power	2200 W
AC Input	220-240V~10A 50/60Hz
Car Charge Input	12/24V= 10A
Solar Charge Input	16-50V= 360W

Battery

Cell Material	LFP
Battery Life	≥6000 cycles
Protection	High temperature protection, low temperature protection, overcharge protection, over-discharge protection, over-current protection, short circuit protection and overload protection

Operating Temperature

Recommended Ambient Temperature	25°C
Discharging Environment Temperature	-20~45°C
Charging Environment Temperature	-10~45°C
Storage Environment Temperature	-20~45°C (Recommended temperature is 25°C)

Others

Lithium Battery Pack Replacement	Support replacement of battery packs
----------------------------------	--------------------------------------

2. Safety Instructions

2.1 Notice for Use

1. Never put this product close to heat sources, such as fire sources or heating furnaces.
2. DO NOT expose the product to any liquid; DO NOT immerse the product in water or wet it. DO NOT use the product in the rain or a source of moisture.
3. DO NOT use this product in the environment with strong electrostatic or electromagnetic fields.
4. DO NOT disassemble this product in any way or pierce it with sharp objects.
5. DO NOT short circuit the product with conductors or other metal pieces.
6. Never use unofficial parts or accessories. If you need to replace them, please go to the official sales channel to check related purchase information.
7. Please strictly follow the requirements on ambient temperature in this user manual when using this product. If the product is used at an ambient temperature above 45°C, it may cause the battery to catch fire or even explode; if the temperature is too low, the performance of the product will be seriously impaired, and even the normal operational requirements will not be met.
8. DO NOT put heavy objects on this product.
9. DO NOT forcibly block the fan during use or keep the product in an unventilated or dusty space.
10. Please avoid collision, falling and violent vibration. Please turn off the power immediately in case of serious external force impact. Please fasten the product properly during transportation to avoid vibration and collision.
11. If the product falls into the water when in use, be sure to take it out immediately and put it in a safe and open area. Keep a safe distance from water until it is completely dry. Never use the dried product again, but dispose it properly as described in “2.2 Notice for Disposal” below. If the product is on fire, it is recommended to use fire extinguishing equipment in the following order: Water or water mist, sand, fire blanket, dry powder, carbon dioxide fire extinguishers.
12. If there is dirt on the interface of this product, wipe it off with a dry cloth.
13. Please place the product carefully to prevent damage that may be caused by dumping. If the product is dumped and seriously damaged, please turn off the power immediately. Put the battery in an open area away from combustibles and people. Please dispose of the product in the light of local laws and regulations.
14. Keep the product out of the reach of children and pets.
15. If a low battery warning appears during use of the product, do not continue to use it, but charge the battery in time.
16. If the product is left unused for a long time, please keep the battery level above 60%, shut it down and let it stand.




2.2 Notice for Disposal

1. If conditions permit, please be sure to completely discharge the battery of this product and put it in the specified battery recycling box. This product contains batteries. Batteries are hazardous chemicals and should not be disposed of in ordinary garbage cans. For details, please follow local laws and regulations on battery recycling and disposal.
2. If the battery cannot be completely discharged due to the failure of this product itself, do not dispose of the battery directly in the battery recycling box, but contact a professional battery recycling company for further treatment.
3. After the battery is discharged, let it stand for a period of time. If the product cannot be started after charging, please dispose of it.




3. Quick Start Guide

3.1 Features of Product

1) Control Box

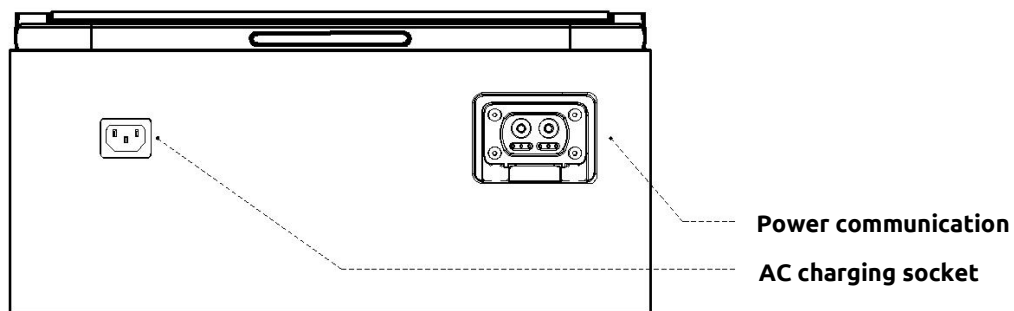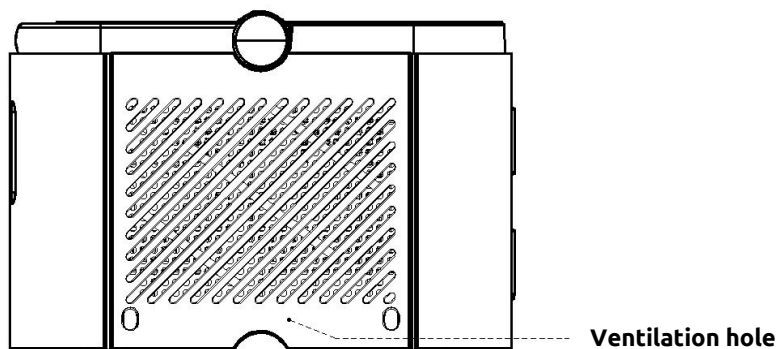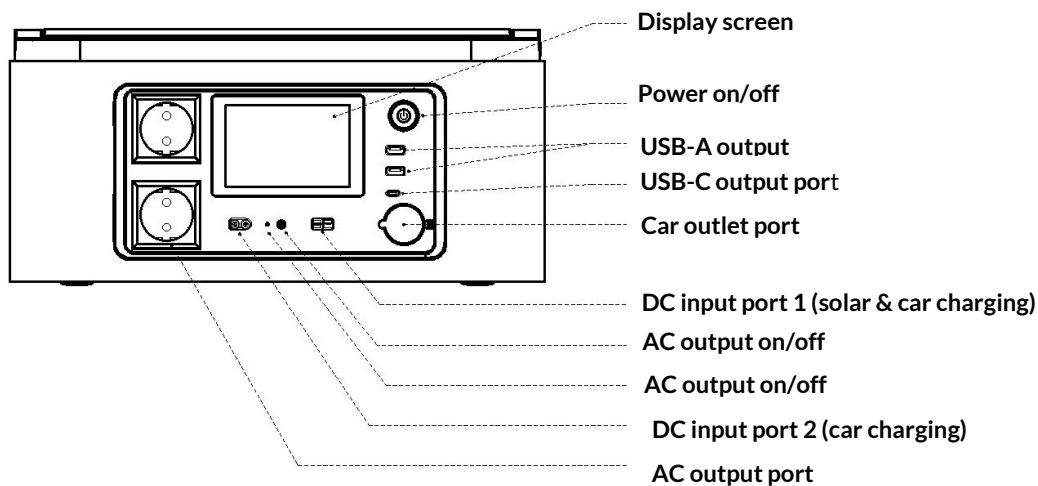

2) Battery pack

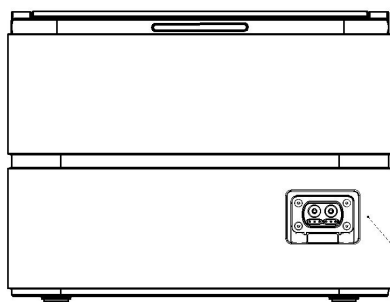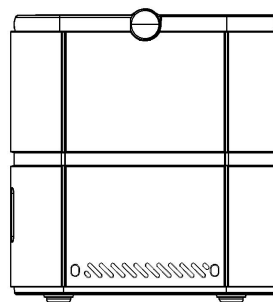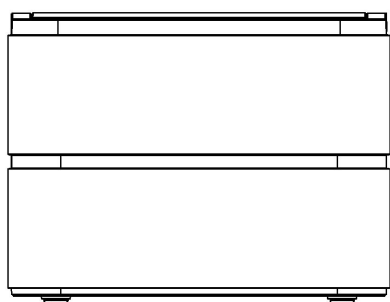


Power communication connection

3) Connecting line




3.2 Screen Features

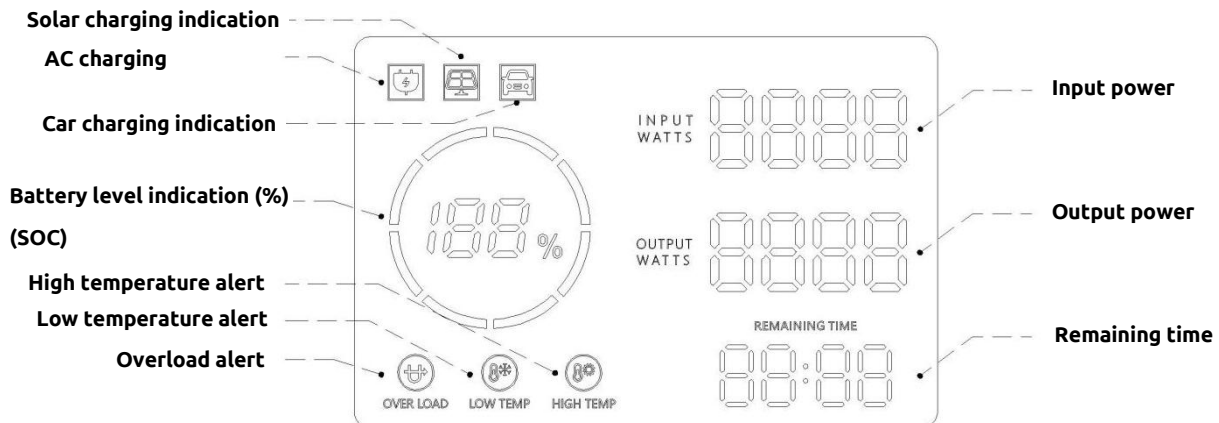

OVERLOAD	This icon lights up when the load connected by the user exceeds the rated power of this product
LOW TEMP	This icon lights up when the internal device of this product detects a temperature lower than the specified operating temperature
HIGH TEMP	This icon lights up when the internal device of this product detects a temperature higher than the specified operating temperature
SOLAR CHARGING	This icon lights up when the user connects the product to the solar panel. This icon goes out when the user unplugs the product from the solar panel
AC CHARGING	This icon lights up when the user connects the product to the AC supply. This icon goes out when the user unplugs the product from the AC supply
CAR CHARGING	This icon lights up when the user connects the product to the car for charging. This icon goes out when the user unplugs the product from the car
INPUT POWER	The current total input power of the product
OUTPUT POWER	The current total output power of the product
REMAINING TIME	Remaining usage time in product discharge or standby mode
SOC	When the product is in the charging state, the icon turns clockwise and displays the battery level in percentage; the icon flashes when the battery level reaches 0%; when the product is in discharge state, the icon indicates the fraction battery level and the percentage


3.3 How to Use

Connecting Product

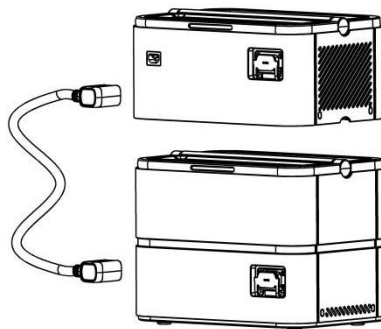


1. Before using the product, please put the battery pack in a flat and open area to avoid dumping caused by the floor inclination.
2. Put the control box over the battery pack.
3. Refer to the picture above and connect the control box and battery pack with the connecting cable provided with the product.

Power on-off control and screen control

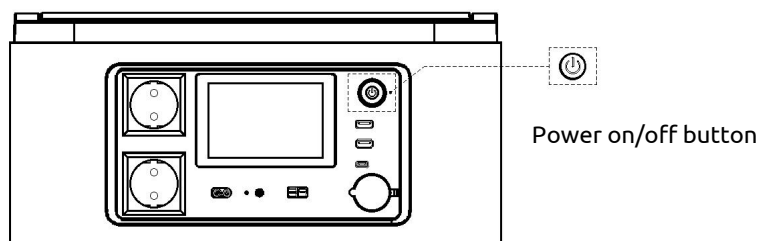


Press to power on, and press & hold to power off


1. Connect the battery pack to control box and press the power button on the control box to turn on the product. Then, the screen lights up, and the power indicator is constantly ON.
2. After the product is powered on, the display is kept steady for 5 minutes, and all other output ports except AC output are kept open..
3. After the product is powered on, press the power on/off button or wait for 5 minutes, the screen will turn off, and the power indicator will enter the breathing light mode. When the screen is off, press the power on/off button or charge the product, to light up the screen.
4. When the power button is pressed long or the battery SOC reaches 0%, the screen will display "OFF", then the product will shut down, the screen will turn off, and the power indicator will turn off.
5. Do not unplug the power cable directly when the product is in service. Be careful not to unplug the connecting cable while the product is being charged.

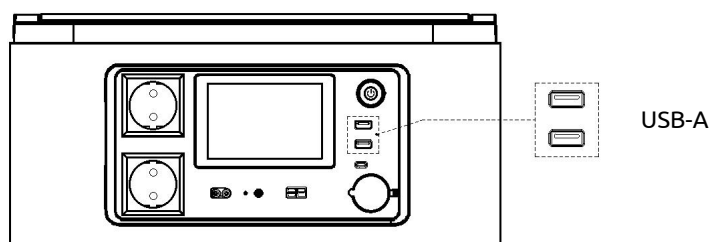Using USB-A DC Output

After confirming that the product is turned on, connect the USB-A product to output directly. When the product is low on battery or turned off, the USB-A output is turned off.

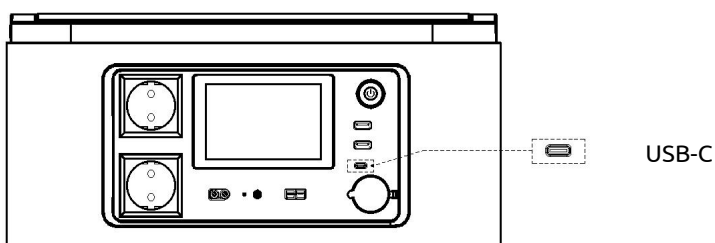Using USB-C DC Output

After confirming that the product is turned on, connect the USB-C product to output directly. When the product is low on battery or turned off, the USB-C output is turned off.

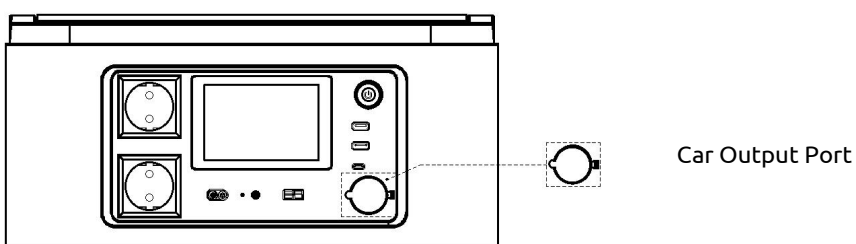
Using Car Output Port

After confirming that the product is turned on, the car-mounted output port can output directly. When the product is low on battery or turned off, the output of the car-mounted output port is turned off.

Using AC Output

AC Output Socket


AC output on/off
button&indicator

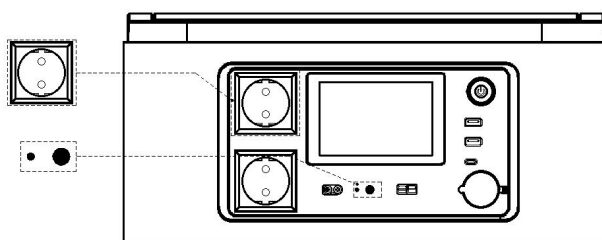

1. After the product is powered on, the AC output is turned off by default. Press the AC output button to turn on the AC output, and the AC output indicator light will be on. Press the button again to turn off the AC output indicator light and turn off the AC output.
2. A single socket supports a maximum output of 2300W. When two sockets are used at the same time, it should be noted that the total power of the device should not be greater than 3000W.
3. In charging mode (bypass output), the total power of the device should not be greater than 2300W.


3.4 How to Recharge

AC Charging

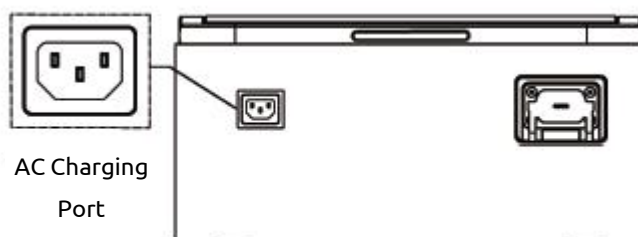


The AC charging of the product is fast charging, and the maximum input power can reach to 2200W; the charging power can be adjusted automatically depending on the power of the battery pack to realize intelligent charging. When the battery level is low, the charging power increases; when the battery level is high, the charging power decreases accordingly. Automatic power switching enables the battery cell to get better charging protection. Please make sure charging cable can continuously carry 10A current. In case of charging failure, such as over-temperature and over-current, the product will stop charging immediately and show the failure details on the screen. After the failure is recovered, please plug in the charger and restart the charging.

Solar Charging

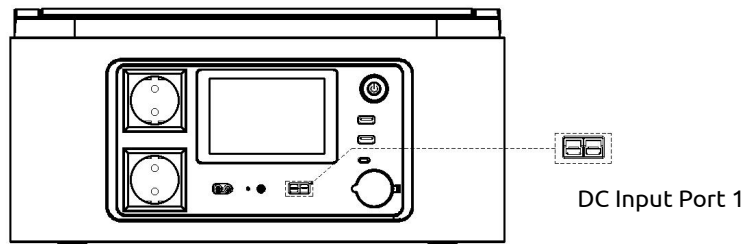

Users are allowed to connect the PV module to the PV input port to charge this product as shown above. The DC input voltage range for the product is 16V to 50V, the maximum supported input power being 360W.


24V Car-mounted Charging

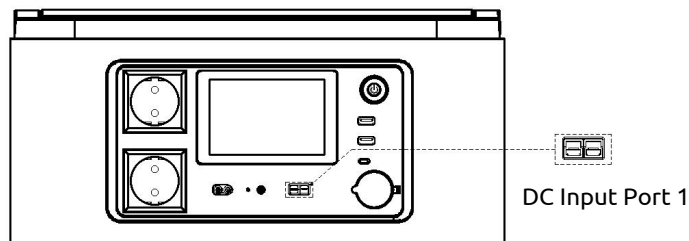

Users are allowed to use the cigarette lighter port of the car to charge the product. DC input port 1 supports 24V on-board charging, and the default charging current is up to 10A.

Note: Do not use the car charging function before your car is started, in order to prevent your car battery losing power and developing start failure. Make sure that the cigarette lighter port of your car and the input cable of the product are properly connected. We shall not be liable for any loss arising from improper operations.

12V Car-mounted Charging

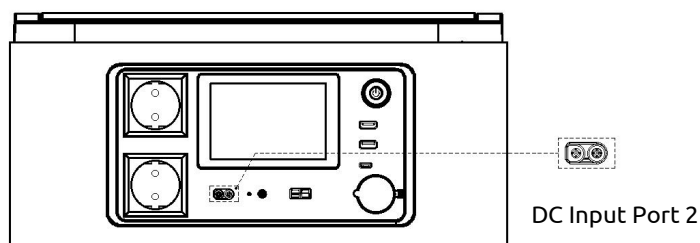

Users are allowed to use the cigarette lighter of the car port to charge the product. DC input port 2 supports 12V on-board charging, and the default charging current is up to 10A.

Note: Do not use the car charging function before your car is started, in order to prevent your car battery losing power and developing start failure. Make sure that the cigarette lighter port of your car and the input cable of the product are properly connected. We shall not be liable for any loss arising from improper operations.

3.5 Bypass Feature

This product supports output bypass. The electrical appliances can be powered by the AC output socket when this product is on charging.

3.6 ECO Feature

If you do not press the power on/off button or charge the product within 5 minutes, the product will automatically enter the hibernation state and the screen will turn off automatically.

After the screen is turned off, without any operating or no load, the product will automatically turn off after 1 hour.

4. FAQs

1. What type of battery is used for this product?

This product incorporates lithium iron phosphate batteries.

2. What electrical appliances are supported by the AC output port?

The rated power of the AC output port is 3000W and the peak power is 6000W. It can power most household appliances. However, it's advisable to check the power of the electrical appliances and make sure their total power is less than the rated power.

3. How to know the remaining working time of the product?

The screen of this product can display the battery level; and the estimated remaining running time, assuming constant consumption.

4. How to tell if the product is being charged?

When the product is being charged, the battery level indicator on the screen rotates and indicates the input power.

5. How to clean this product?

Please wipe the product with a dry, soft and clean cloth or paper towel.

6. How to store this product?

Please turn off the product and keep it in a dry and well ventilated space at room temperature. Do not keep the product near water source or heat source. For long-term storage, it is recommended to discharge the battery level to 30% every three months and then charge it to 60% to extend the service life of the product.

7. Does this product fit on the plane?


No.

5. Fault Indication and Troubleshooting


Symptoms	Types	Remedies
OVER LOAD indicator light up	Overload protection	Press and hold the power button to shut down the product. Disconnect the abnormal load and then restart the product.
LOW TEMP indicator light up	Low temperature protection	Press and hold the power button to shut down the product. Keep this product in a warmer place where the room temperature is $25\pm 2^{\circ}\text{C}$ for half an hour and restart it
HIGH TEMP indicator light up	High temperature protection	Press and hold the power button to shut down the product. Keep this product in a space where the room temperature is $25\pm 2^{\circ}\text{C}$ for half an hour and restart it
Remaining time screen indicates E001~E999	Abnormal	Check the connection cable and restart the product. If the fault cannot be eliminated, contact our after-sales personnel.

If a warning prompt appears during the use of the product and the warning icon does not disappear after restart, please stop using the product immediately (do not attempt to charge or discharge). If the information above does not help solve your problem, please contact our after-sales service for consultation.


6. Package List

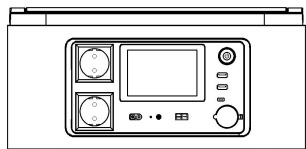


Control box (x1)

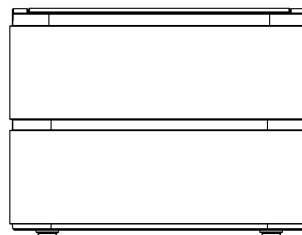

Battery pack (x1)



AC charging cable (x1)

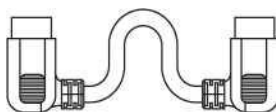Control box and battery pack
connecting cable (x1)

User manual (x1)

7. Product Maintenance

1. It is advisable to use or keep this product at room temperature (25°C) away from water sources, heat sources and metal objects.
2. If long-term storage is needed, please charge and discharge the product every 3 months (discharge the battery to 30% and then charge it to 60%). It is recommended to charge the battery to 100% for use again.
3. For safety's sake, do not keep this product at an ambient temperature above 45°C or below -20°C for a long time.
4. It is recommended to use this product at room temperature (25°C) in order to extend the battery life.
5. If the battery level is less than 1% after use, please charge it to 60% before storage. If the product is left idle for a long time under the condition of serious power shortage, the battery may develop irreversible damage, which may impair the service life of the product.
6. If the battery level of the product is severely low and the idle time is excessively long, the product will get into deep sleep. It needs to be charged before being used again.

STRONG Ges.m.b.H.

E-mail: info_de@strong-energy.eu

Web: <https://strong-energy.eu>

ADD: TeinfaltstraBe 8/4Stock, A-1010 Vienna, Austria

