DLS Lab Seminar

Octavio A. Villarreal Magaña

Istituto Italiano di Tecnologia, Genova, Italy

March 16th, 2017

Outline

Control structure

Numeric simulations

Further work

Outline

Control structure

Numeric simulations

Further work

Motivation

- Provide versatility to the types of gaits that the robot can perform
- Have a unified and systematic way to generate motions of the legs according to the scenario
- Can be applied to other legged systems

General picture

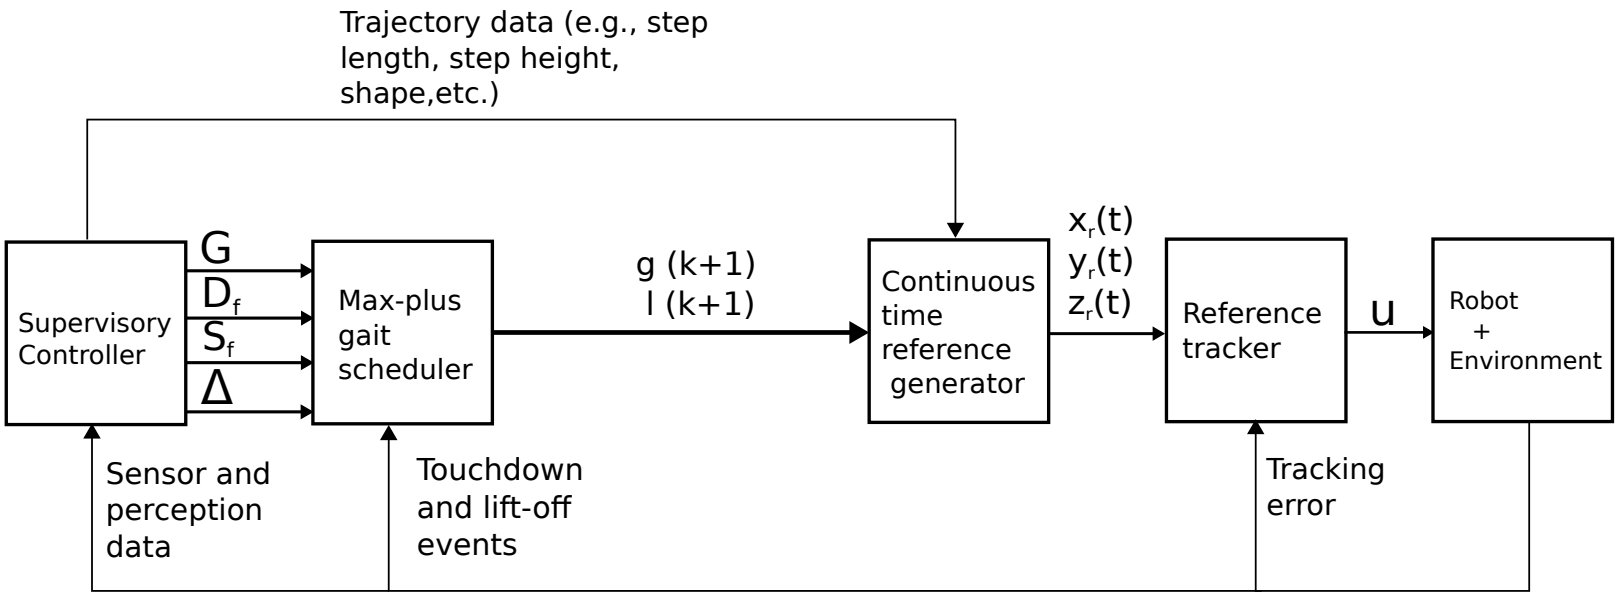

General picture

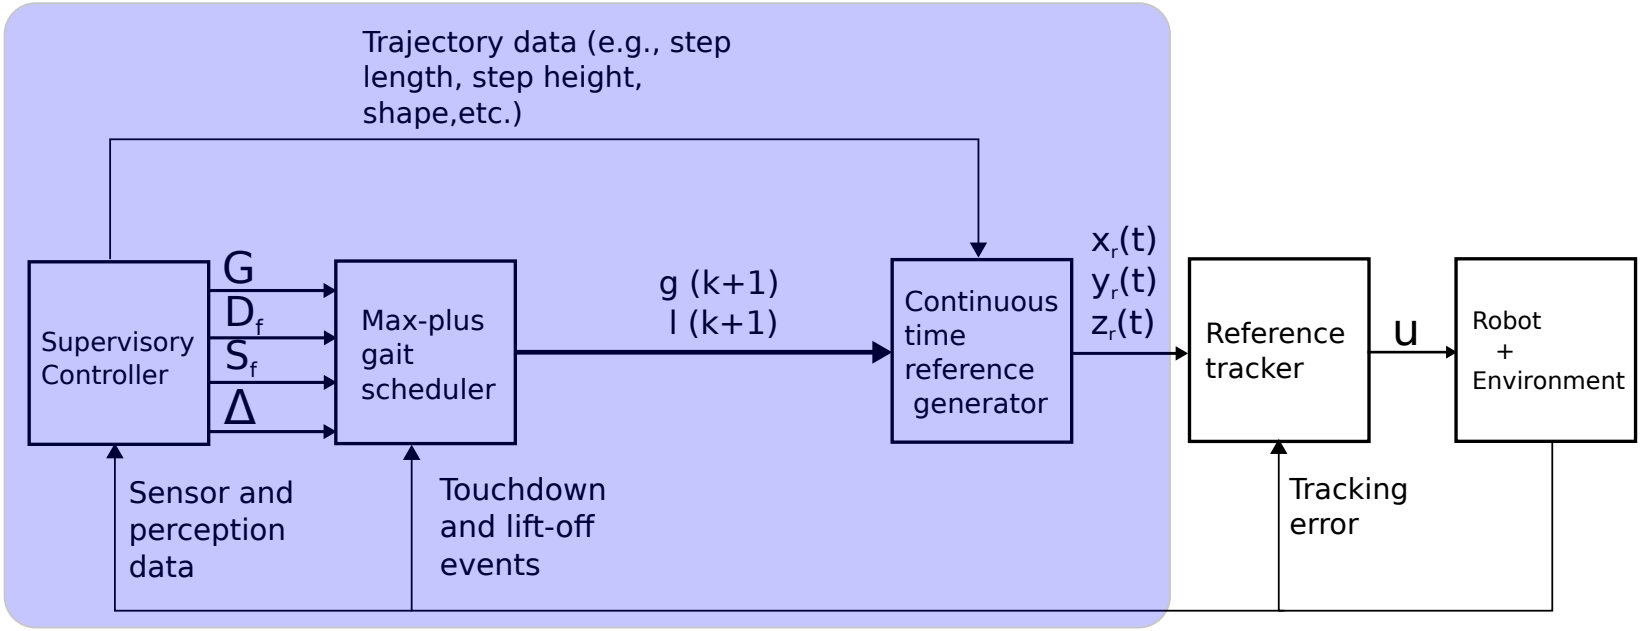

Supervisory controller

Main goal

Provide **geometrical** and **time** gait parameters, based on sensory data, to overcome the scenario that the robot is facing.

Supervisory controller (continue)

Geometrical parameters:

- Step height H_s
- Step length L_s
- Oscillator "primitive" shape changes





Supervisory controller (continue)

Time parameters:

- Duty factor D_f
- Step frequency S_f
- Gait parameterization G (e.g., $G_{trot} = \{1, 4\} \prec \{2, 3\}$)
- Time difference vector Δ







Max-plus gait scheduler

Main goal

Using the **time**-related gait parameters provided by the supervisory controller, generate the list of time-instants when each leg has to leave and touch the ground, so that a desired coordination is achieved.

Max-plus gait scheduler (continue)



$$G_{trot} = \{1,4\} \prec \{2,3\}$$
$$D_f = 0.58$$
$$S_f = 0.42$$
$$\Delta = [0.2, 0.2]$$



k	$g_1(k)$	$g_2(k)$	$g_3(k)$	$g_4(k)$	$l_1(k)$	$l_2(k)$	$l_3(k)$	$l_4(k)$
0	0	0	0	0	0	0	0	0
1	2.4	3.6	3.6	2.4,	1.4	2.6	2.6	1.4
2	4.8	6	6	4.8	3.8	5	5	3.8
3	7.2	8.4	8.4	7.2	6.2	7.4	7.4	6.2
4	9.6	10.8	10.8	9.6	8.6	9.8	9.8	8.6
5	12	13.2	13.2	12	11	12.2	12.2	11

Max-plus gait scheduler (continue)

- Systematic gait generation
- No coupling matrix $\mathbb{C}_{ij}$
- Total cycle time analysis (max-plus eigenvalues of A matrix in $x(k+1) = A \otimes x(k)$)
- Coupling time analysis ("settling time")
- Not computationally expensive
- Possibility to provide "optimal" gait switching

Angular frequency reference generator

Main goal

Making use of the **touchdown** and **lift-off** times of the max-plus gait scheduler, provide a function for the evolution of the angular frequency of the oscillator-based reference generator.

Angular frequency reference generator (continue)

- Stance and swing period:

$$Ti_{st} = l_i(k+1) - g_i(k)$$
$$Ti_{sw} = g_i(k+1) - l_i(k+1),$$

- Average angular frequency:

$$\bar{\omega} = \begin{cases} \frac{\pi}{Ti_{st}} \ \textbf{for} \ t \in [g_i(k), l_i(k+1)] \\ \frac{\pi}{Ti_{sw}} \ \textbf{for} \ t \in (l_i(k+1), g_i(k+1)] \end{cases}$$

- Condition for the angular frequency function:

$$\frac{1}{Ti_p} \int^{Ti_p} \omega dt = \bar{\omega} \ \textbf{for} \ p = st, sw.$$





Angular frequency reference generator (continue)

$$\omega = \bar{\omega}$$

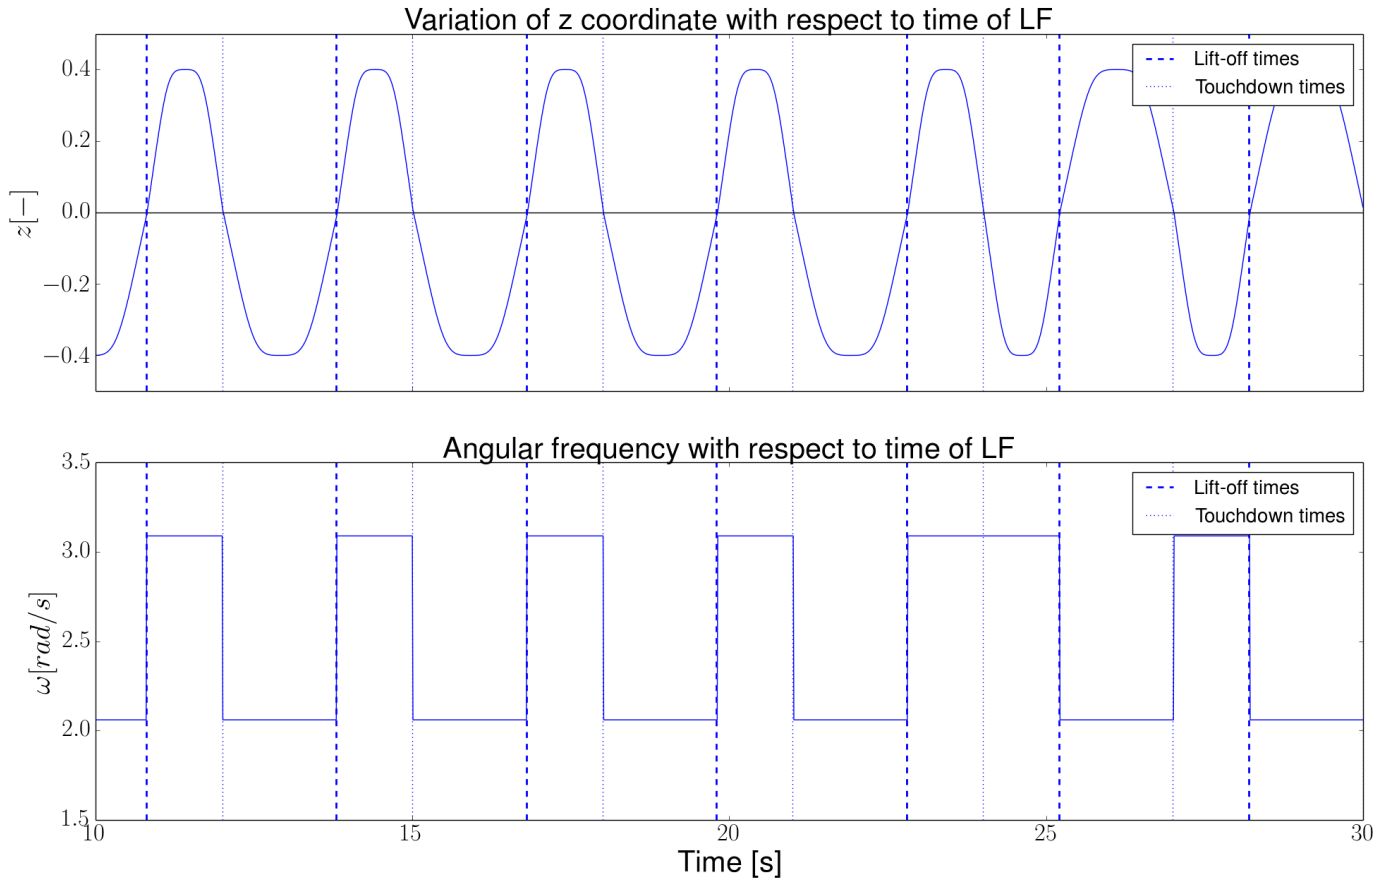

Oscillator continuous time reference generator

Main goal

Generate reference trajectories for each of the legs of the robot in such a way that the desired gait is achieved, according to the angular frequency obtained from the angular frequency reference generator.

Oscillator continuous time reference generator (continue)

Oscillator equations:

$$x = \alpha(1 - \frac{16x^4}{L_s^4} - \frac{z^4}{H_s^4})x + \frac{1.18\omega L_s}{2H_s^3}z^3$$

$$z = \beta(1 - \frac{16x^4}{L_s^4} - \frac{z^4}{H_s^4})z - \frac{9.44\omega H_s}{L_s^3}x^3$$



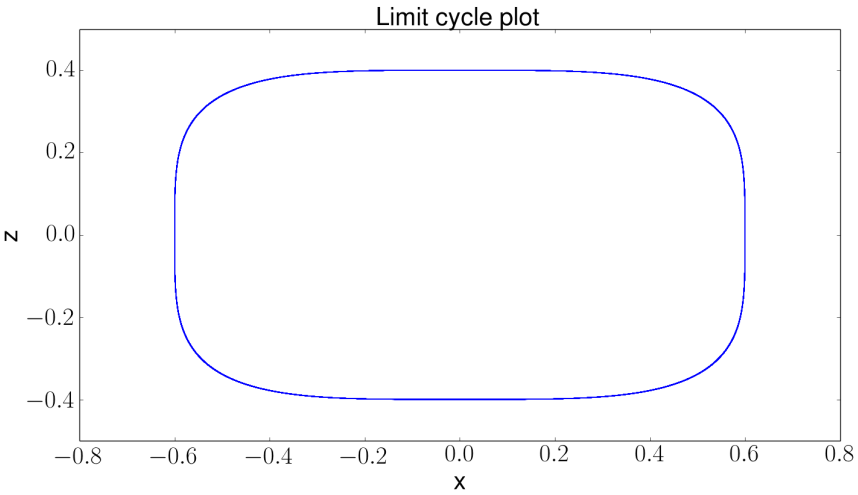

Outline

Control structure

Numeric simulations

Further work

Parameters used

Switch between four different sets of gait parameters:

	G	D_f	$S_f[\frac{1}{s}]$	$\Delta[s]$
T_1	$\{1,4\} \prec \{2,3\}$	0.6	1/3	$[0.2, 0.4]$
T_2	$\{1,4\} \prec \{2,3\}$	0.4	1/3	$[-0.2, -0.4]$
W_1	$\{1\} \prec \{2\} \prec \{3\} \prec \{4\}$	0.6	1/3	$[-0.45, -0.45, -0.45, -0.45]$
W_2	$\{1\} \prec \{2\} \prec \{3\} \prec \{4\}$	0.4	1/3	$[-1.4, -0.7, -1.4, -0.7]$

Generated motion references

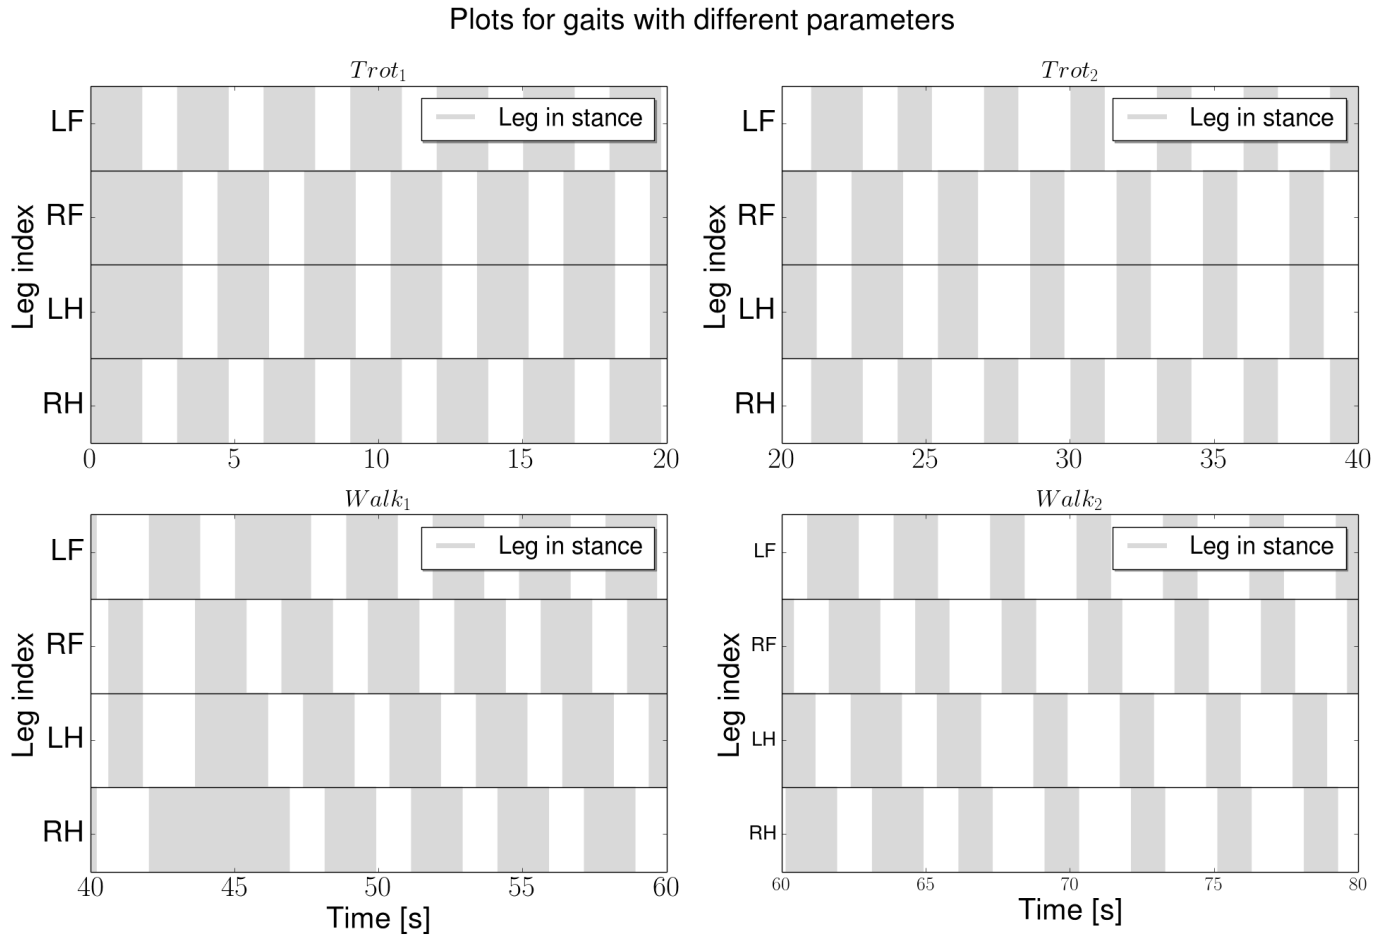

Duty factor

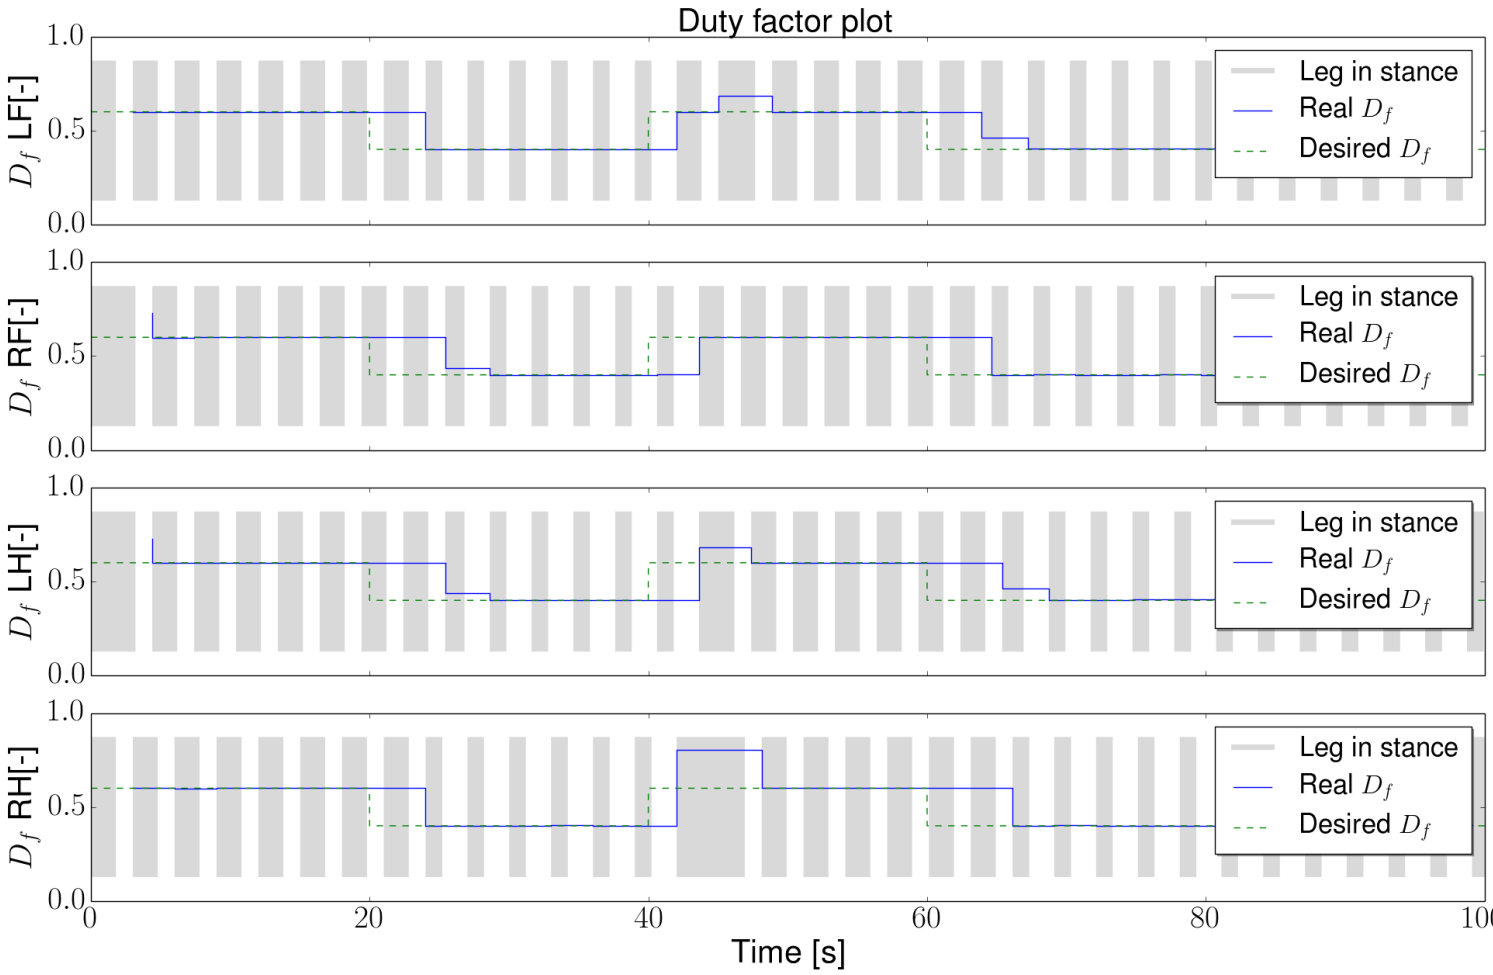

Duty factor plot
Leg in stance
Real D_f
Desired D_f
D_f LF[-]
D_f RF[-]
D_f LH[-]
D_f RH[-]
0.0
0.5
1.0
0
20
40
60
80
100
Time [s]

Animation

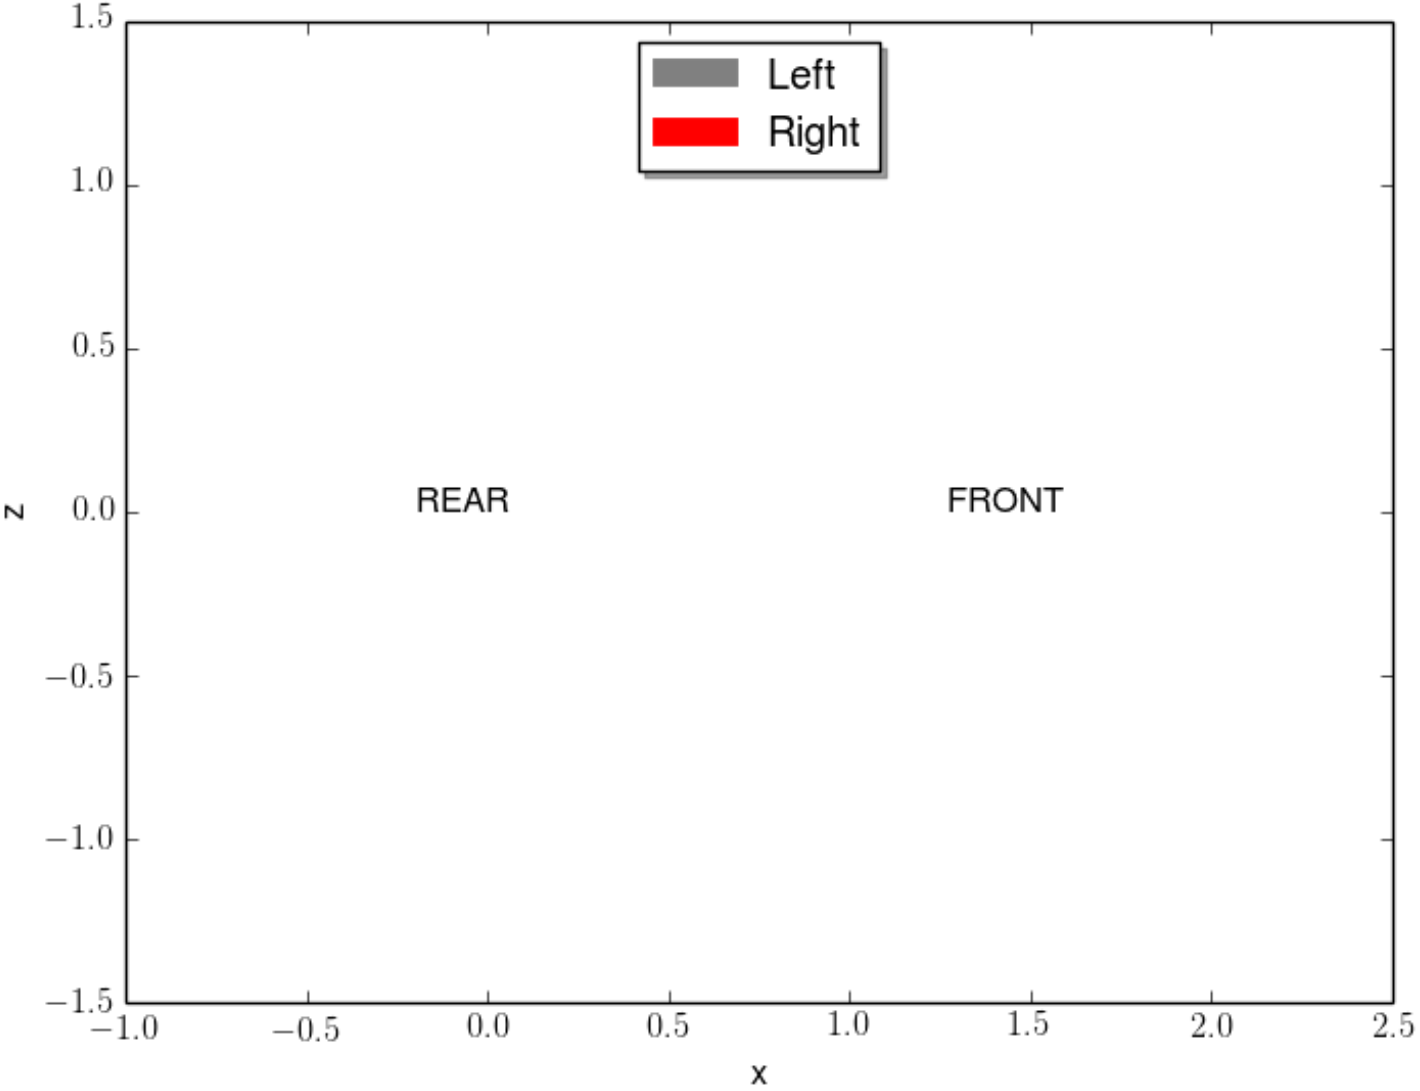
Left
Right
REAR
FRONT
z
x
1.5
1.0
0.5
0.0
−0.5
−1.0
−1.5
−1.0
−0.5
0.0
0.5
1.0
1.5
2.0
2.5

Outline

Control structure

Numeric simulations

Further work

Further work

- Use the proposed strategy in the current framework
- Design angular frequency generator
- Account for disturbances in the max-plus algebra gait scheduler
- Design of supervisory parameters according to sensory information
- Design transition between one set of parameters to another

Thank you. Questions or comments?