Mesh Radio v1 (working name) — OffGrid Devices
LoRa 902–928 MHz mesh radio, up to ~3 W; Bluetooth LE; one LiPo cell; USB-C, solar and drone power.
NDAA-ready parts list: every part from a US / EU / Japan / Taiwan / Korea / Norway maker.
Each box below is one page. Every connection is a named label; the same name is the same wire.
This drawing is generated from src/circuit.py by src/sch.py: change the code, not the drawing.

Power in: USB-C, solar, drone 5 V (each surge-clamped and fused)

Every input: flat-clamp or bidirectional TVS, then a TPS259470A eFuse (over-voltage cut-off, current limit, reverse-blocking) under the 4.5 V/5 V rail.

File: inputs.kicad_sch

Charger and battery: protection, reverse polarity, battery sense

Battery: JST-PH 2-pin, 2 mm pitch. 1 cell, protection on the minus side (OCD ~4.1 A, SCD ~21 A, 0 V lockout, 2.8 mΩ).

File: charger.kicad_sch

System power: on/off switch, 3.3 V rail

The 3 V3 rail: 3.3 V, 2 A, reverse-blocked with a P-FET on the high side.

File: system.kicad_sch

Processor and Bluetooth: nRF52840

nRF52840 in normal-voltage mode: VDD = VDDH = the 3.3 V rail, so its pins and the SX1262 share one logic level.

File: mcu.kicad_sch

LoRa radio: SX1262, its clock, transmit match and receive balun

Semtech SX1262MB2CAS (915 MHz) reference values. TCXO on DIO3 (set 2.2 V in firmware), DIO2 drives the antenna switch.

File: radio.kicad_sch

RF front end: 15 dB pad, 3 W amplifier, filters, antenna switch, LNA

Drive SX1262 +11 dBm -> 30 dBm (1 W), +17 dBm -> ~35 dBm (3 W). The 15.9 dB pad keeps the amplifier input at +11 dBm.

File: frontend.kicad_sch

Amplifier power: battery-first supply, buck-boost, control voltage, temperature

Amplifier runs from the battery through the SX1262 max (charge 2.5 V only when 5 V is present), then a TPS63810 buck-boost set to 3.7 V.

File: pa_power.kicad_sch

Ports: drone (JST-GH), GPS add-on (JST-SH), expansion header, buttons, LEDs

Drone: 6-pin JST-GH, 1.25 mm pitch, 5 V to the drone (up to 3 A).

File: ports.kicad_sch

Generated from src/circuit.py by src/sch.py. Edit the circuit, not this file.
OffGrid Devices


Sheet: /
File: mesh-radio.kicad_sch


Title: Mesh Radio v1 (working name)


Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.6		Id: 1/9


Power in: USB-C, solar, drone 5 V (each surge-clamped and fused)


Every input: flat-clamp or bidirectional TVS, then a TPS259470A eFuse (over-voltage cut-off, current limit, reverse blocking). USB 5.8 V / 1.5 A, drone 5.8 V / 1.3 A, solar 10 V / 1.3 A.

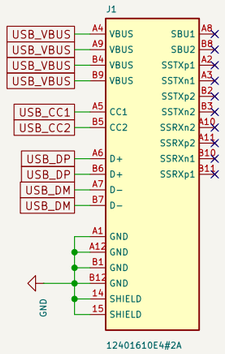


















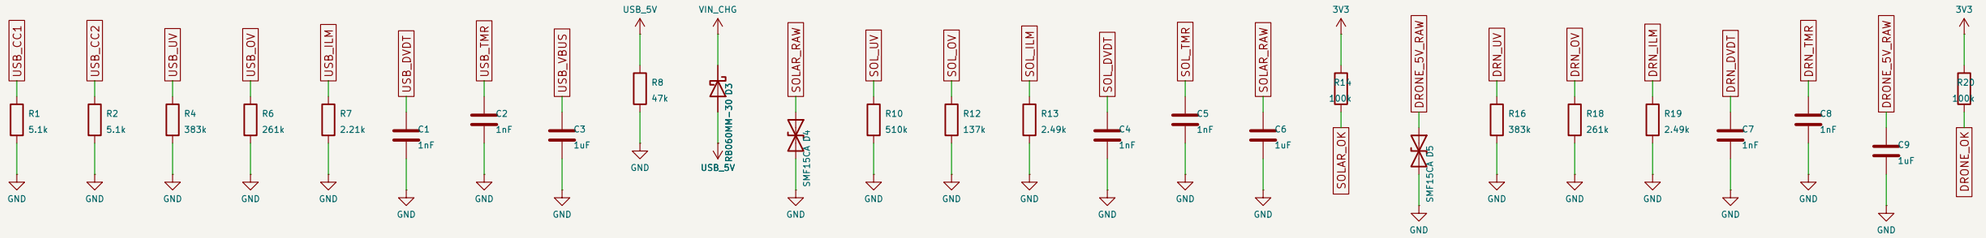





OffGrid Devices


Sheet: /Power in: USB-C, solar, drone 5 V (each surge-clamped and fused)/
File: inputs.kicad_sch

Title: Power in: USB-C, solar, drone 5 V (each surge-clamped and fused)

Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.6		Id: 2/9

Charger and battery: protection, reverse polarity, battery sense


Battery plug wired the Adafruit/SparkFun way (pad 1 = +). Cell protection on the minus side
(OCD ~4.1 A, SCD ~21 A, OV 4.275 V, UV 2.8 V); reverse-battery P-FET on the plus side.

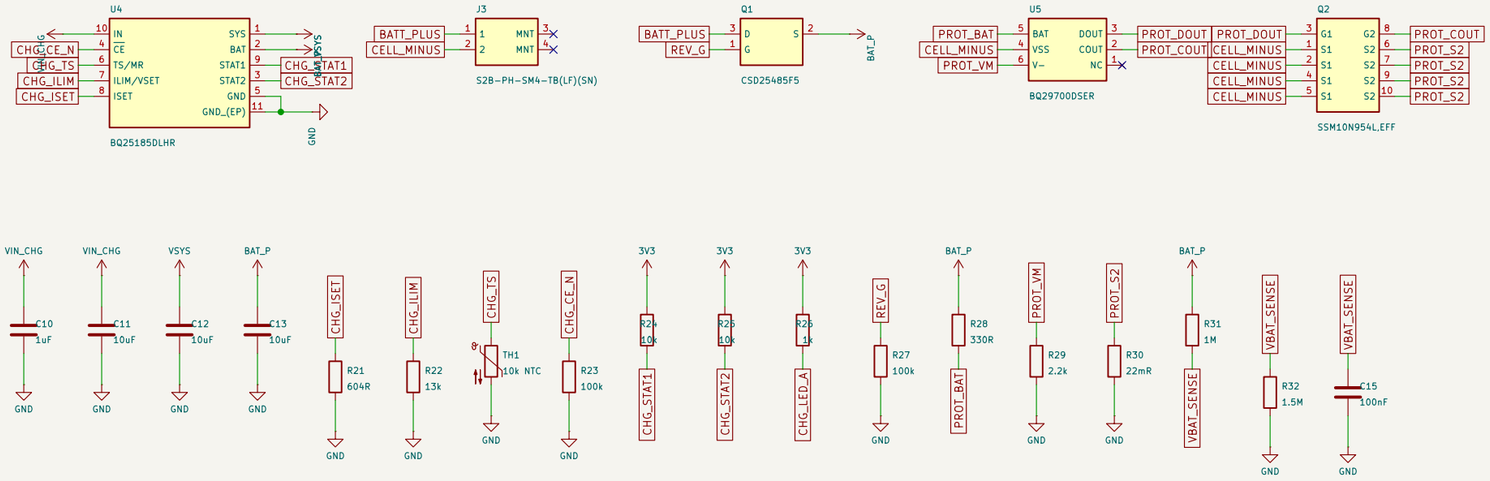



OffGrid Devices	
Sheet: /Charger and battery: protection, reverse polarity, battery sense/	
File: charger.kicad_sch	
Title: Charger and battery: protection, reverse polarity, battery sense	
Size: A3	Date:
KiCad E.D.A. 10.0.6	Id: 3/9

System power: on/off switch, 3.3 V rail

The slide switch only drives the load switch enable; charging works with the board switched off.

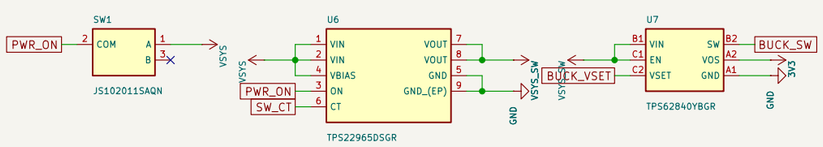



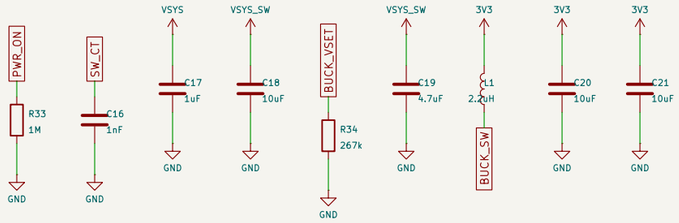

OffGrid Devices


Sheet: /System power: on/off switch, 3.3 V rail/
File: system.kicad_sch


Title: System power: on/off switch, 3.3 V rail

Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.6		Id: 4/9

Processor and Bluetooth: nRF52840

nRF52840 in normal-voltage mode: VDD = VDDH = the 3.3 V rail, so its pins and the SX1262 share one logic level. REG1 DC/DC on (10 uH + 15 nH). Nordic reference circuit, aQFN73.

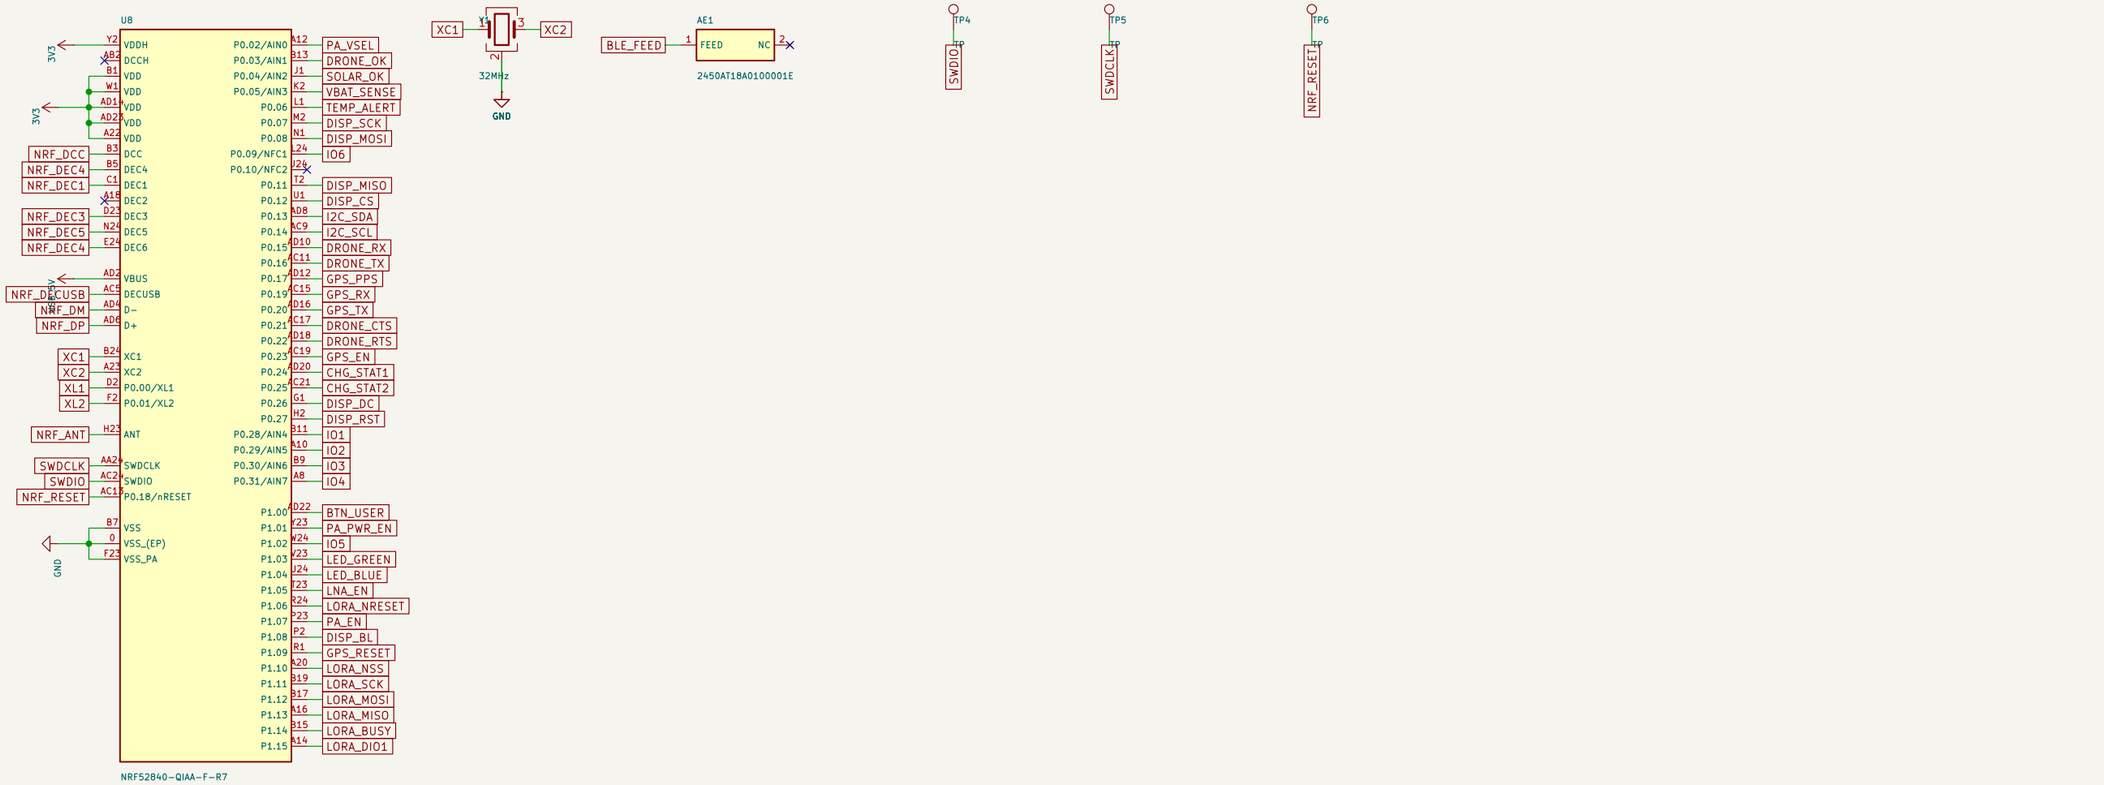

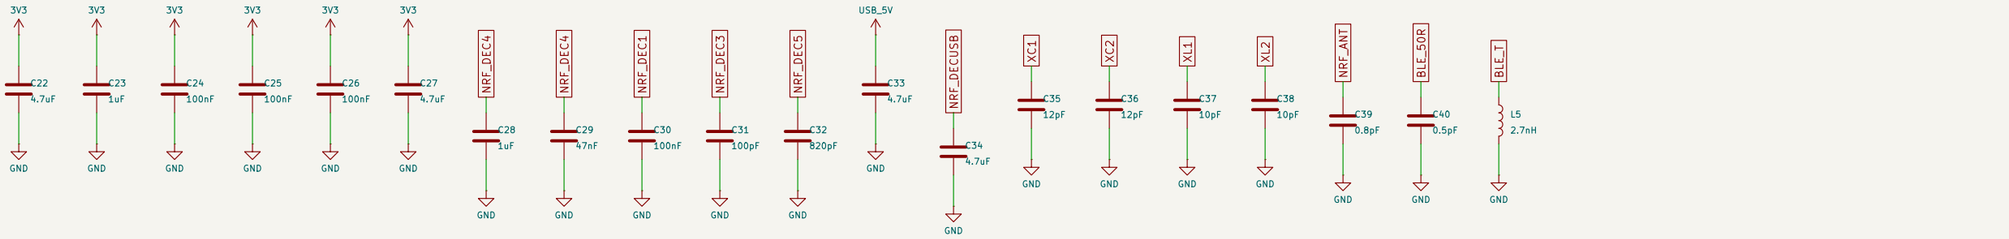



OffGrid Devices


Sheet: /Processor and Bluetooth: nRF52840/
File: mcu.kicad_sch


Title: Processor and Bluetooth: nRF52840


Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.6		Id: 5/9

LoRa radio: SX1262, its clock, transmit match and receive balun

Semtech SX1262MB2CAS (915 MHz) reference values. TCXO on DIO3 (set 2.2 V in firmware), DIO2 drives the antenna switch.

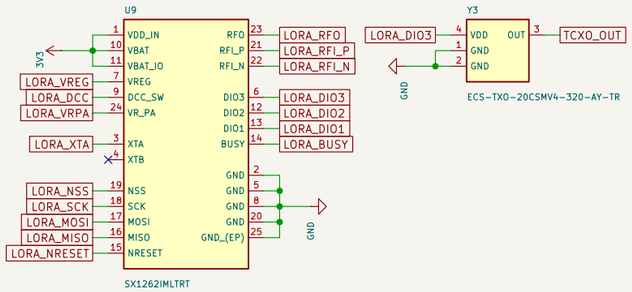

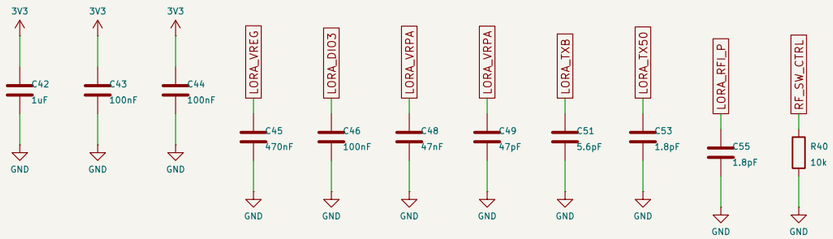

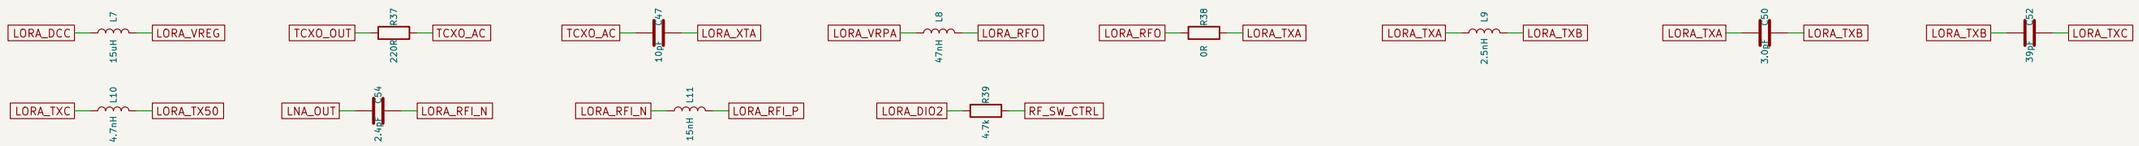

OffGrid Devices


Sheet: /LoRa radio: SX1262, its clock, transmit match and receive balun/
File: radio.kicad_sch


Title: LoRa radio: SX1262, its clock, transmit match and receive balun


Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.6		Id: 6/9


RF front end: 15 dB pad, 3 W amplifier, filters, antenna switch, LNA


Drive: SX1262 +11 dBm -> 30 dBm (1 W), +17 dBm -> ~35 dBm (3 W). The 15.9 dB pad keeps the amplifier input below its +13 dBm limit even at the SX1262 maximum (+22 dBm -> +6 dBm).

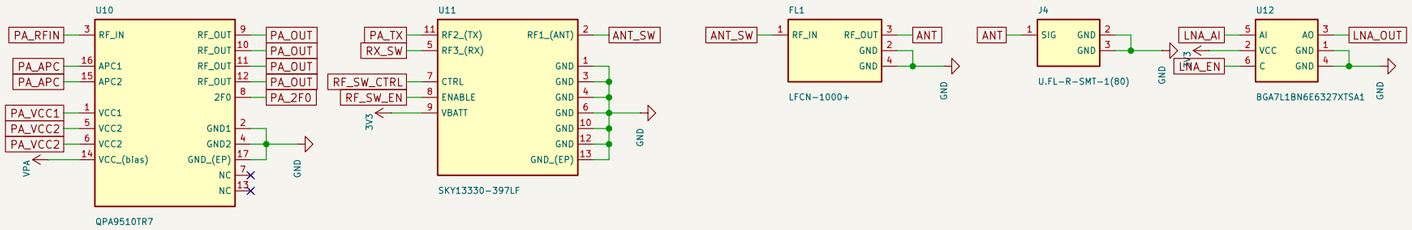

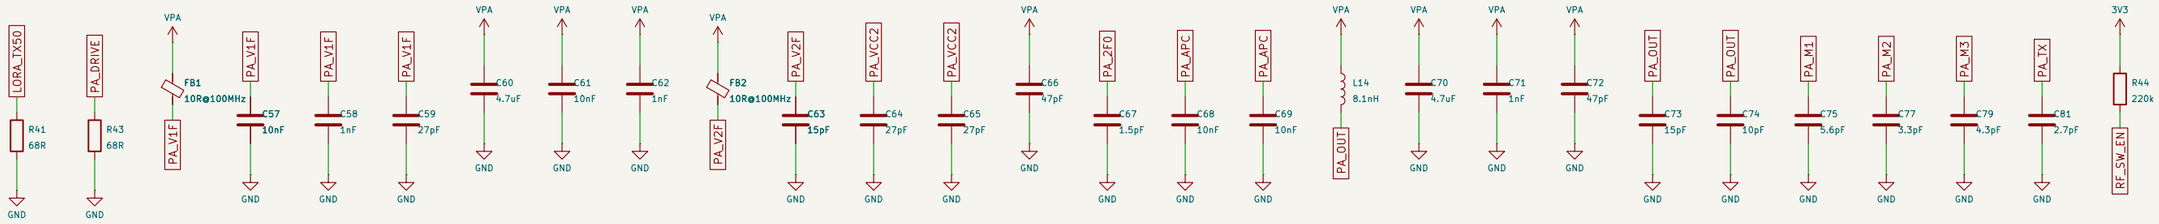

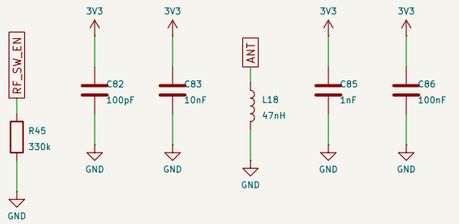

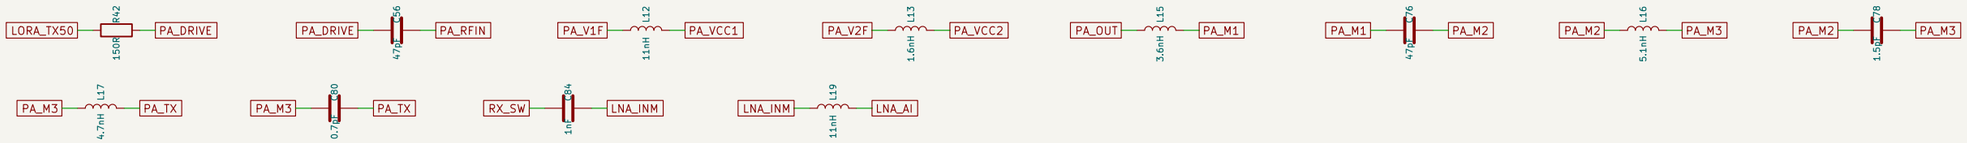



OffGrid Devices


Sheet: /RF front end: 15 dB pad, 3 W amplifier, filters, antenna switch, LNA/
File: frontend.kicad_sch


Title: RF front end: 15 dB pad, 3 W amplifier, filters, antenna switch, LNA

Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.6		Id: 7/9

Amplifier power: battery–first supply, buck–boost, control voltage, temperature

Amplifier runs from the battery through a power mux (charger SYS only when no battery), then a TPS63810 buck–boost set over I2C (0x75): ~2.7 V for 1 W, up to 4.0 V for 3 W.

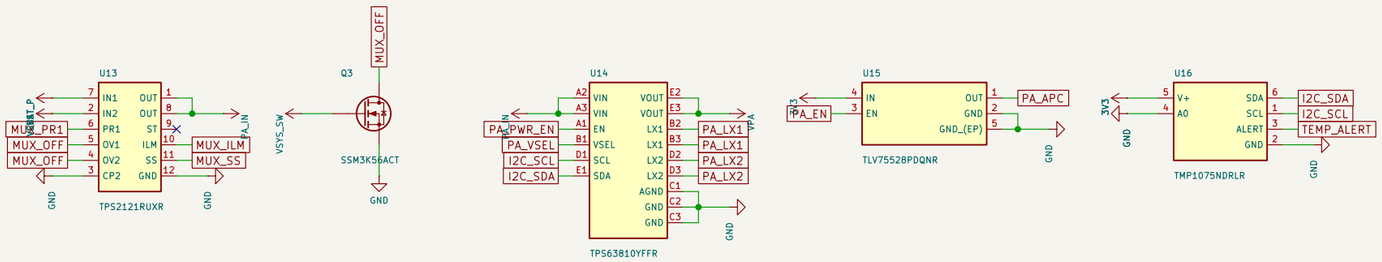

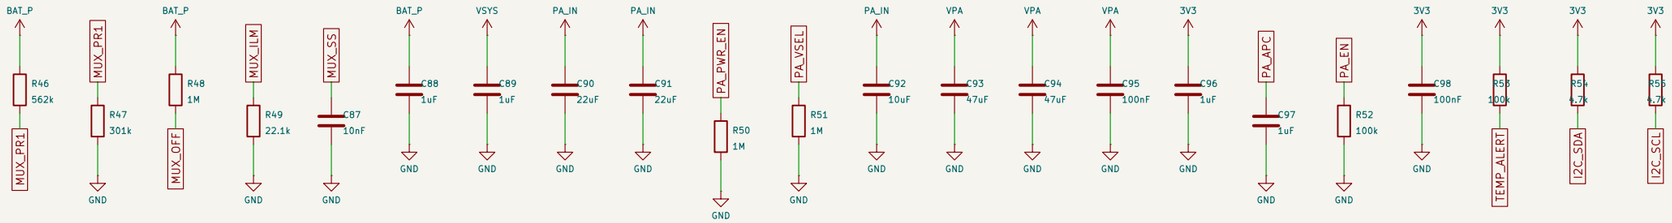

OffGrid Devices


Sheet: /Amplifier power: battery–first supply, buck–boost, control voltage, temperature/
File: pa_power.kicad_sch


Title: Amplifier power: battery–first supply, buck–boost, control voltage, tem


Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.6		Id: 8/9

Ports: drone (JST-GH), GPS add-on (JST-SH), expansion header, buttons, LEDs

Drone port wired as Pixhawk TELEM (pins from the autopilot side): 1 5V, 2 TX, 3 RX, 4 CTS, 5 RTS,
6 GND. Series resistors and ESD on every external signal.

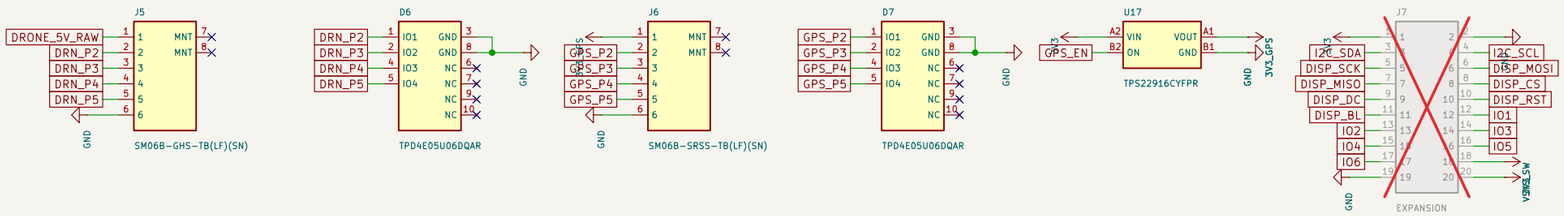

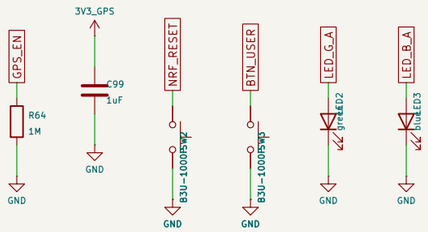

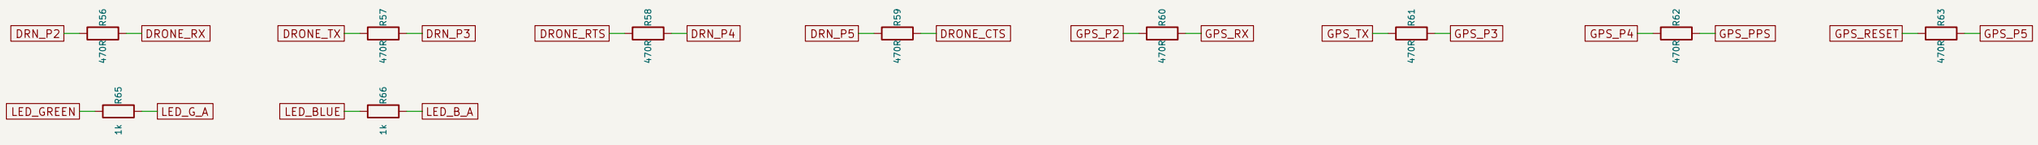

OffGrid Devices

Sheet: /Ports: drone (JST-GH), GPS add-on (JST-SH), expansion header, buttons, LEDs/
File: ports.kicad_sch

Title: Ports: drone (JST-GH), GPS add-on (JST-SH), expansion header, butto

Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.6		Id: 9/9