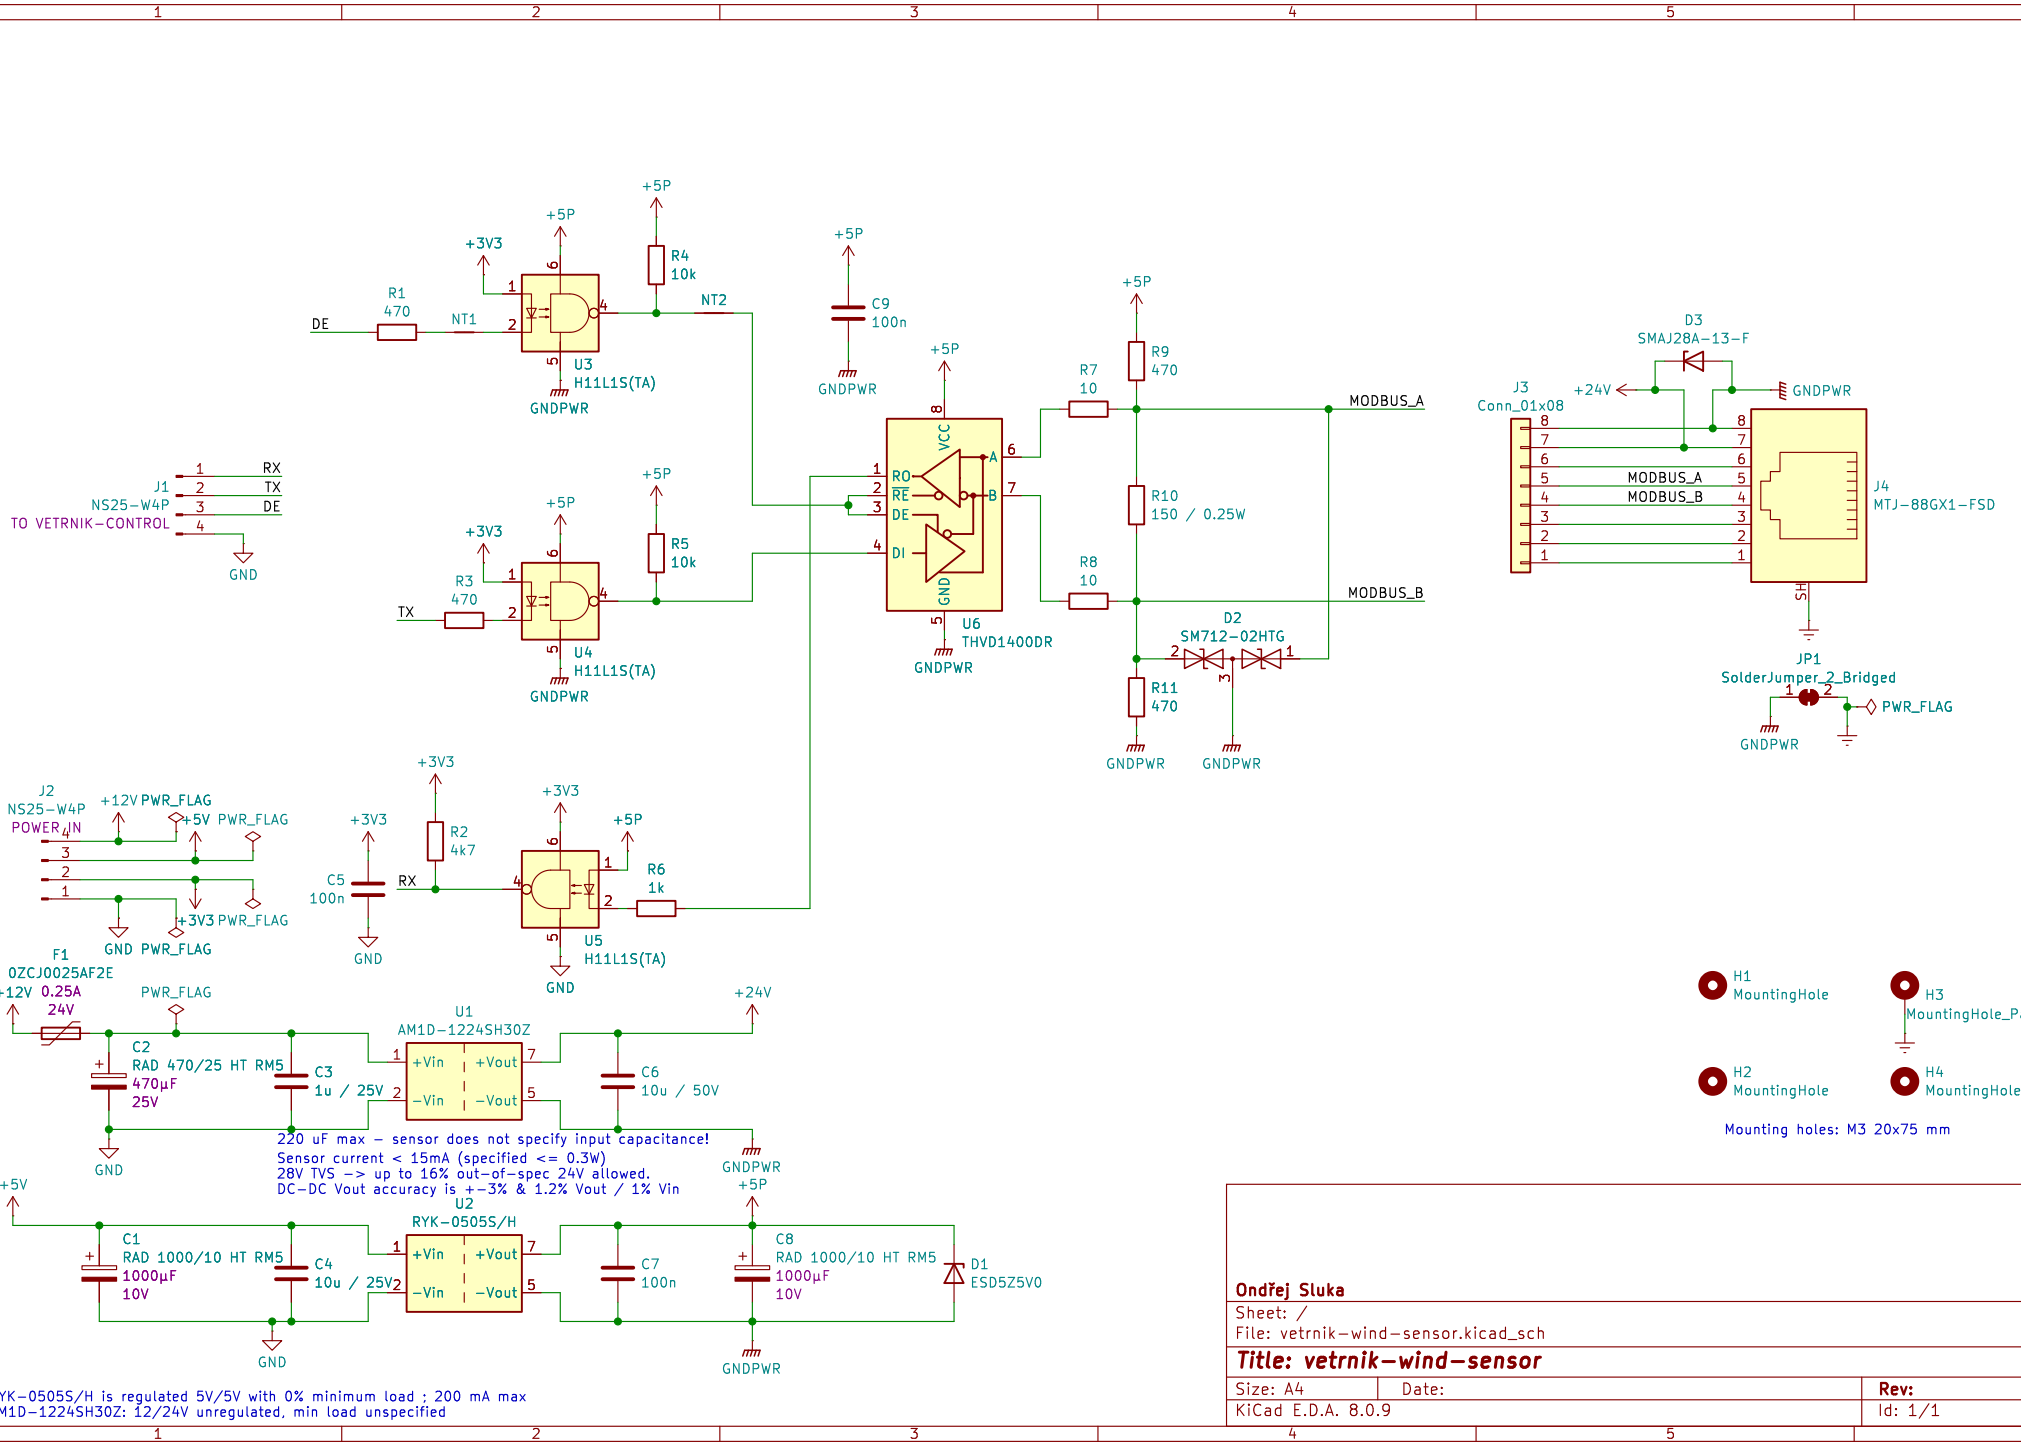

J1
NS25-W4P
TO VETRNIK-CONTROL
RX
TX
DE
GND
R1
470
DE
NT1
U3
H11L1S(TA)
GNDPWR
+3V3
+5P
R4
10k
NT2
R3
470
TX
U4
H11L1S(TA)
R5
10k
C9
100n
U6
THVD1400DR
RO
RE
DE
DI
VCC
GND
A
B
R7
10
R8
10
R9
470
R10
150 / 0.25W
R11
470
MODBUS_A
MODBUS_B
D2
SM712-02HTG
D3
SMAJ28A-13-F
+24V
J3
Conn_01x08
J4
MTJ-88GX1-FSD
JP1
SolderJumper_2_Bridged
PWR_FLAG
J2
NS25-W4P
POWER IN
+12V
+5V
+3V3
GND
F1
0ZCJ0025AF2E
0.25A
24V
C5
100n
R2
4k7
R6
1k
U5
H11L1S(TA)
U1
AM1D-1224SH30Z
+Vin
-Vin
+Vout
-Vout
C2
RAD 470/25 HT RM5
470µF
25V
C3
1u / 25V
C6
10u / 50V
220 uF max - sensor does not specify input capacitance!
Sensor current < 15mA (specified <= 0.3W)
28V TVS -> up to 16% out-of-spec 24V allowed.
DC-DC Vout accuracy is +-3% & 1.2% Vout / 1% Vin
U2
RYK-0505S/H
C1
RAD 1000/10 HT RM5
1000µF
10V
C4
10u / 25V
C7
100n
C8
RAD 1000/10 HT RM5
1000µF
10V
D1
ESD5Z5V0
RYK-0505S/H is regulated 5V/5V with 0% minimum load ; 200 mA max
AM1D-1224SH30Z: 12/24V unregulated, min load unspecified
H1
MountingHole
H2
MountingHole
H3
MountingHole_Pad
H4
MountingHole
Mounting holes: M3 20x75 mm
Ondřej Sluka
Sheet: /
File: vetrnik-wind-sensor.kicad_sch
Title: vetrnik-wind-sensor
Size: A4
Date:
Rev:
KiCad E.D.A. 8.0.9
Id: 1/1