




Power Supply

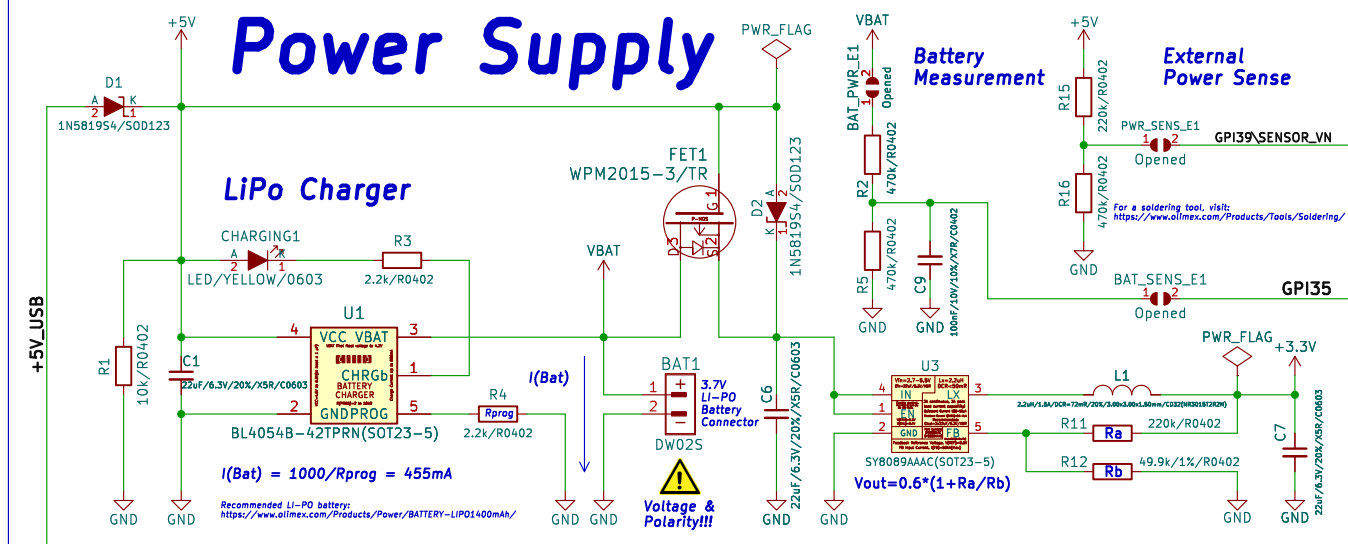

ESP32-WROOM-32x-xxx MODULE

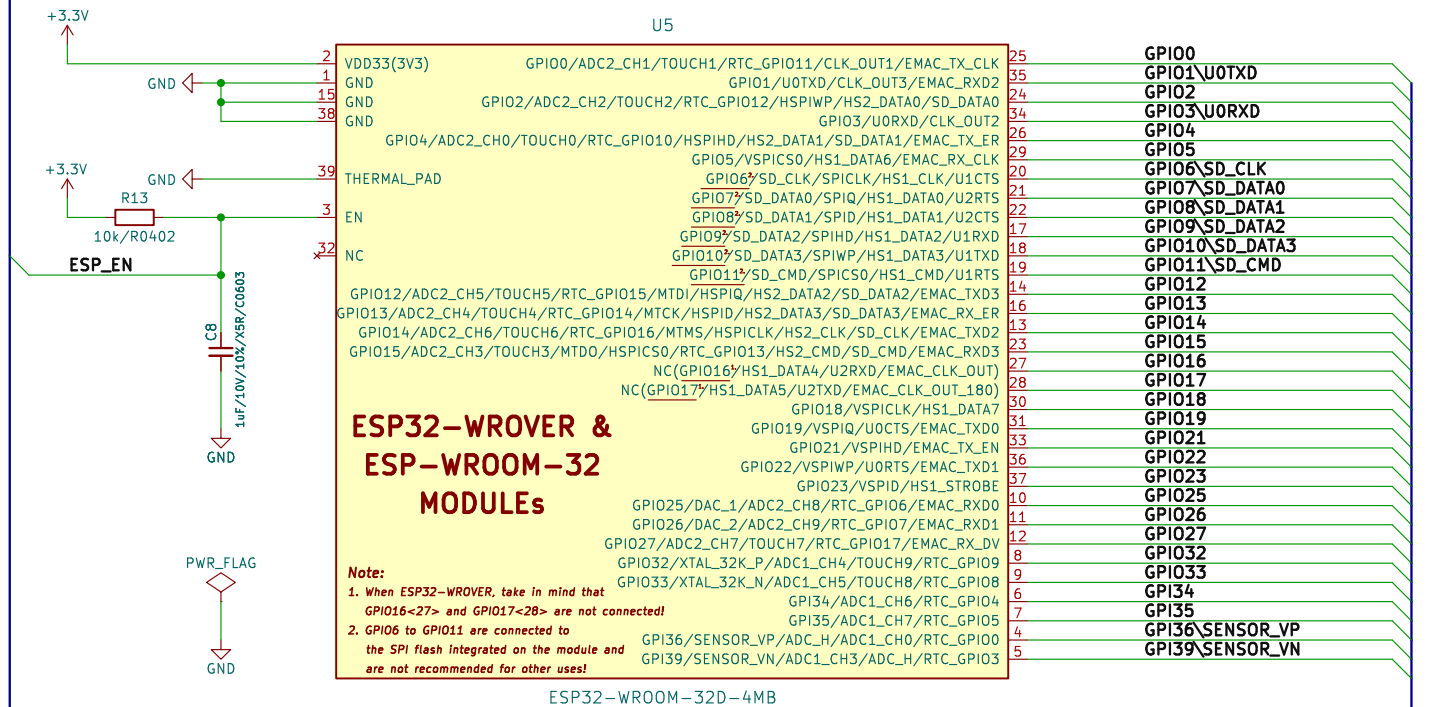

USB to UART

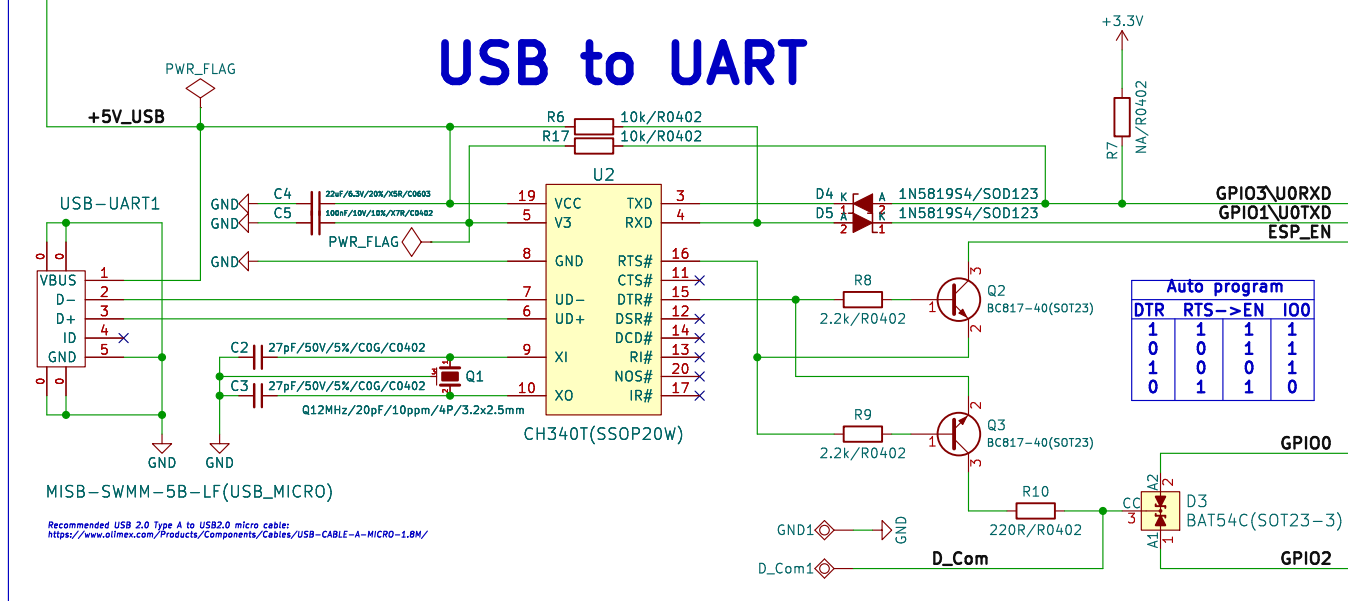


Fiducials:




Internal Bootstrapping Resistors

MTDI/GPIO12:	Pull-Down
GPIO0:	Pull-Up
GPIO2:	Pull-Down
GPIO4:	Pull-Down
MTDO/GPIO15:	Pull-Up
GPIO5:	Pull-Up

Extensions

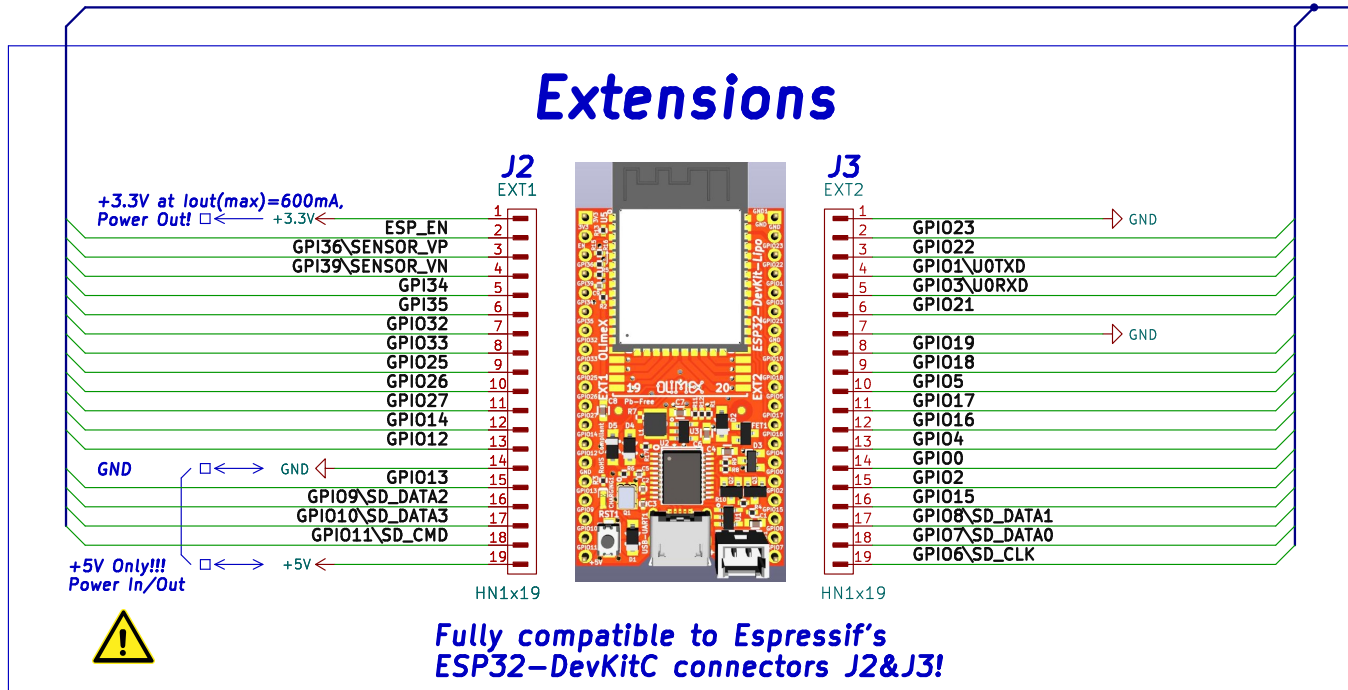

Reset Button

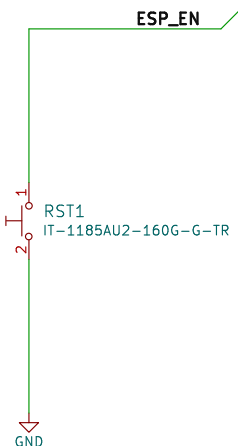

Software Selectable Pins

Interface	Signal	Pin
EMAC	EMAC_MDC_out EMAC_MDIO_in EMAC_MDO_out EMAC_CRD_out EMAC_COL_out	Any GPIO
I2C	I2C_EXT0_SCL_in I2C_EXT0_SDA_in I2C_EXT1_SCL_in I2C_EXT1_SDA_in I2C_EXT0_SCL_out I2C_EXT0_SDA_out I2C_EXT1_SCL_out I2C_EXT1_SDA_out	Any GPIO
General Purpose SPI	HSPIQ_in/_out HSPID_in/_out HSPICLK_in/_out HSPICS0_in/_out HSPICS1_out HSPICS2_out VSPIQ_in/_out VSPID_in/_out VSPICLK_in/_out VSPLCS0_in/_out VSPLCS1_out VSPLCS2_out	Any GPIO

For more information refer to [esp_wroom_32_datasheet_en.pdf](#).

Voltage of Internal LDO(VDD_SDIO)					
Pin	Default	3.3V	1.8V		
GPIO12/MTDI	Pull-Down	0	1		
Bootstrapping Pins Settings					
Bootstrapping Mode					
Pin	Default	SPI Flash Boot	Download Boot		
GPIO0	Pull-Up	1	0		
GPIO2	Pull-Down	Don't-care	0		
Debugging Log on U0TXD During Booting					
Pin	Default	U0TXD Toggling	U0TXD Silent		
GPIO15/MTDO	Pull-Up	1	0		
Timing of SDIO Slave					
Pin	Default	Falling-edge:Output	Falling-edge:Input Rising-edge:Output	Rising-edge:Input Falling-edge:Output	Rising-edge:Input Rising-edge:Output
GPIO15/MTDO	Pull-Up	0	0	1	1
GPIO5	Pull-Up	0	1	0	1



<https://www.olimex.com>
OLIMEX LTD.

Sheet: /
File: working.kicad_sch

Title: ESP32-DevKit-Lipo

Size: A3 Date: 2020-06-09
KiCad E.D.A. eschema 7.0.6

Rev: C
Id: 1/1