


Switch Characteristics

- =====
- 12 VAC/DC max
- 2 VDC min
- 10mA AC/DC max
- 10uA DC min


JP1 and JP6 break out all four component pins. The two headers are breadboard compatible. If multiple switches are connected in a matrix, the SWITCH2 and LED cathod pins can be interconnected to form the ROWS of a matrix.

SJ2 shorts across D1, effectively removing the diode from the circuit.

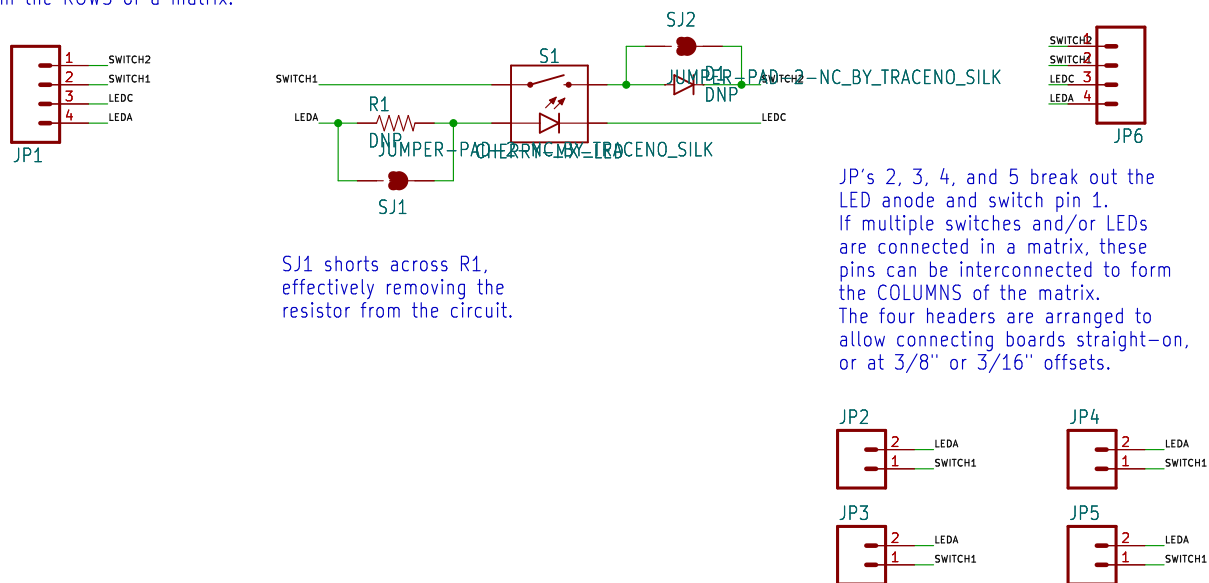

SJ1 shorts across R1, effectively removing the resistor from the circuit.

JP's 2, 3, 4, and 5 break out the LED anode and switch pin 1. If multiple switches and/or LEDs are connected in a matrix, these pins can be interconnected to form the COLUMNS of the matrix. The four headers are arranged to allow connecting boards straight-on, or at 3/8" or 3/16" offsets.

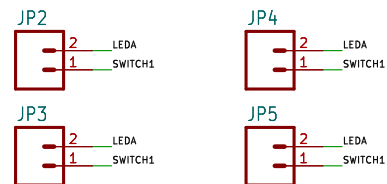

Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/				∞	
TITLE: \${PROJECTNAME}					
Design by: Jim Lindblom			REV: v10		
Date: \${CURRENT_DATE}			Sheet: \${#}/\${##}		
Size: User		Date:			Rev:
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1					Id: 1/1

