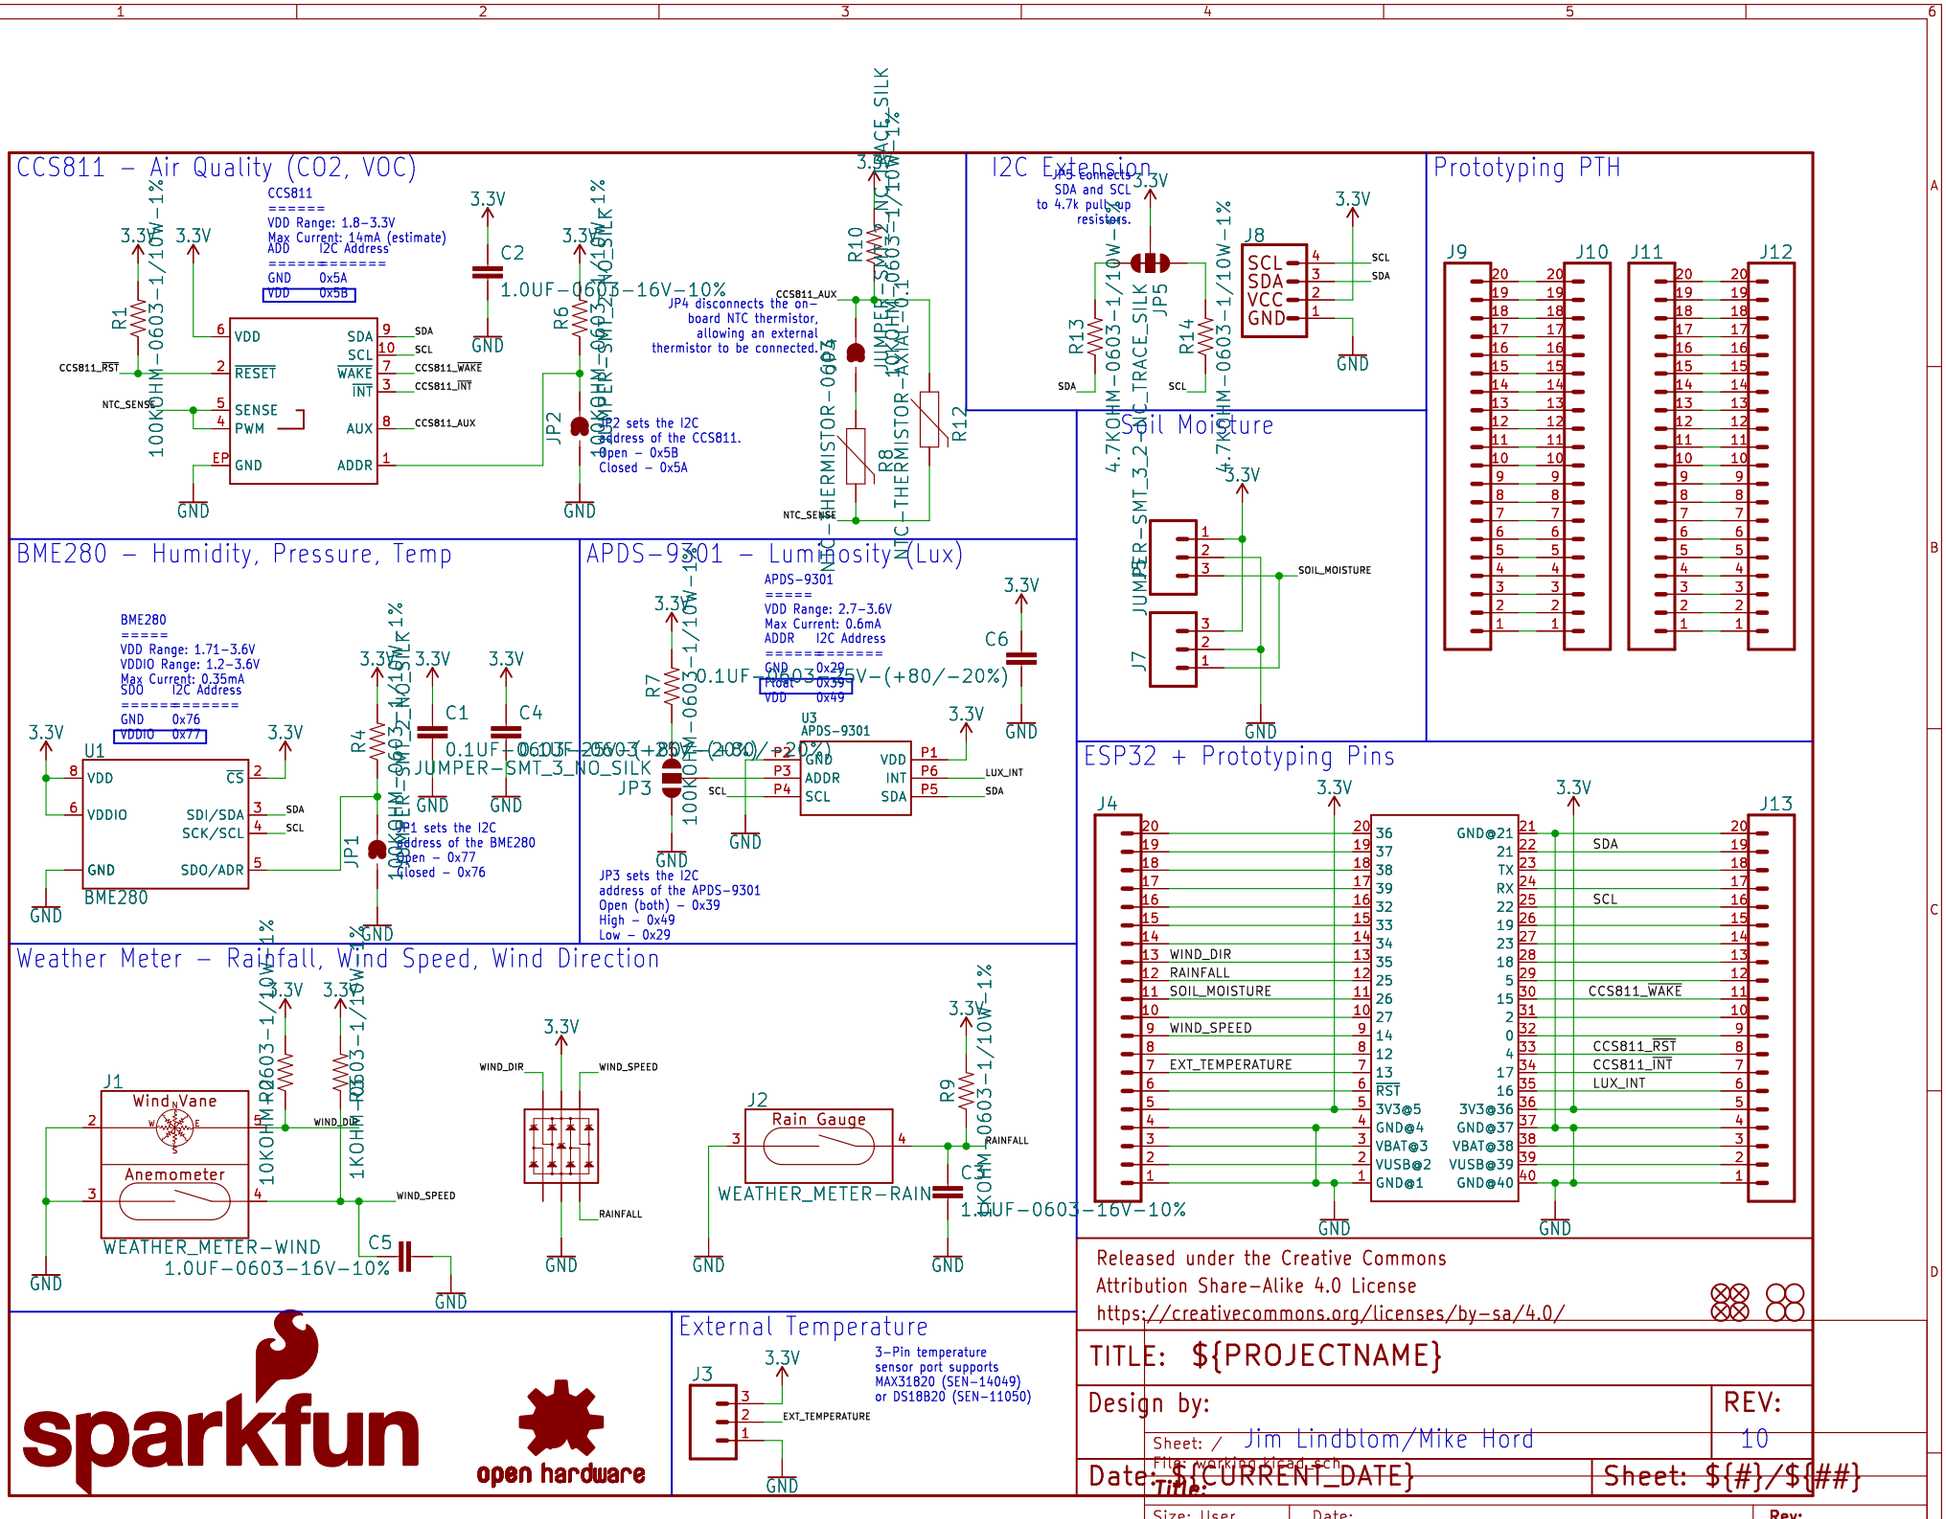

CCS811 – Air Quality (CO2, VOC)
CCS811
VDD Range: 1.8–3.3V
Max Current: 14mA (estimate)
ADD I2C Address
GND 0x5A
VDD 0x5B
JP2 sets the I2C address of the CCS811.
Open – 0x5B
Closed – 0x5A
JP4 disconnects the on-board NTC thermistor, allowing an external thermistor to be connected.
I2C Extension
JP5 connects SDA and SCL to 4.7k pull-up resistors.
Prototyping PTH
Soil Moisture
BME280 – Humidity, Pressure, Temp
BME280
VDD Range: 1.71–3.6V
VDDIO Range: 1.2–3.6V
Max Current: 0.35mA
SDO I2C Address
GND 0x76
VDDIO 0x77
JP1 sets the I2C address of the BME280
Open – 0x77
Closed – 0x76
APDS-9301 – Luminosity (Lux)
APDS-9301
VDD Range: 2.7–3.6V
Max Current: 0.6mA
ADDR I2C Address
GND 0x29
FLOAT 0x39
VDD 0x49
JP3 sets the I2C address of the APDS-9301
Open (both) – 0x39
High – 0x49
Low – 0x29
ESP32 + Prototyping Pins
Weather Meter – Rainfall, Wind Speed, Wind Direction
Wind Vane
Anemometer
Rain Gauge
External Temperature
3-Pin temperature sensor port supports MAX31820 (SEN-14049) or DS18B20 (SEN-11050)
Released under the Creative Commons Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/
TITLE: ${PROJECTNAME}
Design by: Jim Lindblom/Mike Hord
REV: 10
Date: ${CURRENT_DATE}
Sheet: ${#}/${##}
Size: User
KiCad E.D.A. kicad-cli 7.0.6-7.0.6~ubuntu22.04.1
Rev:
Id: 1/1