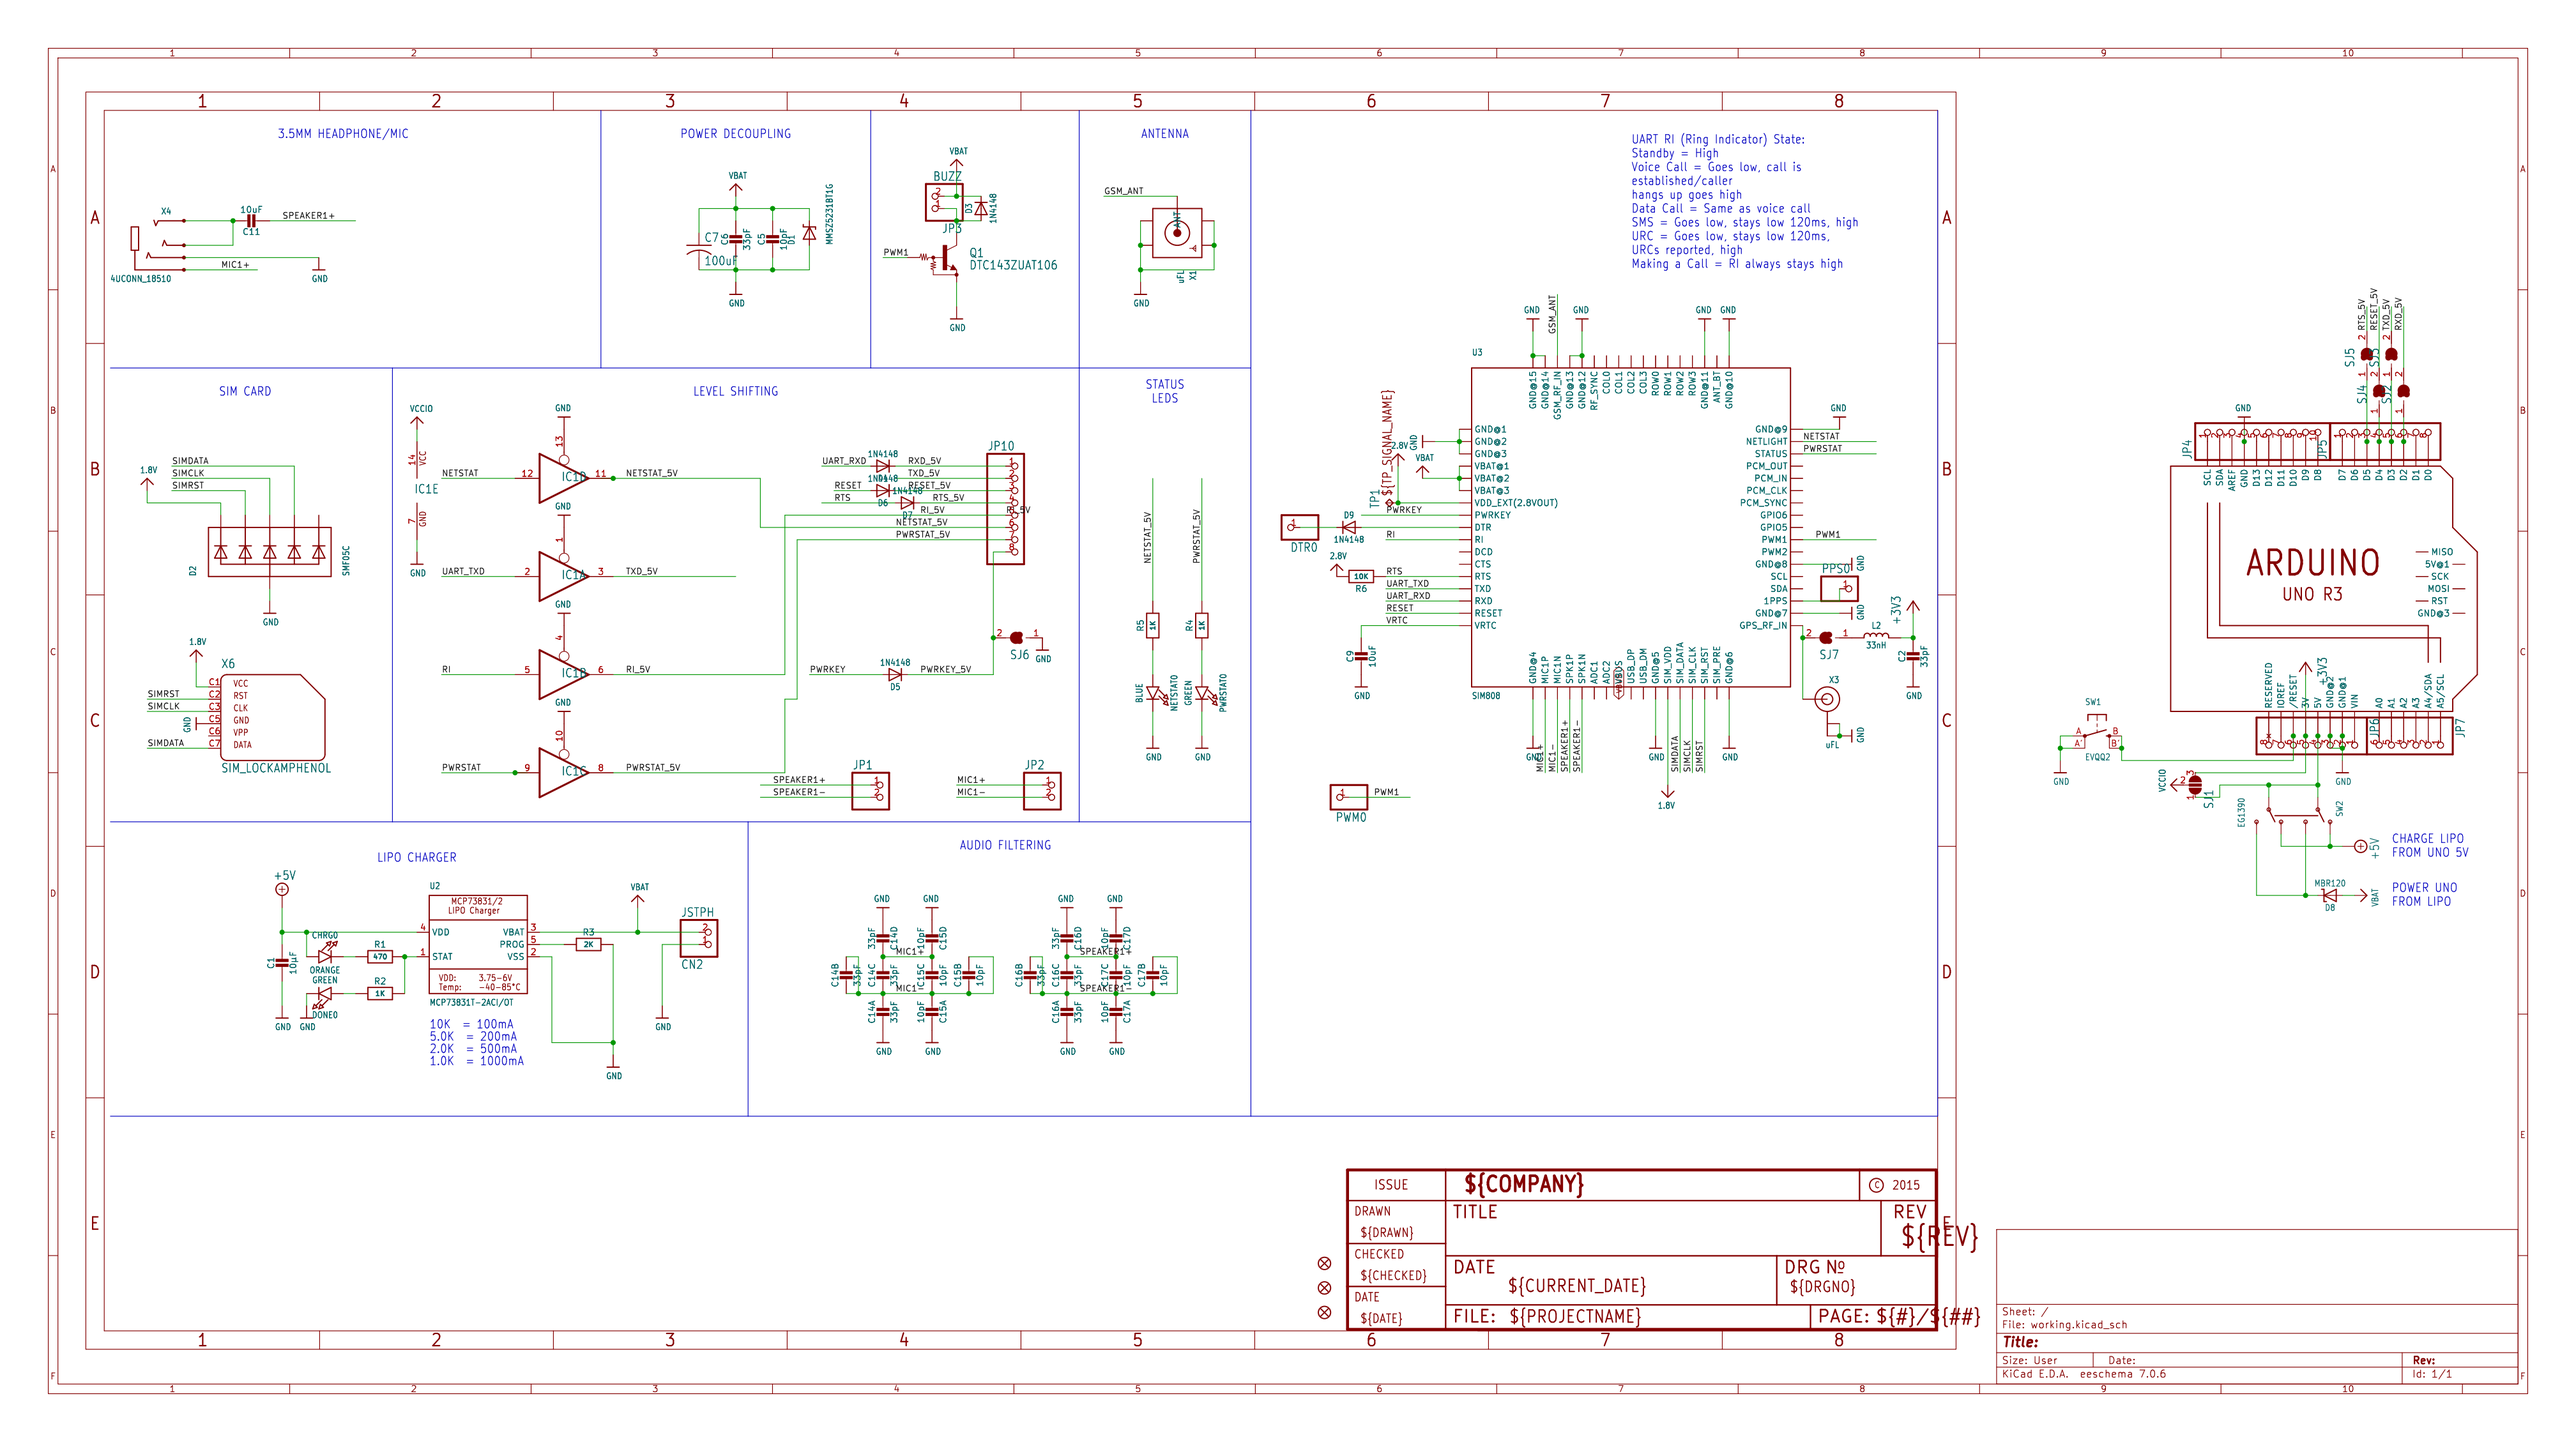
3.5MM HEADPHONE/MIC
X4
10uF
C11
SPEAKER1+
MIC1+
GND
4UCONN_18510
POWER DECOUPLING
VBAT
C7
100uF
C6
33pF
C5
10pF
MMSZ5231B1G
GND
BUZZ
JP3
D3
1N4148
PWM1
R1
Q1
DTC143ZUAT106
GND
ANTENNA
GSM_ANT
ANT
uFL
X1
GND
SIM CARD
1.8V
SIMDATA
SIMCLK
SIMRST
D2
SMF05C
GND
X6
SIMRST
SIMCLK
GND
SIMDATA
C1 VCC
C2 RST
C3 CLK
C5 GND
C6 VPP
C7 DATA
SIM_LOCKAMPHENOL
LEVEL SHIFTING
VCCIO
VCC
14
NETSTAT
12
IC1E
11
NETSTAT_5V
7
GND
UART_TXD
2
IC1A
3
TXD_5V
RI
5
IC1B
6
RI_5V
PWRSTAT
9
IC1C
8
PWRSTAT_5V
UART_RXD
1N4148
RXD_5V
TXD_5V
RESET
1N4148
RESET_5V
RTS
D6
RTS_5V
D7
RI_5V
NETSTAT_5V
PWRSTAT_5V
JP10
PWRKEY
1N4148
D5
PWRKEY_5V
SJ6
JP1
SPEAKER1+
SPEAKER1−
JP2
MIC1+
MIC1−
STATUS LEDS
NETSTAT_5V
PWRSTAT_5V
R5
1K
R4
1K
BLUE
NETSTAT
GREEN
PWRSTAT
GND
GND
LIPO CHARGER
+5V
U2
MCP73831/2
LIPO Charger
VDD
STAT
VBAT
PROG
VSS
VDD: 3.75-6V
Temp: -40-85°C
MCP73831T-2ACI/OT
C1
10uF
CHRGO
ORANGE
R1
470
R2
1K
GREEN
DONEO
R3
2K
VBAT
JSTPH
CN2
GND
10K = 100mA
5.0K = 200mA
2.0K = 500mA
1.0K = 1000mA
AUDIO FILTERING
C14B
33pF
C14C
33pF
C14A
33pF
C15B
10pF
C15C
10pF
C15A
10pF
MIC1+
MIC1−
C16B
33pF
C16C
33pF
C16A
33pF
C17B
10pF
C17C
10pF
C17A
10pF
SPEAKER1+
SPEAKER1−
UART RI (Ring Indicator) State:
Standby = High
Voice Call = Goes low, call is established/caller hangs up goes high
Data Call = Same as voice call
SMS = Goes low, stays low 120ms, high
URC = Goes low, stays low 120ms,
URCs reported, high
Making a Call = RI always stays high
U3
SIM808
GND@15
GND@14
GSM_RF_IN
GND@13
GND@12
RF_SYNC
COL0
COL1
COL2
COL3
ROW0
ROW1
ROW2
ROW3
GND@11
ANT_BT
GND@10
GND@1
GND@2
GND@3
VBAT@1
VBAT@2
VBAT@3
VDD_EXT(2.8VOUT)
PWRKEY
DTR
RI
DCD
CTS
RTS
TXD
RXD
RESET
VRTC
GND@9
NETLIGHT
STATUS
PCM_OUT
PCM_IN
PCM_CLK
PCM_SYNC
GPIO6
GPIO5
PWM1
PWM2
GND@8
SCL
SDA
1PPS
GND@7
GPS_RF_IN
GND@4
MIC1P
MIC1N
SPK1P
SPK1N
ADC1
ADC2
VBUS
USB_DP
USB_DM
GND@5
SIM_VDD
SIM_DATA
SIM_CLK
SIM_RST
SIM_PRE
GND@6
MIC1−
MIC1+
SPEAKER1+
SPEAKER1−
SIMDATA
SIMCLK
SIMRST
1.8V
TP1
${TP_SIGNAL_NAME}
2.8V
VBAT
PWRKEY
D9
1N4148
DTRO
2.8V
10K
R6
RTS
UART_TXD
UART_RXD
RESET
VRTC
C9
100uF
GND
PWM0
PWM1
NETSTAT
PWRSTAT
PPS0
GND
+3V3
L2
33nH
SJ7
X3
uFL
GND
C2
33pF
GND
JP4
JP5
SJ5
SJ4
SJ3
RTS_5V
RESET_5V
TXD_5V
RXD_5V
SCL
SDA
AREF
GND
D13
D12
D11
D10
D9
D8
D7
D6
D5
D4
D3
D2
D1
D0
ARDUINO
UNO R3
MISO
5V@1
SCK
MOSI
RST
GND@3
RESERVED
IOREF
/RESET
3V
5V
GND@2
GND@1
VIN
A0
A1
A2
A3
A4/SDA
A5/SCL
JP6
JP7
SW1
A
B
EVQQ2
GND
VCCIO
SJ1
EG1390
SW2
+5V
CHARGE LIPO FROM UNO 5V
MBR120
D8
VBAT
POWER UNO FROM LIPO
ISSUE
${COMPANY}
© 2015
DRAWN
${DRAWN}
TITLE
REV
${REV}
CHECKED
${CHECKED}
DATE
${CURRENT_DATE}
DRG №
${DRGNO}
DATE
${DATE}
FILE: ${PROJECTNAME}
PAGE: ${#}/${##}
Sheet: /
File: working.kicad_sch
Title:
Size: User
Date:
Rev:
KiCad E.D.A. eeschema 7.0.6
Id: 1/1