



LiPo Charger




External Power Sense

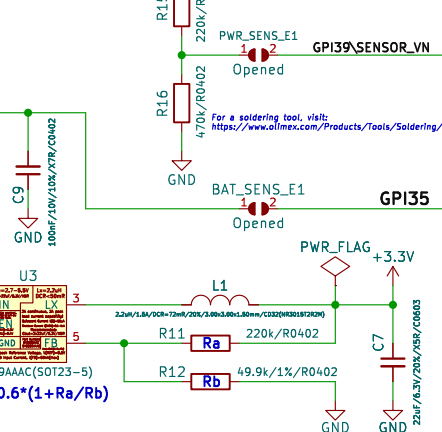

U2



Recommended USB 2.0 Type A to USB2.0 micro cable:
<https://www.oilmex.com/Products/Components/Cables/USB-CABLE-A-MICRO-1.8M/>



Note:

1. When ESP32-WROVER, take in mind that GPIO16<27> and GPIO17<28> are not connected!
2. GPIO6 to GPIO11 are connected to the SPI flash integrated on the module and are not recommended for other uses!

ESP32-WROOM-32D-4MB




FID4
Fiducial

MTD/GPIO12:	Pull-Down
GPI00:	Pull-Up
GPI02:	Pull-Down
GPI04:	Pull-Down
MTD0/GPIO15:	Pull-Up
GPI05:	Pull-Up

N1x19



FSP FN

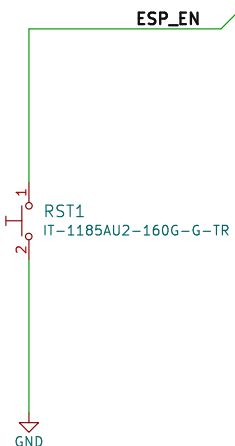

Interface	Signal	Pin
EMAC	EMAC_MDC_out	Any GPIO
	EMAC_MDIO_in	
	EMAC_MDO_out	
	EMAC_CRPS_out	
	EMAC_COL_out	
I2C	I2CEXT0_SCL_in	Any GPIO
	I2CEXT0_SDA_in	
	I2CEXT1_SCL_in	
	I2CEXT1_SDA_in	
	I2CEXT0_SCL_out	
	I2CEXT0_SDA_out	
	I2CEXT1_SCL_out	
	I2CEXT1_SDA_out	
General Purpose SPI	HSPIQ_in/_out	Any GPIO
	HSPIB_in/_out	
	HSPICLK_in/_out	
	HSPLCS0_in/_out	
	HSPLCS1_out	
	HSPLCS2_out	
	VSPIQ_in/_out	
	VSPID_in/_out	
	VSPICLK_in/_out	
	VSPICS0_in/_out	
	VSPICS1_out	
VSPICS2_out		

For more information refer to [PSP_wg00m_32_datasheet_en.pdf](#).

Voltage of Internal LDO(VDD_SDIO)				Bootstrapping Pins Settings
Pin	Default	3.3V	1.8V	
GPIO12/MTDI	Pull-Down	0	1	
Bootting Mode				
Pin	Default	SPI Flash Boot	Download Boot	
GPIO0	Pull-Up	1	0	
GPIO2	Pull-Down	Don't-care	0	
Debugging Log on U0TXD During Bootting				
Pin	Default	U0TXD Toggling	U0TXD Silent	
GPIO15/MTDO	Pull-Up	1	0	
Timing of SDIO Slave				
Pin	Default	Falling-edge:Output	Falling-edge:Input Rising-edge:Output	Rising-edge:Input Rising-edge:Output
GPIO15/MTDO	Pull-Up	0	0	1
GPIO5	Pull-Up	0	1	1



Sheet: /
File: working.kicad_sch

Title: ESP32-DevKit-Lipo

Size: A3	Date: 2020-06-09
KiCad E.D.A. eeschema 7.0.6	

Rev: C
Id: 1/1

