



— CONSTANT · MID-POWER · FACTORY / FIELD INSTALL

EM20-CMB/260DC

ArcticGuard Cold-Pack Emergency LED Driver — High-Voltage Mid-Power

20W constant-power emergency LED driver with cold-rated LiFePO4 battery. Drives 90–260 VDC LED arrays at constant power. Universal 100–347 VAC input. Specify /AG adder for cold-pack operating range. Compatible with lamparRCH and luxorRCH fixture families.

KEY FEATURES

- Universal 100–347 VAC input — one driver, every building voltage
- ArcticGuard cold-pack option — –4°F to 140°F operating range
- Constant brightness for 90 min — no dimming as battery drains
- Self-protecting battery — overcharge / over-discharge / short-circuit
- Test switch with red LED status indicator
- UL 924 listed for code-compliant emergency egress
- 5-year limited warranty on driver and battery
- CSA C22.2 No.141 + CEC Title 20 compliant

PERFORMANCE

Emergency Output Power	20 W
Emergency Runtime	90 min
Output Type	Constant power
Recharge Time	24 hours
Battery Type	LiFePO4 6.4V 3000mAh
Battery Charging Current	0–250 mA

CONSTRUCTION

Max. Application	200 W or 4 A
Operating Temperature	32°F to 122°F (140°F /AG)
Storage Temperature	158°F max
Location Rating	Dry, damp, extreme temp
Battery Cycles	500 full cycles
Warranty	5-year limited

ELECTRICAL

Input Voltage	100–347 VAC
Input Frequency	50 / 60 Hz
Input Current	100 mA max
Input Power	7 W max
Output Voltage	DC 36–150 V
Output Current	410–800 mA

COMPLIANCE

Safety Listings	UL 924 · CSA C22.2 No.141
Energy Compliance	CEC Title 20
Installation Li...	UL listed for factory & field install
Compatibility	lamparRCH, luxorRCH

INSTALLATION

Mounting Type	Surface mount
Test Switch	Test switch with indicator light
Wire Type	UL 2464, 24 AWG, 300 V, 80°C
Wire Length	550 mm (21.65")
Installation	Factory or field
Power Factor	>0.50

COMPATIBILITY · CONSTANT APPLICATION QUICK GUIDE

lamparRCH

luxorRCH

See full Application Quick Guide for sensor & controller pairings.

ORDERING INFORMATION

EM20-CMB/260DC	Standard 20 W driver
EM20-CMB/260DC/AG	With ArcticGuard cold-pack: –4°F operating

20W

OUTPUT POWER

90 min

EGRESS RUNTIME

100–347V

UNIVERSAL INPUT

/AG Ready

COLD-PACK ADDER

LiFePO4

BATTERY

UL 924

LISTED




— CONST **A** NT · MID-POWER · FACTORY/FIELD INSTALL

EM20-CMB/260DC

Page 2 of 2 · Dimensions, Wiring, and Operation Notes


— DIMENSIONS

DRIVER ENCLOSURE

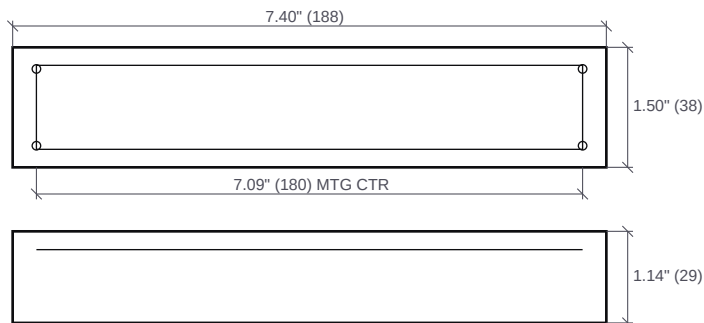

L 7.40" (188) · W 1.50" (38) · H 1.14" (29) · MtgCtr 7.09" (180) · 4×4 mtg holes


BATTERY CASE · 20W (LiFePO4)

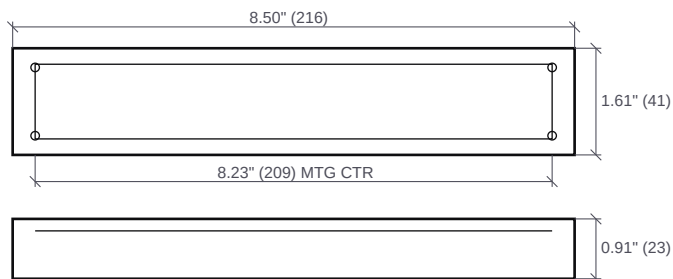

L 8.50" (216) · W 1.61" (41) · H 0.91" (23) · MtgCtr 8.23" (209) · 4×3.2 mtg holes

All dimensions are inches (millimeters) unless otherwise indicated.

— WIRING DIAGRAM

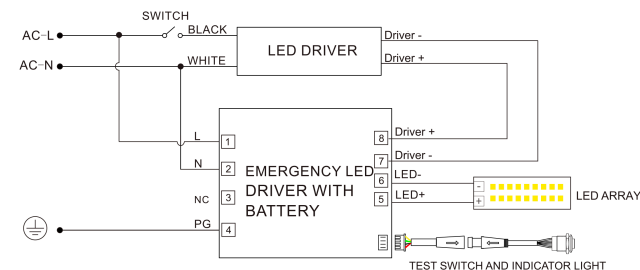

OPERATION

AC Operation:

AC power present · the AC LED driver supplies normal power; emergency driver charges in standby. Red LED indicator on = charging.

Emergency Operation:

On AC failure the emergency driver auto-detects the outage and powers the LED array for ·90 min. Red LED off during egress. AC restoration resumes charging.

— INSTALL REQUIREMENT

The AC LED driver **MUST** be on the same branch circuit as the emergency LED driver. An unswitched hot lead must connect to the emergency driver. Do not mate the battery connector until all other wiring is complete and AC power is on.

20W

OUTPUT POWER

90 min

EGRESS RUNTIME

100-347V

UNIVERSAL INPUT

/AG Ready

COLD-PACK ADDER

LiFePO4

BATTERY

UL 924

LISTED