



— CONSTANT · HIGH-POWER · FIELD INSTALL

EM40-RMB/170DC

⚠ INFERRED SPECS — PENDING VERIFICATION

External Rugged-Mount Emergency LED Driver

40W constant-power external emergency LED driver. Rugged-mount chassis for outdoor and high-bay LED fixtures. Universal 100–347 VAC input. Specify /CL adder for SILVAIR-networked Title 24 NLC compliance and project-wide test/log automation.

KEY FEATURES

- Universal 100–347 VAC input — one driver, every building voltage
- Operating range 32°F to 122°F
- Constant brightness for 90 min — no dimming as battery drains
- Self-protecting battery — overcharge / over-discharge / short-circuit
- Test switch with red LED status indicator
- /CL constantLink option — SILVAIR networked auto-test
- 5-year limited warranty on driver and battery
- CSA C22.2 No.141 + CEC Title 20 compliant

PERFORMANCE

Emergency Output Power	40 W
Emergency Runtime	90 min
Output Type	Constant power
Recharge Time	24 hours
Battery Type	LiFePO4 6.4V 3000mAh
Battery Charging Current	300 mA

CONSTRUCTION

Battery Information	LiFePO4 6.4V 3000mAh
Max. Application	400 W
Operating Temperature	32°F to 122°F
Storage Temperature	158°F max
Location Rating	Dry, damp
Warranty	5-year limited

ELECTRICAL

Input Voltage	100–347 VAC
Input Frequency	50 / 60 Hz
Input Current	250 mA max
Input Power	20 W max
Output Voltage	DC 170 V
Output Current	≤300 mA

COMPLIANCE

Safety Listings	UL 924 · CSA C22.2 No.141
Energy Compliance	CEC Title 20
Installation Listing	UL listed for field install
Compatibility	lamparch high-bay series

INSTALLATION

Mounting Type	External rugged chassis
Test Switch	Test switch with indicator light
Wire Type	UL 2464, 24 AWG, 300 V, 80°C
Wire Length	550 mm (21.65")
Installation	Field (certified electrician)
Power Factor	>0.50

COMPATIBILITY · CONSTANT APPLICATION QUICK GUIDE

lamparch

See full Application Quick Guide for sensor & controller pairings.

ORDERING INFORMATION

EM40-RMB/170DC	Standard 40 W driver
EM40-RMB/170DC/CL	With constantLink: SILVAIR networked auto-test

40W

OUTPUT POWER

90 min

EGRESS RUNTIME

100–347V

UNIVERSAL INPUT

/CL Ready

NLC ADDER

Rugged External

MOUNT TYPE

UL 924

LISTED




— CONST **A** NT · HIGH-POWER · FIELD INSTALL

EM40-RMB/170DC

Page 2 of 2 · Dimensions, Wiring, and Operation Notes

DIMENSIONS

DRIVER ENCLOSURE · Integrated Junction Box

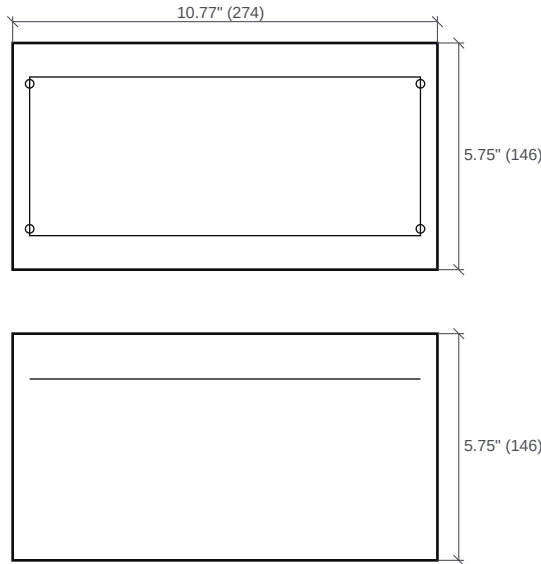


L 10.77" (274) · W 5.75" (146) · H 5.75" (146)

Integrated J-Box chassis · 10.77×5.75×5.75" · CEC Title 20 BC + RoHS

All dimensions are inches (millimeters) unless otherwise indicated.

WIRING DIAGRAM

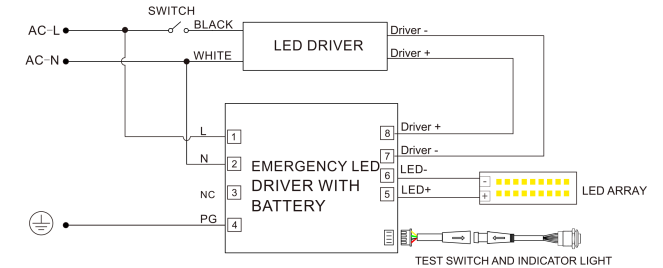

OPERATION

AC Operation:

AC power present · the AC LED driver supplies normal power; emergency driver charges in standby. Red LED indicator on = charging.

Emergency Operation:

On AC failure the emergency driver auto-detects the outage and powers the LED array for ~90 min. Red LED off during egress. AC restoration resumes charging.

INSTALL REQUIREMENT

The AC LED driver **MUST** be on the same branch circuit as the emergency LED driver. An unswitched hot lead must connect to the emergency driver. Do not mate the battery connector until all other wiring is complete and AC power is on.

40W

OUTPUT POWER

90 min

EGRESS RUNTIME

100-347V

UNIVERSAL INPUT

/CL Ready

NLC ADDER

Rugged External

MOUNT TYPE

UL 924

LISTED