



— CONSTANT · HIGH-POWER · FACTORY / FIELD INSTALL

EM60-GMB/170DC

G-Series High-Power Emergency LED Driver

60W constant-power internal emergency LED driver. Mounts inside high-bay LED fixtures. Universal 100–347 VAC input. Drives 170 VDC LED arrays for 90 minutes during outage.

KEY FEATURES

- Universal 100–347 VAC input — one driver, every building voltage
- Operating range 32°F to 122°F
- Constant brightness for 90 min — no dimming as battery drains
- Self-protecting battery — overcharge / over-discharge / short-circuit
- Test switch with red LED status indicator
- UL 924 listed for code-compliant emergency egress
- 5-year limited warranty on driver and battery
- CSA C22.2 No.141 + CEC Title 20 compliant

PERFORMANCE

Emergency Output Power	60 W
Emergency Runtime	90 min
Output Type	Constant power
Recharge Time	24 hours
Battery Type	LiFePO4 6.4V 3000mAh
Battery Charging Current	0–250 mA

CONSTRUCTION

Battery Information	LiFePO4 6.4V 3000mAh
Max. Application	600 W
Operating Temperature	32°F to 122°F
Storage Temperature	158°F max
Location Rating	Dry, damp
Warranty	5-year limited

ELECTRICAL

Input Voltage	100–347 VAC
Input Frequency	50 / 60 Hz
Input Current	200 mA max
Input Power	15 W max
Output Voltage	DC 170 V
Output Current	≤460 mA

COMPLIANCE

Safety Listings	UL 924 · CSA C22.2 No.141
Energy Compliance	CEC Title 20
Installation Li...	UL listed for factory & field install
Compatibility	lamparARCH high-bay series

INSTALLATION

Mounting Type	Internal (fixture-integrated)
Test Switch	Test switch with indicator light
Wire Type	UL 2464, 24 AWG, 300 V, 80°C
Wire Length	550 mm (21.65")
Installation	Factory or field
Power Factor	>0.50

COMPATIBILITY · CONSTANT APPLICATION QUICK GUIDE

lamparARCH

See full Application Quick Guide for sensor & controller pairings.

ORDERING INFORMATION

EM60-GMB/170DC

Standard 60 W driver

60W

OUTPUT POWER

90 min

EGRESS RUNTIME

100–347V

UNIVERSAL INPUT

32° to 122°F

OPERATING RANGE

Internal

MOUNT TYPE

UL 924

LISTED




— CONST **A** NT · HIGH-POWER · FACTORY/FIELD INSTALL

EM60-GMB/170DC

Page 2 of 2 · Dimensions, Wiring, and Operation Notes

DIMENSIONS

DRIVER ENCLOSURE · 60W

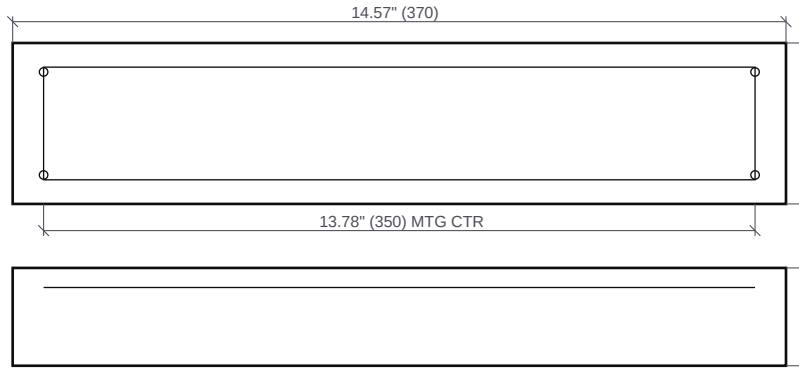


L 14.57" (370) · W 3.03" (77) · H 1.84" (47) · MtgCtr 13.78" (350)

High-capacity integrated case · 14.57×3.03×1.84" · for lampar-RCH applications

All dimensions are inches (millimeters) unless otherwise indicated.

WIRING DIAGRAM

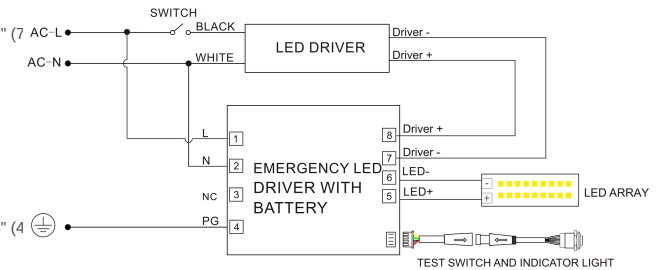

OPERATION

AC Operation:

AC power present · the AC LED driver supplies normal power; emergency driver charges in standby. Red LED indicator on = charging.

Emergency Operation:

On AC failure the emergency driver auto-detects the outage and powers the LED array for ·90 min. Red LED off during egress. AC restoration resumes charging.

INSTALL REQUIREMENT

The AC LED driver MUST be on the same branch circuit as the emergency LED driver. An unswitched hot lead must connect to the emergency driver. Do not mate the battery connector until all other wiring is complete and AC power is on.

60W

OUTPUT POWER

90 min

EGRESS RUNTIME

100-347V

UNIVERSAL INPUT

32° to 122°F

OPERATING RANGE

Internal

MOUNT TYPE

UL 924

LISTED